



COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
AIR QUALITY PROGRAM

STATE ONLY OPERATING PERMIT

Issue Date: May 21, 2019

Effective Date: May 21, 2019

Expiration Date: April 30, 2024

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 43-00363

Federal Tax Id - Plant Code: 43-1037601-2

Owner Information

Name: PENNEX ALUM CO
Mailing Address: 93 WERNER RD
GREENVILLE, PA 16125-9499

Plant Information

Plant: PENNEX ALUM CO/GREENVILLE PLT
Location: 43 Mercer County 43942 Sugar Grove Township
SIC Code: 3334 Manufacturing - Primary Aluminum

Responsible Official

Name: SCOTT STRONG
Title: CAST PROD GENERAL MANAGER
Phone: (717) 432 - 9647 Ext.4349

Permit Contact Person

Name: ROBERT MORRET
Title: EH&S MGR
Phone: (717) 432 - 9647 Ext.4357

[Signature] _____
ERIC A. GUSTAFSON, NORTHWEST REGION AIR PROGRAM MANAGER

**SECTION A. Table of Contents****Section A. Facility/Source Identification**

Table of Contents
Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements



SECTION A. Table of Contents

- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous

**SECTION A. Site Inventory List**

Source ID	Source Name	Capacity/Throughput	Fuel/Material
101	HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)	12.000 MCF/HR	Natural Gas
103	#1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)	20.000 MCF/HR	Natural Gas
104	#2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)	26.000 MCF/HR	Natural Gas
105	HOMOGENIZING FURNACE (15.2 MMBTU/HR)	15.200 MCF/HR	Natural Gas
106	NEW LOG HOMOGENIZING FURNACE (15.2 MMBTU/HR)	15.200 MCF/HR	Natural Gas
110	BILLET SAW	1.500 Tons/HR	ALUMINUM SOW
C110	BILLET SAW CYCLONE		
FML01	NATURAL GAS		
S101	HOLDING FURNACE STACK		
S103	#1 MELTING FURNACE STACK		
S104	#2 MELTING FURNACE STACK		
S105	HOMOGENIZING FURNACE STACK		
S106	NEW HOMOGENIZING FURNACE STACK		
S110	BILLET SAW CYCLONE STACK		

PERMIT MAPS



PERMIT MAPS

PROC
110



CNTL
C110



STAC
S110

**SECTION B. General State Only Requirements****#001 [25 Pa. Code § 121.1]****Definitions.**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]**Operating Permit Duration.**

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)&(c)]**Permit Renewal.**

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application and an additional annual administrative fee as specified in 25 Pa. Code § 127.703(b) and (c). The fees shall be made payable to "The Commonwealth of Pennsylvania - Clean Air Fund" and shall be for the amount specified in the following schedule specified in 25 Pa. Code § 127.703(b) and (c).
- (1) Three hundred dollars for applications filed during the 2000-2004 calendar years.
 - (2) Three hundred seventy-five dollars for applications filed for the calendar years beginning in 2005.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]**Operating Permit Fees under Subchapter I.**

- (a) The permittee shall pay fees according to the following schedule specified in 25 Pa. Code § 127.703(b):
- (1) Three hundred dollars for applications filed during the 2000-2004 calendar years.
 - (2) Three hundred seventy-five dollars for applications filed for the calendar years beginning in 2005.

This fee schedule shall apply to the processing of an application for an operating permit as well as the extension,

**SECTION B. General State Only Requirements**

modification, revision, renewal, and re-issuance of each operating permit or part thereof.

(b) The permittee shall pay an annual operating permit administrative fee according to the fee schedule established in 25 Pa. Code § 127.703(c).

(1) Two hundred fifty dollars for applications filed during the 1995-1999 calendar years.

(2) Three hundred dollars for applications filed during the 2000-2004 calendar years.

(3) Three hundred seventy-five dollars for applications filed during the years beginning in 2005.

(c) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania - Clean Air Fund".

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]**Transfer of Operating Permits.**

(a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.

(b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.

(c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]**Inspection and Entry.**

(a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:

(1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;

(3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;

(4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]**Compliance Requirements.**

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes

**SECTION B. General State Only Requirements**

a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]**Need to Halt or Reduce Activity Not a Defense.**

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]**Duty to Provide Information.**

(a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.

(b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]**Revising an Operating Permit for Cause.**

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450 & 127.462]**Operating Permit Modifications**

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and

SECTION B. General State Only Requirements

significant operating permit modifications, under this permit, as outlined below:

(b) Administrative Amendments. The permittee shall make administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.

(c) Minor Operating Permit Modifications. The permittee shall make minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.

(d) Permit modifications which do not qualify as minor permit modifications under 25 Pa. Code § 127.541 will be treated as a significant operating permit revision subject to the public notification procedures in §§ 127.424 and 127.425.

#012 [25 Pa. Code § 127.441]**Severability Clause.**

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]**De Minimis Emission Increases.**

(a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:

(1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.

(2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

(b) The Department may disapprove or condition de minimis emission increases at any time.

(c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

(1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.

(2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.

(3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:

**SECTION B. General State Only Requirements**

- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
 - (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
 - (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
 - (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]**Operational Flexibility.**

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)

**SECTION B. General State Only Requirements**

(6) Section 127.462 (relating to minor operating permit modifications)

(7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11]**Reactivation**

(a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]**Health Risk-based Emission Standards and Operating Practice Requirements.**

(a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].

(b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]**Circumvention.**

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]**Reporting Requirements.**

(a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.

(b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.

(c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

(d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.

(e) Any records, reports or information submitted to the Department shall be available to the public except for such

**SECTION B. General State Only Requirements**

records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]**Sampling, Testing and Monitoring Procedures.**

(a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.

(b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]**Recordkeeping.**

(a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]**Property Rights.**

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]**Alternative Operating Scenarios.**

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §121.7]****Prohibition of air pollution.**

No person may permit air pollution as that term is defined in the act.

002 [25 Pa. Code §123.1]**Prohibition of certain fugitive emissions**

(a) No person may permit the emission into the outdoor atmosphere of fugitive air contaminant from a source other than the following:

(1) Construction or demolition of buildings or structures.

(2) Grading, paving and maintenance of roads and streets.

(3) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.

(4) Clearing of land.

(5) Stockpiling of materials.

(6) Open burning operations.

(7) Not applicable.

(8) Not applicable.

(9) Sources and classes of sources other than those identified in paragraphs (1)-(8), for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:

(i) the emissions are of minor significance with respect to causing air pollution; and

(ii) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

(b) An application form for requesting a determination under either subsection (a)(9) or 129.15(c) is available from the Department. In reviewing these applications, the Department may require the applicant to supply information including, but not limited to, a description of proposed control measures, characteristics of emissions, quantity of emissions, and ambient air quality data and analysis showing the impact of the source on ambient air quality. The applicant shall be required to demonstrate that the requirements of subsections (a)(9) and (c) and 123.2 (relating to fugitive particulate matter) or of the requirements of 129.15(c) have been satisfied. Upon such demonstration, the Department will issue a determination, in writing, either as an operating permit condition, for those sources subject to permit requirements under the act, or as an order containing appropriate conditions and limitations.

(c) See Workpractice Requirements.

(d) Not applicable.

003 [25 Pa. Code §123.2]**Fugitive particulate matter**

A person may not permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in [25 Pa. Code Section] 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions) if such emissions are visible at the point the emissions pass outside the person's property.

**SECTION C. Site Level Requirements****# 004 [25 Pa. Code §123.31]****Limitations**

(a) Limitations are as follows:

(1) If control of malodorous air contaminants is required under subsection (b), emissions shall be incinerated at a minimum of 1200F for at least 0.3 seconds prior to their emission into the outdoor atmosphere.

(2) Techniques other than incineration may be used to control malodorous air contaminants if such techniques are equivalent to or better than the required incineration in terms of control of the odor emissions and are approved in writing by the Department.

(b) A person may not permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

(c) Not applicable.

005 [25 Pa. Code §123.41]**Limitations**

The permittee may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

(1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any 1 hour.

(2) Equal to or greater than 60% at any time.

006 [25 Pa. Code §123.42]**Exceptions**

The limitations of 123.41 (relating to limitations) shall not apply to a visible emission in any of the following instances:

(1) when the presence of uncombined water is the only reason for failure of the emission to meet the limitations.

(2) When the emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.

(3) When the emission results from sources specified in 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions).

(4) Not applicable.

II. TESTING REQUIREMENTS.**# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The Department reserves the right to require exhaust stack testing of any source(s) as necessary to verify emissions for purposes including determining the correct emission fee, malfunctions, or determining compliance with any applicable requirement.

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION C. Site Level Requirements****V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 008 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

[From 25 Pa. Code Section 123.1(c)]

The permittee responsible for any source specified in Condition #001, above, shall take all reasonable actions to prevent particulate matter from becoming airborne. These actions shall include, but not be limited to, the following:

- (1) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (2) Application of asphalt, oil, water or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.
- (3) Paving and maintenance of roadways.
- (4) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

VII. ADDITIONAL REQUIREMENTS.**# 009 [25 Pa. Code §129.14]****Open burning operations**

(a) Not Applicable.

(b) Outside of air basins. No person may permit the open burning of material in an area outside of air basins in a manner that:

- (1) The emissions are visible, at any time, at the point such emissions pass outside the property of the person on whose land the open burning is being conducted.
- (2) Malodorous air contaminants from the open burning are detectable outside the property of the person on whose land the open burning is being conducted.
- (3) The emissions interfere with the reasonable enjoyment of life or property.
- (4) The emissions cause damage to vegetation or property.
- (5) The emissions are or may be deleterious to human or animal health.

(c) Exceptions: The requirements of subsections (a) and (b) do not apply where the open burning operations result from:

- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) Not applicable.
- (5) Not applicable.

SECTION C. Site Level Requirements

(6) A fire set solely for recreational or ceremonial purposes.

(7) A fire set solely for cooking food.

(d) Clearing and grubbing wastes. The following is applicable to clearing and grubbing wastes:

(1) As used in this subsection the following terms shall have the following meanings:

Air curtain destructor -- A mechanical device which forcefully projects a curtain of air across a pit in which open burning is being conducted so that combustion efficiency is increased and smoke and other particulate matter are contained.

Clearing and grubbing wastes -- Trees, shrubs, and other native vegetation which are cleared from land during or prior to the process of construction. The term does not include demolition wastes and dirt laden roots.

(2) Not applicable.

(3) Subsection (b) notwithstanding clearing and grubbing wastes may be burned outside of an air basin, subject to the following limitations:

(i) Upon receipt of a complaint or determination by the Department that an air pollution problem exists, the Department may order that the open burning cease or comply with subsection (b) of this section.

(ii) Authorization for open burning under this paragraph does not apply to clearing and grubbing wastes transported from an air basin for disposal outside of an air basin.

(4) During an air pollution episode, open burning is limited by Chapter 137 (relating to air pollution episodes) and shall cease as specified in such chapter.

[This permit does not constitute authorization to burn solid waste pursuant to Section 610(3) of the Solid Waste Management Act, 35 P.S. Section 6018.610(3), or any other provision of the Solid Waste Management Act.]

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.

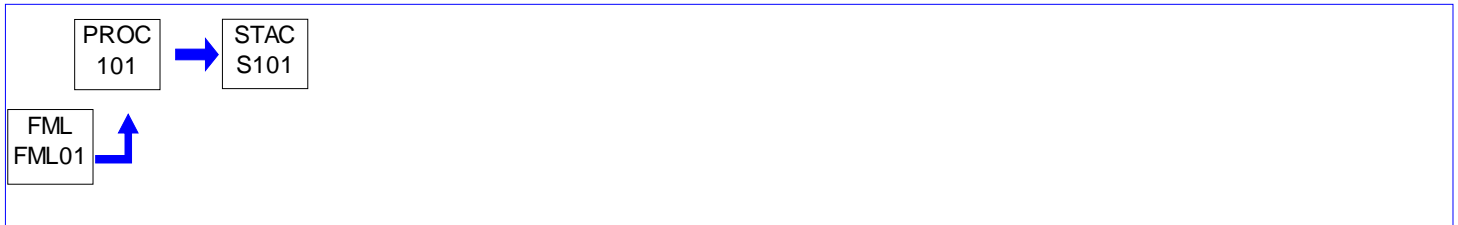
**SECTION D. Source Level Requirements**

Source ID: 101

Source Name: HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)

Source Capacity/Throughput: 12.000 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 1) 40 CFR PART 63 SUBPART RRR
 2) FURNACE TUNING BAT
 3) FURNACE REQS

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

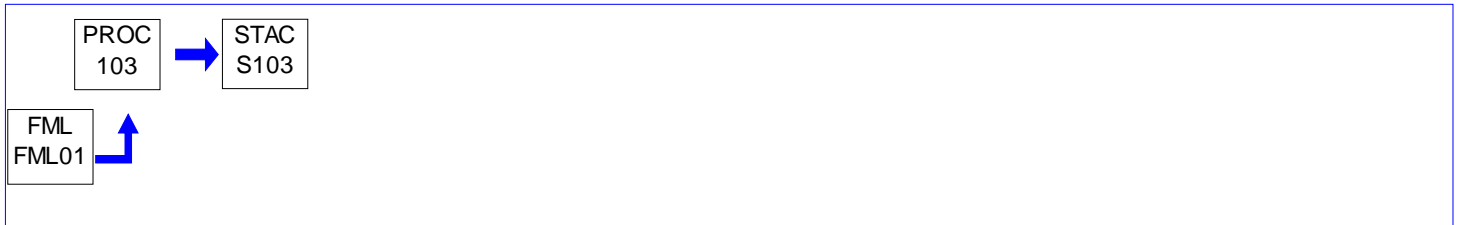
**SECTION D. Source Level Requirements**

Source ID: 103

Source Name: #1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)

Source Capacity/Throughput: 20.000 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 1) 40 CFR PART 63 SUBPART RRR
 2) FURNACE TUNING BAT
 3) FURNACE REQS

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

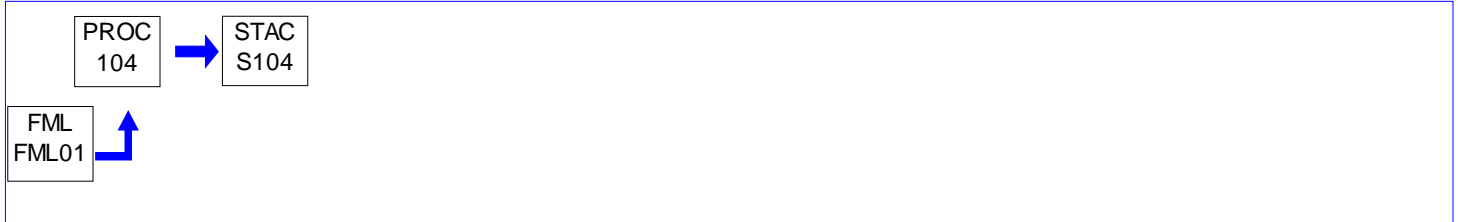
**SECTION D. Source Level Requirements**

Source ID: 104

Source Name: #2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)

Source Capacity/Throughput: 26.000 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 1) 40 CFR PART 63 SUBPART RRR
2) FURNACE TUNING BAT
3) FURNACE REQS

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

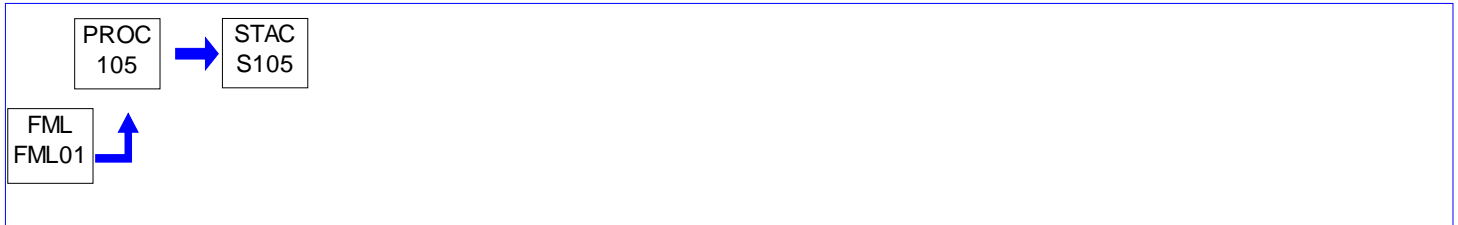
SECTION D. Source Level Requirements

Source ID: 105

Source Name: HOMOGENIZING FURNACE (15.2 MMBTU/HR)

Source Capacity/Throughput: 15.200 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 3) FURNACE REQS

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

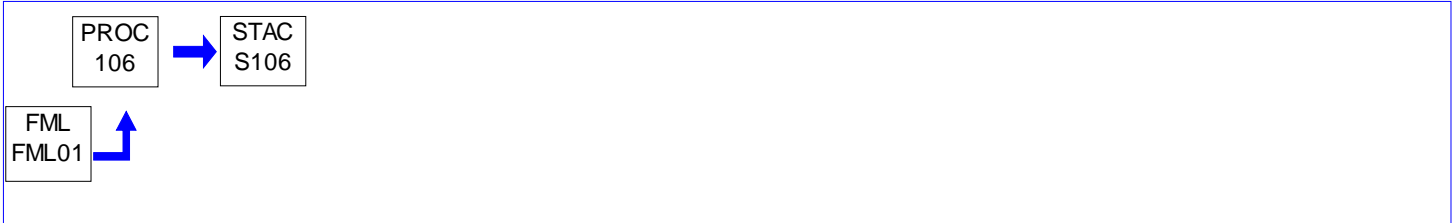
**SECTION D. Source Level Requirements**

Source ID: 106

Source Name: NEW LOG HOMOGENIZING FURNACE (15.2 MMBTU/HR)

Source Capacity/Throughput: 15.200 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 3) FURNACE REQS

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**


Source ID: 110

Source Name: BILLET SAW

Source Capacity/Throughput:

1.500 Tons/HR

ALUMINUM SOW

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §123.13]

Processes

No person may permit the emission into the outdoor atmosphere of particulate matter in a manner that the concentration of particulate matter in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall maintain a record of all preventative maintenance inspections of the control device. These records shall, at a minimum, contain the dates of the inspections, any problems or defects, the actions taken to correct the problem or defects, and any routine maintenance performed.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

(a) The permittee shall perform a weekly operational inspection of the control device.

(b) The permittee shall operate the control device at all times that the source is in operation.

(c) The permittee shall maintain and operate the source and control device in accordance with the manufacturer's specifications and in accordance with good air pollution control practices.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.**

Group Name: 1) 40 CFR PART 63 SUBPART RRR

Group Description: This source group contains applicable requirements of Subpart RRR.

Sources included in this group

ID	Name
101	HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)
103	#1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)
104	#2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1505]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production
Emission standards for affected sources and emission units.**

(a) Summary. The owner or operator of a new or existing affected source must comply at all times with each applicable limit in this section, including periods of startup and shutdown. Table 1 to this subpart summarizes the emission standards for each type of source.

(b) - (h) Not Applicable

(i) Group 1 furnace. The owner or operator of a group 1 furnace must use the limits in this paragraph to determine the emission standards for a SAPU.

(1) Not applicable

(2) Not applicable

(3) 15 µg of D/F TEQ per Mg (2.1×10^{-4} gr of D/F TEQ per ton) of feed/charge from a group 1 furnace at a secondary aluminum production facility that is a major or area source. This limit does not apply if the furnace processes only clean charge; and

(4) Not applicable

(5) Not applicable

(6) The owner or operator may determine the emission standards for a SAPU by applying the group 1 furnace limits on the basis of the aluminum production weight in each group 1 furnace, rather than on the basis of feed/charge.

(7) Not applicable.

(j) Not applicable

(k) Secondary aluminum processing unit. The owner or operator must comply with the emission limits calculated using the equations for PM, HCl and HF in paragraphs (k)(1) and (2) of this section for each secondary aluminum processing unit at a secondary aluminum production facility that is a major source. The owner or operator must comply with the emission limit calculated using the equation for D/F in paragraph (k)(3) of this section for each secondary aluminum processing unit at a secondary aluminum production facility that is a major or area source.

(1) Not applicable

(2) Not applicable

(3) The owner or operator must not discharge or allow to be discharged to the atmosphere any 3-day, 24-hour rolling average emissions of D/F in excess of:

(Equation 3)
$$n$$

$$E (LtiD/F * Tti)$$

**SECTION E. Source Group Restrictions.**

$$LcD/F = \frac{\sum_{i=1}^n E (T_i)}{\sum_{i=1}^n T_i}$$

Where,

$L_{Ti}D/F$ = The D/F emission limit for individual emission unit i in paragraph (i)(3) of this section for a group 1 furnace; and

LcD/F = The daily D/F emission limit for the secondary aluminum processing unit which is used to calculate the 3-day, 24-hour D/F emission limit applicable to the SAPU.

Note: Clean charge furnaces cannot be included in this calculation since they are not subject to the D/F limit.

(4) Not applicable

(5) The owner or operator of a SAPU at a secondary aluminum production facility that is an area source may demonstrate compliance with the emission limits of paragraph (k)(3) of this section by demonstrating that each emission unit within the SAPU is in compliance with the emission limit of paragraph (i)(3) of this section.

(6) With the prior approval of the permitting authority for major sources, or the Administrator for area sources, an owner or operator may redesignate any existing group 1 furnace or in-line fluxer at a secondary aluminum production facility as a new emission unit. Any emission unit so redesignated may thereafter be included in a new SAPU at that facility. Any such redesignation will be solely for the purpose of this NESHAP and will be irreversible.

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 59792, Sept. 24, 2002; 67 FR 79816, Dec. 30, 2002; 70 FR 57517, Oct. 3, 2005; 80 FR 56739, Sept. 18, 2015]

II. TESTING REQUIREMENTS.**# 002 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1511]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Performance test/compliance demonstration general requirements.**

(a) Site-specific test plan. Prior to conducting any performance test required by this subpart, the owner or operator must prepare a site-specific test plan which satisfies all of the requirements, and must obtain approval of the plan pursuant to the procedures set forth in §63.7. Performance tests shall be conducted under such conditions as the Administrator specifies to the owner or operator based on representative performance of the affected source for the period being tested. Upon request, the owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.

(b) Initial performance test. Following approval of the site-specific test plan, the owner or operator must demonstrate initial compliance with each applicable emission, equipment, work practice, or operational standard for each affected source and emission unit, and report the results in the notification of compliance status report as described in Sec. 63.1515(b). The owner or operator of any affected source constructed before February 14, 2012, for which an initial performance test is required to demonstrate compliance must conduct this initial performance test no later than the date for compliance established by §63.1501. The owner or operator of any affected source constructed or reconstructed after February 14, 2012, for which an initial performance test is required must conduct this initial performance test within 180 days after the date for compliance established by §63.1501. Except for the date by which the performance test must be conducted, the owner or operator must conduct each performance test in accordance with the requirements and procedures set forth in §63.7(c). Owners or operators of affected sources located at facilities which are area sources are subject only to those performance testing requirements pertaining to D/F. Owners or operators of sweat furnaces meeting the specifications of §63.1505(f)(1) are not required to conduct a performance test.

(1) The performance tests must be conducted under representative conditions expected to produce the highest level of HAP emissions expressed in the units of the emission standards for the HAP (considering the extent of feed/charge contamination, reactive flux addition rate and feed/charge rate). If a single test condition is not expected to produce the highest level of emissions for all HAP, testing under two or more sets of conditions (for example high contamination at low

**SECTION E. Source Group Restrictions.**

feed/charge rate, and low contamination at high feed/charge rate) may be required. Any subsequent performance tests for the purposes of establishing new or revised parametric limits shall be allowed upon pre-approval from the permitting authority for major sources, or the Administrator for area sources. These new parametric settings shall be used to demonstrate compliance for the period being tested.

(2) Each performance test for a continuous process must consist of 3 separate runs; pollutant sampling for each run must be conducted for the time period specified in the applicable method or, in the absence of a specific time period in the test method, for a minimum of 3 hours.

(3) Each performance test for a batch process must consist of three separate runs; pollutant sampling for each run must be conducted over the entire process operating cycle. Additionally, for batch processes where the length of the process operating cycle is not known in advance, and where isokinetic sampling must be conducted based on the procedures in Method 5 in appendix A to part 60, use the following procedure to ensure that sampling is conducted over the entire process operating cycle:

(i) Choose a minimum operating cycle length and begin sampling assuming this minimum length will be the run time (e.g., if the process operating cycle is known to last from four to six hours, then assume a sampling time of four hours and divide the sampling time evenly between the required number of traverse points);

(ii) After each traverse point has been sampled once, begin sampling each point again for the same time per point, in the reverse order, until the operating cycle is complete. All traverse points as required by Method 1 of appendix A to part 60, must be sampled at least once during each test run;

(iii) In order to distribute the sampling time most evenly over all the traverse points, do not perform all runs using the same sampling point order (e.g., if there are four ports and sampling for run 1 began in port 1, then sampling for run 2 could begin in port 4 and continue in reverse order.)

(4) Where multiple affected sources or emission units are exhausted through a common stack, pollutant sampling for each run must be conducted over a period of time during which all affected sources or emission units complete at least 1 entire process operating cycle or for 24 hours, whichever is shorter.

(5) Initial compliance with an applicable emission limit or standard is demonstrated if the average of three runs conducted during the performance test is less than or equal to the applicable emission limit or standard.

(6) Apply paragraphs (b)(1) through (5) of this section for each pollutant separately if a different production rate, charge material or, if applicable, reactive fluxing rate would apply and thereby result in a higher expected emissions rate for that pollutant.

(7) The owner or operator may not conduct performance tests during periods of malfunction.

(c) Test methods. The owner or operator must use the following methods in appendix A to 40 CFR part 60 to determine compliance with the applicable emission limits or standards:

(1) Method 1 for sample and velocity traverses.

(2) Method 2 for velocity and volumetric flow rate.

(3) Method 3 for gas analysis.

(4) Method 4 for moisture content of the stack gas.

(5) Method 5 for the concentration of PM.

(6) Method 9 for visible emission observations.

(7) Method 23 for the concentration of D/F.

**SECTION E. Source Group Restrictions.**

(8) Method 25A for the concentration of THC, as propane.

(9) Method 26A for the concentration of HCl and HF. Method 26 may also be used, except at sources where entrained water droplets are present in the emission stream. Where a lime-injected fabric filter is used as the control device to comply with the 90 percent reduction standard, the owner or operator must measure the fabric filter inlet concentration of HCl at a point before lime is introduced to the system.

(d) Alternative methods. The owner or operator may use an alternative test methods as provided in paragraphs (d)(1) through (3) of this section.

(1) The owner or operator may use test method ASTM D7520-13 as an alternative to EPA Method 9 subject to conditions described in §63.1510(f)(4).

(2) In lieu of conducting the annual flow rate measurements using Methods 1 and 2, the owner or operator may use Method 204 in Appendix M to 40 CFR part 51 to conduct annual verification of a permanent total enclosure for the affected source/emission unit.

(3) The owner or operator may use an alternative test method approved by the Administrator.

(e) Not applicable.

(f) Testing of representative emission units. With the prior approval of the permitting authority for major sources, or the Administrator for area sources, an owner or operator may utilize emission rates obtained by testing a particular type of group 1 furnace that does not have an add-on air pollution control device, or by testing an in-line flux box that does not have an add-on air pollution control device, to determine the emission rate for other units of the same type at the same facility. Such emission test results may only be considered to be representative of other units if all of the following criteria are satisfied:

(1) The tested emission unit must use feed materials and charge rates which are comparable to the emission units that it represents;

(2) The tested emission unit must use the same type of flux materials in the same proportions as the emission units it represents;

(3) The tested emission unit must be operated utilizing the same work practices as the emission units that it represents;

(4) The tested emission unit must be of the same design as the emission units that it represents; and

(5) The tested emission unit must be tested under the highest load or capacity reasonably expected to occur for any of the emission units that it represents.

(6) All 3 separate runs of a performance test must be conducted on the same emission unit.

(g) Establishment of monitoring and operating parameter values. The owner or operator of new or existing affected sources and emission units must establish a minimum or maximum operating parameter value, or an operating parameter range for each parameter to be monitored as required by Sec. 63.1510 that ensures compliance with the applicable emission limit or standard. To establish the minimum or maximum value or range, the owner or operator must use the appropriate procedures in this section and submit the information required by Sec. 63.1515(b)(4) in the notification of compliance status report. The owner or operator may use existing data in addition to the results of performance tests to establish operating parameter values for compliance monitoring provided each of the following conditions are met to the satisfaction of the applicable permitting authority for major sources, or the Administrator for area sources::

(1) The complete emission test report(s) used as the basis of the parameter(s) is submitted.

(2) The same test methods and procedures as required by this subpart were used in the test.

(3) The owner or operator certifies that no design or work practice changes have been made to the source, process, or

**SECTION E. Source Group Restrictions.**

emission control equipment since the time of the report.

(4) All process and control equipment operating parameters required to be monitored were monitored as required in this subpart and documented in the test report.

(5) If the owner or operator wants to conduct a new performance test and establish different operating parameter values, they must submit a revised site specific test plan and receive approval in accordance with paragraph (a) of this section. In addition, if an owner or operator wants to use existing data in addition to the results of the new performance test to establish operating parameter values, they must meet the requirements in paragraphs (g)(1) through (4) of this section.

(h) Not applicable.

(i) Not applicable.

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 59792, Sept. 24, 2002; 67 FR 79817, Dec. 30, 2002; 79 FR 11284, Feb. 27, 2014; 80 FR 56745, Sept. 18, 2015; 81 FR 38087, June 13, 2016]

003 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1512]

Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Performance test/compliance demonstration requirements and procedures.

(a) through (d) Not applicable

(e) Group 1 furnace (including melting holding furnaces) without add-on air pollution control devices. In the site-specific monitoring plan required by § 63.1510(o), the owner or operator of a group 1 furnace (including a melting/holding furnaces) without add-on air pollution control devices must include data and information demonstrating compliance with the applicable emission limits.

(1) If the group 1 furnace processes other than clean charge material, the owner or operator must conduct emission tests to measure emissions of PM, HCl, HF, and D/F at the furnace exhaust outlet.

(2) Not applicable

(3) The owner or operator may choose to determine the rate of reactive flux addition to the group 1 furnace and assume, for the purposes of demonstrating compliance with the SAPU emission limit, that all chlorine and fluorine contained in reactive flux added to the group 1 furnace is emitted as HCl and HF. Under these circumstances, the owner or operator is not required to conduct an emission test for HCl or HF.

(4) Not applicable.

(5) When testing a new uncontrolled furnace, other than a new round top furnace, constructed after February 14, 2012, the owner or operator must comply with the requirements of paragraph (e)(5)(i) or (ii) of this section at the next required performance test required by §63.1511(e). When testing a new round top furnace constructed after February 14, 2012, the owner or operator must comply with the requirements of either paragraphs (e)(5)(i), (ii), or (iii) of this section at the next required performance test required by §63.1511(e).

(i) Install hooding that meets ACGIH Guidelines (incorporated by reference, see §63.14), or

(ii) At least 180 days prior to testing petition the permitting authority for major sources, or the Administrator for area sources, that such hoods are impractical under the provisions of paragraph (e)(6) of this section and propose testing procedures that will minimize unmeasured emissions during the performance test according to the paragraph (e)(7) of this section, or

(iii) Assume an 80-percent capture efficiency for the furnace exhaust (i.e., multiply emissions measured at the furnace exhaust outlet by 1.25). If the source fails to demonstrate compliance using the 80-percent capture efficiency assumption, the owner or operator must re-test with a hood that meets the ACGIH Guidelines within 180 days, or petition the permitting authority for major sources, or the Administrator for area sources, within 180 days that such hoods are impractical under the provisions of paragraph (e)(6) of this section and propose testing procedures that will minimize unmeasured emissions during the performance test according to paragraph (e)(7) of this section.

**SECTION E. Source Group Restrictions.**

(iv) The 80-percent capture efficiency assumption is not applicable in the event of testing conducted under an approved petition submitted pursuant to paragraphs (e)(5)(ii) or (iii) of this section.

(6) The installation of hooding that meets ACGIH Guidelines (incorporated by reference, see §63.14) is considered impractical if any of the following conditions exist:

(i) Building or equipment obstructions (for example, wall, ceiling, roof, structural beams, utilities, overhead crane or other obstructions) are present such that the temporary hood cannot be located consistent with acceptable hood design and installation practices;

(ii) Space limitations or work area constraints exist such that the temporary hood cannot be supported or located to prevent interference with normal furnace operations or avoid unsafe working conditions for the furnace operator; or

(iii) Other obstructions and limitations subject to agreement of the permitting authority for major sources, or the Administrator for area sources.

(7) Testing procedures that will minimize unmeasured emissions may include, but are not limited to the following:

(i) Installing a hood that does not entirely meet ACGIH guidelines;

(ii) Using the building as an enclosure, and measuring emissions exhausted from the building if there are no other furnaces or other significant sources in the building of the pollutants to be measured;

(iii) Installing temporary baffles on those sides or top of furnace opening if it is practical to do so where they will not interfere with material handling or with the furnace door opening and closing;

(iv) Minimizing the time the furnace doors are open or the top is off;

(v) Delaying gaseous reactive fluxing until charging doors are closed and, for round top furnaces, until the top is on;

(vi) Agitating or stirring molten metal as soon as practicable after salt flux addition and closing doors as soon as possible after solid fluxing operations, including mixing and dross removal;

(vii) Keeping building doors and other openings closed to the greatest extent possible to minimize drafts that would divert emissions from being drawn into the furnace;

(viii) Maintaining burners on low-fire or pilot operation while the doors are open or the top is off;

(ix) Use of fans or other device to direct flow into a furnace when door is open; or

(x) Removing the furnace cover one time in order to add a smaller but representative charge and then replacing the cover.

(f) through (i) Not applicable

(j) Secondary aluminum processing unit. The owner or operator must conduct performance tests as described in paragraphs (j)(1) through (3) of this section. The results of the performance tests are used to establish emission rates in lb/ton of feed/charge for PM, HCl and HF and $\mu\text{g TEQ/Mg}$ of feed/charge for D/F emissions from each emission unit. These emission rates are used for compliance monitoring in the calculation of the 3-day, 24-hour rolling average emission rates using the equation in § 63.1510(t). A performance test is required for:

(1) Not applicable

(2) Each group 1 furnace that processes scrap other than clean charge to measure emissions of PM and D/F and either:

(i) Emissions of HF and HCl (for the emission limit); or

(ii) Not applicable

**SECTION E. Source Group Restrictions.**

(3) Not applicable

(k) Feed/charge weight measurement. During the emission test(s) conducted to determine compliance with emission limits in a kg/Mg (lb/ton) format, the owner or operator of an affected source or emission unit, subject to an emission limit in a kg/Mg (lb/ton) of feed/charge format, must measure (or otherwise determine) and record the total weight of feed/charge to the affected source or emission unit for each of the three test runs and calculate and record the total weight. An owner or operator that chooses to demonstrate compliance on the basis of the aluminum production weight must measure the weight of aluminum produced by the emission unit or affected source instead of the feed/charge weight.

(l) through (n) Not applicable

(o) Flux injection rate. The owner or operator must use these procedures to establish an operating parameter value or range for the total reactive chlorine flux injection rate and, for uncontrolled furnaces, the total reactive fluorine flux injection rate.

(1) Continuously measure and record the weight of gaseous or liquid reactive flux injected for each 15 minute period during the HCl, HF and D/F tests, determine and record the 15-minute block average weights, and calculate and record the total weight of the gaseous or liquid reactive flux for the 3 test runs;

(2) Record the identity, composition, and total weight of each addition of solid reactive flux for the 3 test runs;

(3) Determine the total reactive chlorine flux injection rate and, for uncontrolled furnaces, the total reactive fluorine flux injection rate by adding the recorded measurement of the total weight of chlorine and, for uncontrolled furnaces, fluorine in the gaseous or liquid reactive flux injected and the total weight of chlorine and, for uncontrolled furnaces, fluorine in the solid reactive flux using Equation 5:

$$\text{(Equation 5)} \quad Wt = (F1 * W1) + (F2 * W2)$$

Where,

Wt = Total chlorine or fluorine usage, by weight;

F1 = Fraction of gaseous or liquid flux that is chlorine or fluorine;

W1 = Weight of reactive flux gas injected;

F2 = Fraction of solid reactive chloride flux that is chlorine (e.g., F = 0.75 for magnesium chloride or fraction of solid reactive fluoride flux that is fluorine (e.g., F = 0.33 for potassium fluoride); and

W2 = Weight of solid reactive flux;

(4) Divide the weight of total chlorine usage (Wt) for the 3 test runs by the recorded measurement of the total weight of feed for the 3 test runs; and

(5) If a solid reactive flux other than magnesium chloride or potassium fluoride is used, the owner or operator must derive the appropriate proportion factor subject to approval by the permitting authority for major sources, or the Administrator for area sources..

(p) Not applicable

(q) Not applicable

(r) Labeling. The owner or operator of each scrap dryer/delacquering kiln/decoating kiln, group 1 furnace, group 2 furnace and in-line fluxer must submit the information described in § 63.1515(b)(3) as part of the notification of compliance status report to document conformance with the operational standard in § 63.1506(b).

(s) Not applicable

**SECTION E. Source Group Restrictions.**

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 79817, Dec. 30, 2002; 69 FR 53984, Sept. 3, 2004; 80 FR 56746, Sept. 18, 2015; 81 FR 38087, June 13, 2016]

III. MONITORING REQUIREMENTS.**# 004 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1510]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Monitoring requirements.**

(a) Summary. The owner or operator of a new or existing affected source or emission unit must monitor all control equipment and processes according to the requirements in this section. Monitoring requirements for each type of affected source and emission unit are summarized in Table 3 to this subpart. Area sources are subject to monitoring requirements for those affected sources listed in §63.1500(c)(1) through (4) of this subpart, and associated control equipment as required by paragraphs (b) through (k), (n) through (q), and (s) through (w) of this section, including but not limited to:

(1) The OM&M plan required in paragraph (b) of this section pertaining to each affected source listed in §63.1500(c)(1) through (4) of this subpart,

(2) The labeling requirements described in paragraph (c) of this section pertaining to group 1 furnaces processing other than clean charge, and scrap dryer/delacquering kiln/decoating kilns,

(3) Not applicable.

(4) The feed/charge weight monitoring requirements described in paragraph (e) of this section applicable to group 1 furnaces processing other than clean charge, scrap dryer/delacquering kiln/decoating kilns and thermal chip dryers,

(5) Not applicable.

(6) Not applicable.

(7) Not applicable.

(8) Not applicable.

(9) The requirements for monitoring total reactive flux injection described in paragraph (j) of this section for all group 1 furnaces processing other than clean charge,

(10) Not applicable.

(11) Not applicable.

(12) The requirements described in paragraph (o) of this section for uncontrolled group 1 sidewall furnaces processing other than clean charge,

(13) The requirements described in paragraph (p) of this section for scrap inspection programs for uncontrolled group 1 furnaces.

(14) The requirements described in paragraph (q) of this section for monitoring scrap contamination level for uncontrolled group 1 furnaces,

(15) The requirements described in paragraph (s) of this section for secondary aluminum processing units, limited to compliance with limits for emissions of D/F from group 1 furnaces processing other than clean charge,

(16) The requirements described in paragraph (t) of this section for secondary aluminum processing units limited to compliance with limits for emissions of D/F from group 1 furnaces processing other than clean charge,

(17) The requirements described in paragraph (u) of this section for secondary aluminum processing units limited to

**SECTION E. Source Group Restrictions.**

compliance with limits for emissions of D/F from group 1 furnaces processing other than clean charge,

(18) Not applicable.

(19) The requirements described in paragraph (w) of this section for approval of alternate methods for monitoring group 1 furnaces processing other than clean charge, thermal chip dryers, scrap dryer/delacquering kiln/decoating kilns and sweat furnaces and associated control devices for the control of D/F emissions

(b) Operation, maintenance, and monitoring (OM&M) plan. The owner or operator must prepare and implement for each new or existing affected source and emission unit, a written OM&M plan. The owner or operator of an existing affected source must submit the OM&M plan to the permitting authority for major sources, or the Administrator for area sources no later than the compliance date established by §63.1501. The owner or operator of any new affected source must submit the OM&M plan to the permitting authority for major sources, or the Administrator for area sources within 90 days after a successful initial performance test under §63.1511(b), or within 90 days after the compliance date established by §63.1501 if no initial performance test is required. The plan must be accompanied by a written certification by the owner or operator that the OM&M plan satisfies all requirements of this section and is otherwise consistent with the requirements of this subpart. The owner or operator must comply with all of the provisions of the OM&M plan as submitted to the permitting authority for major sources, or the Administrator for area sources, unless and until the plan is revised in accordance with the following procedures. If the permitting authority for major sources, or the Administrator for area sources determines at any time after receipt of the OM&M plan that any revisions of the plan are necessary to satisfy the requirements of this section or this subpart, the owner or operator must promptly make all necessary revisions and resubmit the revised plan. If the owner or operator determines that any other revisions of the OM&M plan are necessary, such revisions will not become effective until the owner or operator submits a description of the changes and a revised plan incorporating them to the permitting authority for major sources, or the Administrator for area sources. Each plan must contain the following information:

(1) Process and control device parameters to be monitored to determine compliance, along with established operating levels or ranges, as applicable, for each process and control device.

(2) A monitoring schedule for each affected source and emission unit.

(3) Procedures for the proper operation and maintenance of each process unit and add-on control device used to meet the applicable emission limits or standards in § 63.1505.

(4) Procedures for the proper operation and maintenance of monitoring devices or systems used to determine compliance, including:

(i) Calibration and certification of accuracy of each monitoring device, at least once every 6 months, according to the manufacturer's instructions; and

(ii) Procedures for the quality control and quality assurance of continuous emission or opacity monitoring systems as required by the general provisions in subpart A of this part.

(5) Procedures for monitoring process and control device parameters, including lime injection rates, procedures for annual inspections of afterburners, and if applicable, the procedure to be used for determining charge/feed (or throughput) weight if a measurement device is not used.

(6) Corrective actions to be taken when process or operating parameters or add-on control device parameters deviate from the value or range established in paragraph (b)(1) of this section, including:

(i) Procedures to determine and record the cause of any deviation or excursion, and the time the deviation or excursion began and ended; and

(ii) Procedures for recording the corrective action taken, the time corrective action was initiated, and the time/date corrective action was completed.

(7) A maintenance schedule for each process and control device that is consistent with the manufacturer's instructions and

**SECTION E. Source Group Restrictions.**

recommendations for routine and long-term maintenance.

(8) Documentation of the work practice and pollution prevention measures used to achieve compliance with the applicable emission limits and a site-specific monitoring plan as required in paragraph (o) of this section for each group 1 furnace not equipped with an add-on air pollution control device.

(9) Procedures to be followed when changing furnace classifications under the provisions of §63.1514.

(c) Labeling. The owner or operator must inspect the labels for each group 1 furnace, group 2 furnace, in-line fluxer and scrap dryer/delacquering kiln/decoating kiln at least once per calendar month to confirm that posted labels as required by the operational standard in § 63.1506(b) are intact and legible.

(d) Not applicable

(e) Feed/charge weight. The owner or operator of an affected source or emission unit subject to an emission limit in kg/Mg (lb/ton) or $\mu\text{g}/\text{Mg}$ (gr/ton) of feed/charge must install, calibrate, operate, and maintain a device to measure and record the total weight of feed/charge to, or the aluminum production from, the affected source or emission unit over the same operating cycle or time period used in the performance test. Feed/charge or aluminum production within SAPUs must be measured and recorded on an emission unit-by-emission unit basis. As an alternative to a measurement device, the owner or operator may use a procedure acceptable to the permitting authority for major sources, or the Administrator for area sources to determine the total weight of feed/charge or aluminum production to the affected source or emission unit.

(1) The accuracy of the weight measurement device or procedure must be ± 1 percent of the weight being measured. The owner or operator may apply to the permitting agency for approval to use a device of alternative accuracy if the required accuracy cannot be achieved as a result of equipment layout or charging practices. A device of alternative accuracy will not be approved unless the owner or operator provides assurance through data and information that the affected source will meet the relevant emission standard.

(2) The owner or operator must verify the calibration of the weight measurement device in accordance with the schedule specified by the manufacturer, or if no calibration schedule is specified, at least once every 6 months.

(f) Not applicable

(g) Not applicable

(h) Not applicable

(i) Not applicable

(j) Total reactive flux injection rate. These requirements apply to the owner or operator of a group 1 furnace (with or without add-on air pollution control devices) or in-line fluxer. The owner or operator must:

(1) Not applicable.

(2) Not applicable.

(3) Record, for each 15-minute block period during each operating cycle or time period used in the performance test during which reactive fluxing occurs, the time, weight, and type of flux for each addition of:

(i) Not applicable.

(ii) Solid reactive flux.

(4) Calculate and record the total reactive flux injection rate for each operating cycle or time period used in the performance test using the procedure in §63.1512(o). For solid flux that is added intermittently, record the amount added for each operating cycle or time period used in the performance test using the procedures in §63.1512(o).

**SECTION E. Source Group Restrictions.**

(5) The owner or operator of a group 1 furnace or in-line fluxer performing reactive fluxing may apply to the Administrator for approval of an alternative method for monitoring and recording the total reactive flux addition rate based on monitoring the weight or quantity of reactive flux per ton of feed/charge for each operating cycle or time period used in the performance test. An alternative monitoring method will not be approved unless the owner or operator provides assurance through data and information that the affected source will meet the relevant emission standards on a continuous basis.

(k) Not applicable

(l) Not applicable

(m) Not applicable

(n) Not applicable

(o) Group 1 furnace without add-on air pollution control devices. These requirements apply to the owner or operator of a group 1 furnace that is not equipped with an add-on air pollution control device.

(1) The owner or operator must develop, in consultation with the permitting authority for major sources, or the Administrator for area sources, a written site-specific monitoring plan. The site-specific monitoring plan must be submitted to the permitting authority for major sources, or the Administrator for area sources as part of the OM&M plan. The site-specific monitoring plan must contain sufficient procedures to ensure continuing compliance with all applicable emission limits and must demonstrate, based on documented test results, the relationship between emissions of PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces), and the proposed monitoring parameters for each pollutant. Test data must establish the highest level of PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces) that will be emitted from the furnace in accordance with §63.1511(b)(1). If the permitting authority for major sources, or the Administrator for area sources determines that any revisions of the site-specific monitoring plan are necessary to meet the requirements of this section or this subpart, the owner or operator must promptly make all necessary revisions and resubmit the revised plan.

(i) The owner or operator of an existing affected source must submit the site-specific monitoring plan to the permitting authority for major sources, or the Administrator for area sources for review at least 6 months prior to the compliance date.

(ii) The permitting authority for major sources, or the Administrator for area sources will review and approve or disapprove a proposed plan, or request changes to a plan, based on whether the plan contains sufficient provisions to ensure continuing compliance with applicable emission limits and demonstrates, based on documented test results, the relationship between emissions of PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces) and the proposed monitoring parameters for each pollutant. Test data must establish the highest level of PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces) that will be emitted from the furnace. Subject to approval of the OM&M plan, the highest levels may be determined by conducting performance tests and monitoring operating parameters in accordance with §63.1511(b)(1).

(2) Each site-specific monitoring plan must document each work practice, equipment/design practice, pollution prevention practice, or other measure used to meet the applicable emission standards.

(3) Each site-specific monitoring plan must include provisions for unit labeling as required in paragraph (c) of this section, feed/charge weight measurement (or production weight measurement) as required in paragraph (e) of this section and flux weight measurement as required in paragraph (j) of this section.

(4) Each site-specific monitoring plan for a melting/holding furnace subject to the clean charge emission standard in § 63.1505(i)(3) must include these requirements:

(i) The owner or operator must record the type of feed/ charge (e.g ., ingot, thermally dried chips, dried scrap, etc.) for each operating cycle or time period used in the performance test; and

(ii) The owner or operator must submit a certification of compliance with the applicable operational standard for clean charge materials in § 63.1506(n)(3) for each 6-month reporting period. Each certification must contain the information in § 63.1516(b)(2)(iv).

(5) Not applicable

**SECTION E. Source Group Restrictions.**

(6) Not applicable

(7) If a site-specific monitoring plan includes a scrap inspection program for monitoring the scrap contaminant level of furnace feed/charge materials, the plan must include provisions for the demonstration and implementation of the program in accordance with all applicable requirements in paragraph (p) of this section.

(8) If a site-specific monitoring plan includes a calculation method for monitoring the scrap contaminant level of furnace feed/charge materials, the plan must include provisions for the demonstration and implementation of the program in accordance with all applicable requirements in paragraph (q) of this section.

(p) Not applicable.

(q) Not applicalbe.

(r) Group 2 furnace. These requirements apply to the owner or operator of a new or existing group 2 furnace. The owner or operator must:

(1) Record a description of the materials charged to each furnace, including any nonreactive, non-HAP-containing/non-HAP-generating fluxing materials or agents.

(2) Submit a certification of compliance with the applicable operational standard for charge materials in § 63.1506(o) for each 6-month reporting period. Each certification must contain the information in § 63.1516(b)(2)(v).

(s) Site-specific requirements for secondary aluminum processing units. (1) An owner or operator of a secondary aluminum processing unit at a facility must include, within the OM&M plan prepared in accordance with § 63.1510(b), the following information:

(i) The identification of each emission unit in the secondary aluminum processing unit;

(ii) The specific control technology or pollution prevention measure to be used for each emission unit in the secondary aluminum processing unit and the date of its installation or application;

(iii) The emission limit calculated for each secondary aluminum processing unit and performance test results with supporting calculations demonstrating initial compliance with each applicable emission limit;

(iv) Information and data demonstrating compliance for each emission unit with all applicable design, equipment, work practice or operational standards of this subpart; and

(v) The monitoring requirements applicable to each emission unit in a secondary aluminum processing unit and the monitoring procedures for daily calculation of the 3-day, 24-hour rolling average using the procedure in § 63.1510(t).

(2) The SAPU compliance procedures within the OM&M plan may not contain any of the following provisions:

(i) Any averaging among emissions of differing pollutants;

(ii) The inclusion of any affected sources other than emission units in a secondary aluminum processing unit;

(iii) The inclusion of any emission unit while it is shutdown; or

(iv) The inclusion of any periods of startup, shutdown, or malfunction in emission calculations.

(3) To revise the SAPU compliance provisions within the OM&M plan prior to the end of the permit term, the owner or operator must submit a request to the permitting authority for major sources, or the Administrator for area sources containing the information required by paragraph (s)(1) of this section and obtain approval of the permitting authority for major sources, or the Administrator for area sources prior to implementing any revisions.

(t) Secondary aluminum processing unit. Except as provided in paragraph (u) of this section, the owner or operator must

**SECTION E. Source Group Restrictions.**

calculate and record the 3-day, 24-hour rolling average emissions of PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces) for each secondary aluminum processing unit on a daily basis. To calculate the 3-day, 24-hour rolling average, the owner or operator must:

(1) Calculate and record the total weight of material charged to each emission unit in the secondary aluminum processing unit for each 24-hour day of operation using the feed/charge weight information required in paragraph (e) of this section. If the owner or operator chooses to comply on the basis of weight of aluminum produced by the emission unit, rather than weight of material charged to the emission unit, all performance test emissions results and all calculations must be conducted on the aluminum production weight basis.

(2) Multiply the total feed/charge weight to the emission unit, or the weight of aluminum produced by the emission unit, for each emission unit for the 24-hour period by the emission rate (in lb/ton of feed/charge) for that emission unit (as determined during the performance test) to provide emissions for each emission unit for the 24-hour period, in pounds.

(i) Where no performance test has been conducted, for a particular emission unit, because the owner or operator has, with the approval of the permitting authority for major sources, or the Administrator for area sources, chosen to determine the emission rate of an emission unit by testing a representative unit, in accordance with §63.1511(f), the owner or operator shall use the emission rate determined from the representative unit in the SAPU emission rate calculation required in §63.1510(t)(4).

(ii) Except as provided in paragraph (t)(2)(iii) of this section, if the owner or operator has not conducted performance tests for HCl (and HF for an uncontrolled group 1 furnace) or for HCl for an in-line fluxer, in accordance with the provisions of §63.1512(d)(3), (e)(3), or (h)(2), the calculation required in §63.1510(t)(4) to determine SAPU-wide HCl and HF emissions shall be made under the assumption that all chlorine contained in reactive flux added to the emission unit is emitted as HCl and all fluorine contained in reactive flux added to the emission unit is emitted as HF.

(iii) Prior to the date by which the initial performance test for HF emissions from uncontrolled group 1 furnaces is conducted, or is required to be conducted, the calculation required in §63.1505(k) to determine the SAPU-wide HF emission limit and the calculation required in §63.1510(t)(4) to determine the SAPU-wide HF emission rate must exclude HF emissions from untested uncontrolled group 1 furnaces and feed/charge processed in untested uncontrolled group 1 furnaces.

(3) Divide the total emissions for each SAPU for the 24-hour period by the total material charged to the SAPU, or the weight of aluminum produced by the SAPU over the 24-hour period to provide the daily emission rate for the SAPU.

(4) Compute the 24-hour daily emission rate using Equation 4:

$$\text{(Equation 4) } E_{\text{day}} = \frac{\sum_{i=1}^n E(T_i * ER_i)}{\sum_{i=1}^n E(T_i)}$$

Where,

E_{day} = The daily PM, HCl, and D/F (and HF for uncontrolled group 1 furnaces) emission rate for the secondary aluminum processing unit for the 24-hour period;

T_i = The total amount of feed, or aluminum produced, for emission unit i for the 24-hour period (tons or Mg);

ER_i = The measured emission rate for emission unit i as determined in the performance test (lb/ton or $\mu\text{g}/\text{Mg}$ of feed/charge); and

n = The number of emission units in the secondary aluminum processing unit.

(5) Calculate and record the 3-day, 24-hour rolling average for each pollutant each day by summing the daily emission rates for each pollutant over the 3 most recent consecutive days and dividing by 3. The SAPU is in compliance with an applicable emission limit if the 3-day, 24-hour rolling average for each pollutant is no greater than the applicable SAPU emission limit

**SECTION E. Source Group Restrictions.**

determined in accordance with §63.1505(k)(1)-(3).

(u) Secondary aluminum processing unit compliance by individual emission unit demonstration. As an alternative to the procedures of paragraph (t) of this section, an owner or operator may demonstrate, through performance tests, that each individual emission unit within the secondary aluminum production unit is in compliance with the applicable emission limits for the emission unit.

(v) Not applicable

(w) Alternative monitoring methods. If an owner or operator wishes to use an alternative monitoring method to demonstrate compliance with any emission standard in this subpart, other than those alternative monitoring methods which may be authorized pursuant to § 63.1510(j)(5) and § 63.1510(v), the owner or operator may submit an application to the Administrator. Any such application will be processed according to the criteria and procedures set forth in paragraphs (w)(1) through (6) of this section.

(1) The Administrator will not approve averaging periods other than those specified in this section.

(2) The owner or operator must continue to use the original monitoring requirement until necessary data are submitted and approval is received to use another monitoring procedure.

(3) The owner or operator shall submit the application for approval of alternate monitoring methods no later than the notification of the performance test. The application must contain the information specified in paragraphs (w)(3) (i) through (iii) of this section:

(i) Data or information justifying the request, such as the technical or economic infeasibility, or the impracticality of using the required approach;

(ii) A description of the proposed alternative monitoring requirements, including the operating parameters to be monitored, the monitoring approach and technique, and how the limit is to be calculated; and

(iii) Data and information documenting that the alternative monitoring requirement(s) would provide equivalent or better assurance of compliance with the relevant emission standard(s).

(4) The Administrator will not approve an alternate monitoring application unless it would provide equivalent or better assurance of compliance with the relevant emission standard(s). Before disapproving any alternate monitoring application, the Administrator will provide:

(i) Notice of the information and findings upon which the intended disapproval is based; and

(ii) Notice of opportunity for the owner or operator to present additional supporting information before final action is taken on the application. This notice will specify how much additional time is allowed for the owner or operator to provide additional supporting information.

(5) The owner or operator is responsible for submitting any supporting information in a timely manner to enable the Administrator to consider the application prior to the performance test. Neither submittal of an application nor the Administrator's failure to approve or disapprove the application relieves the owner or operator of the responsibility to comply with any provisions of this subpart.

(6) The Administrator may decide at any time, on a case-by-case basis, that additional or alternative operating limits, or alternative approaches to establishing operating limits, are necessary to demonstrate compliance with the emission standards of this subpart.

IV. RECORDKEEPING REQUIREMENTS.

**# 005 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.10]
Subpart A--General Provisions
Recordkeeping and reporting requirements.**

**SECTION E. Source Group Restrictions.**

[From 40 C.F.R. Section 63.10(b)]

(b) General recordkeeping requirements. (1) The owner or operator of an affected source subject to the provisions of this part shall maintain files of all information (including all reports and notifications) required by this part recorded in a form suitable and readily available for expeditious inspection and review. The files shall be retained for at least 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record. At a minimum, the most recent 2 years of data shall be retained on site. The remaining 3 years of data may be retained off site. Such files may be maintained on microfilm, on a computer, on computer floppy disks, on magnetic tape disks, or on microfiche.

(2) The owner or operator of an affected source subject to the provisions of this part shall maintain relevant records for such source of—

(i) The occurrence and duration of each startup or shutdown when the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards;

(ii) The occurrence and duration of each malfunction of operation (i.e., process equipment) or the required air pollution control and monitoring equipment;

(iii) All required maintenance performed on the air pollution control and monitoring equipment;

(iv)(A) Actions taken during periods of startup or shutdown when the source exceeded applicable emission limitations in a relevant standard and when the actions taken are different from the procedures specified in the affected source's startup, shutdown, and malfunction plan (see § 63.6(e)(3)); or

(B) Actions taken during periods of malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) when the actions taken are different from the procedures specified in the affected source's startup, shutdown, and malfunction plan (see § 63.6(e)(3));

(v) All information necessary, including actions taken, to demonstrate conformance with the affected source's startup, shutdown, and malfunction plan (see § 63.6(e)(3)) when all actions taken during periods of startup or shutdown (and the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards), and malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) are consistent with the procedures specified in such plan. (The information needed to demonstrate conformance with the startup, shutdown, and malfunction plan may be recorded using a "checklist," or some other effective form of recordkeeping, in order to minimize the recordkeeping burden for conforming events);

(vi) Not applicable

(vii) Not applicable

(viii) All results of performance tests, CMS performance evaluations, and opacity and visible emission observations;

(ix) All measurements as may be necessary to determine the conditions of performance tests and performance evaluations;

(x) Not applicable

(xi) Not applicable

(xii) Any information demonstrating whether a source is meeting the requirements for a waiver of recordkeeping or reporting requirements under this part, if the source has been granted a waiver under paragraph (f) of this section;

(xiii) All emission levels relative to the criterion for obtaining permission to use an alternative to the relative accuracy test, if the source has been granted such permission under § 63.8(f)(6); and

(xiv) All documentation supporting initial notifications and notifications of compliance status under § 63.9.

**SECTION E. Source Group Restrictions.**

(3) Recordkeeping requirement for applicability determinations. If an owner or operator determines that his or her stationary source that emits (or has the potential to emit, without considering controls) one or more hazardous air pollutants regulated by any standard established pursuant to section 112(d) or (f), and that stationary source is in the source category regulated by the relevant standard, but that source is not subject to the relevant standard (or other requirement established under this part) because of limitations on the source's potential to emit or an exclusion, the owner or operator must keep a record of the applicability determination on site at the source for a period of 5 years after the determination, or until the source changes its operations to become an affected source, whichever comes first. The record of the applicability determination must be signed by the person making the determination and include an analysis (or other information) that demonstrates why the owner or operator believes the source is unaffected (e.g., because the source is an area source). The analysis (or other information) must be sufficiently detailed to allow the Administrator to make a finding about the source's applicability status with regard to the relevant standard or other requirement. If relevant, the analysis must be performed in accordance with requirements established in relevant subparts of this part for this purpose for particular categories of stationary sources. If relevant, the analysis should be performed in accordance with EPA guidance materials published to assist sources in making applicability determinations under section 112, if any. The requirements to determine applicability of a standard under § 63.1(b)(3) and to record the results of that determination under paragraph (b)(3) of this section shall not by themselves create an obligation for the owner or operator to obtain a title V permit.

006 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1517]**Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Records**

(a) As required by § 63.10(b), the owner or operator shall maintain files of all information (including all reports and notifications) required by the general provisions and this subpart.

(1) The owner or operator must retain each record for at least 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record. The most recent 2 years of records must be retained at the facility. The remaining 3 years of records may be retained off site.

(2) The owner or operator may retain records on microfilm, computer disks, magnetic tape, or microfiche; and

(3) The owner or operator may report required information on paper or on a labeled computer disk using commonly available and EPA-compatible computer software.

(b) In addition to the general records required by § 63.10(b), the owner or operator of a new or existing affected source (including an emission unit in a secondary aluminum processing unit) must maintain records of:

(1) Not applicable

(2) Not applicable

(3) Not applicable

(4) Not applicable

(5) For each group 1 furnace (with or without add-on air pollution control devices) or in-line fluxer, records of 15-minute block average weights of gaseous or liquid reactive flux injection, total reactive flux injection rate and calculations (including records of the identity, composition, and weight of each addition of gaseous, liquid or solid reactive flux), including records of any period the rate exceeds the compliant operating parameter value and corrective action taken.

(6) Not applicable

(7) For each affected source and emission unit subject to an emission standard in kg/Mg (lb/ton) of feed/charge, records of feed/charge (or throughput) weights for each operating cycle or time period used in the performance test.

(8) Approved site-specific monitoring plan for a group 1 furnace without add-on air pollution control devices with records documenting conformance with the plan.

**SECTION E. Source Group Restrictions.**

- (9) Records of all charge materials for each thermal chip dryer, cross-only furnace, and group 1 melting/holding furnaces without air pollution control devices processing only clean charge.
- (10) Not applicable
- (11) Not applicable
- (12) Records of all charge materials and fluxing materials or agents for a group 2 furnace.
- (13) Records of monthly inspections for proper unit labeling for each affected source and emission unit subject to labeling requirements.
- (14) Not applicable
- (15) Records for any approved alternative monitoring or test procedure.
- (16) Current copy of all required plans, including any revisions, with records documenting conformance with the applicable plan, including:
- (i) [Reserved]
 - (ii) OM&M plan; and
 - (iii) Site-specific secondary aluminum processing unit emission plan (if applicable).
- (17) For each secondary aluminum processing unit, records of total charge weight, or if the owner or operator chooses to comply on the basis of aluminum production, total aluminum produced for each 24-hour period and calculations of 3-day, 24-hour rolling average emissions.
- (18) For any failure to meet an applicable standard, the owner or operator must maintain the following records;
- (i) Records of the emission unit ID, monitor ID, pollutant or parameter monitored, beginning date and time of the event, end date and time of the event, cause of the deviation or exceedance and corrective action taken.
 - (ii) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.1506(a)(5), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.
- (19) For each period of startup or shutdown for which the owner or operator chooses to demonstrate compliance for an affected source, the owner or operator must comply with (b)(19)(i) or (ii) of this section.
- (i) To demonstrate compliance based on a feed/charge rate of zero, a flux rate of zero and the use of electricity, propane or natural gas as the sole sources of heating or the lack of heating, the owner or operator must submit a semiannual report in accordance with §63.1516(b)(2)(vii) or maintain the following records:
 - (A) The date and time of each startup and shutdown;
 - (B) The quantities of feed/charge and flux introduced during each startup and shutdown; and
 - (C) The types of fuel used to heat the unit, or that no fuel was used, during startup and shutdown; or
 - (ii) To demonstrate compliance based on performance tests, the owner or operator must maintain the following records:
 - (A) The date and time of each startup and shutdown;
 - (B) The measured emissions in lb/hr or µg/hr or ng/hr;

**SECTION E. Source Group Restrictions.**

(C) The measured feed/charge rate in tons/hr or Mg/hr from your most recent performance test associated with a production rate greater than zero, or the rated capacity of the affected source if no prior performance test data is available; and

(D) An explanation to support that such conditions are considered representative startup and shutdown operations.

(20) For owners or operators that choose to change furnace operating modes, the following records must be maintained:

(i) The date and time of each change in furnace operating mode, and

(ii) The nature of the change in operating mode (for example, group 1 controlled furnace processing other than clean charge to group 2).

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 79818, Dec. 30, 2002; 80 FR 56753, Sept. 18, 2015; 81 FR 38089, June 13, 2016]

V. REPORTING REQUIREMENTS.**# 007 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1515]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Notifications.**

(a) Initial notifications. The owner or operator must submit initial notifications to the permitting authority for major sources, or the Administrator for area sources as described in paragraphs (a)(1) through (7) of this section.

(1) As required by § 63.9(b)(1), the owner or operator must provide notification for an area source that subsequently increases its emissions such that the source is a major source subject to the standard.

(2) As required by § 63.9(b)(3), the owner or operator of a new or reconstructed affected source, or a source that has been reconstructed such that it is an affected source, that has an initial startup after the effective date of this subpart and for which an application for approval of construction or reconstruction is not required under § 63.5(d), must provide notification that the source is subject to the standard.

(3) Not applicable

(4) As required by § 63.9(b)(5), after the effective date of this subpart, an owner or operator who intends to construct a new affected source or reconstruct an affected source subject to this subpart, or reconstruct a source such that it becomes an affected source subject to this subpart, must provide notification of the intended construction or reconstruction. The notification must include all the information required for an application for approval of construction or reconstruction as required by § 63.5(d). For major sources, the application for approval of construction or reconstruction may be used to fulfill these requirements.

(i) The application must be submitted as soon as practicable before the construction or reconstruction is planned to commence (but no sooner than the effective date) if the construction or reconstruction commences after the effective date of this subpart; or

(ii) The application must be submitted as soon as practicable before startup but no later than 90 days after the effective date of this subpart if the construction or reconstruction had commenced and initial startup had not occurred before the effective date.

(5) As required by § 63.9(d), the owner or operator must provide notification of any special compliance obligations for a new source.

(6) As required by § 63.9(e) and (f), the owner or operator must provide notification of the anticipated date for conducting performance tests and visible emission observations. The owner or operator must notify the Administrator of the intent to conduct a performance test at least 60 days before the performance test is scheduled; notification of opacity or visible emission observations for a performance test must be provided at least 30 days before the observations are scheduled to take place.

**SECTION E. Source Group Restrictions.**

(7) As required by § 63.9(g), the owner or operator must provide additional notifications for sources with continuous emission monitoring systems or continuous opacity monitoring systems.

(b) Notification of compliance status report. Each owner or operator of an existing affected source must submit a notification of compliance status report within 60 days after the compliance date established by §63.1501. Each owner or operator of a new affected source must submit a notification of compliance status report within 90 days after conducting the initial performance test required by §63.1511(b), or within 90 days after the compliance date established by §63.1501 if no initial performance test is required. The notification must be signed by the responsible official who must certify its accuracy. A complete notification of compliance status report must include the information specified in paragraphs (a)(1) through (10) of this section. The required information may be submitted in an operating permit application, in an amendment to an operating permit application, in a separate submittal, or in any combination. In a State with an approved operating permit program where delegation of authority under section 112(l) of the CAA has not been requested or approved, the owner or operator must provide duplicate notification to the applicable Regional Administrator. If an owner or operator submits the information specified in this section at different times or in different submittals, later submittals may refer to earlier submittals instead of duplicating and resubmitting the information previously submitted. A complete notification of compliance status report must include:

(1) All information required in § 63.9(h). The owner or operator must provide a complete performance test report for each affected source and emission unit for which a performance test is required. A complete performance test report includes all data, associated measurements, and calculations (including visible emission and opacity tests).

(2) The approved site-specific test plan and performance evaluation test results for each continuous monitoring system (including a continuous emission or opacity monitoring system).

(3) Unit labeling as described in § 63.1506(b), including process type or furnace classification and operating requirements.

(4) The compliant operating parameter value or range established for each affected source or emission unit with supporting documentation and a description of the procedure used to establish the value (e.g., lime injection rate, total reactive chlorine flux injection rate, total reactive fluorine flux injection rate for uncontrolled group 1 furnaces, afterburner operating temperature, fabric filter inlet temperature), including the operating cycle or time period used in the performance test.

(5) Design information and analysis, with supporting documentation, demonstrating conformance with the requirements for capture/collection systems in § 63.1506(c).

(6) Not applicable.

(7) Not applicable

(8) Not applicable

(9) The OM&M plan (including site-specific monitoring plan for each group 1 furnace with no add-on air pollution control device).

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 59793, Sept. 24, 2002; 67 FR 79818, Dec. 30, 2002; 80 FR 56752, Sept. 18, 2015; 81 FR 38088, June 13, 2016]

008 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1516]

Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Reports.

(a) [Reserved]

(b) Excess emissions/summary report. The owner or operator of a major or area source must submit semiannual reports according to the requirements in §63.10(e)(3). Except, the owner or operator must submit the semiannual reports within 60 days after the end of each 6-month period instead of within 30 days after the calendar half as specified in §63.10(e)(3)(v). When no deviations of parameters have occurred, the owner or operator must submit a report stating that no excess

SECTION E. Source Group Restrictions.

emissions occurred during the reporting period.

(1) A report must be submitted if any of these conditions occur during a 6-month reporting period:

(i) Not applicable

(ii) Not applicable

(iii) Not applicable

(iv) An excursion of a compliant process or operating parameter value or range (e.g., lime injection rate or screw feeder setting, total reactive chlorine flux injection rate, afterburner operating temperature, fabric filter inlet temperature, definition of acceptable scrap, or other approved operating parameter).

(v) [Reserved]

(vi) An affected source (including an emission unit in a secondary aluminum processing unit) was not operated according to the requirements of this subpart.

(vii) A deviation from the 3-day, 24-hour rolling average emission limit for a secondary aluminum processing unit.

(2) Each report must include each of these certifications, as applicable:

(i) Not applicable

(ii) Not applicable

(iii) Not applicable

(iv) For each group 1 melting/holding furnace without add-on air pollution control devices and using pollution prevention measures that processes only clean charge material: "Each group 1 furnace without add-on air pollution control devices subject to emission limits in § 63.1505(i)(2) processed only clean charge during this reporting period."

(v) For each group 2 furnace: "Only clean charge materials were processed in any group 2 furnace during this reporting period, and no fluxing was performed or all fluxing performed was conducted using only nonreactive, non-HAP-containing/non-HAP-generating fluxing gases or agents, except for cover fluxes, during this reporting period."

(vi) Not applicable

(vii) For each affected source choosing to demonstrate compliance during periods of startup and shutdown in accordance with §63.1513(f)(1): "During each startup and shutdown, no flux and no feed/charge were added to the emission unit, and electricity, propane or natural gas were used as the sole source of heat or the emission unit was not heated."

(3) The owner or operator must submit the results of any performance test conducted during the reporting period, including one complete report documenting test methods and procedures, process operation, and monitoring parameter ranges or values for each test method used for a particular type of emission point tested.

(i) Within 60 days after the date of completing each performance test (as defined in §63.2) required by this subpart, you must submit the results of the performance tests, including any associated fuel analyses, following the procedure specified in either paragraph (b)(3)(i)(A) or (B) of this section.

(A) For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT Web site (https://www3.epa.gov/ttn/chief/ert/ert_info.html), you must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). (CEDRI can be accessed through the EPA's Central Data Exchange (CDX) (<https://cdx.epa.gov/>)). Performance test data must be submitted in a file format generated through the use of the EPA's ERT or an alternate electronic file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT Web site. If you claim that some of the performance test information being submitted

**SECTION E. Source Group Restrictions.**

is confidential business information (CBI), you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAQPS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

(B) For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT Web site, you must submit the results of the performance test to the Administrator at the appropriate address listed in §63.13.

(ii) [Reserved]

(4) A malfunction report that is required under paragraph (d) of this section shall be submitted simultaneously with the semiannual excess emissions/summary report required by paragraph (b) of this section.

(c) Annual compliance certifications. For the purpose of annual certifications of compliance required by 40 CFR part 70 or 71, the owner or operator must certify continuing compliance based upon, but not limited to, the following conditions:

(1) Any period of excess emissions, as defined in paragraph (b)(1) of this section, that occurred during the year were reported as required by this subpart; and

(2) All monitoring, recordkeeping, and reporting requirements were met during the year.

(d) If there was a malfunction during the reporting period, the owner or operator must submit a report that includes the emission unit ID, monitor ID, pollutant or parameter monitored, beginning date and time of the event, end date and time of the event, cause of the deviation or exceedance and corrective action taken for each malfunction which occurred during the reporting period and which caused or may have caused any applicable emission limitation to be exceeded. The report must include a list of the affected source or equipment, an estimate of the quantity of each regulated pollutant emitted over any emission limit, and a description of the method used to estimate the emissions, including, but not limited to, product-loss calculations, mass balance calculations, measurements when available, or engineering judgment based on known process parameters. The report must also include a description of actions taken by an owner or operator during a malfunction of an affected source to minimize emissions in accordance with §63.1506(a)(5).

(e) All reports required by this subpart not subject to the requirements in paragraph (b) of this section must be sent to the Administrator at the appropriate address listed in §63.13. If acceptable to both the Administrator and the owner or operator of a source, these reports may be submitted on electronic media. The Administrator retains the right to require submittal of reports subject to paragraph (b) of this section in paper format.

[65 FR 15710, Mar. 23, 2000, as amended at 69 FR 53984, Sept. 3, 2004; 71 FR 20461, Apr. 20, 2006; 80 FR 56753, Sept. 18, 2015; 81 FR 38088, June 13, 2016]

VI. WORK PRACTICE REQUIREMENTS.**# 009 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1506]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Operating requirements.**

(a) Summary. (1) The owner or operator must operate all new and existing affected sources and control equipment according to the requirements in this section. The affected sources, and their associated control equipment, listed in §63.1500(c)(1) through (4) of this subpart that are located at a secondary aluminum production facility that is an area source are subject to the operating requirements of paragraphs (b), (c), (d), (f), (g), (h), (m), (n), and (p) of this section.

(2) Not Applicable

(3) Not applicable

(4) Operating requirements are summarized in Table 2 to this subpart.

**SECTION E. Source Group Restrictions.**

(5) At all times, the owner or operator must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

(b) Labeling. The owner or operator must provide and maintain easily visible labels posted at each group 1 furnace, group 2 furnace, in-line fluxer and scrap dryer/delacquering kiln/decoating kiln that identifies the applicable emission limits and means of compliance, including:

(1) The type of affected source or emission unit (e.g., scrap dryer/delacquering kiln/decoating kiln, group 1 furnace, group 2 furnace, in-line fluxer).

(2) The applicable operational standard(s) and control method(s) (work practice or control device). This includes, but is not limited to, the type of charge to be used for a furnace (e.g ., clean scrap only, all scrap, etc.), flux materials and addition practices, and the applicable operating parameter ranges and requirements as incorporated in the OM&M plan.

(3) Not applicable

(c) Not applicable

(d) Feed/charge weight. The owner or operator of each affected source or emission unit subject to an emission limit in kg/Mg (lb/ton) or µg/Mg (gr/ton) of feed/charge must:

(1) Except as provided in paragraph (d)(3) of this section, install and operate a device that measures and records or otherwise determine the weight of feed/charge (or throughput) for each operating cycle or time period used in the performance test; and

(2) Operate each weight measurement system or other weight determination procedure in accordance with the OM&M plan.

(3) Not applicable

(e) - (m) Not applicable

(n) Group 1 furnace without add-on air pollution control devices. The owner or operator of a group 1 furnace (including a group 1 furnace that is part of a secondary aluminum processing unit) without add-on air pollution control devices must:

(1) Maintain the total reactive chlorine flux injection rate and fluorine flux injection rate for each operating cycle or time period used in the performance test, at or below the average rate established during the performance test.

(2) Operate each furnace in accordance with the work practice/pollution prevention measures documented in the OM&M plan and within the parameter values or ranges established in the OM&M plan.

(3) Operate each group 1 melting/holding furnace subject to the emission standards in § 63.1505(i)(2) using only clean charge as the feedstock.

(o) Group 2 furnace. The owner or operator of a new or existing group 2 furnace must:

(1) Operate each furnace using only clean charge as the feedstock.

(2) Operate each furnace using no reactive flux.

(p) Corrective action. When a process parameter or add-on air pollution control device operating parameter deviates from the value or range established during the performance test and incorporated in the OM&M plan, the owner or operator must initiate corrective action. Corrective action must restore operation of the affected source or emission unit (including the process or control device) to its normal or usual mode of operation as expeditiously as practicable in accordance with good air pollution control practices for minimizing emissions. Corrective actions taken must include follow-up actions necessary

**SECTION E. Source Group Restrictions.**

to return the process or control device parameter level(s) to the value or range of values established during the performance test and steps to prevent the likely recurrence of the cause of a deviation.

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 59792, Sept. 24, 2002; 67 FR 79816, Dec. 30, 2002; 69 FR 53984, Sept. 3, 2004; 80 FR 56740, Sept. 18, 2015]

VII. ADDITIONAL REQUIREMENTS.**# 010 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1500]****Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Applicability.**

(a) The requirements of this subpart apply to the owner or operator of each secondary aluminum production facility as defined in § 63.1503.

(b) Not applicable

(c) The requirements of this subpart pertaining to dioxin and furan (D/F) emissions and associated operating, monitoring, reporting and recordkeeping requirements apply to the following affected sources, located at a secondary aluminum production facility that is an area source of HAPs as defined in § 63.2:

(1) Not applicable

(2) Not applicable

(3) Not applicable

(4) Each new and existing secondary aluminum processing unit, containing one or more group 1 furnace emission units processing other than clean charge.

(d) The requirements of this subpart do not apply to facilities and equipment used for research and development that are not used to produce a saleable product.

(e) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart applicable to area sources.

(f) An aluminum die casting facility, aluminum foundry, or aluminum extrusion facility shall be considered to be an area source if it does not emit, or have the potential to emit considering controls, 10 tons per year or more of any single listed HAP or 25 tons per year of any combination of listed HAP from all emission sources which are located in a contiguous area and under common control, without regard to whether or not such sources are regulated under this subpart or any other subpart. In the case of an aluminum die casting facility, aluminum foundry, or aluminum extrusion facility which is an area source and is subject to regulation under this subpart only because it operates a thermal chip dryer, no furnace operated by such a facility shall be deemed to be subject to the requirements of this subpart if it melts only clean charge, internal scrap, or customer returns.

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 79814, Dec. 30, 2002; 70 FR 75346, Dec. 19, 2005]

011 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1503]**Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Definitions.**

Terms used in this subpart are defined in the Clean Air Act as amended (CAA), in §63.2, or in this section as follows:

ACGIH Guidelines means chapters 3 and 5 of Industrial Ventilation: A Manual of Recommended Practice 23rd edition or appropriate chapters of Industrial Ventilation: A Manual of Recommended Practice for Design 27th edition (incorporated by reference, see §63.14).

**SECTION E. Source Group Restrictions.**

Add-on air pollution control device means equipment installed on a process vent that reduces the quantity of a pollutant that is emitted to the air.

Afterburner means an air pollution control device that uses controlled flame combustion to convert combustible materials to noncombustible gases; also known as an incinerator or a thermal oxidizer.

Aluminum scrap means fragments of aluminum stock removed during manufacturing (i.e., machining), manufactured aluminum articles or parts rejected or discarded and useful only as material for reprocessing, and waste and discarded material made of aluminum.

Aluminum scrap shredder means a high speed or low speed unit that crushes, grinds, granulates, shears or breaks aluminum scrap into a more uniform size prior to processing or charging to a scrap dryer/delacquering kiln/decoating kiln, or furnace. A bale breaker is not an aluminum scrap shredder. Shearing and cutting operations performed at rolling mills and aluminum finishing operations (such as slitters) are not aluminum scrap shredders.

Bag leak detection system means an instrument that is capable of monitoring particulate matter loadings in the exhaust of a fabric filter (i.e., baghouse) in order to detect bag failures. A bag leak detection system includes, but is not limited to, an instrument that operates on triboelectric, light scattering, light transmittance, or other effect to monitor relative particulate matter loadings.

Bale breaker means a device used to break apart a bale of aluminum scrap for further processing. Bale breakers are not used to crush, grind, granulate, shear or break aluminum scrap into more uniform size pieces.

Capture and collection system means the system, including duct systems and fans, and, in some cases, hoods, used to collect a contaminant at or near its source, and for affected sources equipped with an air pollution control device, transport the contaminated air to the air cleaning device.

Chips means small, uniformly-sized, unpainted pieces of aluminum scrap, typically below 1 1/4 inches in any dimension, primarily generated by turning, milling, boring, and machining of aluminum parts.

Clean charge means furnace charge materials, including molten aluminum; T-bar; sow; ingot; billet; pig; alloying elements; aluminum scrap known by the owner or operator to be entirely free of paints, coatings, and lubricants; uncoated/unpainted aluminum chips that have been thermally dried or treated by a centrifugal cleaner; aluminum scrap dried at 343 °C (650 °F) or higher; aluminum scrap delacquered/decoated at 482 °C (900 °F) or higher; and runaround scrap. Anodized aluminum that contains dyes or sealants containing organic compounds is not clean charge.

Cover flux means salt added to the surface of molten aluminum in a group 1 or group 2 furnace, without surface agitation of the molten aluminum, for the purpose of preventing oxidation. Any flux added to a rotary furnace is not a cover flux.

Customer returns means any aluminum product which is returned by a customer to the aluminum company that originally manufactured the product prior to resale of the product or further distribution in commerce, and which contains no paint or other solid coatings (i.e., lacquers).

D/F means dioxins and furans.

Dioxins and furans means tetra-, penta-, hexa-, and octachlorinated dibenzo dioxins and furans.

Dross means the slags and skimmings from aluminum melting and refining operations consisting of fluxing agent(s), impurities, and/or oxidized and non-oxidized aluminum, from scrap aluminum charged into the furnace.

Dross-only furnace means a furnace, typically of rotary barrel design, dedicated to the reclamation of aluminum from dross formed during melting, holding, fluxing, or alloying operations carried out in other process units. Dross and salt flux are the sole feedstocks to this type of furnace.

Emission unit means a group 1 furnace or in-line fluxer at a secondary aluminum production facility.

Fabric filter means an add-on air pollution control device used to capture particulate matter by filtering gas streams through

**SECTION E. Source Group Restrictions.**

filter media; also known as a baghouse.

Feed/charge means, for a furnace or other process unit that operates in batch mode, the total weight of material (including molten aluminum, T-bar, sow, ingot, etc.) and alloying agents that enter the furnace during an operating cycle. For a furnace or other process unit that operates continuously, feed/charge means the weight of material (including molten aluminum, T-bar, sow, ingot, etc.) and alloying agents that enter the process unit within a specified time period (e.g., a time period equal to the performance test period). The feed/charge for a dross only furnace includes the total weight of dross and solid flux.

Fluxing means refining of molten aluminum to improve product quality, achieve product specifications, or reduce material loss, including the addition of solvents to remove impurities (solvent flux); and the injection of gases such as chlorine, or chlorine mixtures, to remove magnesium (demagging) or hydrogen bubbles (degassing). Fluxing may be performed in the furnace or outside the furnace by an in-line fluxer.

Furnace hearth means the combustion zone of a furnace in which the molten metal is contained.

Group 1 furnace means a furnace of any design that melts, holds, or processes aluminum that contains paint, lubricants, coatings, or other foreign materials with or without reactive fluxing, or processes clean charge with reactive fluxing.

Group 2 furnace means a furnace of any design that melts, holds, or processes only clean charge and that performs no fluxing or performs fluxing using only nonreactive, non-HAP-containing/non-HAP-generating gases or agents. Unheated pots, to which no flux is added and that are used to transport metal, are not furnaces.

HCl means hydrogen chloride.

HF means hydrogen fluoride.

In-line fluxer means a device exterior to a furnace, located in a transfer line from a furnace, used to refine (flux) molten aluminum; also known as a flux box, degassing box, or demagging box.

Internal scrap means all aluminum scrap regardless of the level of contamination which originates from castings or extrusions produced by an aluminum die casting facility, aluminum foundry, or aluminum extrusion facility, and which remains at all times within the control of the company that produced the castings or extrusions.

Lime means calcium oxide or other alkaline reagent.

Lime-injection means the continuous addition of lime upstream of a fabric filter.

Melting/holding furnace means a group 1 furnace that processes only clean charge, performs melting, holding, and fluxing functions, and does not transfer molten aluminum to or from another furnace except for purposes of alloy changes, off-specification product drains, or maintenance activities.

Operating cycle means for a batch process, the period beginning when the feed material is first charged to the operation and ending when all feed material charged to the operation has been processed. For a batch melting or holding furnace process, operating cycle means the period including the charging and melting of scrap aluminum and the fluxing, refining, alloying, and tapping of molten aluminum (the period from tap-to-tap).

PM means, for the purposes of this subpart, emissions of particulate matter that serve as a measure of total particulate emissions and as a surrogate for metal HAPs contained in the particulates, including but not limited to, antimony, arsenic, beryllium, cadmium, chromium, cobalt, lead, manganese, mercury, nickel, and selenium.

Pollution prevention means source reduction as defined under the Pollution Prevention Act of 1990 (e.g., equipment or technology modifications, process or procedure modifications, reformulation or redesign of products, substitution of raw materials, and improvements in housekeeping, maintenance, training, or inventory control), and other practices that reduce or eliminate the creation of pollutants through increased efficiency in the use of raw materials, energy, water, or other resources, or protection of natural resources by conservation.

Reactive fluxing means the use of any gas, liquid, or solid flux (other than cover flux) that results in a HAP emission. Argon

**SECTION E. Source Group Restrictions.**

and nitrogen are not reactive and do not produce HAP.

Reconstruction means the replacement of components of an affected source or emission unit such that the fixed capital cost of the new components exceeds 50 percent of the fixed capital cost that would be required to construct a comparable new affected source, and it is technologically and economically feasible for the reconstructed source to meet relevant standard(s) established in this subpart. Replacement of the refractory in a furnace is routine maintenance and is not a reconstruction. The repair and replacement of in-line fluxer components (e.g., rotors/shafts, burner tubes, refractory, warped steel) is considered to be routine maintenance and is not considered a reconstruction. In-line fluxers are typically removed to a maintenance/repair area and are replaced with repaired units. The replacement of an existing in-line fluxer with a repaired unit is not considered a reconstruction.

Residence time means, for an afterburner, the duration of time required for gases to pass through the afterburner combustion zone. Residence time is calculated by dividing the afterburner combustion zone volume in cubic feet by the volumetric flow rate of the gas stream in actual cubic feet per second. The combustion zone volume includes the reaction chamber of the afterburner in which the waste gas stream is exposed to the direct combustion flame and the complete refractory lined portion of the furnace stack up to the measurement thermocouple.

Rotary dross cooler means a water-cooled rotary barrel device that accelerates cooling of dross.

Round top furnace means a cylindrically-shaped reverberatory furnace that has a top that is removed for charging and other furnace operations.

Runaround scrap means scrap materials generated on-site by aluminum casting, extruding, rolling, scalping, forging, forming/stamping, cutting, and trimming operations and that do not contain paint or solid coatings. Uncoated/unpainted aluminum chips generated by turning, boring, milling, and similar machining operations may be clean charge if they have been thermally dried or treated by a centrifugal cleaner, but are not considered to be runaround scrap.

Scrap dryer/delacquering kiln/decoating kiln means a unit used primarily to remove various organic contaminants such as oil, paint, lacquer, ink, plastic, and/or rubber from aluminum scrap (including used beverage containers) prior to melting, or that separates aluminum foil from paper and plastic in scrap.

Secondary aluminum processing unit (SAPU). An existing SAPU means all existing group 1 furnaces and all existing in-line fluxers within a secondary aluminum production facility. Each existing group 1 furnace or existing in-line fluxer is considered an emission unit within a secondary aluminum processing unit. A new SAPU means any combination of individual group 1 furnaces and in-line fluxers within a secondary aluminum processing facility which either were constructed or reconstructed after February 11, 1999, or have been permanently redesignated as new emission units pursuant to §63.1505(k)(6). Each of the group 1 furnaces or in-line fluxers within a new SAPU is considered an emission unit within that secondary aluminum processing unit. A secondary aluminum production facility may have more than one new SAPU.

Secondary aluminum production facility means any establishment using clean charge, aluminum scrap, or dross from aluminum production, as the raw material and performing one or more of the following processes: scrap shredding, scrap drying/delacquering/decoating, thermal chip drying, furnace operations (i.e., melting, holding, sweating, refining, fluxing, or alloying), recovery of aluminum from dross, in-line fluxing, or dross cooling. A secondary aluminum production facility may be independent or part of a primary aluminum production facility. For purposes of this subpart, aluminum die casting facilities, aluminum foundries, and aluminum extrusion facilities are not considered to be secondary aluminum production facilities if the only materials they melt are clean charge, customer returns, or internal scrap, and if they do not operate sweat furnaces, thermal chip dryers, or scrap dryers/delacquering kilns/decoating kilns. The determination of whether a facility is a secondary aluminum production facility is only for purposes of this subpart and any regulatory requirements which are derived from the applicability of this subpart, and is separate from any determination which may be made under other environmental laws and regulations, including whether the same facility is a "secondary metal production facility" as that term is used in 42 U.S.C. §7479(1) and 40 CFR 52.21(b)(1)(i)(A) ("prevention of significant deterioration of air quality").

Shutdown means the period of operation for thermal chip dryers, scrap dryers/delacquering kilns, decoating kilns, dross-only furnaces, group 1 furnaces, in-line fluxers, sweat furnaces and group 2 furnaces that begins when the introduction of feed/charge is intentionally halted, the source of heat to the emissions unit is turned off, and product has been removed from the emission unit to the greatest extent practicable (e.g., by tapping a furnace). Shutdown ends when the emission unit is near ambient temperature.

**SECTION E. Source Group Restrictions.**

Sidewell means an open well adjacent to the hearth of a furnace with connecting arches between the hearth and the open well through which molten aluminum is circulated between the hearth, where heat is applied by burners, and the open well, which is used for charging scrap and solid flux or salt to the furnace, injecting fluxing agents, and skimming dross.

Startup means the period of operation for thermal chip dryers, scrap dryers/delacquering kilns, decoating kilns, dross-only furnaces, group 1 furnaces, in-line fluxers, sweat furnaces and group 2 furnaces that begins with equipment warming from a shutdown, that is, the equipment is at or near ambient temperature. Startup ends at the point that flux or feed/charge is introduced.

Sweat furnace means a furnace used exclusively to reclaim aluminum from scrap that contains substantial quantities of iron by using heat to separate the low-melting point aluminum from the scrap while the higher melting-point iron remains in solid form.

Tap means the end of an operating cycle of any individual furnace when processed molten aluminum is poured from that furnace.

TEQ means the international method of expressing toxicity equivalents for dioxins and furans as defined in "Interim Procedures for Estimating Risks Associated with Exposures to Mixtures of Chlorinated Dibenzo-p-Dioxins and -Dibenzofurans (CDDs and CDFs) and 1989 Update" (EPA-625/3-89-016), available from the National Technical Information Service (NTIS), 5285 Port Royal Road, Springfield, Virginia 22161, NTIS no. PB 90-145756.

THC means, for the purposes of this subpart, total hydrocarbon emissions that also serve as a surrogate for the emissions of organic HAP compounds.

Thermal chip dryer means a device that uses heat to evaporate oil or oil/water mixtures from unpainted/uncoated aluminum chips. Pre-heating boxes or other dryers which are used solely to remove water from aluminum scrap are not considered to be thermal chip dryers for purposes of this subpart.

Three-day, 24-hour rolling average means daily calculations of the average 24-hour emission rate (lbs/ton of feed/charge), over the 3 most recent consecutive 24-hour periods, for a secondary aluminum processing unit.

Total reactive chlorine flux injection rate means the sum of the total weight of chlorine in the gaseous or liquid reactive flux and the total weight of chlorine in the solid reactive chloride flux, divided by the total weight of feed/charge, as determined by the procedure in §63.1512(o).

Total reactive fluorine flux injection rate means the sum of the total weight of fluorine in the gaseous or liquid reactive flux added to an uncontrolled group 1 furnace, and the total weight of fluorine in the solid reactive flux added to an uncontrolled group 1 furnace, divided by the total weight of feed/charge, as determined by the procedure in §63.1512(o).

[65 FR 15710, Mar. 23, 2000, as amended at 67 FR 79814, Dec. 30, 2002; 69 FR 18803, Apr. 9, 2004; 69 FR 53984, Sept. 3, 2004; 70 FR 57517, Oct. 3, 2005; 80 FR 56738, Sept. 18, 2015]

012 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1513]**Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production Equations for determining compliance.**

(a) Not applicable

(b) PM, HCl, HF and D/F emission limits.

(1) Not applicable

(2) Use Equation 7A of this section to determine compliance with an emission limit for D/F:

$$E = (C * Q) / P \quad (\text{Equation 7A})$$

Where:

**SECTION E. Source Group Restrictions.**

E = Emission rate of D/F, $\mu\text{g}/\text{Mg}$ (gr/ton) of feed;

C = Concentration of D/F, $\mu\text{g}/\text{dscm}$ (gr/dscf);

Q = Volumetric flow rate of exhaust gases, dscm/hr (dscf/hr); and

P = Production rate, Mg/hr (ton/hr).

(c) Not applicable

(d) Conversion of D/F measurements to TEQ units. To convert D/F measurements to TEQ units, the owner or operator must use the procedures and equations in Interim Procedures for Estimating Risks Associated with Exposures to Mixtures of Chlorinated Dibenzo-p-Dioxins and -Dibenzofurans (CDDs and CDFs) and 1989 Update, incorporated by reference see §63.14.

(e) Secondary aluminum processing unit. Use the procedures in paragraphs (e)(1), (2), and (3) or the procedure in paragraph (e)(4) of this section to determine compliance with emission limits for a secondary aluminum processing unit.

(1) Not applicable

(2) Not applicable

(3) Use Equation 11 to compute the aluminum mass-weighted D/F emissions for the secondary aluminum processing unit. Compliance is achieved if the mass-weighted emissions for the secondary aluminum processing unit is less than or equal to the emission limit for the secondary aluminum processing unit ($L_{cD/F}$) calculated using Equation 3 in § 63.1505(k).

$$E_{cD/F} = \frac{\sum_{i=1}^n E_i (T_i D/F * T_i)}{\sum_{i=1}^n E_i (T_i)} \quad (\text{Equation 11})$$

Where,

$E_{cD/F}$ = The mass-weighted D/F emissions for the secondary aluminum processing unit; and

$E_i D/F$ = Measured D/F emissions for individual emission unit i .

(4) As an alternative to using the equations in paragraphs (e)(1), (2), and (3) of this section, the owner or operator may demonstrate compliance for a secondary aluminum processing unit by demonstrating that each existing group 1 furnace is in compliance with the emission limits for a new group 1 furnace in § 63.1505(i) and that each existing in-line fluxer is in compliance with the emission limits for a new in-line fluxer in § 63.1505(j).

(f) Periods of startup and shutdown. For a new or existing affected source, or a new or existing emission unit subject to an emissions limit in paragraphs §63.1505(b) through (j) expressed in units of pounds per ton of feed/charge, or μg TEQ or ng TEQ per Mg of feed/charge, demonstrate compliance during periods of startup and shutdown in accordance with paragraph (f)(1) of this section or determine your emissions per unit of feed/charge during periods of startup and shutdown in accordance with paragraph (f)(2) of this section. Startup and shutdown emissions for group 1 furnaces and in-line fluxers must be calculated individually, and not on the basis of a SAPU. Periods of startup and shutdown are excluded from the calculation of SAPU emission limits in §63.1505(k), the SAPU monitoring requirements in §63.1510(t) and the SAPU emissions calculations in §63.1513(e).

(1) For periods of startup and shutdown, records establishing a feed/charge rate of zero, a flux rate of zero, and that the affected source or emission unit was either heated with electricity, propane or natural gas as the sole sources of heat or was not heated, may be used to demonstrate compliance with the emission limit, or

**SECTION E. Source Group Restrictions.**

(2) For periods of startup and shutdown, divide your measured emissions in lb/hr or µg/hr or ng/hr by the feed/charge rate in tons/hr or Mg/hr from your most recent performance test associated with a production rate greater than zero, or the rated capacity of the affected source if no prior performance test data are available.

[65 FR 15710, Mar. 23, 2000, as amended at 69 FR 53984, Sept. 3, 2004; 80 FR 56748, Sept. 18, 2015; 81 FR 38088, June 13, 2016]

013 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1518]**Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production
Applicability of general provisions.**

The requirements of the general provisions in subpart A of this part [40 CFR Part 63] that are applicable to the owner or operator subject to the requirements of this subpart are shown in appendix A to this subpart [40 CFR Part 63, Subpart RRR].

014 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1519]**Subpart RRR -- National Emission Standards for Hazardous Air Pollutants for Secondary Aluminum Production
Delegation of authority.**

(a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or Tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or Tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this regulation. Contact the applicable U.S. EPA Regional Office to find out if this subpart is delegated to a State, local, or Tribal agency.

(b) In delegating implementation and enforcement authority of this regulation to a State, local, or Tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or Tribal agency.

(c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (4) of this section.

(1) Approval of alternatives to the requirements in §§ 63.1500 through 63.1501 and 63.1505 through 63.1506.

(2) Approval of major alternatives to test methods for under § 63.7(e)(2)(ii) and (f), as defined in § 63.90, and as required in this subpart.

(3) Approval of major alternatives to monitoring under § 63.8(f), as defined in § 63.90, and as required in this subpart.

(4) Approval of major alternatives to recordkeeping and reporting under § 63.10(f), as defined in § 63.90, and as required in this subpart.

015 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6]**Subpart A--General Provisions****Compliance with standards and maintenance requirements.**

[From 40 C.F.R. Section 63.6(e)]

(e) Operation and maintenance requirements. (1)(i) At all times, including periods of startup, shutdown, and malfunction, the owner or operator must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. During a period of startup, shutdown, or malfunction, this general duty to minimize emissions requires that the owner or operator reduce emissions from the affected source to the greatest extent which is consistent with safety and good air pollution control practices. The general duty to minimize emissions during a period of startup, shutdown, or malfunction does not require the owner or operator to achieve emission levels that would be required by the applicable standard at other times if this is not consistent with safety and good air pollution control practices, nor does it require the owner or operator to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures (including the startup, shutdown, and malfunction plan required in paragraph (e)(3) of this

**SECTION E. Source Group Restrictions.**

section), review of operation and maintenance records, and inspection of the source.

(ii) Malfunctions must be corrected as soon as practicable after their occurrence. To the extent that an unexpected event arises during a startup, shutdown, or malfunction, an owner or operator must comply by minimizing emissions during such a startup, shutdown, and malfunction event consistent with safety and good air pollution control practices.

(iii) Operation and maintenance requirements established pursuant to section 112 of the Act are enforceable independent of emissions limitations or other requirements in relevant standards.

(2) [Reserved]

(3) Startup, shutdown, and malfunction plan. (i) The owner or operator of an affected source must develop a written startup, shutdown, and malfunction plan that describes, in detail, procedures for operating and maintaining the source during periods of startup, shutdown, and malfunction; and a program of corrective action for malfunctioning process, air pollution control, and monitoring equipment used to comply with the relevant standard. The startup, shutdown, and malfunction plan does not need to address any scenario that would not cause the source to exceed an applicable emission limitation in the relevant standard. This plan must be developed by the owner or operator by the source's compliance date for that relevant standard. The purpose of the startup, shutdown, and malfunction plan is to—

(A) Ensure that, at all times, the owner or operator operates and maintains each affected source, including associated air pollution control and monitoring equipment, in a manner which satisfies the general duty to minimize emissions established by paragraph (e)(1)(i) of this section;

(B) Ensure that owners or operators are prepared to correct malfunctions as soon as practicable after their occurrence in order to minimize excess emissions of hazardous air pollutants; and

(C) Reduce the reporting burden associated with periods of startup, shutdown, and malfunction (including corrective action taken to restore malfunctioning process and air pollution control equipment to its normal or usual manner of operation).

(ii) [Reserved]

(iii) When actions taken by the owner or operator during a startup or shutdown (and the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards), or malfunction (including actions taken to correct a malfunction) are consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, the owner or operator must keep records for that event which demonstrate that the procedures specified in the plan were followed. These records may take the form of a "checklist," or other effective form of recordkeeping that confirms conformance with the startup, shutdown, and malfunction plan and describes the actions taken for that event. In addition, the owner or operator must keep records of these events as specified in paragraph 63.10(b), including records of the occurrence and duration of each startup or shutdown (if the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards), or malfunction of operation and each malfunction of the air pollution control and monitoring equipment. Furthermore, the owner or operator shall confirm that actions taken during the relevant reporting period during periods of startup, shutdown, and malfunction were consistent with the affected source's startup, shutdown and malfunction plan in the semiannual (or more frequent) startup, shutdown, and malfunction report required in § 63.10(d)(5).

(iv) If an action taken by the owner or operator during a startup, shutdown, or malfunction (including an action taken to correct a malfunction) is not consistent with the procedures specified in the affected source's startup, shutdown, and malfunction plan, and the source exceeds any applicable emission limitation in the relevant emission standard, then the owner or operator must record the actions taken for that event and must report such actions within 2 working days after commencing actions inconsistent with the plan, followed by a letter within 7 working days after the end of the event, in accordance with § 63.10(d)(5) (unless the owner or operator makes alternative reporting arrangements, in advance, with the Administrator).

(v) The owner or operator must maintain at the affected source a current startup, shutdown, and malfunction plan and must make the plan available upon request for inspection and copying by the Administrator. In addition, if the startup, shutdown, and malfunction plan is subsequently revised as provided in paragraph (e)(3)(viii) of this section, the owner or operator must maintain at the affected source each previous (i.e., superseded) version of the startup, shutdown, and malfunction

**SECTION E. Source Group Restrictions.**

plan, and must make each such previous version available for inspection and copying by the Administrator for a period of 5 years after revision of the plan. If at any time after adoption of a startup, shutdown, and malfunction plan the affected source ceases operation or is otherwise no longer subject to the provisions of this part, the owner or operator must retain a copy of the most recent plan for 5 years from the date the source ceases operation or is no longer subject to this part and must make the plan available upon request for inspection and copying by the Administrator. The Administrator may at any time request in writing that the owner or operator submit a copy of any startup, shutdown, and malfunction plan (or a portion thereof) which is maintained at the affected source or in the possession of the owner or operator. Upon receipt of such a request, the owner or operator must promptly submit a copy of the requested plan (or a portion thereof) to the Administrator. The owner or operator may elect to submit the required copy of any startup, shutdown, and malfunction plan to the Administrator in an electronic format. If the owner or operator claims that any portion of such a startup, shutdown, and malfunction plan is confidential business information entitled to protection from disclosure under section 114(c) of the Act or 40 CFR 2.301, the material which is claimed as confidential must be clearly designated in the submission.

(vi) To satisfy the requirements of this section to develop a startup, shutdown, and malfunction plan, the owner or operator may use the affected source's standard operating procedures (SOP) manual, or an Occupational Safety and Health Administration (OSHA) or other plan, provided the alternative plans meet all the requirements of this section and are made available for inspection or submitted when requested by the Administrator.

(vii) Based on the results of a determination made under paragraph (e)(1)(i) of this section, the Administrator may require that an owner or operator of an affected source make changes to the startup, shutdown, and malfunction plan for that source. The Administrator must require appropriate revisions to a startup, shutdown, and malfunction plan, if the Administrator finds that the plan:

(A) Does not address a startup, shutdown, or malfunction event that has occurred;

(B) Fails to provide for the operation of the source (including associated air pollution control and monitoring equipment) during a startup, shutdown, or malfunction event in a manner consistent with the general duty to minimize emissions established by paragraph (e)(1)(i) of this section;

(C) Does not provide adequate procedures for correcting malfunctioning process and/or air pollution control and monitoring equipment as quickly as practicable; or

(D) Includes an event that does not meet the definition of startup, shutdown, or malfunction listed in § 63.2.

(viii) The owner or operator may periodically revise the startup, shutdown, and malfunction plan for the affected source as necessary to satisfy the requirements of this part or to reflect changes in equipment or procedures at the affected source. Unless the permitting authority provides otherwise, the owner or operator may make such revisions to the startup, shutdown, and malfunction plan without prior approval by the Administrator or the permitting authority. However, each such revision to a startup, shutdown, and malfunction plan must be reported in the semiannual report required by § 63.10(d)(5). If the startup, shutdown, and malfunction plan fails to address or inadequately addresses an event that meets the characteristics of a malfunction but was not included in the startup, shutdown, and malfunction plan at the time the owner or operator developed the plan, the owner or operator must revise the startup, shutdown, and malfunction plan within 45 days after the event to include detailed procedures for operating and maintaining the source during similar malfunction events and a program of corrective action for similar malfunctions of process or air pollution control and monitoring equipment. In the event that the owner or operator makes any revision to the startup, shutdown, and malfunction plan which alters the scope of the activities at the source which are deemed to be a startup, shutdown, or malfunction, or otherwise modifies the applicability of any emission limit, work practice requirement, or other requirement in a standard established under this part, the revised plan shall not take effect until after the owner or operator has provided a written notice describing the revision to the permitting authority.

(ix) The title V permit for an affected source must require that the owner or operator develop a startup, shutdown, and malfunction plan which conforms to the provisions of this part, but may do so by citing to the relevant subpart or subparagraphs of paragraph (e) of this section. However, any revisions made to the startup, shutdown, and malfunction plan in accordance with the procedures established by this part shall not be deemed to constitute permit revisions under part 70 or part 71 of this chapter and the elements of the startup, shutdown, and malfunction plan shall not be considered an applicable requirement as defined in § 70.2 and § 71.2 of this chapter. Moreover, none of the procedures specified by the startup, shutdown, and malfunction plan for an affected source shall be deemed to fall within the permit shield provision in



SECTION E. Source Group Restrictions.

section 504(f) of the Act.

**SECTION E. Source Group Restrictions.**

Group Name: 2) FURNACE TUNING BAT

Group Description: This source group is for furnaces using burner tuning and good combustion practices for BAT.

Sources included in this group

ID	Name
101	HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)
103	#1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)
104	#2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall record each annual adjustment or tune-up on the combustion process in a permanently bound log book. This log shall contain, at a minimum, the following:

1. The date of the tuning procedure
2. The name of the service company and technicians
3. The final operating rate or load
4. The final CO and NOx emission rates
5. The final excess oxygen rate

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall maintain on site the total nitrogen oxide (NOx) emissions of applicable sources on a monthly basis and 12-month rolling totals.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

(a) The permittee shall perform an annual adjustment or tune-up on the combustion process. This adjustment shall include, at a minimum, the following:

1. Inspection, adjustment, cleaning or replacement of fuel-burning equipment, including the burners and moving parts necessary for proper operation as specified by the manufacturer.
2. Inspection of the flame pattern or characteristics and adjustments necessary to minimize total emissions of NOx, and to the extent practicable minimize emissions of CO.

**SECTION E. Source Group Restrictions.**

3. Inspection of the air-to-fuel ratio control system and adjustments necessary to ensure proper calibration and operation as specified by the manufacturer.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.**

Group Name: 3) FURNACE REQS

Group Description:

Sources included in this group

ID	Name
101	HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)
103	#1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)
104	#2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)
105	HOMOGENIZING FURNACE (15.2 MMBTU/HR)
106	NEW LOG HOMOGENIZING FURNACE (15.2 MMBTU/HR)

I. RESTRICTIONS.**Emission Restriction(s).**

001 [25 Pa. Code §123.13]

Processes

No person may permit the emission into the outdoor atmosphere of particulate matter in a manner that the concentration of particulate matter in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §123.21]

General

No person may permit the emission into the outdoor atmosphere of sulfur oxides from a source in a manner that the concentration of the sulfur oxides, expressed as SO₂, in the effluent gas exceeds 500 parts per million, by volume, dry basis.

Fuel Restriction(s).

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The source shall burn only natural gas.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

004 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The source shall be maintained and operated in accordance with the manufacturer's specifications and in accordance with good air pollution control practices.

**SECTION E. Source Group Restrictions.****VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.

**SECTION G. Emission Restriction Summary.**

Source Id	Source Description		
101	HOLDING FURNACE (12 MMBTU/HR)(GROUP 2)		
Emission Limit			
15.000	ug/mg	TEQ of feed for Dioxins/Furans.	Furan
500.000	PPMV	dry basis.	SOX
0.040	gr/DRY FT3		TSP
103	#1 MELTING FURNACE (20 MMBTU/HR)(GROUP 1)		
Emission Limit			
15.000	ug/mg	TEQ of feed for Dioxins/Furans.	Furan
500.000	PPMV	dry basis.	SOX
0.040	gr/DRY FT3		TSP
104	#2 MELTING FURNACE (26 MMBTU/HR)(GROUP 1)		
Emission Limit			
15.000	ug/mg	TEQ of feed for Dioxins/Furans.	Furan
500.000	PPMV	dry basis.	SOX
0.040	gr/DRY FT3		TSP
105	HOMOGENIZING FURNACE (15.2 MMBTU/HR)		
Emission Limit			
500.000	PPMV	dry basis.	SOX
0.040	gr/DRY FT3		TSP
106	NEW LOG HOMOGENIZING FURNACE (15.2 MMBTU/HR)		
Emission Limit			
500.000	PPMV	dry basis.	SOX
0.040	gr/DRY FT3		TSP
110	BILLET SAW		
Emission Limit			
0.040	gr/DRY FT3		TSP

Site Emission Restriction Summary

Emission Limit	Pollutant
----------------	-----------

**SECTION H. Miscellaneous.**

a) This permit was issued on May 21, 2019. Sources included were originally permitted under plan approvals 43-363A and 43-363B.



***** End of Report *****
