

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION AIR QUALITY PROGRAM

STATE ONLY SYNTHETIC MINOR OPERATING PERMIT

Issue Date: December 30, 2021 Effective Date: August 16, 2022

Revision Date: August 16, 2022 Expiration Date: December 31, 2026

Revision Type: Amendment

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 36-05071

Synthetic Minor

Federal Tax Id - Plant Code: 36-2495346-2

Owner Information

Name: DARLING INGREDIENTS INC
Mailing Address: 693 WIDE HOLLOW RD
EAST EARL, PA 17519-9645

Plant Information

Plant: DARLING INGREDIENTS INC/TERRE HILL PLT

Location: 36 Lancaster County 36927 East Earl Township

SIC Code: 2077 Manufacturing - Animal And Marine Fats And Oils

Responsible Official

Name: CHRIS BUCKLEY Title: GENERAL MANAGER

Phone: (717) 517 - 0585 Email: CBuckley@valleyproteins.com

Permit Contact Person

Name: CHRIS BUCKLEY
Title: GENERAL MANAGER

Phone: (717) 517 - 0585 Email: CBuckley@valleyproteins.com

[Signature]	

WILLIAM R. WEAVER, SOUTHCENTRAL REGION AIR PROGRAMMANAGER



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #023 Reporting
- #024 Report Format

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

E-I: Restrictions



SECTION A. Table of Contents

E-II: Testing Requirements
E-III: Monitoring Requirements
E-IV: Recordkeeping Requirements
E-V: Reporting Requirements
E-VI: Work Practice Standards
E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

F-I: Restrictions

F-II: Testing Requirements
F-III: Monitoring Requirements
F-IV: Recordkeeping Requirements
F-V: Reporting Requirements
F-VI: Work Practice Standards
F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous





SECTION A. Site Inventory List


Course	Source ID Source Name Capacity/Throughput Fuel/Material				
Source ID Source Name		Capacity/Throughput		rue/inaterial	
031	BOILER 1 (B-1)	33.500	MMBTU/HR	#0 O'I	
		222.000	Gal/HR	#6 Oil	
		32.843	MCF/HR	natural gas	
		264.000	Gal/HR	BY-PRODUCT OIL #2 Oil	
022	DOILED 3 (D.3)	239.000 33.500	Gal/HR MMBTU/HR	#2 OII	
033	BOILER 3 (B-3)			#C O:I	
		222.000	Gal/HR MCF/HR	#6 Oil	
		32.843		Natural Gas	
		258.000	Gal/HR	BY-PRODUCT OIL	
025	DOILED 3 (D 3A)	239.000	Gal/HR	#2 Oil	
035	BOILER 2 (B-2A)	33.500	MMBTU/HR	#0 O:1	
		222.000	Gal/HR	#6 Oil	
		32.843	MCF/HR	Natural Gas	
		264.000	Gal/HR	BY-PRODUCT OIL	
100	MEAT DOOM AID	239.000	Gal/HR	#2 Oil	
100	MEAT ROOM AIR	05.000	T/UD	INEDIDI E DV DDODLIOT	
101	CONTINUOUS COOKER (CC-1) WITH CONDENSERS	25.000	Tons/HR	INEDIBLE BY-PRODUCT	
102A	CRAX PRESS & CENTRIFUGE				
102B	PERCOLATOR				
103A	FEATHER COOKERS (FC-1 THRU FC-4) WITH CONDENSER	7.000	Tons/HR	FEATHER BY-PRODUCT	
103B	FEATHER DRYER (FD-1) WITH CONDENSER	7.000	Tons/HR	FEATHERS	
200	FEATHER ROOM AIR	L			
500	COLD CLEANER DEGREASERS				
C031	BOILER INCINERATION, BOILER 031				
C035	BOILER INCINERATION, BOILER 035				
C03A	VENTURI SCRUBBER (VEN-1)				
C03B	VENTURI SCRUBBER (VEN-2)				
C04	DUAL STAGE CROSS-FLOW SCRUBBER (CFS-1)				
C06	DUAL PACKED TOWER SCRUBBER (PTS-1)				
C08A	DUAL STAGE CROSS-FLOW SCRUBBER (CFS-2A)				
FML01	NO. 6 FUEL OIL				
FML02	BY-PRODUCT OIL (SEE NOTE IN SECTION H)				
FML03	NO. 2 FUEL OIL				
FML04	NATURAL GAS PIPELINE				
S031	STACK BOILER 031				
S033	STACK, BOILER 033				
S035	STACK BOILER 035				
S04	STACK, MEAT ROOM SCRUBBER				
S06	STACK, SINGLE STAGE PACKED BED SCRUBBER				
S08A	STACK, FEATHER ROOM SCRUBBER (CFS-2A)				
3007	CITION, I EATHER ROOM GORDBER (OF G-ZA)				






SECTIONAL SILE INVENTORY EIS	SECTION A. Site Inve	ntory List
------------------------------	----------------------	------------

Source ID Source Name		Capacity/Throughput	Fuel/Material
Z500	FUGITIVES, CLEANING MACHINES		

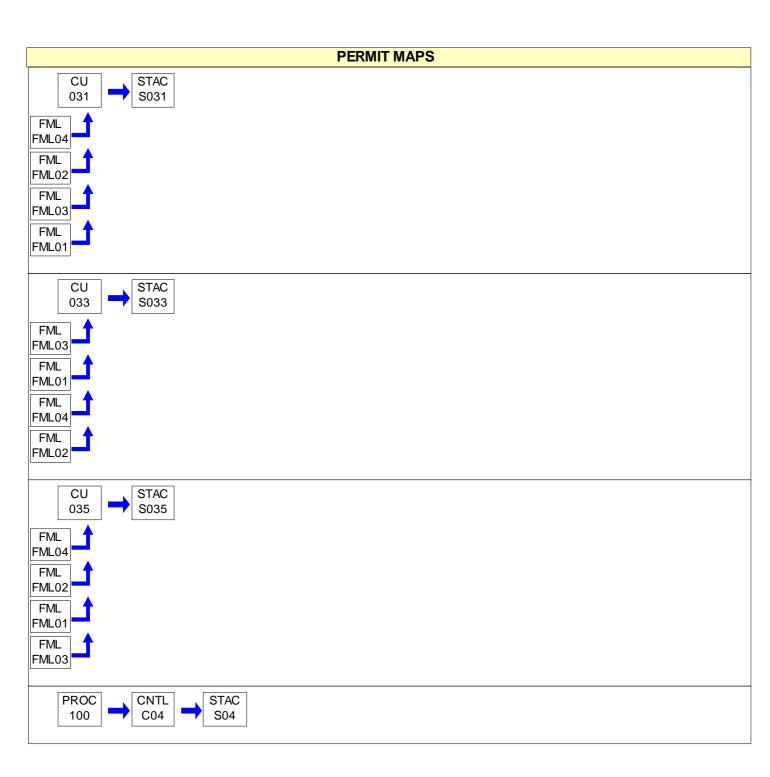





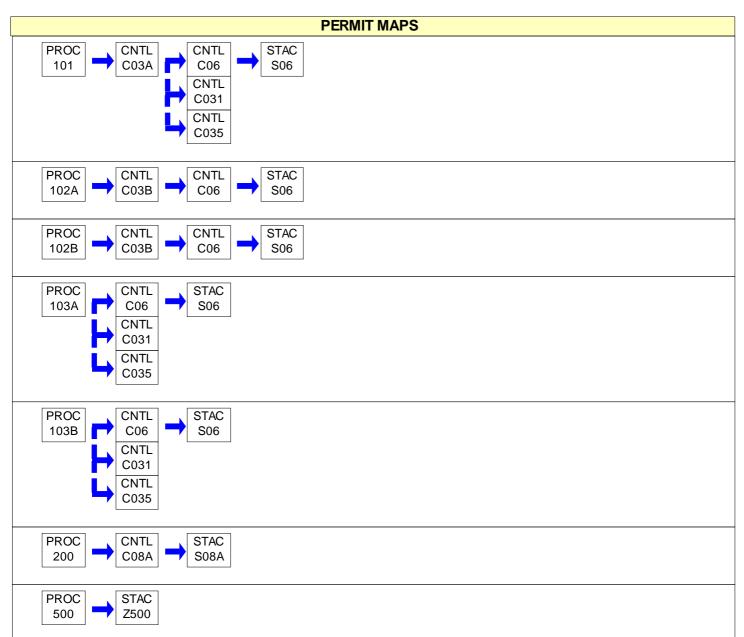





#001 [25 Pa. Code § 121.1]

Definitions.

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]

Operating Permit Duration.

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]

Permit Renewal.

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]

Operating Permit Fees under Subchapter I.

- (a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.
 - (1) For a synthetic minor facility, a fee equal to:
 - (i) Four thousand dollars (\$4,000) for calendar years 2021—2025.
 - (ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.
 - (iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.





- (2) For a facility that is not a synthetic minor, a fee equal to:
 - (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
 - (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
 - (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.
- (b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]

Transfer of Operating Permits.

- (a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.
- (b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.
- (c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]

Inspection and Entry.

- (a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:
- (1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
 - (2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.
- (b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.
- (c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]

Compliance Requirements.

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:



- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application
- (b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.
- (c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]

Need to Halt or Reduce Activity Not a Defense.

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]

Duty to Provide Information.

- (a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.
- (b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]

Revising an Operating Permit for Cause.

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]

Operating Permit Modifications

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:

DEP Auth ID: 1404661 DEP PF ID: Page 9





- (b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.
- (c) Minor Operating Permit Modifications. The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.
- (d) Significant Operating Permit Modifications. The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.
- (e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#012 [25 Pa. Code § 127.441]

Severability Clause.

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]

De Minimis Emission Increases.

- (a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:
 - (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.
- (b) The Department may disapprove or condition de minimis emission increases at any time.
- (c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:
- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NOx from a single source during the term of the permit and 5 tons of NOx at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.
- (4) Six-tenths of a ton of PM10 from a single source during the term of the permit and 3.0 tons of PM10 at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
- (5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:





- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
- (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
- (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]

Operational Flexibility.

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)



- (6) Section 127.462 (relating to minor operating permit modifications)
- (7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11]

Reactivation

- (a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).
- (b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]

Health Risk-based Emission Standards and Operating Practice Requirements.

- (a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].
- (b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]

Circumvention.

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]

Reporting Requirements.

- (a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.
- (b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.
- (c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

- (d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.
- (e) Any records, reports or information submitted to the Department shall be available to the public except for such





records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]

Sampling, Testing and Monitoring Procedures.

- (a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.
- (b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]

Recordkeeping.

- (a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:
 - (1) The date, place (as defined in the permit) and time of sampling or measurements.
 - (2) The dates the analyses were performed.
 - (3) The company or entity that performed the analyses.
 - (4) The analytical techniques or methods used.
 - (5) The results of the analyses.
 - (6) The operating conditions as existing at the time of sampling or measurement.
- (b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.
- (c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]

Property Rights.

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]

Alternative Operating Scenarios.

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.





#023 [25 Pa. Code §135.3]

Reporting

- (a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.
- (b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#024 [25 Pa. Code §135.4]

Report Format

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

DEP Auth ID: 1404661



SECTION C. Site Level Requirements

I. RESTRICTIONS.

Emission Restriction(s).

36-05071

001 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall not allow the emission into the outdoor atmosphere of a fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of buildings or structures.
- (b) Grading, paving, and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars, and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of materials.
- (f) Open burning operations.
- (g) Sources and classes of sources other than those identified in (a)-(f), above, for which the permittee has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
 - (1) The emissions are of minor significance with respect to causing air pollution; and
- (2) The emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

002 [25 Pa. Code §123.2]

Fugitive particulate matter

The permittee shall not allow the emission of fugitive particulate matter into the outdoor atmosphere from a source specified in Section C, Condition #001, if the emissions are visible at the point the emissions pass outside the permittee's property.

003 [25 Pa. Code §123.31]

Limitations

The permittee shall not allow the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the permittee's property.

004 [25 Pa. Code §123.41]

Limitations

The permittee shall not allow the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any one hour.
- (2) Equal to or greater than 60% at any time.

005 [25 Pa. Code §123.42]

Exceptions

The emission limitations of Section C, Condition #004, shall not apply when:

- (a) The presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (b) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (c) The emission results from sources specified in Section C, Condition #001(a)-(g).





SECTION C. Site Level Requirements

006 [25 Pa. Code §123.42]

Exceptions

The avobe boiler shall not exceed the following limits:

(a) When firing No. 2 fuel oil:

90 ppmdv NOx at 3% O2.

300 ppmdv CO at 3% O2.

(b) When firing No. 6 fuel oil;

270 ppmdv NOx at 3% O2.

300 ppmdv CO at 3% O2.

007 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) The permittee shall limit the facility's actual emissions to below the following levels:

100 tons/year of SOx

100 tons/year of NOx

100 tons/year of CO

100 tons/year of PM10

100 tons/year of PM2.5

50 tons/year of VOC

25 tons/year of HAPS

10 tons/year of a HAP

- (b) The above emission limits are based on a consecutive 12-month rolling period.
- (c) Compliance verification requires emissions to be calculated and recorded for each month and each consecutive 12-month rolling period.

008 [25 Pa. Code §129.14]

Open burning operations

- (a) The permittee shall not allow the open burning of material on the permittee's property in a manner such that:
- (1) The emissions are visible, at any time, at the point such emissions pass outside the permittee's property.
- (2) Malodorous air contaminants from the open burning are detectable outside the permittee's property.
- (3) The emissions interfere with the reasonable enjoyment of life or property.
- (4) The emissions cause damage to vegetation or property.
- (5) The emissions are or may be deleterious to human or animal health.
- (b) The requirements of (a), above, do not apply when the open burning operations result from:
- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set solely for recreational or ceremonial purposes.





SECTION C. Site Level Requirements

- (5) A fire set solely for cooking food.
- (c) This permit condition does not constitute authorization to burn solid waste in violation of Section 610(3) of the Solid Waste Management Act (SWMA), contained at 35 P.S. Section 6018.610(3), or any other provision of the SWMA.

II. TESTING REQUIREMENTS.

009 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The Department reserves the right to require exhaust stack testing of the sources referenced in this permit to measure emissions for purposes including verification of permit condition compliance and estimation of annual air emissions.

010 [25 Pa. Code §139.1]

Sampling facilities.

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such source. The Department will set forth, in the request, the time period in which the facilities shall be provided as well as the specifications for such facilities.

III. MONITORING REQUIREMENTS.

011 [25 Pa. Code §123.43]

Measuring techniques

Visible emissions may be measured using either of the following:

- (a) A device approved by the Department and maintained to provide accurate opacity measurements (e.g. Continuous Opacity Monitor).
- (b) Observers trained and certified in EPA Reference Method 9 to measure plume opacity with the naked eye; or with the aid of any device(s) approved by the Department.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall conduct a weekly inspection around the plant periphery during daylight hours when the plant is in operation to detect visible emissions, fugitive particulate matter emissions, and malodorous air contaminants. Daily inspections are necessary to determine:


- (a) The presence of visible emissions. Visible emissions may be measured according to the methods specified in Section C, Condition #010. As an alternative, plant personnel who observe visible emissions may report the incidence of visible emissions to the Department within two (2) hours of the incident and make arrangements for a certified observer to measure the visible emissions.
- (b) The presence of fugitive particulate matter emissions beyond the plant property boundaries, as stated in Section C, Condition #002.
- (c) The presence of malodorous air contaminants beyond the plant property boundaries, as stated in Section C, Condition #003.

IV. RECORDKEEPING REQUIREMENTS.

013 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the weekly inspections referenced in Section C, Condition #011. The records shall include, at a minimum, the following information:
- (1) The name of the company representative monitoring these instances.



SECTION C. **Site Level Requirements**

- (2) The date and time of the observation.
- (3) The wind direction during each observation.
- (4) A description of the emissions and/or malodors observed and actions taken to mitigate them.

Note: The permittee shall be required to make a log entry for each of the daily inspections whether or not any visible or fugitive emissions or odors are detected.

- (b) The permittee shall maintain records, in addition to the above, of daily hours of operation.
- (c) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

[25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall report malfunctions which occur at the facility to the Department. As defined in 40 CFR Section 60.2 and incorporated by reference in 25 Pa. Code Chapter 122, a malfunction is any sudden, infrequent and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:
- (1) Any malfunction which poses an imminent danger to the public health, safety, welfare and environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two (2) hours after the permittee is aware of the malfunction. The permittee shall submit a written report of instances of such malfunctions to the Department within three (3) days of the telephone report.
- (2) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirements of paragraph (1) above, shall be reported to the Department, in writing, within five (5) days of discovery of the malfunction.
- (b) Malfunctions shall be reported to the Department at the following address:

PADEP

Air Quality Program 909 Elmerton Avenue Harrisburg, PA 17110

(c) Telephone reports can be made to the Reading District Office at 610-916-0100 during normal business hours, or to the Department's Emergency Hotline at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at:

https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx.

VI. WORK PRACTICE REQUIREMENTS.

015 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall take all reasonable actions to prevent particulate matter from becoming airborne from any source specified in Section C, Condition #001(a)-(f). These actions shall include, but not be limited to, the following:

- (a) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (b) Application of asphalt, oil, water, or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.

DEP Auth ID: 1404661 DEP PF ID: Page 18





SECTION C. **Site Level Requirements**

- (c) Paving and maintenance of roadways.
- (d) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

[25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall follow good work practices at all times. The following minimum work practices shall be followed:

- (a) All exterior doors will be kept closed at all times unless passage through the door is needed for a work activity directly requiring the door to be open.
- (b) All uncovered, full or partially unloaded, vehicles parked outside of the plant enclosure, prior to complete unloading, shall be covered within 15 minutes of arrival.
- (c) All vehicles used for hauling raw materials:
- (1) Will be constructed and operated so as to prevent spillage, and be covered to prevent exposure to odor carrying air currents.
- (2) Upon being unloaded, be promptly and thoroughly washed, to remove all residual materials, prior to being parked or put back into service.
- (3) Maintain records identifying each vehicle, the arrival time, and the unloading time.
- (d) All spilled raw or processed material, whether solid or liquid, shall be cleaned up immediately.

ADDITIONAL REQUIREMENTS. VII.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.



Source ID: 031 Source Name: BOILER 1 (B-1)

Source Capacity/Throughput: 33.500 MMBTU/HR

222.000 Gal/HR #6 Oil


32.843 MCF/HR natural gas

264.000 Gal/HR BY-PRODUCT OIL

239.000 Gal/HR #2 Oil

Conditions for this source occur in the following groups: GROUP 001

GROUP 003 GROUP 007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.



VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

Page 21

DEP Auth ID: 1404661 DEP PF ID:





Source ID: 033 Source Name: BOILER 3 (B-3)

> Source Capacity/Throughput: 33.500 MMBTU/HR

> > 222.000 Gal/HR #6 Oil


32.843 MCF/HR Natural Gas

258.000 Gal/HR BY-PRODUCT OIL

239.000 Gal/HR #2 Oil

Conditions for this source occur in the following groups: GROUP 001

GROUP 004 GROUP 005 GROUP 007



RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The avobe boiler shall not exceed the following limits:

(a) When firing No. 2 fuel oil:

90 ppmdv NOx at 3% o2.

300 ppmdv CO at 3% O2.

(b) When firing No. 6 fuel oil;

270 ppmdv NOx at 3% O2.

300 ppmdv CO at 3% O2.

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.



IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

002 [25 Pa. Code §127.441] Operating permit terms and conditions.

- (a) The above boiler shall be operated in accordance with good combustion practices and air pollution control practices.
- (b) The permittee shall comply with the tune-up, maintenance, and operating vendor guidelines for the boiler and shall keep records of any adjustments or tune-ups including any corrective measures taken on the boiler including but not limited to; inspection, adjustment, cleaning or replacement of fuel-burning equipment, including burners and parts necessary for proper operation as specified by the manufacturer, inspection of the flame pattern or characteristics, and adjustments necessary to minimize emissions of NOx (expressed as NO2), and to the extent practicable minimize emissions of CO.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

DEP Auth ID: 1404661



Source ID: 035 Source Name: BOILER 2 (B-2A)

Source Capacity/Throughput: 33.500 MMBTU/HR

222.000 Gal/HR #6 Oil


32.843 MCF/HR Natural Gas

264.000 Gal/HR BY-PRODUCT OIL

239.000 Gal/HR #2 Oil

Conditions for this source occur in the following groups: GROUP 001

GROUP 004 GROUP 007



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

In accordance with Section 63.11195(e) of Subpart JJJJJJ, the above boiler is exempt from the requirements of this Subpart as long as the above boiler combusts only natural gas and uses fuel oil only during those periods of gas curtailment, gas supply interruptions, startups, or for periodic testing on fuel oil that does not exceed a combined total of 48 hours during any calendar year.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.



V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

DEP Auth ID: 1404661 DEP PF ID:





Source ID: 100 Source Name: MEAT ROOM AIR

Source Capacity/Throughput:

Conditions for this source occur in the following groups: GROUP 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


VII. ADDITIONAL REQUIREMENTS.



Source ID: 101 Source Name: CONTINUOUS COOKER (CC-1) WITH CONDENSERS

Source Capacity/Throughput: 25.000 Tons/HR INEDIBLE BY-PRODUCT

Conditions for this source occur in the following groups: GROUP 002

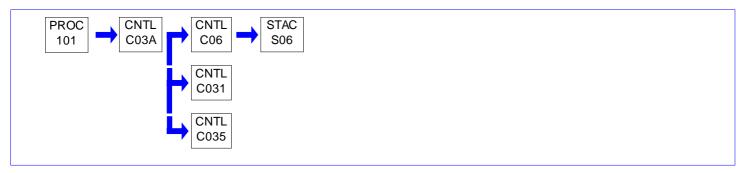

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.






Source ID: 102A Source Name: CRAX PRESS & CENTRIFUGE

Source Capacity/Throughput:

Conditions for this source occur in the following groups: GROUP 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.






Source ID: 102B Source Name: PERCOLATOR

Source Capacity/Throughput:

Conditions for this source occur in the following groups: GROUP 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.






Source ID: 103A Source Name: FEATHER COOKERS (FC-1 THRU FC-4) WITH CONDENSER

Source Capacity/Throughput: 7.000 Tons/HR FEATHER BY-PRODUCT

Conditions for this source occur in the following groups: GROUP 002

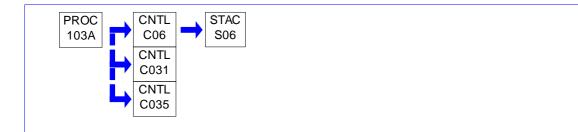

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.





Source ID: 103B Source Name: FEATHER DRYER (FD-1) WITH CONDENSER

> Source Capacity/Throughput: 7.000 Tons/HR **FEATHERS**

Conditions for this source occur in the following groups: GROUP 002



RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

RECORDKEEPING REQUIREMENTS. IV.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

WORK PRACTICE REQUIREMENTS. VI.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.



Source ID: 200 Source Name: FEATHER ROOM AIR

Source Capacity/Throughput:

Conditions for this source occur in the following groups: GROUP 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.


No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.



Source ID: 500 Source Name: COLD CLEANER DEGREASERS

Source Capacity/Throughput:



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.63]

Degreasing operations

- (a) 25 Pa. Code 129.63 applies to cold cleaning machines that use two gallons or more of solvents containing greater than five percent volatile organic compounds (VOC) content by weight for the cleaning of metal parts.
- (b) After December 22, 2002, the permittee may not use, sell or offer for sale for use in a cold cleaning machine any solvent with a vapor pressure of 1.0 millimeter of mercury (mm Hg) or greater and containing greater than 5 percent VOC by weight, measured at 20°C (68°F) containing VOCs.
- (c) The requirement in above (b) does not apply:
- 1) To cold cleaning machines used in extreme cleaning service.
- 2) If the owner or operator of the cold cleaning machine demonstrates, and the Department approves in writing, that compliance with this condition will result in unsafe operating conditions.
- 3) To immersion cold cleaning machines with a freeboard ratio equal to or greater than 0.75.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall maintain for at least two years and shall provide to the Department, on request, the following information:

- (a) The name and address of the solvent supplier.
- (b) The type of solvent including the product or vendor identification number.
- (c) The vapor pressure of the solvent measured in mm Hg at 20°C (68°F).

An invoice, bill of sale, or a certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this section.



V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §129.63]

Degreasing operations

Immersion cold cleaning machines shall be equipped with a cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent. For remote reservoir cold cleaning machines which drain directly into the solvent storage reservoir, a perforated drain with a diameter of not more than six inches shall constitute an acceptable cover.

004 [25 Pa. Code §129.63]

Degreasing operations

For immersion cold cleaning machines and remote reservoir cold cleaning machines, the permittee shall: Have a permanent, conspicuous label summarizing the operating requirements in Condition #006. In addition, the label shall include the following discretionary good operating practices:

- (a) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the cold cleaning machine.
- (b) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.
- (c) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

005 [25 Pa. Code §129.63]

Degreasing operations

Immersion cold cleaning machines shall have a freeboard ratio of 0.50 or greater.

006 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall operate the cold cleaning machines in accordance with the following procedures:

- (a) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.
- (b) Flushing of parts using a flexible hose or other flushing device shall be performed only within the cold cleaning machine. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.
- (c) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in the cold cleaning machine.
- (d) Air agitated solvent baths may not be used.
- (e) Spills during solvent transfer and use of the cold cleaning machine shall be cleaned up immediately.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).







SECTION E. Source Group Restrictions.

Group Name: GROUP 001
Group Description: Boilers
Sources included in this group

ID	Name
031	BOILER 1 (B-1)
033	BOILER 3 (B-3)
035	BOILER 2 (B-2A)

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.11]

Combustion units

The permittee shall not allow the emission into the outdoor atmosphere of particulate matter (PM) from either of the above combustion units in excess of 0.4 pounds per million BTUs of heat input.

002 [25 Pa. Code §123.22]

Combustion units

The permittee shall not allow the emission into the outdoor atmosphere of sulfur oxides, expressed as SO2, from either of the boilers in excess of the rate of 4.0 pounds per million BTUs of heat input over any 1-hour period.

Fuel Restriction(s).

003 [25 Pa. Code §123.22]

Combustion units

The maximum allowable sulfur content expressed as parts per million (ppm) by weight or percentage by weight is as follows:

No. 2 Fuel Oil 15 ppm or 0.0015%

No. 6 Fuel Oil 5000 ppm or 0.50%

Note: Commercial fuel oil that was stored in this Commonwealth by the ultimate consumer prior to September 1, 2020, which met the applicable maximum allowable sulfur content for commercial fuel oil through August 31, 2020, as defined in section 123.22(a)(2)(i) at the time it was stored, may be used by the ultimate consumer in this Commonwealth on and after September 1, 2020.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate any boiler being used for odor control at a minimum 25% burner firing rate. The firing rate, as determined by the fuel valve setting, shall be visually verified and logged daily.

IV. RECORDKEEPING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall maintain fuel usage records on a monthly basis of fuel consumed in the combustion units, in cubic feet and/or gallons.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

DEP Auth ID: 1404661 DEP PF ID: Page 35





SECTION E. Source Group Restrictions.

VI. WORK PRACTICE REQUIREMENTS.

006 [25 Pa. Code §127.25]

Compliance requirement.

The permittee must adhere to the following requirements in order to assure that each boiler when utilized as a control device or as a boiler, will function properly.

- (a) Each boiler operator shall be trained in the operation and maintenance of the boilers and their use as a control device.
- (b) The boilers are operated with good combustion practices in accordance with the manufacturer's recommended operating and maintenance procedures.
- (c) Periodic inspections and maintenance are performed on the boilers in order to assure that the boilers are capable of proper operation and incineration.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

DEP Auth ID: 1404661 DEP PF ID:







Group Name: GROUP 002

Group Description: Rendering Operations

Sources included in this group

ID	Name
100	MEAT ROOM AIR
101	CONTINUOUS COOKER (CC-1) WITH CONDENSERS
102A	CRAX PRESS & CENTRIFUGE
102B	PERCOLATOR
103A	FEATHER COOKERS (FC-1 THRU FC-4) WITH CONDENSER
103B	FEATHER DRYER (FD-1) WITH CONDENSER
200	FEATHER ROOM AIR

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

Particulate matter emissions from any scrubber exhaust stack shall not exceed 0.04 grain per dry standard cubic foot.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate and maintain instrumentation to measure the liquid pressure of the spray nozzle and the scrubber exhaust temperature for the venturi scrubbers.

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate and maintain instrumentation to measure and display the oxidation reduction potential (ORP) for the packed bed and cross-flow scrubbers.

IV. RECORDKEEPING REQUIREMENTS.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall monitor and record the oxidation reduction potential (ORP) for the packed tower and cross-flow scrubbers. At a minimum, the ORP shall be monitored twice per shift and recorded at least once per day while the scrubbers are operating. The permittee shall retain these records for a minimum of five years and shall make them available to the Department upon its request.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

For scrubbers configured with multiple stages the appropriate parameters listed in Condition #003 are to be monitored and recorded for each stage.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall maintain detailed records of all maintenance performed on all scrubbers. The permittee shall retain these records for a minimum of five years and shall make them available to the Department upon its request.

007 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) The permittee shall calculate facility-wide air emissions from the rendering process based on total raw material

DEP Auth ID: 1404661 DEP PF ID: Page 37



throughput rates using emission data, EPA AP-42 emission factors, performance test results, or other method(s) approved by the Department in writing. The emissions shall be calculated on a montly basis.

- (b) Unless otherwise approved by the Department in writing, emissions shall be based upon "post condenser" conditions, upstream of any control devices such as the packed tower scrubber or the boilers that are used for odor abatement.
- (c) The permittee shall maintain records for a minimum of five (5) years and shall make them available to the Department upon request.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall monitor and record the liquid pressure of the spray nozzle and the scrubber exhaust temperature for the venturi scrubbers. At a minimum, these parameters shall be monitored twice per shift and recorded at least once per day while the scrubbers are operating. The permittee shall retain these records for a minimum of five years and shall make them available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

009 [25 Pa. Code §127.25]

Compliance requirement.

The permittee shall operate the associated venturi scrubber at all times that any cooker or any press is operating. The permittee shall operate the cross-flow scrubber at all times that the associated plant is in operation. This includes all times that the rendering plant is in operation.

010 [25 Pa. Code §127.25]

Compliance requirement.

The permittee shall operate the packed tower scrubber and/or utilize boiler incineration at all times that the rendering plant is in operation.

011 [25 Pa. Code §127.25]

Compliance requirement.

The permittee shall operate and maintain all scrubbers in accordance with the manufacturer's specifications.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate and maintain all sources and any air cleaning devices identified in this operating permit in accordance with the manufacturer's recommendations/specifications, as well as in a manner consistent with good operating practices.

013 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall inspect the scrubbers weekly by opening each unit and checking for scale buildup and proper operation. All nozzles, weirs, tubes, packing materials, separators, plates and strainers shall be checked for buildup and proper positioning. Cleaning and maintenance shall be accomplished, per the manufacturer's recommendation, when noted as required.

014 [25 Pa. Code §127.441]

Operating permit terms and conditions.

When adding Chlorine Dioxide solution to the scrubbing system, the set point for the oxidation reduction potential (ORP) shall be between 300 and 800.

Note: A positive ORP in the cross-flow and packed tower scrubbers shall be maintained at all times when using any approved scrubbing solution.

015 [25 Pa. Code §127.441]

Operating permit terms and conditions.





The permittee shall operate all control devices within the parameters and set-points as established during equipment setup and listed in the following table:

	C03A	C03B	C04	C06	C08A
Oxygen Reduction Potential:			> 1	> 1	>1
Spray Nozzle Pressure (psig):	7-15	7-15			
Maximum Scrubber Exhaust Temperature (F):	: 130	130			

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: GROUP 003

Group Description: Area Source Boiler MACT Subpart JJJJJJ - Existing Sources

Sources included in this group

ID	Name
031	BOILER 1 (B-1)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11196]

SUBPART JJJJJJ - National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources

What are my compliance dates?

§ 63.11193 Am I subject to this subpart?

You are subject to this subpart if you own or operate an industrial, commercial, or institutional boiler as defined in § 63.11237 that is located at, or is part of, an area source of hazardous air pollutants (HAP), as defined in § 63.2, except as specified in § 63.11195.

§ 63.11194 What is the affected source of this subpart?

- (a) This subpart applies to each new, reconstructed, or existing affected source as defined in paragraphs (a)(1) and (2) of this section.
- (1) The affected source of this subpart is the collection of all existing industrial, commercial, and institutional boilers within a subcategory, as listed in § 63.11200 and defined in § 63.11237, located at an area source.
- (2) The affected source of this subpart is each new or reconstructed industrial, commercial, or institutional boiler within a subcategory, as listed in § 63.11200 and as defined in § 63.11237, located at an area source.





- (b) An affected source is an existing source if you commenced construction or reconstruction of the affected source on or before June 4, 2010.
- (c) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (d) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (e) An existing dual-fuel fired boiler meeting the definition of gas-fired boiler, as defined in § 63.11237, that meets the applicability requirements of this subpart after June 4, 2010 due to a fuel switch from gaseous fuel to solid fossil fuel, biomass, or liquid fuel is considered to be an existing source under this subpart as long as the boiler was designed to accommodate the alternate fuel.
- (f) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or part 71 as a result of this subpart. You may, however, be required to obtain a title V permit due to another reason or reasons. See 40 CFR 70.3(a) and (b) or 71.3(a) and (b). Notwithstanding the exemption from title V permitting for area sources under this subpart, you must continue to comply with the provisions of this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

§ 63.11195 Are any boilers not subject to this subpart?

The types of boilers listed in paragraphs (a) through (k) of this section are not subject to this subpart and to any requirements in this subpart.

- (a) [NA NO UNITS PART OF SOURCES SUBJECT TO OTHER PART 63 SUBPART]
- (b) [NA NO CAA SECTION 129 UNITS]
- (c) [NA UNITS DO NOT BURN HAZARDOUS WASTE].
- (d) [NA UNITS ARE NOT R&D]
- (e) [NA UNITS ARE NOT DEFINED AS GAS-FIRED]
- (f) [NA UNITS NOT DEFINED AS HOT WATER HEATERS]
- (g) [NA UNITS NOT USED AS CONTROL DEVICES]
- (h) [NA UNITS DO NOT QUALIFY AS TEMPORARY UNITS]
- (i) [NA UNITS ARE NOT DEFINED AS RESIDENTIAL]
- (j) [NA UNITS ARE NOT DEFINED AS ELECTRIC
- (k) [NA UNITS ARE NOT SUBJECT TO MACT 5U]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]

- § 63.11196 What are my compliance dates?
- (a) If you own or operate an existing affected boiler, you must achieve compliance with the applicable provisions in this subpart as specified in paragraphs (a)(1) through (3) of this section.
- (1) If the existing affected boiler is subject to a work practice or management practice standard of a tune-up, you must achieve compliance with the work practice or management practice standard no later than March 21, 2014.
- (2) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]





- (3) If the existing affected boiler is subject to the energy assessment requirement, you must achieve compliance with the energy assessment requirement no later than March 21, 2014.
- (b) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (c) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (d) [NA NSPS 4C AND 4D EXEMPTIONS NOT INVOKED]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

Emission Limits, Work Practice Standards, Emission Reduction Measures, and Management Practices

§ 63.11200 What are the subcategories of boilers?

The subcategories of boilers, as defined in § 63.11237 are:

- (a) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (b) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (c) Oil.
- (d) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]
- (e) [NA SOURCES IN THIS GROUP >= 10 MMBTU]
- (f) [NA SOURCES IN THIS GROUP DO NOT HAVE OXYGEN TRIM SYSTEM]
- (g) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS LIMITED USE]

[78 FR 7506, Feb. 1, 2013]

- § 63.11201 What standards must I meet?
- (a) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (b) You must comply with each work practice standard, emission reduction measure, and management practice specified in Table 2 to this subpart that applies to your boiler. An energy assessment completed on or after January 1, 2008 that meets or is amended to meet the energy assessment requirements in Table 2 to this subpart satisfies the energy assessment requirement. A facility that operates under an energy management program established through energy management systems compatible with ISO 50001, that includes the affected units, also satisfies the energy assessment requirement.

TABLE 2 REQUIREMENTS:

As stated in § 63.11201, you must comply with the following applicable work practice standards, emission reduction measures, and management practices:

- 4. If your boiler is in this subcategory: Existing oil-fired boilers with heat input capacity greater than 5 MMBtu/hr that do not meet the definition of seasonal boiler or limited-use boiler, or use an oxygen trim system that maintains an optimum air-to-fuel ratio, you must meet the following: Conduct an initial tune-up as specified in § 63.11214, and conduct a tune-up of the boiler biennially as specified in § 63.11223.
- 16. If your boiler is in this subcategory: Existing coal-fired, biomass-fired, or oil-fired boilers (units with heat input capacity of 10 MMBtu/hr and greater), not including limited-use boilers, you must meet the following: Must have a one-time energy assessment performed by a qualified energy assessor. An energy assessment completed on or after January 1, 2008, that





meets or is amended to meet the energy assessment requirements in this table satisfies the energy assessment requirement. Energy assessor approval and qualification requirements are waived in instances where past or amended energy assessments are used to meet the energy assessment requirements. A facility that operates under an energy management program compatible with ISO 50001 that includes the affected units also satisfies the energy assessment requirement. The energy assessment must include the following with extent of the evaluation for items (1) to (4) appropriate for the on-site technical hours listed in § 63.11237:

- (1) A visual inspection of the boiler system,
- (2) An evaluation of operating characteristics of the affected boiler systems, specifications of energy use systems, operating and maintenance procedures, and unusual operating constraints,
- (3) An inventory of major energy use systems consuming energy from affected boiler(s) and which are under control of the boiler owner or operator,
- (4) A review of available architectural and engineering plans, facility operation and maintenance procedures and logs, and fuel usage,
- (5) A list of major energy conservation measures that are within the facility's control,
- (6) A list of the energy savings potential of the energy conservation measures identified, and
- (7) A comprehensive report detailing the ways to improve efficiency, the cost of specific improvements, benefits, and the time frame for recouping those investments.

END OF TABLE 2 REQUIREMENTS

- (c) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO OPERATING LIMITS]
- (d) These standards apply at all times the affected boiler is operating, except during periods of startup and shutdown as defined in § 63.11237, during which time you must comply only with Table 2 to this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

General Compliance Requirements

- § 63.11205 What are my general requirements for complying with this subpart?
- (a) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator that may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.
- (b) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (c) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

Initial Compliance Requirements

- § 63.11210 What are my initial compliance requirements and by what date must I conduct them?
- (a) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

DEP Auth ID: 1404661 DEP PF ID: Page 43





- (b) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (c) For existing affected boilers that have applicable work practice standards, management practices, or emission reduction measures, you must demonstrate initial compliance no later than the compliance date that is specified in § 63.11196 and according to the applicable provisions in § 63.7(a)(2), except as provided in paragraph (j) of this section.
- (d) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (e) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (f) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (g) [NA THE SOURCES IN THIS GROUP ARE EXISTING]
- (h) [NA THE SOURCES IN THIS GROUP DO NOT BURN SOLID WASTE]
- (i) For affected boilers that switch fuels or make a physical change to the boiler that results in the applicability of a different subcategory within subpart JJJJJJ or the boiler becoming subject to subpart JJJJJJ, you must demonstrate compliance within 180 days of the effective date of the fuel switch or the physical change. Notification of such changes must be submitted according to §63.11225(g).
- (j) [NA FACILITY IS MINOR FOR HAP]
- (k) [NA UNITS HAVE OPERATED SINCE 6J EFFECTIVE DATE]
- [76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7507, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]
- § 63.11211 How do I demonstrate initial compliance with the emission limits?
- [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- \S 63.11212 What stack tests and procedures must I use for the performance tests?
- [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]
- § 63.11213 What fuel analyses and procedures must I use for the performance tests?
- [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]
- § 63.11214 How do I demonstrate initial compliance with the work practice standard, emission reduction measures, and management practice?
- (a) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (b) If you own or operate an existing or new biomass-fired boiler or an existing or new oil-fired boiler, you must conduct a performance tune-up according to §63.11210(c) or (g), as applicable, and §63.11223(b). If you own or operate an existing biomass-fired boiler or existing oil-fired boiler, you must submit a signed statement in the Notification of Compliance Status report that indicates that you conducted an initial tune-up of the boiler.
- (c) If you own or operate an existing affected boiler with a heat input capacity of 10 million Btu per hour or greater, you must submit a signed certification in the Notification of Compliance Status report that an energy assessment of the boiler and its energy use systems was completed according to Table 2 to this subpart and that the assessment is an accurate depiction of your facility at the time of the assessment or that the maximum number of on-site technical hours specified in the definition of energy assessment applicable to the facility has been expended.
- (d) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]





[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7508, Feb. 1, 2013; 81 FR 63126, Sept. 14, 2016]

Continuous Compliance Requirements

§ 63.11220 When must I conduct subsequent performance tests or fuel analyses?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING OR FUEL ANALYSES]

§ 63.11221 Is there a minimum amount of monitoring data I must obtain?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

§ 63.11222 How do I demonstrate continuous compliance with the emission limits?

[NA - SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

- (a) For affected sources subject to the work practice standard or the management practices of a tune-up, you must conduct a performance tune-up according to paragraph (b) of this section and keep records as required in §63.11225(c) to demonstrate continuous compliance. You must conduct the tune-up while burning the type of fuel (or fuels in the case of boilers that routinely burn two types of fuels at the same time) that provided the majority of the heat input to the boiler over the 12 months prior to the tune-up.
- (b) Except as specified in paragraphs (c) through (f) of this section, you must conduct a tune-up of the boiler biennially to demonstrate continuous compliance as specified in paragraphs (b)(1) through (7) of this section. Each biennial tune-up must be conducted no more than 25 months after the previous tune-up. For a new or reconstructed boiler, the first biennial tune-up must be no later than 25 months after the initial startup of the new or reconstructed boiler.
- (1) As applicable, inspect the burner, and clean or replace any components of the burner as necessary (you may delay the burner inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the burner inspection until the first outage, not to exceed 36 months from the previous inspection.
- (2) Inspect the flame pattern, as applicable, and adjust the burner as necessary to optimize the flame pattern. The adjustment should be consistent with the manufacturer's specifications, if available.
- (3) Inspect the system controlling the air-to-fuel ratio, as applicable, and ensure that it is correctly calibrated and functioning properly (you may delay the inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the inspection until the first outage, not to exceed 36 months from the previous inspection.
- (4) Optimize total emissions of CO. This optimization should be consistent with the manufacturer's specifications, if available, and with any nitrogen oxide requirement to which the unit is subject.
- (5) Measure the concentrations in the effluent stream of CO in parts per million, by volume, and oxygen in volume percent, before and after the adjustments are made (measurements may be either on a dry or wet basis, as long as it is the same basis before and after the adjustments are made). Measurements may be taken using a portable CO analyzer.
- (6) Maintain on-site and submit, if requested by the Administrator, a report containing the information in paragraphs (b)(6)(i) through (iii) of this section.
- (i) The concentrations of CO in the effluent stream in parts per million, by volume, and oxygen in volume percent, measured at high fire or typical operating load, before and after the tune-up of the boiler.
- (ii) A description of any corrective actions taken as a part of the tune-up of the boiler.
- (iii) The type and amount of fuel used over the 12 months prior to the tune-up of the boiler, but only if the unit was physically and legally capable of using more than one type of fuel during that period. Units sharing a fuel meter may estimate the fuel





use by each unit.

- (7) If the unit is not operating on the required date for a tune-up, the tune-up must be conducted within 30 days of startup.
- (c) [NA SOURCES IN THIS GROUP DO NOT HAVE OXYGEN TRIM SYSTEM]
- (d) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]
- (e) [NA SOURCES IN THIS GROUP >=10 MMBTU]
- (f) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]
- (g) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7509, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

- § 63.11224 What are my monitoring, installation, operation, and maintenance requirements?
- (a) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (b) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (c) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (d) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO OPERATING LIMITS]
- (e) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (f) [NA BLDS NOT USED OR REQUIRED]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7510, Feb. 1, 2013]

- § 63.11225 What are my notification, reporting, and recordkeeping requirements?
- (a) You must submit the notifications specified in paragraphs (a)(1) through (5) of this section to the administrator.
- (1) You must submit all of the notifications in §§63.7(b); 63.8(e) and (f); and 63.9(b) through (e), (g), and (h) that apply to you by the dates specified in those sections except as specified in paragraphs (a)(2) and (4) of this section.
- (2) An Initial Notification must be submitted no later than January 20, 2014 or within 120 days after the source becomes subject to the standard.
- (3) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]
- (4) You must submit the Notification of Compliance Status no later than 120 days after the applicable compliance date specified in §63.11196 unless you own or operate a new boiler subject only to a requirement to conduct a biennial or 5-year tune-up or you must conduct a performance stack test. If you own or operate a new boiler subject to a requirement to conduct a tune-up, you are not required to prepare and submit a Notification of Compliance Status for the tune-up. If you must conduct a performance stack test, you must submit the Notification of Compliance Status within 60 days of completing the performance stack test. You must submit the Notification of Compliance Status in accordance with paragraphs (a)(4)(i) and (vi) of this section. The Notification of Compliance Status must include the information and certification(s) of compliance in paragraphs (a)(4)(i) through (v) of this section, as applicable, and signed by a responsible official.
- (i) You must submit the information required in §63.9(h)(2), except the information listed in §63.9(h)(2)(i)(B), (D), (E), and (F). If you conduct any performance tests or CMS performance evaluations, you must submit that data as specified in paragraph (e) of this section. If you conduct any opacity or visible emission observations, or other monitoring procedures or methods, you must submit that data to the Administrator at the appropriate address listed in §63.13.



- (ii) "This facility complies with the requirements in §63.11214 to conduct an initial tune-up of the boiler."
- (iii) "This facility has had an energy assessment performed according to §63.11214(c)."
- (iv) For units that install bag leak detection systems: "This facility complies with the requirements in §63.11224(f)."
- (vi) The notification must be submitted electronically using the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written Notification of Compliance Status must be submitted to the Administrator at the appropriate address listed in §63.13.
- (5) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (b) You must prepare, by March 1 of each year, and submit to the delegated authority upon request, an annual compliance certification report for the previous calendar year containing the information specified in paragraphs (b)(1) through (4) of this section. You must submit the report by March 15 if you had any instance described by paragraph (b)(3) of this section. For boilers that are subject only to the energy assessment requirement and/or a requirement to conduct a biennial or 5-year tune-up according to §63.11223(a) and not subject to emission limits or operating limits, you may prepare only a biennial or 5-year compliance report as specified in paragraphs (b)(1) and (2) of this section.
- (1) Company name and address.
- (2) Statement by a responsible official, with the official's name, title, phone number, email address, and signature, certifying the truth, accuracy and completeness of the notification and a statement of whether the source has complied with all the relevant standards and other requirements of this subpart. Your notification must include the following certification(s) of compliance, as applicable, and signed by a responsible official:
- (i) "This facility complies with the requirements in §63.11223 to conduct a biennial or 5-year tune-up, as applicable, of each boiler."
- (ii) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (iii) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (3) If the source experiences any deviations from the applicable requirements during the reporting period, include a description of deviations, the time periods during which the deviations occurred, and the corrective actions taken.
- (4) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (c) You must maintain the records specified in paragraphs (c)(1) through (7) of this section.
- (1) As required in §63.10(b)(2)(xiv), you must keep a copy of each notification and report that you submitted to comply with this subpart and all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted.
- (2) You must keep records to document conformance with the work practices, emission reduction measures, and management practices required by §63.11214 and §63.11223 as specified in paragraphs (c)(2)(i) through (vi) of this section.
- (i) Records must identify each boiler, the date of tune-up, the procedures followed for tune-up, and the manufacturer's specifications to which the boiler was tuned.
- (ii) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (iii) For each boiler required to conduct an energy assessment, you must keep a copy of the energy assessment report.
- (iv) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]





- (v) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS SEASONAL]
- (vi) [NA SOURCES IN THIS GROUP ARE NOT DEFINED AS LIMITED USE]
- (3) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO FUEL ANALYSES]
- (4) Records of the occurrence and duration of each malfunction of the boiler, or of the associated air pollution control and monitoring equipment.
- (5) Records of actions taken during periods of malfunction to minimize emissions in accordance with the general duty to minimize emissions in §63.11205(a), including corrective actions to restore the malfunctioning boiler, air pollution control, or monitoring equipment to its normal or usual manner of operation.
- (6) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO EMISSION LIMITS]
- (7) [NA BLDS NOT USED OR REQUIRED]
- (d) Your records must be in a form suitable and readily available for expeditious review. You must keep each record for 5 years following the date of each recorded action. You must keep each record on-site or be accessible from a central location by computer or other means that instantly provide access at the site for at least 2 years after the date of each recorded action. You may keep the records off site for the remaining 3 years
- (e) [NA SOURCES IN THIS GROUP ARE NOT SUBJECT TO PERFORMANCE TESTING]
- (f) [NA SOURCES IN THIS GROUP ARE OIL-FIRED]
- (g) If you have switched fuels or made a physical change to the boiler and the fuel switch or change resulted in the applicability of a different subcategory within this subpart, in the boiler becoming subject to this subpart, or in the boiler switching out of this subpart due to a fuel change that results in the boiler meeting the definition of gas-fired boiler, as defined in §63.11237, or you have taken a permit limit that resulted in you becoming subject to this subpart or no longer being subject to this subpart, you must provide notice of the date upon which you switched fuels, made the physical change, or took a permit limit within 30 days of the change. The notification must identify:
- (1) The name of the owner or operator of the affected source, the location of the source, the boiler(s) that have switched fuels, were physically changed, or took a permit limit, and the date of the notice.
- (2) The date upon which the fuel switch, physical change, or permit limit occurred.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7511, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

§ 63.11226 [RESERVED]

Other Requirements and Information

§ 63.11235 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you.

§ 63.11236 Who implements and enforces this subpart? [INCOPORATED BY REFERENCE]

§ 63.11237 What definitions apply to this subpart? [INCORPORATED BY REFERENCE]

Reporting Addresses & Regulatory Changes

(a) The source(s) within this source group that are subject to 40 CFR Part 63 Subpart JJJJJJ - National Emissions Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources shall comply with all applicable requirements of the Subpart. Furthermore, 40 CFR 63.13(a) requires submission of copies of all requests,

36-05071



SECTION E. Source Group Restrictions.

reports and other communications to both the DEP and the EPA. The EPA copies shall be forwarded to:

Associate Director Office of Air Enforcement and Compliance Assistance (3AP20) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The DEP copies shall be forwarded to the DEP SCRO Air Quality Program Manager at wiweaver@pa.gov, unless otherwise directed in writing by DEP.

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

DEP Auth ID: 1404661

36-05071



SECTION E. Source Group Restrictions.

Group Name: GROUP 004

Group Description: 40 CFR Part 60, Subpart Dc Requirements

Sources included in this group

ID	Name
033	BOILER 3 (B-3)
035	BOILER 2 (B-2A)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.40c]
Subpart Dc - Standards of Performance for Small Industrial- Commercial-Institutional Steam Generating Units
Applicability and delegation of authority.

- § 60.40c Applicability and delegation of authority.
- (a) Except as provided in paragraphs (d), (e), (f), and (g) of this section, the affected facility to which this subpart applies is each steam generating unit for which construction, modification, or reconstruction is commenced after June 9, 1989 and that has a maximum design heat input capacity of 29 megawatts (MW) (100 million British thermal units per hour (MMBtu/h)) or less, but greater than or equal to 2.9 MW (10 MMBtu/h).
- (b) In delegating implementation and enforcement authority to a State under section 111(c) of the Clean Air Act, § 60.48c(a)(4) shall be retained by the Administrator and not transferred to a State.
- (c) [NA UNIT(S) NOT ASSOCIATED WITH COMBUSTION RESEARCH]
- (d) [NA UNIT(S) NOT ASSOCIATED WITH COMBUSTION RESEARCH]
- (e) [NA UNIT(S) NOT ASSOCIATED WITH STATIONARY COMBUSTION TURBINE]
- (f) [NA NOT SUBJECT TO NSPS AAAA OR CCCC]

DEP Auth ID: 1404661 DEP PF ID: Page 50





- (g) [NA NOT SUBJECT TO NSPS BBBB]
- (h) [NA NOT SUBJECT TO NSPS J OR Ja]
- (i) [NA UNIT(S) ARE NOT TEMPORARY BOILERS]

[72 FR 32759, June 13, 2007, as amended at 74 FR 5090, Jan. 28, 2009; 77 FR 9461, Feb. 16, 2012]

- § 60.42c Standard for sulfur dioxide (SO2).
- (a) [NA UNIT(S) NOT COAL FIRED]
- (b) [NA UNIT(S) NOT COAL FIRED]
- (c) [NA UNIT(S) NOT COAL FIRED]
- (d) On and after the date on which the initial performance test is completed or required to be completed under § 60.8, whichever date comes first, no owner or operator of an affected facility that combusts oil shall cause to be discharged into the atmosphere from that affected facility any gases that contain SO2 in excess of 215 ng/J (0.50 lb/MMBtu) heat input from oil; or, as an alternative, no owner or operator of an affected facility that combusts oil shall combust oil in the affected facility that contains greater than 0.5 weight percent sulfur. The percent reduction requirements are not applicable to affected facilities under this paragraph.
- (e) On and after the date on which the initial performance test is completed or required to be completed under § 60.8, whichever date comes first, no owner or operator of an affected facility that combusts coal, oil, or coal and oil with any other fuel shall cause to be discharged into the atmosphere from that affected facility any gases that contain SO2 in excess of the following:
- (1) [NA UNIT(S) NOT COAL FIRED, AND <75 MMBTU]
- (2) The emission limit determined according to the following formula for any affected facility that combusts coal, oil, or coal and oil with any other fuel: [SEE REGULATION FOR EQUATION FOR BOILER 3, THE LIMIT COMES TO 0.5 LB SO2/MMBTU]
- (f) [NA UNIT(S) NOT COAL FIRED]
- (g) Except as provided in paragraph (h) of this section, compliance with the percent reduction requirements, fuel oil sulfur limits, and emission limits of this section shall be determined on a 30-day rolling average basis.
- (h) [NA UNIT(S) > 30MMBTU]
- (i) The SO2 emission limits, fuel oil sulfur limits, and percent reduction requirements under this section apply at all times, including periods of startup, shutdown, and malfunction.
- (j) [NA UNIT(S) NOT IN NON-CONTINENTAL AREA]

[72 FR 32759, June 13, 2007, as amended at 74 FR 5090, Jan. 28, 2009; 77 FR 9462, Feb. 16, 2012]

- § 60.43c Standard for particulate matter (PM).
- (a) [NA UNIT(S) NOT COAL FIRED]
- (b) [NA UNIT(S) NOT WOOD FIRED]
- (c) On and after the date on which the initial performance test is completed or required to be completed under § 60.8, whichever date comes first, no owner or operator of an affected facility that combusts coal, wood, or oil and has a heat input capacity of 8.7 MW (30 MMBtu/h) or greater shall cause to be discharged into the atmosphere from that affected facility any



gases that exhibit greater than 20 percent opacity (6-minute average), except for one 6-minute period per hour of not more than 27 percent opacity. Owners and operators of an affected facility that elect to install, calibrate, maintain, and operate a continuous emissions monitoring system (CEMS) for measuring PM emissions according to the requirements of this subpart and are subject to a federally enforceable PM limit of 0.030 lb/MMBtu or less are exempt from the opacity standard specified in this paragraph (c).

- (d) The PM and opacity standards under this section apply at all times, except during periods of startup, shutdown, or malfunction.
- (e)(1) (3) [NA FACILITY ELECTS TO FOLLOW THE FUEL SULFUR RESTRICTION IN (e)(4) FOR BOILER 3]
- (4) An owner or operator of an affected facility that commences construction, reconstruction, or modification after February 28, 2005, and that combusts only oil that contains no more than 0.50 weight percent sulfur or a mixture of 0.50 weight percent sulfur oil with other fuels not subject to a PM standard under § 60.43c and not using a post-combustion technology (except a wet scrubber) to reduce PM or SO2 emissions is not subject to the PM limit in this section.

[72 FR 32759, June 13, 2007, as amended at 74 FR 5091, Jan. 28, 2009; 77 FR 9462, Feb. 16, 2012]

- § 60.44c Compliance and performance test methods and procedures for sulfur dioxide.
- (a) Except as provided in paragraphs (g) and (h) of this section and § 60.8(b), performance tests required under § 60.8 shall be conducted following the procedures specified in paragraphs (b), (c), (d), (e), and (f) of this section, as applicable. Section 60.8(f) does not apply to this section. The 30-day notice required in § 60.8(d) applies only to the initial performance test unless otherwise specified by the Administrator.
- (b) [INITIAL PERFORMANCE TEST FOR BOILER 3 IS IN THE PAST]
- (c) After the initial performance test required under paragraph (b) of this section and § 60.8, compliance with the percent reduction requirements and SO2 emission limits under § 60.42c is based on the average percent reduction and the average SO2 emission rates for 30 consecutive steam generating unit operating days. A separate performance test is completed at the end of each steam generating unit operating day, and a new 30-day average percent reduction and SO2 emission rate are calculated to show compliance with the standard.
- (d) If only coal, only oil, or a mixture of coal and oil is combusted in an affected facility, the procedures in Method 19 of appendix A of this part are used to determine the hourly SO2 emission rate (Eho) and the 30-day average SO2 emission rate (Eao). The hourly averages used to compute the 30-day averages are obtained from the CEMS. Method 19 of appendix A of this part shall be used to calculate Eao when using daily fuel sampling or Method 6B of appendix A of this part.

 (e) If coal, oil, or coal and oil are combusted with other fuels:
- (1) An adjusted Eho (Eho o) is used in Equation 19-19 of Method 19 of appendix A of this part to compute the adjusted Eao (Eao o). The Eho o is computed using the following formula: [SEE REGULATION FOR EQUATION]
- (2) The owner or operator of an affected facility that qualifies under the provisions of § 60.42c(c) or (d) (where percent reduction is not required) does not have to measure the parameters Ew or Xk if the owner or operator of the affected facility elects to measure emission rates of the coal or oil using the fuel sampling and analysis procedures under Method 19 of appendix A of this part.
- (f) [NA NOT SUBJECT TO PERCENT REDUCTION REQUIREMENTS]
- (g) [NA UNIT(S) > 30MMBTU]
- (h) [NA UNIT(S) > 30MMBTU]
- (i) [NA UNIT(S) NOT COAL FIRED]
- (j) The owner or operator of an affected facility shall use all valid SO2 emissions data in calculating %Ps and Eho under paragraphs (d), (e), or (f) of this section, as applicable, whether or not the minimum emissions data requirements under §





60.46c(f) are achieved. All valid emissions data, including valid data collected during periods of startup, shutdown, and malfunction, shall be used in calculating %Ps or Eho pursuant to paragraphs (d), (e), or (f) of this section, as applicable.

[72 FR 32759, June 13, 2007, as amended at 74 FR 5091, Jan. 28, 2009]

- § 60.45c Compliance and performance test methods and procedures for particulate matter.
- (a) The owner or operator of an affected facility subject to the PM and/or opacity standards under § 60.43c shall conduct an initial performance test as required under § 60.8, and shall conduct subsequent performance tests as requested by the Administrator, to determine compliance with the standards using the following procedures and reference methods, except as specified in paragraph (c) of this section. [TEST DETAILS IN (1)-(8) INCORPORATED BY REFERENCE]
- (b) [NA UNIT(S) NOT WOOD FIRED]
- (c) [NA CEMS NOT USED OR REQUIRED]
- (d) [NA UNIT(S) > 30MMBTU]

[72 FR 32759, June 13, 2007, as amended at 74 FR 5091, Jan. 28, 2009; 76 FR 3523, Jan. 20, 2011; 77 FR 9463, Feb. 16, 2012]

- § 60.46c Emission monitoring for sulfur dioxide.
- (a) [NA PARAGRAPH (d) APPLIES]
- (b) [NA CEMS NOT USED OR REQUIRED]
- (c) [NA CEMS NOT USED OR REQUIRED]
- (d) As an alternative to operating a CEMS at the inlet to the SO2 control device (or outlet of the steam generating unit if no SO2 control device is used) as required under paragraph (a) of this section, an owner or operator may elect to determine the average SO2 emission rate by sampling the fuel prior to combustion. As an alternative to operating a CEMS at the outlet from the SO2 control device (or outlet of the steam generating unit if no SO2 control device is used) as required under paragraph (a) of this section, an owner or operator may elect to determine the average SO2 emission rate by using Method 6B of appendix A of this part. Fuel sampling shall be conducted pursuant to either paragraph (d)(1) or (d)(2) of this section. Method 6B of appendix A of this part shall be conducted pursuant to paragraph (d)(3) of this section.
- (1) For affected facilities combusting coal or oil, coal or oil samples shall be collected daily in an as-fired condition at the inlet to the steam generating unit and analyzed for sulfur content and heat content according the Method 19 of appendix A of this part. Method 19 of appendix A of this part provides procedures for converting these measurements into the format to be used in calculating the average SO2 input rate.
- (2) As an alternative fuel sampling procedure for affected facilities combusting oil, oil samples may be collected from the fuel tank for each steam generating unit immediately after the fuel tank is filled and before any oil is combusted. The owner or operator of the affected facility shall analyze the oil sample to determine the sulfur content of the oil. If a partially empty fuel tank is refilled, a new sample and analysis of the fuel in the tank would be required upon filling. Results of the fuel analysis taken after each new shipment of oil is received shall be used as the daily value when calculating the 30-day rolling average until the next shipment is received. If the fuel analysis shows that the sulfur content in the fuel tank is greater than 0.5 weight percent sulfur, the owner or operator shall ensure that the sulfur content of subsequent oil shipments is low enough to cause the 30-day rolling average sulfur content to be 0.5 weight percent sulfur or less.
- (3) [METHOD 6B NOT APPLICABLE IN THIS CASE]
- (e) [NA UNIT(S) > 30MMBTU]
- (f) [NA CEMS NOT USED OR REQUIRED]





§ 60.47c Emission monitoring for particulate matter.

- (a) The owner or operator of an affected facility subject to an opacity standard in § 60.43c(c) that is not required to use a COMS due to paragraphs (c), (d), (e), or (f) of this section that elects not to use a COMS shall conduct a performance test using Method 9 of appendix A-4 of this part and the procedures in § 60.11 to demonstrate compliance with the applicable limit in § 60.43c by April 29, 2011, within 45 days of stopping use of an existing COMS, or within 180 days after initial startup of the facility, whichever is later, and shall comply with either paragraphs (a)(1), (a)(2), or (a)(3) of this section. The observation period for Method 9 of appendix A-4 of this part performance tests may be reduced from 3 hours to 60 minutes if all 6-minute averages are less than 10 percent and all individual 15-second observations are less than or equal to 20 percent during the initial 60 minutes of observation. [Note: NO COMS REQUIRED. FACILITY WILL OPERATE BOILER 3 IN ACCORDANCE WITH THE SUBMITTED SSMP AS REQUIRED IN PARAGRAPH (F)(3) OF THIS SECTION.]
- (1) Except as provided in paragraph (a)(2) and (a)(3) of this section, the owner or operator shall conduct subsequent Method 9 of appendix A-4 of this part performance tests using the procedures in paragraph (a) of this section according to the applicable schedule in paragraphs (a)(1)(i) through (a)(1)(iv) of this section, as determined by the most recent Method 9 of appendix A-4 of this part performance test results.
- (i) If no visible emissions are observed, a subsequent Method 9 of appendix A-4 of this part performance test must be completed within 12 calendar months from the date that the most recent performance test was conducted or within 45 days of the next day that fuel with an opacity standard is combusted, whichever is later;
- (ii) If visible emissions are observed but the maximum 6-minute average opacity is less than or equal to 5 percent, a subsequent Method 9 of appendix A-4 of this part performance test must be completed within 6 calendar months from the date that the most recent performance test was conducted or within 45 days of the next day that fuel with an opacity standard is combusted, whichever is later;
- (iii) If the maximum 6-minute average opacity is greater than 5 percent but less than or equal to 10 percent, a subsequent Method 9 of appendix A-4 of this part performance test must be completed within 3 calendar months from the date that the most recent performance test was conducted or within 45 days of the next day that fuel with an opacity standard is combusted, whichever is later; or
- (iv) If the maximum 6-minute average opacity is greater than 10 percent, a subsequent Method 9 of appendix A-4 of this part performance test must be completed within 45 calendar days from the date that the most recent performance test was conducted.
- (2) If the maximum 6-minute opacity is less than 10 percent during the most recent Method 9 of appendix A-4 of this part performance test, the owner or operator may, as an alternative to performing subsequent Method 9 of appendix A-4 of this part performance tests, elect to perform subsequent monitoring using Method 22 of appendix A-7 of this part according to the procedures specified in paragraphs (a)(2)(i) and (ii) of this section.
- (i) The owner or operator shall conduct 10 minute observations (during normal operation) each operating day the affected facility fires fuel for which an opacity standard is applicable using Method 22 of appendix A-7 of this part and demonstrate that the sum of the occurrences of any visible emissions is not in excess of 5 percent of the observation period (i.e., 30 seconds per 10 minute period). If the sum of the occurrence of any visible emissions is greater than 30 seconds during the initial 10 minute observation, immediately conduct a 30 minute observation. If the sum of the occurrence of visible emissions is greater than 5 percent of the observation period (i.e., 90 seconds per 30 minute period), the owner or operator shall either document and adjust the operation of the facility and demonstrate within 24 hours that the sum of the occurrence of visible emissions is equal to or less than 5 percent during a 30 minute observation (i.e., 90 seconds) or conduct a new Method 9 of appendix A-4 of this part performance test using the procedures in paragraph (a) of this section within 45 calendar days according to the requirements in § 60.45c(a)(8).
- (ii) If no visible emissions are observed for 10 operating days during which an opacity standard is applicable, observations can be reduced to once every 7 operating days during which an opacity standard is applicable. If any visible emissions are observed, daily observations shall be resumed.
- (3) [NA DIGITAL OPACITY COMPLIANCE SYSTEM NOT USED]



(b) [NA - COMS NOT REQUIRED OR USED PER (c)]

- (c) Owners and operators of an affected facilities that burn only distillate oil that contains no more than 0.5 weight percent sulfur and/or liquid or gaseous fuels with potential sulfur dioxide emission rates of 26 ng/J (0.060 lb/MMBtu) heat input or less and that do not use a post-combustion technology to reduce SO2 or PM emissions and that are subject to an opacity standard in §60.43c(c) are not required to operate a COMS if they follow the applicable procedures in §60.48c(f).
- (d) [NA PM CEMS NOT USED]
- (e) [NA DOES NOT MAINTAIN CO EMISSION RECORDS ON AN OPERATING DAY BASIS]
- (f) (f) An owner or operator of an affected facility that is subject to an opacity standard in § 60.43c(c) is not required to operate a COMS provided that the affected facility meets the conditions in either paragraphs (f)(1), (2), or (3) of this section.
- (1) [NA NO BAGHOUSE]
- (2) [NA NO ESP]
- (3) The affected facility burns only gaseous fuels and/or fuel oils that contain no greater than 0.5 weight percent sulfur, and the owner or operator operates the unit according to a written site-specific monitoring plan approved by the permitting authority. This monitoring plan must include procedures and criteria for establishing and monitoring specific parameters for the affected facility indicative of compliance with the opacity standard. For testing performed as part of this site-specific monitoring plan, the permitting authority may require as an alternative to the notification and reporting requirements specified in §§ 60.8 and 60.11 that the owner or operator submit any deviations with the excess emissions report required under § 60.48c(c). [NOTE: SITE SPECIFIC MONITORING PLAN (SSMP) WAS SUBMITTED AND APPROVED BY THE DEPARTMENT ON FEBRUARY 15, 2011].

[72 FR 32759, June 13, 2007, as amended at 74 FR 5091, Jan. 28, 2009; 76 FR 3523, Jan. 20, 2011; 77 FR 9463, Feb. 16, 2012]

- § 60.48c Reporting and recordkeeping requirements.
- (a) [NA STARTUP IS IN THE PAST]
- (b) The owner or operator of each affected facility subject to the SO2 emission limits of § 60.42c, or the PM or opacity limits of § 60.43c, shall submit to the Administrator the performance test data from the initial and any subsequent performance tests and, if applicable, the performance evaluation of the CEMS and/or COMS using the applicable performance specifications in appendix B of this part.
- (c) In addition to the applicable requirements in § 60.7, the owner or operator of an affected facility subject to the opacity limits in § 60.43c(c) shall submit excess emission reports for any excess emissions from the affected facility that occur during the reporting period and maintain records according to the requirements specified in paragraphs (c)(1) through (3) of this section, as applicable to the visible emissions monitoring method used.
- (1) For each performance test conducted using Method 9 of appendix A-4 of this part, the owner or operator shall keep the records including the information specified in paragraphs (c)(1)(i) through (iii) of this section.
- (i) Dates and time intervals of all opacity observation periods;
- (ii) Name, affiliation, and copy of current visible emission reading certification for each visible emission observer participating in the performance test; and
- (iii) Copies of all visible emission observer opacity field data sheets;
- (2) For each performance test conducted using Method 22 of appendix A-4 of this part, the owner or operator shall keep the records including the information specified in paragraphs (c)(2)(i) through (iv) of this section.



- (i) Dates and time intervals of all visible emissions observation periods;
- (ii) Name and affiliation for each visible emission observer participating in the performance test;
- (iii) Copies of all visible emission observer opacity field data sheets; and
- (iv) Documentation of any adjustments made and the time the adjustments were completed to the affected facility operation by the owner or operator to demonstrate compliance with the applicable monitoring requirements.
- (3) [NA NO COMS]
- (d) The owner or operator of each affected facility subject to the SO2 emission limits, fuel oil sulfur limits, or percent reduction requirements under § 60.42c shall submit reports to the Administrator.
- (e) The owner or operator of each affected facility subject to the SO2 emission limits, fuel oil sulfur limits, or percent reduction requirements under § 60.42c shall keep records and submit reports as required under paragraph (d) of this section, including the following information, as applicable.
- (1) Calendar dates covered in the reporting period.
- (2) Each 30-day average SO2 emission rate (ng/J or lb/MMBtu), or 30-day average sulfur content (weight percent), calculated during the reporting period, ending with the last 30-day period; reasons for any noncompliance with the emission standards; and a description of corrective actions taken.
- (3) [NA PERCENT OF POTENTIAL NOT USED]
- (4) Identification of any steam generating unit operating days for which SO2 or diluent (O2 or CO2) data have not been obtained by an approved method for at least 75 percent of the operating hours; justification for not obtaining sufficient data; and a description of corrective actions taken.
- (5) Identification of any times when emissions data have been excluded from the calculation of average emission rates; justification for excluding data; and a description of corrective actions taken if data have been excluded for periods other than those during which coal or oil were not combusted in the steam generating unit.
- (6) Identification of the F factor used in calculations, method of determination, and type of fuel combusted.
- (7) (10) [NA CEMS NOT USED]
- (11) [NA FUEL SUPPLIER CERTIFICATION NOT APPLICABLE IN THIS CASE]
- (f) [NA FUEL SUPPLIER CERTIFICATION NOT APPLICABLE IN THIS CASE]
- g)(1) Except as provided under paragraphs (g)(2) and (g)(3) of this section, the owner or operator of each affected facility shall record and maintain records of the amount of each fuel combusted during each operating day.
- (2) As an alternative to meeting the requirements of paragraph (g)(1) of this section, the owner or operator of an affected facility that combusts only natural gas, wood, fuels using fuel certification in §60.48c(f) to demonstrate compliance with the SO2 standard, fuels not subject to an emissions standard (excluding opacity), or a mixture of these fuels may elect to record and maintain records of the amount of each fuel combusted during each calendar month. [OPTION APPLIES TO BOILER 2]
- (3) As an alternative to meeting the requirements of paragraph (g)(1) of this section, the owner or operator of an affected facility or multiple affected facilities located on a contiguous property unit where the only fuels combusted in any steam generating unit (including steam generating units not subject to this subpart) at that property are natural gas, wood, distillate oil meeting the most current requirements in §60.42C to use fuel certification to demonstrate compliance with the SO2 standard, and/or fuels, excluding coal and residual oil, not subject to an emissions standard (excluding opacity) may elect to record and maintain records of the total amount of each steam generating unit fuel delivered to that property during each calendar month.



- (2) (3) [NA FUEL SUPPLIER CERTIFICATION NOT APPLICABLE IN THIS CASE]
- (h) [NA UNIT(S) NO ANNUAL CAPACITY FACTOR]
- (j) The reporting period for the reports required under this subpart is each six-month period. All reports shall be submitted to the Administrator and shall be postmarked by the 30th day following the end of the reporting period. [SIX MONTHS PERIODS SHALL BE DEFINED AS CALENDAR HALVES]

[72 FR 32759, June 13, 2007, as amended at 74 FR 5091, Jan. 28, 2009]

Reporting Addresses & Regulatory Changes

Individual sources within this source group that are subject to 40 CFR Part 60 Subpart Dc shall comply with all applicable requirements of the Subpart. 40 CFR 60.8 requires submission of copies of all requests, reports and other communications to both DEP and the EPA The EPA copies shall be forwarded to:

Associate Director
Office of Air Enforcement and Compliance Assistance (3AP20)
U.S. EPA Region III
1650 Arch Street
Philadelphia, PA 19103-2029

The DEP copies shall be forwarded to the DEP SCRO Air Quality Program Manager at wiweaver@pa.gov, unless otherwise directed in writing by DEP.

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

DEP Auth ID: 1404661





Group Name: GROUP 005

Group Description: Area Source Boiler MACT Subpart JJJJJJ - New Sources

Sources included in this group

ID	Name
033	BOILER 3 (B-3)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11193]

SUBPART JJJJJJ - National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources

Am I subject to this subpart?

§ 63.11193 Am I subject to this subpart?

You are subject to this subpart if you own or operate an industrial, commercial, or institutional boiler as defined in § 63.11237 that is located at, or is part of, an area source of hazardous air pollutants (HAP), as defined in § 63.2, except as specified in § 63.11195.

§ 63.11194 What is the affected source of this subpart?

- (a) This subpart applies to each new, reconstructed, or existing affected source as defined in paragraphs (a)(1) and (2) of this section.
- (1) [NA UNIT(S) ARE NEW]
- (2) The affected source of this subpart is each new or reconstructed industrial, commercial, or institutional boiler within a subcategory, as listed in § 63.11200 and as defined in § 63.11237, located at an area source.
- (b) [NA UNIT(S) ARE NEW]





- (c) An affected source is a new source if you commenced construction of the affected source after June 4, 2010, and the boiler meets the applicability criteria at the time you commence construction.
- (d) [NA UNIT(S) ARE NOT RECONSTRUCTED]
- (e) [NA UNIT(S) ARE NEW]
- (f) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or part 71 as a result of this subpart. You may, however, be required to obtain a title V permit due to another reason or reasons. See 40 CFR 70.3(a) and (b) or 71.3(a) and (b). Notwithstanding the exemption from title V permitting for area sources under this subpart, you must continue to comply with the provisions of this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

§ 63.11195 Are any boilers not subject to this subpart?

The types of boilers listed in paragraphs (a) through (k) of this section are not subject to this subpart and to any requirements in this subpart.

- (a) [NA NO UNITS PART OF SOURCES SUBJECT TO OTHER PART 63 SUBPART]
- (b) [NA NO CAA SECTION 129 UNITS]
- (c) [NA UNITS DO NOT BURN HAZARDOUS WASTE].
- (d) [NA UNITS ARE NOT R&D]
- (e) [NA UNITS ARE NOT DEFINED AS GAS-FIRED]
- (f) [NA UNITS NOT DEFINED AS HOT WATER HEATERS]
- (g) [NA UNITS NOT USED AS CONTROL DEVICES]
- (h) [NA UNITS DO NOT QUALIFY AS TEMPORARY UNITS]
- (i) [NA UNITS ARE NOT DEFINED AS RESIDENTIAL]
- (j) [NA UNITS ARE NOT DEFINED AS ELECTRIC
- (k) [NA UNITS ARE NOT SUBJECT TO MACT 5U]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]

- § 63.11196 What are my compliance dates?
- (a) [NA UNIT(S) ARE NEW]
- (b) If you start up a new affected source on or before May 20, 2011, you must achieve compliance with the provisions of this subpart no later than May 20, 2011.
- (c) If you start up a new affected source after May 20, 2011, you must achieve compliance with the provisions of this subpart upon startup of your affected source.
- (d) [NA UNIT(S) DO NOT COMBUST SOLID WASTE]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]





Emission Limits, Work Practice Standards, Emission Reduction Measures, and Management Practices

§ 63.11200 What are the subcategories of boilers?

The subcategories of boilers, as defined in § 63.11237 are:

- (a) [NA UNIT(S) DO NOT BURN COAL]
- (b) [NA UNIT(S) DO NOT BURN BIOMASS]
- (c) Oil.
- (d) [NA UNIT(S) NOT DEFINED AS SEASONAL]
- (e) [NA UNIT(S) > 5 MMBTU]
- (f) [NA UNITS DO NOT HAVE O2 TRIM SYSTEM]
- (g) [NA UNIT(S) NOT DEFINED AS LIMITED USE]

[78 FR 7506, Feb. 1, 2013]

- § 63.11201 What standards must I meet?
- (a) You must comply with each emission limit specified in Table 1 to this subpart that applies to your boiler.

TABLE 1 REQUIREMENTS

As stated in § 63.11201, you must comply with each emission limit specified in Table 1 to this subpart that applies to your boiler.

5. If your boiler is in this subcategory: New oil-fired boilers with heat input capacity of 10.0 mmbtu/hr or greater that do not meet the definition of seasonal or limited use boilers must limit filterable PM emissions to no more than .030 lbs per mmbtu of heat input, except during those periods of startup and shutdown. [THIS EMISSION LIMIT DOES NOT APPY TO THOSE BOILERS THAT COMBUST ULTRA-LOW-SULFUR LIQUID FUELS AS DEFINED IN 63.11237]

END OF TABLE 1 REQUIREMENTS

(b) You must comply with each work practice standard, emission reduction measure, and management practice specified in Table 2 to this subpart that applies to your boiler. An energy assessment completed on or after January 1, 2008 that meets or is amended to meet the energy assessment requirements in Table 2 to this subpart satisfies the energy assessment requirement. A facility that operates under an energy management program established through energy management systems compatible with ISO 50001, that includes the affected units, also satisfies the energy assessment requirement.

TABLE 2 REQUIREMENTS

As stated in § 63.11201, you must comply with the following applicable work practice standards, emission reduction measures, and management practices:

- 1. If your boiler is in this subcategory: Existing or new coal-fired, new biomass-fired, or new oil-fired boilers (units with heat input capacity of 10 MMBtu/hr or greater), then you must meet the following: Minimize the boiler's startup and shutdown periods and conduct startups and shutdowns according to the manufacturer's recommended procedures. If manufacturer's recommended procedures are not available, you must follow recommended procedures for a unit of similar design for which manufacturer's recommended procedures are available.
- 5. If your boiler is in this subcategory: New oil-fired boilers with heat input capacity greater than 5 MMBtu/hr that do not meet



the definition of seasonal boiler or limited-use boiler, or use an oxygen trim system that maintains an optimum air-to-fuel ratio, then you must meet the following: Conduct a tune-up of the boiler biennially as specified in § 63.11223.

END OF TABLE 2 REQUIREMENTS

(c) You must comply with each operating limit specified in Table 3 to this subpart that applies to your boiler.

TABLE 3 REQUIREMENTS

As stated in § 63.11201, You must comply with each operating limit specified in Table 3 to this subpart that applies to your boiler.

7. If you are required to demonstrate compliance with an applicable emission limit by performing a stack test, the permittee shall maintain the operating load of the boiler such that it does not exceed 110 percent of the average operating load recorded during the most recent performance test.

END OF TABLE 3 REQUIREMENTS

(d) These standards apply at all times the affected boiler is operating, except during periods of startup and shutdown as defined in § 63.11237, during which time you must comply only with Table 2 to this subpart.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

General Compliance Requirements

- § 63.11205 What are my general requirements for complying with this subpart?
- (a) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator that may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.
- (b) You must demonstrate compliance with all applicable emission limits using performance stack testing, fuel analysis, or a continuous monitoring system (CMS), including a continuous emission monitoring system (CEMS), a continuous opacity monitoring system (COMS), or a continuous parameter monitoring system (CPMS), where applicable. You may demonstrate compliance with the applicable mercury emission limit using fuel analysis if the emission rate calculated according to §63.11211(c) is less than the applicable emission limit. Otherwise, you must demonstrate compliance using stack testing.
- (c) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7506, Feb. 1, 2013]

Initial Compliance Requirements

- § 63.11210 What are my initial compliance requirements and by what date must I conduct them?
- (a) You must demonstrate initial compliance with each emission limit specified in Table 1 to this subpart that applies to you by either conducting performance (stack) tests, as applicable, according to §63.11212 and Table 4 to this subpart or, for mercury, conducting fuel analyses, as applicable, according to §63.11213 and Table 5 to this subpart.
- (b) [NA UNIT(S) ARE NEW]
- (c) [NA UNIT(S) ARE NEW]

DEP Auth ID: 1404661 DEP PF ID: Page 61





- (d) For new or reconstructed affected boilers that have applicable emission limits, you must demonstrate initial compliance with the applicable emission limits no later than 180 days after March 21, 2011 or within 180 days after startup of the source, whichever is later, according to §63.7(a)(2)(ix).
- (e) For new or reconstructed oil-fired boilers that commenced construction or reconstruction on or before September 14, 2016, that combust only oil that contains no more than 0.50 weight percent sulfur or a mixture of 0.50 weight percent sulfur oil with other fuels not subject to a particulate matter (PM) emission limit under this subpart and that do not use a post-combustion technology (except a wet scrubber) to reduce PM or sulfur dioxide emissions, you are not subject to the PM emission limit in Table 1 of this subpart until September 14, 2019, providing you monitor and record on a monthly basis the type of fuel combusted. If you intend to burn a new type of fuel or fuel mixture that does not meet the requirements of this paragraph, you must conduct a performance test within 60 days of burning the new fuel. On and after September 14, 2019, you are subject to the PM emission limit in Table 1 of this subpart and you must demonstrate compliance with the PM emission limit in Table 1 no later than March 12, 2020.
- (f) For new or reconstructed boilers that combust only ultra-low-sulfur liquid fuel as defined in §63.11237, you are not subject to the PM emission limit in Table 1 of this subpart providing you monitor and record on a monthly basis the type of fuel combusted. If you intend to burn a fuel other than ultra-low-sulfur liquid fuel or gaseous fuels as defined in §63.11237, you must conduct a performance test within 60 days of burning the new fuel.
- (g) For new or reconstructed affected boilers that have applicable work practice standards or management practices, you are not required to complete an initial performance tune-up, but you are required to complete the applicable biennial or 5-year tune-up as specified in §63.11223 no later than 25 months or 61 months, respectively, after the initial startup of the new or reconstructed affected source.
- (h) [NA UNIT(S) DO NOT COMBUST SOLID WASTE]
- (i) For affected boilers that switch fuels or make a physical change to the boiler that results in the applicability of a different subcategory within subpart JJJJJJ or the boiler becoming subject to subpart JJJJJJ, you must demonstrate compliance within 180 days of the effective date of the fuel switch or the physical change. Notification of such changes must be submitted according to §63.11225(g).
- (j) [NA FACILITY IS AN AREA HAP SOURCE]
- (k) [NA UNIT(S) ARE NEW]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7507, Feb. 1, 2013; 81 FR 63125, Sept. 14, 2016]

- § 63.11211 How do I demonstrate initial compliance with the emission limits?
- (a) For affected boilers that demonstrate compliance with any of the emission limits of this subpart through performance (stack) testing, your initial compliance requirements include conducting performance tests according to §63.11212 and Table 4 to this subpart, conducting a fuel analysis for each type of fuel burned in your boiler according to §63.11213 and Table 5 to this subpart, establishing operating limits according to §63.11222, Table 6 to this subpart and paragraph (b) of this section, as applicable, and conducting CMS performance evaluations according to §63.11224. For affected boilers that burn a single type of fuel, you are exempted from the compliance requirements of conducting a fuel analysis for each type of fuel burned in your boiler. For purposes of this subpart, boilers that use a supplemental fuel only for startup, unit shutdown, and transient flame stability purposes still qualify as affected boilers that burn a single type of fuel, and the supplemental fuel is not subject to the fuel analysis requirements under §63.11213 and Table 5 to this subpart.
- (b) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS OR ADD-ON CONTROLS]
- (c) [NA BOILERS DO NOT COMBUST COAL AND THEREFORE NO HG EMISSION LIMIT]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7508, Feb. 1, 2013]

§ 63.11212 What stack tests and procedures must I use for the performance tests?

DEP Auth ID: 1404661 DEP PF ID: Page 62



- (a) You must conduct all performance tests according to §63.7(c), (d), (f), and (h). You must also develop a site-specific test plan according to the requirements in §63.7(c).
- (b) You must conduct each stack test according to the requirements in Table 4 to this subpart. Boilers that use a CEMS for carbon monoxide (CO) are exempt from the initial CO performance testing in Table 4 to this subpart and the oxygen concentration operating limit requirement specified in Table 3 to this subpart.
- (c) You must conduct performance stack tests at the representative operating load conditions while burning the type of fuel or mixture of fuels that have the highest emissions potential for each regulated pollutant, and you must demonstrate initial compliance and establish your operating limits based on these performance stack tests. For subcategories with more than one emission limit, these requirements could result in the need to conduct more than one performance stack test. Following each performance stack test and until the next performance stack test, you must comply with the operating limit for operating load conditions specified in Table 3 to this subpart.
- (d) You must conduct a minimum of three separate test runs for each performance stack test required in this section, as specified in §63.7(e)(3) and in accordance with the provisions in Table 4 to this subpart.
- (e) To determine compliance with the emission limits, you must use the F-Factor methodology and equations in sections 12.2 and 12.3 of EPA Method 19 of appendix A-7 to part 60 of this chapter to convert the measured PM concentrations and the measured mercury concentrations that result from the performance test to pounds per million Btu heat input emission rates.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7508, Feb. 1, 2013]

- § 63.11213 What fuel analyses and procedures must I use for the performance tests?
- (a) (c) [NA NO MERCURY LIMIT]
- § 63.11214 How do I demonstrate initial compliance with the work practice standard, emission reduction measures, and management practice?
- (a) [NA NOT COAL FIRED]
- (b) If you own or operate an existing or new biomass-fired boiler or an existing or new oil-fired boiler, you must conduct a performance tune-up according to §63.11210(c) or (g), as applicable, and §63.11223(b). If you own or operate an existing biomass-fired boiler or existing oil-fired boiler, you must submit a signed statement in the Notification of Compliance Status report that indicates that you conducted an initial tune-up of the boiler.
- (c) [NA UNIT(S) ARE NEW]
- (d) If you own or operate a boiler subject to emission limits in Table 1 of this subpart, you must minimize the boiler's startup and shutdown periods following the manufacturer's recommended procedures, if available. If manufacturer's recommended procedures are not available, you must follow recommended procedures for a unit of similar design for which manufacturer's recommended procedures are available. You must submit a signed statement in the Notification of Compliance Status report that indicates that you conducted startups and shutdowns according to the manufacturer's recommended procedures or procedures specified for a boiler of similar design if manufacturer's recommended procedures are not available.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7508, Feb. 1, 2013; 81 FR 63126, Sept. 14, 2016]

Continuous Compliance Requirements

- § 63.11220 When must I conduct subsequent performance tests or fuel analyses?
- (a) If your boiler has a heat input capacity of 10 million Btu per hour or greater, you must conduct all applicable performance (stack) tests according to §63.11212 on a triennial basis, except as specified in paragraphs (b) through (e) of this section. Triennial performance tests must be completed no more than 37 months after the previous performance test.





- (b) For new or reconstructed boilers that commenced construction or reconstruction on or before September 14, 2016, when demonstrating initial compliance with the PM emission limit, if your boiler's performance test results show that your PM emissions are equal to or less than half of the PM emission limit, you do not need to conduct further performance tests for PM until September 14, 2021, but must continue to comply with all applicable operating limits and monitoring requirements and must comply with the provisions as specified in paragraphs (b)(1) through (4) of this section.
- (1) A performance test for PM must be conducted by September 14, 2021.
- (2) If your performance test results show that your PM emissions are equal to or less than half of the PM emission limit, you may choose to conduct performance tests for PM every fifth year. Each such performance test must be conducted no more than 61 months after the previous performance test.
- (3) If you intend to burn a new type of fuel other than ultra-low-sulfur liquid fuel or gaseous fuels as defined in §63.11237, you must conduct a performance test within 60 days of burning the new fuel type.
- (4) If your performance test results show that your PM emissions are greater than half of the PM emission limit, you must conduct subsequent performance tests on a triennial basis as specified in paragraph (a) of this section.
- (c) For new or reconstructed boilers that commenced construction or reconstruction after September 14, 2016, when demonstrating initial compliance with the PM emission limit, if your boiler's performance test results show that your PM emissions are equal to or less than half of the PM emission limit, you may choose to conduct performance tests for PM every fifth year, but must continue to comply with all applicable operating limits and monitoring requirements and must comply with the provisions as specified in paragraphs (c)(1) through (3) of this section.
- (1) Each such performance test must be conducted no more than 61 months after the previous performance test.
- (2) If you intend to burn a new type of fuel other than ultra-low-sulfur liquid fuel or gaseous fuels as defined in §63.11237, you must conduct a performance test within 60 days of burning the new fuel type.
- (3) If your performance test results show that your PM emissions are greater than half of the PM emission limit, you must conduct subsequent performance tests on a triennial basis as specified in paragraph (a) of this section.
- (d) [NA BOILERS DO NOT HAVE A MERCURY LIMIT]
- (e) [NA BOILERS ARE NEW UNITS]
- [81 FR 63127, Sept. 14, 2016]
- § 63.11221 Is there a minimum amount of monitoring data I must obtain?
- (a) (d) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS]
- 78 FR 7508, Feb. 1, 2013, as amended at 81 FR 63127, Sept. 14, 2016]
- § 63.11222 How do I demonstrate continuous compliance with the emission limits?
- (a) You must demonstrate continuous compliance with each emission limit and operating limit in Tables 1 and 3 to this subpart that applies to you according to the methods specified in Table 7 to this subpart and to paragraphs (a)(1) through (4) of this section.
- (1) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS]
- (2) If you have an applicable mercury or PM emission limit, you must keep records of the type and amount of all fuels burned in each boiler during the reporting period. If you have an applicable mercury emission limit, you must demonstrate that all fuel types and mixtures of fuels burned would result in lower emissions of mercury than the applicable emission limit (if you demonstrate compliance through fuel analysis), or result in lower fuel input of mercury than the maximum values calculated during the last performance stack test (if you demonstrate compliance through performance stack testing).





- (3) [NA BOILERS HAVE NO MERCURY LIMIT]
- (4) [NA BOILERS DO NOT USE FABRIC COLLECTORS]
- (b) You must report each instance in which you did not meet each emission limit and operating limit in Tables 1 and 3 to this subpart that apply to you. These instances are deviations from the emission limits in this subpart. These deviations must be reported according to the requirements in §63.11225.

[76 FR 15591, Mar. 21, 2011, as amended at 81 FR 63127, Sept. 14, 2016]

- § 63.11223 How do I demonstrate continuous compliance with the work practice and management practice standards?
- (a) For affected sources subject to the work practice standard or the management practices of a tune-up, you must conduct a performance tune-up according to paragraph (b) of this section and keep records as required in §63.11225(c) to demonstrate continuous compliance. You must conduct the tune-up while burning the type of fuel (or fuels in the case of boilers that routinely burn two types of fuels at the same time) that provided the majority of the heat input to the boiler over the 12 months prior to the tune-up.
- (b) Except as specified in paragraphs (c) through (f) of this section, you must conduct a tune-up of the boiler biennially to demonstrate continuous compliance as specified in paragraphs (b)(1) through (7) of this section. Each biennial tune-up must be conducted no more than 25 months after the previous tune-up. For a new or reconstructed boiler, the first biennial tune-up must be no later than 25 months after the initial startup of the new or reconstructed boiler.
- (1) As applicable, inspect the burner, and clean or replace any components of the burner as necessary (you may delay the burner inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the burner inspection until the first outage, not to exceed 36 months from the previous inspection.
- (2) Inspect the flame pattern, as applicable, and adjust the burner as necessary to optimize the flame pattern. The adjustment should be consistent with the manufacturer's specifications, if available.
- (3) Inspect the system controlling the air-to-fuel ratio, as applicable, and ensure that it is correctly calibrated and functioning properly (you may delay the inspection until the next scheduled unit shutdown, not to exceed 36 months from the previous inspection). Units that produce electricity for sale may delay the inspection until the first outage, not to exceed 36 months from the previous inspection.
- (4) Optimize total emissions of CO. This optimization should be consistent with the manufacturer's specifications, if available, and with any nitrogen oxide requirement to which the unit is subject.
- (5) Measure the concentrations in the effluent stream of CO in parts per million, by volume, and oxygen in volume percent, before and after the adjustments are made (measurements may be either on a dry or wet basis, as long as it is the same basis before and after the adjustments are made). Measurements may be taken using a portable CO analyzer.
- (6) Maintain on-site and submit, if requested by the Administrator, a report containing the information in paragraphs (b)(6)(i) through (iii) of this section.
- (i) The concentrations of CO in the effluent stream in parts per million, by volume, and oxygen in volume percent, measured at high fire or typical operating load, before and after the tune-up of the boiler.
- (ii) A description of any corrective actions taken as a part of the tune-up of the boiler.
- (iii) The type and amount of fuel used over the 12 months prior to the tune-up of the boiler, but only if the unit was physically and legally capable of using more than one type of fuel during that period. Units sharing a fuel meter may estimate the fuel use by each unit.
- (7) If the unit is not operating on the required date for a tune-up, the tune-up must be conducted within 30 days of startup.





- (c) [NA NO O2 TRIM SYSTEM]
- (d) [NA UNIT(S) NOT DEFINED AS SEASONAL]
- (e) [NA UNIT(S) > 5 MMBTU]
- (f) [NA UNIT(S) NOT LIMITED USE]
- (g) If you own or operate a boiler subject to emission limits in Table 1 of this subpart, you must minimize the boiler's startup and shutdown periods following the manufacturer's recommended procedures, if available. If manufacturer's recommended procedures are not available, you must follow recommended procedures for a unit of similar design for which manufacturer's recommended procedures are available. You must submit a signed statement in the Notification of Compliance Status report that indicates that you conducted startups and shutdowns according to the manufacturer's recommended procedures or procedures specified for a boiler of similar design if manufacturer's recommended procedures are not available.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7509, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

- § 63.11224 What are my monitoring, installation, operation, and maintenance requirements?
- (a) [NA NO CO EMISSION LIMIT]
- (b) [NA BOILERS DO NOT USE ADD-ON CONTROLS]
- (c) [NA BOILERS DO NOT USE CONTINOUS MONITORING SYSTEMS]
- (d) [NA BOILERS DO NOT USE CONTINOUS MONITORING SYSTEMS]
- (e) [NA NO OPACITY LIMIT]
- (f) [NA NO BAGHOUSE]

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7510, Feb. 1, 2013]

- § 63.11225 What are my notification, reporting, and recordkeeping requirements
- (a) You must submit the notifications specified in paragraphs (a)(1) through (5) of this section to the administrator.
- (1) You must submit all of the notifications in §§63.7(b); 63.8(e) and (f); and 63.9(b) through (e), (g), and (h) that apply to you by the dates specified in those sections except as specified in paragraphs (a)(2) and (4) of this section.
- (2) An Initial Notification must be submitted no later than January 20, 2014 or within 120 days after the source becomes subject to the standard.[INITIAL NOTIFICATION FOR BOILER B-3 WAS SUBMITTED TO DEP ON JULY 15, 2013]
- (3) If you are required to conduct a performance stack test you must submit a Notification of Intent to conduct a performance test at least 60 days before the performance stack test is scheduled to begin.
- (4) You must submit the Notification of Compliance Status no later than 120 days after the applicable compliance date specified in §63.11196 unless you own or operate a new boiler subject only to a requirement to conduct a biennial or 5-year tune-up or you must conduct a performance stack test. If you own or operate a new boiler subject to a requirement to conduct a tune-up, you are not required to prepare and submit a Notification of Compliance Status for the tune-up. If you must conduct a performance stack test, you must submit the Notification of Compliance Status within 60 days of completing the performance stack test. You must submit the Notification of Compliance Status in accordance with paragraphs (a)(4)(i) and (vi) of this section. The Notification of Compliance Status must include the information and certification(s) of compliance in paragraphs (a)(4)(i) through (v) of this section, as applicable, and signed by a responsible official. [NOTIFICATION OF COMPLIANCE STATUS FOR BOILER B-3 SUBMITTED TO THE DEP ON NOVEMBER 21, 2011]



- (i) You must submit the information required in §63.9(h)(2), except the information listed in §63.9(h)(2)(i)(B), (D), (E), and (F). If you conduct any performance tests or CMS performance evaluations, you must submit that data as specified in paragraph (e) of this section. If you conduct any opacity or visible emission observations, or other monitoring procedures or methods, you must submit that data to the Administrator at the appropriate address listed in §63.13.
- (ii) "This facility complies with the requirements in §63.11214 to conduct an initial tune-up of the boiler."
- (iii) "This facility has had an energy assessment performed according to §63.11214(c)."
- (iv) For units that install bag leak detection systems: "This facility complies with the requirements in §63.11224(f)."
- (v) For units that do not qualify for a statutory exemption as provided in section 129(g)(1) of the Clean Air Act: "No secondary materials that are solid waste were combusted in any affected unit."
- (vi) The notification must be submitted electronically using the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written Notification of Compliance Status must be submitted to the Administrator at the appropriate address listed in §63.13.
- (5) If you are using data from a previously conducted emission test to serve as documentation of conformance with the emission standards and operating limits of this subpart, you must include in the Notification of Compliance Status the date of the test and a summary of the results, not a complete test report, relative to this subpart.
- (b) You must prepare, by March 1 of each year, and submit to the delegated authority upon request, an annual compliance certification report for the previous calendar year containing the information specified in paragraphs (b)(1) through (4) of this section. You must submit the report by March 15 if you had any instance described by paragraph (b)(3) of this section. For boilers that are subject only to the energy assessment requirement and/or a requirement to conduct a biennial or 5-year tune-up according to §63.11223(a) and not subject to emission limits or operating limits, you may prepare only a biennial or 5-year compliance report as specified in paragraphs (b)(1) and (2) of this section.
- (1) Company name and address.
- (2) Statement by a responsible official, with the official's name, title, phone number, email address, and signature, certifying the truth, accuracy and completeness of the notification and a statement of whether the source has complied with all the relevant standards and other requirements of this subpart. Your notification must include the following certification(s) of compliance, as applicable, and signed by a responsible official:
- (i) "This facility complies with the requirements in §63.11223 to conduct a biennial or 5-year tune-up, as applicable, of each boiler."
- (ii) [NA UNIT(S) DO NOT BURN SOLID WASTE]
- (iii) "This facility complies with the requirement in §§63.11214(d) and 63.11223(g) to minimize the boiler's time spent during startup and shutdown and to conduct startups and shutdowns according to the manufacturer's recommended procedures or procedures specified for a boiler of similar design if manufacturer's recommended procedures are not available."
 (3) If the source experiences any deviations from the applicable requirements during the reporting period, include a description of deviations, the time periods during which the deviations occurred, and the corrective actions taken.
- (4) The total fuel use by each affected boiler subject to an emission limit, for each calendar month within the reporting period, including, but not limited to, a description of the fuel, whether the fuel has received a non-waste determination by you or EPA through a petition process to be a non-waste under §241.3(c), whether the fuel(s) were processed from discarded non-hazardous secondary materials within the meaning of §241.3, and the total fuel usage amount with units of measure.
- (c) You must maintain the records specified in paragraphs (c)(1) through (7) of this section.
- (1) As required in §63.10(b)(2)(xiv), you must keep a copy of each notification and report that you submitted to comply with this subpart and all documentation supporting any Initial Notification or Notification of Compliance Status that you



submitted.

- (2) You must keep records to document conformance with the work practices, emission reduction measures, and management practices required by §63.11214 and §63.11223 as specified in paragraphs (c)(2)(i) through (vi) of this section.
- (i) Records must identify each boiler, the date of tune-up, the procedures followed for tune-up, and the manufacturer's specifications to which the boiler was tuned..
- (ii) [NA UNIT(S) DO NOT BURN SOLID WASTE]
- (iii) [NA ENERGY ASSESSMENT NOT REQUIRED FOR NEW BOILERS]
- (iv) For each boiler subject to an emission limit in Table 1 to this subpart, you must keep records of monthly fuel use by each boiler, including the type(s) of fuel and amount(s) used. For each new oil-fired boiler that meets the requirements of §63.11210(e) or (f), you must keep records, on a monthly basis, of the type of fuel combusted.
- (v) [NA UNIT(S) NOT DEFINED AS SEASONAL]
- (vi) [NA UNIT(S) NOT DEFINED AS LIMITED USE]
- (3) [NA NO HG EMISSION LIMIT]
- (4) Records of the occurrence and duration of each malfunction of the boiler, or of the associated air pollution control and monitoring equipment.
- (5) Records of actions taken during periods of malfunction to minimize emissions in accordance with the general duty to minimize emissions in §63.11205(a), including corrective actions to restore the malfunctioning boiler, air pollution control, or monitoring equipment to its normal or usual manner of operation.
- (6) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS]
- (7) [NA NO BAGHOUSE]
- (d) Your records must be in a form suitable and readily available for expeditious review. You must keep each record for 5 years following the date of each recorded action. You must keep each record on-site or be accessible from a central location by computer or other means that instantly provide access at the site for at least 2 years after the date of each recorded action. You may keep the records off site for the remaining 3 years..
- (e)(1) Within 60 days after the date of completing each performance test (as defined in §63.2) required by this subpart, you must submit the results of the performance tests, including any associated fuel analyses, following the procedure specified in either paragraph (e)(1)(i) or (ii) of this section.
- (i) For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT Web site (https://www3.epa.gov/ttn/chief/ert/ert__info.html) at the time of the test, you must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). (CEDRI can be accessed through the EPA's Central Data Exchange (CDX) (https://cdx.epa.gov/).) Performance test data must be submitted in a file format generated through the use of the EPA's ERT or an alternate electronic file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT Web site. If you claim that some of the performance test information being submitted is confidential business information (CBI), you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT Web site, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAQPS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.





- (ii) For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT Web site at the time of the test, you must submit the results of the performance test to the Administrator at the appropriate address listed in §63.13.
- (e)(2) [NA BOILERS DO NOT USE CONTINUOUS MONITORING SYSTEMS]
- (f) [NA UNITS DO NOT BURN SOLID WASTE]
- (g) If you have switched fuels or made a physical change to the boiler and the fuel switch or change resulted in the applicability of a different subcategory within this subpart, in the boiler becoming subject to this subpart, or in the boiler switching out of this subpart due to a fuel change that results in the boiler meeting the definition of gas-fired boiler, as defined in §63.11237, or you have taken a permit limit that resulted in you becoming subject to this subpart or no longer being subject to this subpart, you must provide notice of the date upon which you switched fuels, made the physical change, or took a permit limit within 30 days of the change. The notification must identify:
- (1) The name of the owner or operator of the affected source, the location of the source, the boiler(s) that have switched fuels, were physically changed, or took a permit limit, and the date of the notice.
- (2) The date upon which the fuel switch, physical change, or permit limit occurred.

[76 FR 15591, Mar. 21, 2011, as amended at 78 FR 7511, Feb. 1, 2013; 81 FR 63127, Sept. 14, 2016]

§ 63.11226 [RESERVED]

Other Requirements and Information

§ 63.11235 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you.

§ 63.11236 Who implements and enforces this subpart? [INCOPORATED BY REFERENCE]

§ 63.11237 What definitions apply to this subpart? [INCORPORATED BY REFERENCE]

Reporting Addresses & Regulatory Changes

(a) The source(s) within this source group that are subject to 40 CFR Part 63 Subpart JJJJJJ - National Emissions Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers Area Sources shall comply with all applicable requirements of the Subpart. Furthermore, 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the DEP and the EPA copies shall be forwarded to:

Associate Director
Office of Air Enforcement and Compliance Assistance (3AP20)
U.S. EPA Region III
1650 Arch Street
Philadelphia, PA 19103-2029

The DEP copies shall be forwarded to the DEP SCRO Air Quality Program Manager at wiweaver@pa.gov, unless otherwise directed in writing by DEP.

(b) In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.





Group Name: GROUP 007

Group Description: Presumptive RACT2 Requirements for Combustion Boilers

Sources included in this group

ID	Name
031	BOILER 1 (B-1)
033	BOILER 3 (B-3)
035	BOILER 2 (B-2A)

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.97]

Presumptive RACT requirements, RACT emission limitations and petition for alternative compliance schedule.

The permittee shall perform a biennial tune-up for each of the above boilers in accordance with the procedures in 40 CFR 63.11223 (relating to how do I demonstrate continuous compliance with the work practice and management practice standards). The biennial tune-up must include, at a minimum, the following:

- (1) Inspection and cleaning or replacement of fuel-burning equipment, including the burners and components, as necessary, for proper operation as specified by the manufacturer.
- (2) Inspection of the flame pattern and adjustment of the burner, as necessary, to optimize the flame pattern to minimize total emissions of NOx and, to the extent possible, emissions of CO.
- (3) Inspection and adjustment, as necessary, of the air-to-fuel ratio control system to ensure proper calibration and operation as specified by the manufacturer.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §129.100]

Compliance demonstration and recordkeeping requirements.

The permittee shall record and maintain the results of the biennial tune-ups required in Condition #001 above.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

DEP Auth ID: 1404661 DEP PF ID: Page 70





SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.

DEP Auth ID: 1404661



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

DEP Auth ID: 1404661 DEP PF ID:



SECTION H. Miscellaneous.

36-05071

This administrative amendment for an ownership change supersedes operating permit 36-05071 issued in December 30, 2021.

Source 101 consists of a continuous cooker, a shell and tube condenser, and an air cooled condenser.

Source 103A and 103B consist of feather cookers and a feather dryer, respectively, and the associated condenser.

Note: FML02 By-Product oil is either saleable fat or saleable fat blended with 0.05% low-sulfur No. 2 fuel oil.

DEP Auth ID: 1404661





***** End of Report *****