



Transcontinental Gas Pipe Line Company, LLC

Section 3-4 PCSM Plan for Compressor Station 515

Regional Energy Access Expansion Project – Compressor Station 515

April 2021
(Revised July 2022)

TABLE OF CONTENTS

Sections

1. Project Description
2. Topographic Features of the Area
3. Receiving Surface Waters
4. Types, Depth, Slope, Locations & Limitation of the Soils and Geologic Formations
 - 4.1 Resolution of Soil Limitations
 - 4.2 Geologic Formations
5. Characterizations of Earth Disturbance Activities, Including Past, Present, and Proposed Land Uses
6. Post-Construction Stormwater Management Best Management Practices, Installation Sequence and PCSM Critical Stages
7. Net Change in Volume and Rate of Runoff
8. Temporary and Permanent Stabilization
 - 8.1 Permanent Stabilization
 - 8.2 Temporary Stabilization
 - 8.3 Stabilization During Non-Growing Season
 - 8.4 Riparian Buffer Stabilization
9. Long Term Operation and Maintenance Schedule
10. Recycling and Disposal of Materials
11. Thermal Impacts
12. Antidegradation Requirements
13. Riparian Buffers
14. Offsite Discharge Analysis
15. Non-Structural and Structural Water Quality BMP Description
16. The PCSM Plan Shall be Prepared by a Person Trained and Experienced in PCSM Methods and Techniques

Attachments

- 1 Project Location Map
- 2 Soils Map and Report
- 3 Site Evaluation and Soil Infiltration Test Report
- 4 PCSM Plan BMP Design Worksheets and Calculations
 - 4.1 CN Table
 - 4.2 Stormwater BMP Manual Appendix D Worksheet
 - 4.3 BMP HydroCAD Report
 - 4.4 Channel Design Worksheets
 - 4.5 Channel HydroCAD Reports
 - 4.6 Riprap Apron Worksheet
 - 4.7 BMP Erosion Control Blanket Reports
- 5 Non-Structural and Structural Water Quality BMPs Map
- 6 Offsite Discharge Report

Drawings

- 1 of 6 Post Construction Stormwater Management Plan - Cover
- 2 of 6 Post Construction Stormwater Management Plan - Existing Conditions Plan
- 3 of 6 Post Construction Stormwater Management Plan - Proposed Plan
- 4 of 6 Post Construction Stormwater Management Plan - Notes
- 5-6 of 6 Post Construction Stormwater Management Plan - Details

SECTION 3.4.1
NARRATIVE

1. Project Description

Transcontinental Gas Pipe Line Company, LLC (Transco), indirectly owned by the Williams Companies, Inc. (Williams) is seeking authorization from the Federal Energy Regulatory Commission (FERC) under Section 7(c) of the Natural Gas Act and Part 157 of the Commissions regulations, to construct, own, operate, and maintain the proposed Project facilities associated with the Regional Energy Access Expansion Project (Project). The Project is an expansion of Transco's existing natural gas transmission system that will enable Transco to provide an incremental 829,400 dekatherms per day (Dth/d) of year-round firm transportation capacity from the Marcellus Shale production area in northeastern Pennsylvania to multiple delivery points along Transco's Leidy Line in PA and Mainline in PA, NJ, and MD.

The existing Compressor Station 515 component of the Project is located at the eastern terminus of the Regional Energy Lateral in Buck Township, Luzerne County. Proposed at this facility is the addition of one gas-fired turbine driven compressor with 31,871 nominal HP at ISO conditions and modification of three existing compressors. Also proposed is the abandonment and replacement of 17,000 HP from five existing gas fired reciprocating driven compressors with one additional gas-fired turbine driven compressor with 20,502 nominal HP at ISO conditions. One Mainline Valve will be installed at this facility.

This Post Construction Stormwater Management (PCSM) Plan has been developed for the Compressor Station 515 site. The PCSM Plan shall be designed and implemented to be consistent with the PCSM Plan under 25 Pa. Code § 102.8 (relating to PCSM requirements). The work and disturbed areas are located within Transco property, existing easements or legally obtained workspace. The limit of disturbance (LOD) for the Compressor Station 515 site will be approximately 24.83 acres, which includes the offline contractor yard. Subject to FERC's certification of the Project and receipt of the necessary permits and authorizations, Transco anticipates construction of the Project to start in second quarter 2023 to meet a proposed in-service date of fourth quarter 2024.

2. Topographic Features of the Area

A Project Location Map for Compressor Station 515 is included in Attachment 1. This map shows the topographical features of the general site vicinity and is based on the USGS 7.5 Minute topographical mapping of the Pleasant View Summit, Pennsylvania quadrangles.

3. Receiving Surface Waters

The following table (Table 1) lists each watershed located in the Compressor Station 515 Project Area, its Chapter 93 Water Quality Standards, and Pennsylvania Fish and Boat Commission classifications. A Wetland and Watercourse Delineation Report is included in Attachment A of the ESCP permit application.

| Table 1 – Receiving Waters | | | |
|--|----------------|--------------|---------------------------------------|
| Watershed Name | Designated Use | Existing Use | PFBC Classification |
| Trib 04285 to Shades Creek | HQ-CWF, MF | - | Class A Wild Trout |
| Stony Run | HQ-CWF, MF | - | Naturally Producing Wild Trout Stream |
| MF: Migratory Fishes, CWF: Cold Water Fishes, HQ: High Quality | | | |

An evaluation of potential hydrologic impacts to wetlands associated with proposed PCSM facilities was undertaken at Compressor Station 515. There are no changes in the pre and post construction drainage area associated with the gravel pad and PCSM facilities. There are no wetlands located with the drainage area or immediately downslope of the proposed PCSM facility that would result in a change to the hydrologic conditions of the area that could impact wetland hydrology.

4. Types, Depth, Slope, Locations & Limitation of the Soils and Geologic Formations

The soil associations on site were identified by soil map units as mapped in the Web Soil Survey website (<https://websoilsurvey.sc.egov.usda.gov/>) by the United States Dept. of Agriculture (USDA), Natural Resources Conservation Service (NRCS). There are 6 soil mapping units located within the LOD, see Table 2 below.

| Table 2 – Soils Mapping Units with Limits of Disturbance | |
|--|---|
| Soil Mapping Unit | Soil Series |
| MsB | Morris channery silt loam, 0 to 8 percent slopes, extremely stony |
| OpD | Oquaga and Lordstown extremely stony silt loams, 8 to 25 percent slopes |
| WIB | Wellsboro channery silt loam, 3 to 8 percent slopes |
| WIC | Wellsboro channery silt loam, 8 to 15 percent slopes |
| WID | Wellsboro channery silt loam, 15 to 25 percent slopes |
| WmB | Wellsboro channery silt loam, 3 to 8 percent slopes, extremely stony |

Detailed descriptions and mapping of soil mapping units are provided in the Attachment 2. Soil use limitations (outlined in Table 3) were reviewed in relation to and resolutions were identified in Section 4.1.

| SOIL NAME | SOIL WITH SLOPE CLASS | CUTBANKS CAVE | CORROSIVE TO CONCRETE\STEEL | DROUGHTY | EASILY ERODIBLE | FLOODING | DEPTH TO SATURATED ZONE/ SEASONAL HIGH WATER TABLE | HYDRIC/ HYDRIC INCLUSIONS | LOW STRENGTH / LANDSLIDE PRONE | SLOW PERCOLATION | PIPING | POOR SOURCE OF TOPSOIL | FROST ACTION | SHRINK - SWELL | POTENTIAL SINKHOLE | PONDING | WETNESS |
|-----------|-----------------------|---------------|-----------------------------|----------|-----------------|----------|---|---------------------------|--------------------------------|------------------|--------|------------------------|--------------|----------------|--------------------|---------|---------|
| Morris | MsB | X | C/S | X | X | | X | X | X | X | | X | X | | | | X |
| Oquaga | OpD | X | C | X | X | | | X | | X | | | X | | | | |
| Wellsboro | WIB, WIC, WID, WmB | X | C/S | X | X | | X | X | X | X | X | | X | | | | X |

4.1. Resolution of Soil Limitations

Transco proposes the following resolutions to compensate for soil limitations summarized in Table 3 above:

1. To offset the caving of cutbanks, trenching operations will be conducted in accordance with the OSHA Technical Manual for Trenching.
2. Preventative coatings shall be used to prevent corrosion of concrete and/ or steel.
3. When bedrock is encountered it will be removed by mechanical methods or blasting. Blasting operations will conform with local, state, and federal regulations.
4. Precautions will be taken to prevent slope failure when working within low strength soils by flattening cut / fill slopes, not overloading, maintaining lateral support, and preventing saturation of soils. Low strength soils will not be used for roadway construction.
5. Excavation in soils prone to flooding, slow percolation, ponding, wetness, located in a seasonal high water table, or which are hydric, will likely encounter water. Compensation will involve dewatering with appropriate means such as pump water filter bags, sediment traps, etc.

6. Soils that have the potential to swell, shrink, or heave due to frost action may cause damage to roadways or pads. Where foundations are critical, compensation may require removal and replacement of soils with suitable material.
7. In circumstances where soils appear to be a poor source of topsoil, droughty or prone to wetness, soil testing will be performed to determine the appropriate applications of soil amendments to promote growth. Soils onsite that are fair sources of topsoil, will be identified, stripped and stockpiled for use during restoration.
8. In order to minimize erosion of soils that are easily erodible, compensation may involve providing a protective lining, to apply seed, mulch, erosion control blankets (either in rolls or hydraulically applied), tracking slopes, upstream diversions, waterbars, etc. to minimize soil erosion.

4.2. Geologic Formations

Transco retained Civil & Environmental Consultants, Inc. (CEC) of Pittsburgh, PA to perform a geohazard assessment, the following is provided from their 2020 report. Transco utilized United States Geological Survey (USGS), Geologic Map of Pennsylvania - Map 1, dated 1980 (online), to evaluate geologic hazards on the Project. The desktop analysis completed for the Project by CEC revealed that Compressor Station 515 does not cross known, mapped, or inferred faults. No mines or Karst formations were identified in the site vicinity. However, the analysis outlined that Compressor Station 515 lies within a zone low landslide incidence and susceptibility.

A Geological Hazard Assessment and Mitigation Plan was completed by CEC and is submitted with this application (Attachment B). The Geological Hazard Assessment and Mitigation Plan identifies appropriate best management practices to avoid and mitigate for conditions encountered during construction.

5. Characterizations of Earth Disturbance Activities, Including Past, Present, and Proposed Land Uses

The Compressor Station 515 component of the Project is located at the eastern terminus of the Regional Energy Lateral in Buck Township, Luzerne County. The Project at Compressor Station 515 will involve the installation a gravel pad, several buildings, a new communications tower, proposed PCSM Best Management Practices (BMPs) and other compressor station modifications. Transco will use and implement the practices, measures, and details to control soil

erosion and off-site sedimentation during construction. Using data taken from Google Earth and Multi-Resolution Land Characteristics (MRLC) Consortium website (<https://www.mrlc.gov/viewer/>), it appears that land use for the past few decades has been utilized as a compressor station site. In the future, this site will continue to be used as a compressor station site.

6. Post Construction Stormwater Management Best Management Practices, Installation Sequence and PCSM Critical Stages

Increase in stormwater runoff during and after construction shall be controlled by sequencing the operations and using a selection of BMPs. Channels, culverts, vegetated filter strip and an infiltration berm will be installed across the developed area to convey the net increase in volume between the pre- and post-development 2-year storm events and mitigate the increase (pre-post development) in peak runoff for the 1-, 2-, 10-, 25-, 50-, and 100-year storm events. Channels will be constructed to direct the majority of runoff from the developed area to the vegetated filter strip and infiltration berm. PCSM BMP design calculations and drawings are provided in Attachment 4 and PCSM Plan set. For these calculations, Test Pit 501 and Test Pit 502 were selected and used for design criteria. See Attachment 3 for the specific infiltration data. A summary of the PCSM BMP design criteria is below.

Compressor Station 515: Design Criteria

| Test Pits | | | PCSM BMP | |
|---|----------------------|-------------------|---|-------------------|
| | TP 501 | TP 502 | | Infiltration Berm |
| Existing Ground Elevation (ft) | 1923.06 | 1924.41 | Minimum Final Grade (ft) | 1925.5 |
| Elevation of Confining Layer (ft) | 1920.73 (Bedrock) | 1921.91 (SHWT) | Interpreted Elevation of Confining Layer (ft) | 1921.91 |
| Depth to Confining Layer (in) | 28 (Bedrock) | 30 (SHWT) | Provided Separation (in) | 43.1 |
| Lowest Observed Infiltration Rate (in/hr) | 2.06 | 0.31 | Infiltration Rate Used (in/hr) | 0.31 |

BMP Installation Sequence

The PCSM BMPs should be installed in a manner designed to:

1. Protect BMP areas associated with infiltration from compaction prior to and during installation.
2. Maintain proper Erosion and Sediment Control Measures during construction.

3. Select plants that are well adapted to the specific site conditions. Meadow plants must be able to out compete weed species in the first few years as they become established.
4. Temporary E&S BMPs will be removed following site stabilization. Do not remove other Erosion and Sediment Control measures until site is fully stabilized.
5. Construct the infiltration berm and vegetated filter strip in accordance with the plans:
 - a. Complete site grading and stabilize within the limit of disturbance except where the infiltration berms will be constructed. Make every effort to minimize berm footprint and necessary zone of disturbance (including both removal of exiting vegetation and disturbance of empty soil) in order to maximize infiltration.
 - b. Lightly scarify the soil in the area of the proposed berm before delivering soil to site.
 - c. Utilize suitable fill material to make up the major portion of the berm. Soil should be added in 8-inch lifts and compacted after each addition according to design specifications. The slope and shape of the berm should be graded out as soil is added.
 - d. Protect the surface ponding area at the base of the berm from compaction. If compaction of this area does occur, scarify the soil to a depth of at least 8 inches.
 - e. Complete final grading of the berm after the top layer of soil is added. Tamp soil down lightly and smooth sides of the berm. The crest and base of the berm should be at level grade.
 - f. Plant berm with turf, meadow plants, shrubs or trees, as desired.
 - g. Mulch planted and disturbed areas with compost mulch to prevent erosion while plants become established.
6. Starting downstream at the infiltration berm, construct PCSM Channel C5, C4, Culvert 1, PCSM Channels C1 and level spreader, C2, and C3. Stabilize the PCSM channels with specified channel linings.*
7. Installed BMPs will be monitored until final site stabilization is achieved.*
8. Follow long term operation and maintenance guidelines discussed below.

**Portions of the BMP installation sequence denoted with an asterisk (*) above are critical stages as discussed on this sheet.*

PCSM Critical Stages

Critical points requiring visits by the licensed professional or delegate are as follows:

1. Following installation of the pad subgrade to ensure stormwater flow is directed to the infiltration BMPs.
2. Prior to construction to ensure the area of the infiltration berm and vegetated filter strip has not been impacted by construction activities.
3. During construction of the infiltration berm and vegetated filter strip to ensure compliance with construction requirements.
4. Following final grading and seeding of the PCSM channels, infiltration berm and vegetated filter strip in order to confirm they have been constructed according to the plan details for proper collection, infiltration, and conveyance of runoff. Periodic assessments will need to be made to ensure that accumulated sediment should be cleaned out so the channels and berm maintain necessary design volume.
5. For final inspection of constructed BMPs.
6. At the establishment of hard surface stabilization or 70% vegetation covers to allow removal of E&S controls.

7. Net Change in Volume and Rate of Runoff

An analysis of pre- and post-development stormwater runoff was performed for the proposed Compressor Station 515. The installation of compressor units, pad areas and access road will increase the volume of stormwater runoff between the pre and post development 2-year rain event due to the increase in the type and size of the impervious area. The increase in impervious area will increase the pre to post development peak runoff for the 1-, 2-, 10-, 25-, 50-, and 100-year storm events. Design calculations using HydroCAD software are included in Attachment 4. Refer to the Post-Construction Stormwater Management (PCSM) Plan drawings for additional information.

Pre- and Post-Construction Stormwater Volume for 2-yr Rainfall event

| Pre-construction (cf) | Post-construction before BMPs (cf) | Post-construction after BMPs (cf) | Net (cf) |
|-----------------------|------------------------------------|-----------------------------------|----------|
| 25,269 | 39,014 | 21,255 | -4,014 |

Pre-Construction Peak Discharge Rates (cfs)

| 1-year | 2-year | 10-year | 25-year | 50-year | 100-year |
|--------|--------|---------|---------|---------|----------|
| 4.58 | 6.19 | 11.74 | 16.10 | 19.64 | 24.34 |

Post-Construction Peak Discharge Rates (cfs)

| | | | | | |
|--------|--------|---------|---------|---------|----------|
| 1-year | 2-year | 10-year | 25-year | 50-year | 100-year |
| 11.55 | 14.31 | 23.16 | 29.76 | 35.00 | 41.89 |

Post-Construction w/ BMPs Peak Discharge Rates (cfs)

| | | | | | |
|--------|--------|---------|---------|---------|----------|
| 1-year | 2-year | 10-year | 25-year | 50-year | 100-year |
| 1.04 | 2.55 | 10.18 | 15.89 | 19.57 | 24.23 |

Difference between Pre-Construction and Post-Construction w/ BMPs

| | | | | | | |
|----------------|--------|--------|---------|---------|---------|----------|
| | 1-year | 2-year | 10-year | 25-year | 50-year | 100-year |
| NET Difference | -3.54 | -3.64 | -1.56 | -0.21 | -0.07 | -0.11 |

8. Temporary and Permanent Stabilization

Appropriate seed mixtures for temporary and permanent stabilization are outlined on the notes sheet of the plan drawings.

8.1. Permanent Stabilization

Upon final completion of an earth disturbance activity or stage or phase of an activity, the site shall immediately have topsoil restored, replaced, or amended, seeded, mulched or otherwise permanently stabilized and protected from accelerated erosion and sedimentation. E&S BMPs shall be implemented and maintained until the permanent stabilization is completed. Once permanent stabilization has been established, the temporary E&S BMPs shall be removed. Areas disturbed in the act of removing temporary E&S BMPs shall be permanently stabilized upon completion of the temporary E&S BMP removal activity. For an earth disturbance activity or stage or phase of an activity to be considered permanently stabilized, the disturbed areas shall be covered with one of the following:

- A minimum uniform 70% perennial vegetative cover, with a density capable of resisting accelerated erosion and sedimentation.
- An acceptable BMP which permanently minimizes accelerated erosion and sedimentation. When erosion and sedimentation controls are to be removed in agricultural non-sensitive areas (streams/wetlands), agricultural landowners shall maintain agricultural BMPs per PaDEP regulations.

8.2. Temporary Stabilization

Upon temporary cessation of an earth disturbance activity or stage or phase of an activity where a cessation of earth disturbance activities will exceed 4 days (including agricultural areas), the site shall be immediately seeded, mulched, or otherwise protected from accelerated erosion

and sedimentation pending future earth disturbance activities. For an earth disturbance activity or stage or phase of an activity to be considered temporarily stabilized, the disturbed areas shall be covered with one of the following:

- A minimum uniform coverage of mulch and seed, with a density capable of resisting accelerated erosion and sedimentation.
- An acceptable BMP which temporarily minimizes accelerated erosion and sedimentation.

8.3. Stabilization During Non-Growing Season

When utility construction must be done and is completed during a non-growing season, interim stabilization BMPs must be implemented and adequately maintained. The application of straw mulch at the rate of 3.0 tons per acre is required. The BMPs should be inspected weekly (unless snow covered) and after each runoff event to identify areas that become bare. Temporary erosion and sediment pollution controls must be maintained.

8.4. Riparian Buffer Stabilization

Temporary Cover for riparian areas to include seed from mixture 1 from Table 11.4 (provided in the PCSM Plan set), at the outlined seeding rate. Permanent cover for riparian areas will include 20 lbs/acre of Ernst 178 Riparian buffer mix. Where slopes exceed 10%, seed Mixture 2 from Table 11.4 shall be utilized.

9. Long Term Operation and Maintenance Schedule

PCSM BMPs should be properly maintained to ensure their effectiveness. Transcontinental Gas Pipe Line Company, LLC will be responsible for the long-term operation and maintenance of the PCSM BMPs proposed at Compressor Station 515. Sheet flow conditions and infiltration must be sustained throughout the life of the BMP. BMPs should be inspected for clogging from sediment or debris, damage by foot or vehicular traffic, and flow channelization. Inspections should be made on a quarterly basis for the first two years following installation, and then twice per year thereafter. Inspections should also be made after every storm event greater than 1 inch during the establishment period.

Channel linings should be inspected for signs of erosion or dislodging, as applicable. Channels should be inspected for debris, overgrown vegetation, and other blockages. Culverts and trench drains should be inspected at least two times per year and after runoff events and cleaned as needed. Vegetation along the surface of the infiltration berm and vegetated filter strip

should be maintained in good conditions. Vehicles should not park or drive on an infiltration berm or vegetated filter strip and care should be taken to avoid excessive compaction by mowers. Inspect the berm after runoff events and make sure that runoff drains within 72 hours.

Operation and maintenance guidelines should be provided to facility owner. Sediment and debris should be routinely removed upon observation. If erosion is observed, measures should be taken to improve the dispersion method to address the source of erosion. Sediment should be removed when the BMP is thoroughly dry. Trash and debris removed from the site should be deposited only at suitable disposal/recycling sites and must comply with applicable local, state, and federal waste regulations. Grass cover should be mowed with low ground pressure equipment annually to control noxious weeds. Mowing should be done only when the soil is dry in order to prevent tracking damage to vegetation, soil compaction, and flow concentrations. If vegetative cover is not fully established within the designated time, it should be replaced with an alternative species. Unwanted or invasive growth should be removed on an annual basis.

Vegetated areas will be inspected weekly and after runoff events until permanent vegetation is achieved. Once the vegetation is established, inspections of health, diversity, and density should be performed at least twice per year, during both the growing and non-growing season. Vegetative cover should be sustained at 85% and reestablished if damage greater than 50% is observed. Damaged BMPs will be repaired as soon as possible upon discovery. Repairs will be made to restore damaged BMPs to the original design condition.

The vegetated filter strip should be properly maintained to ensure their effectiveness. Sediment and debris should be routinely removed (biannually at minimum), or upon observation, when buildup exceeds 2 inches in depth over the filter strip. If erosion is observed, measures should be taken to maintain sheet flow over the filter strip. Re-grading may also be required when pools of standing water are observed along the slope. Grass cover should be mowed with low ground pressure equipment as needed to maintain a height of 4-6 inches. Mowing will be performed annually. Unwanted or invasive growth should be removed on an annual basis. All maintenance/mowing shall be performed when soil is dry to prevent tracking damage, soil compaction, and flow concentrations.

Transcontinental Gas Pipeline Company, LLC will be responsible for the long term operation and maintenance of the post-construction stormwater management facilities proposed at the site.

10. Recycling and Disposal of Materials

The restoration will require the removal of the temporary materials. The temporary materials include, but may not be limited to, stone surfaces and associated geotextiles. The contractors are required to dispose of the materials at suitable disposal or recycling sites and in compliance with local, state and federal regulations.

Contractors are required to inventory and manage their construction site materials. The goal is to be aware of the materials on-site, ensure they are properly maintained, used, and disposed of, and to make sure the materials are not exposed to stormwater. The following materials or substances are expected to be present on-site during construction (Note: this list is not an all-inclusive list and the materials management plan can be modified to address additional materials used on-site):

- Acids
- Detergents
- Fertilizers (nitrogen/phosphorus)
- Hydroseeding mixtures
- Petroleum based products
- Sanitary wastes
- Soil stabilization additives
- Solder
- Solvents

These materials must be stored as appropriate and shall not contact storm or non-stormwater discharges. Contractor shall provide a weatherproof container to store chemicals or erodible substances that must be kept on the site. Contractor is responsible for reading, maintaining, and making employees and subcontractors aware of Safety Data Sheets (SDSs).

11. Thermal Impacts

Thermal impacts to surface waters are not anticipated. Most of the stormwater will be routed through the stormwater BMP designed to retain and infiltrate the first surge of water from the site. The first surge of water will be the warmest water for the duration of the storm event and will quickly cool as the storm event progresses. The BMPs are designed to capture and infiltrate this warmest surge of stormwater. Based on routing calculations, stormwater is retained in the BMPs for a period of 11 hours before being discharged during a 100-year/24-hour storm event. This retention period is longer for less intense storms. Therefore, as a result of these measures, no significant thermal impact to the receiving waters is anticipated.

12. Antidegradation Requirements

The Compressor Station 515 site is located within an HQ watershed; therefore, an evaluation for antidegradation requirements was performed. Transco used various criteria to evaluate parcels suitable for a compressor station within the hydraulic range required to meet the purpose and need of the project. The criteria for parcel evaluation included but was not limited to existing conditions, resource impacts, workspace, and reasonable availability. Based on the location selected for Compressor Station 515, impacts to HQ watersheds are unavoidable. Transco determined that there are no cost-effective and environmental sound viable non-discharge alternatives for the project.

Construction activities within the HQ watershed will result in increased discharge of stormwater to surface waters which will be mitigated by the implementation of post construction stormwater management (PCSM) BMPs. Proposed PCSM BMPs are designed with stormwater volume reduction and water quality treatment maximized to the extent practicable within the site constraints to maintain and protect existing water quality and existing and designated uses.

13. Riparian Buffers

Temporary workspace associated with Compressor Station 515 is located within the non-forested riparian buffer of stream S77-T2. After completing the construction activities, the impacted riparian area will be restored back to pre-existing contours and reseeded with a riparian seed mix.

Because the project is temporary in nature and the site will be fully restored to its preexisting condition leaving riparian buffers undisturbed to the extent practical, it is eligible for the Riparian Buffer Waiver under 25 PA Code §102.14(d)(2)(iv). As such, a Riparian Buffer Waiver has been requested along with this ESCP application (Section 1-7).

14. Offsite Discharge Analysis

The stormwater BMPs being constructed at Compressor Station 515 are in areas that will discharge stormwater to offsite non-surface water. These areas have been analyzed to reduce the likelihood that these discharges will be erosive to adjacent property owners. The analysis has been performed in accordance with PADEP Document 3150-FS-DEP4124, "Off-Site Discharges of Stormwaters to Areas That Are Not Surface Waters". The full analysis is presented in Attachment 6 – Offsite Discharge Report. A summary of the findings for Compressor Station 515 is presented below.

At Compressor Station 515, a series of channels will be installed to direct runoff water from the proposed expansion to a rip rap apron, which will release water into an infiltration berm. At the base of the spillway a level spreader will allow water to flow into the forested area northwest of the Limits of Disturbance. The area downgradient of the proposed infiltration berm is primarily forestland and vegetated. Calculations indicated that the discharge velocity at the riprap apron for the 25-yr 24-hr storm is 2.13 feet per second (fps). Since the outlet velocity is below 2.5 fps, downstream erosion will be minimal, if not negligible.

15. Non-Structural and Structural Water Quality BMP Description

Limit of disturbance will be minimized to the maximum extent possible by disturbing only those areas necessary to complete the proposed earthwork and BMP installations.

Sensitive features such as wetlands and riparian buffers will be protected to the maximum extent possible. These areas will be clearly delineated in the field and protected prior to construction activities taking place. Existing vegetation is not to be removed from the protected area and the areas shall not be subject to grading or movement of existing soils. Protected areas that have been disturbed/compacted during construction will be restored using soil amendment and restoration.


Temporarily impacted riparian buffer will be fully restored to its preexisting conditions. Disturbed areas that are not proposed to be impervious will be revegetated as per the seeding and mulching notes provided in PCSM plan notes.

16. The PCSM Plan Shall be Prepared by a Person Trained and Experienced in PCSM Methods and Techniques

These plans and narrative were prepared by Patrick Wozinski, PE (BAI Group, LLC) of State College, PA in accordance with the Pennsylvania Department of Environmental Protection Stormwater BMP Manual, December 2006. Plan preparer's resume is provided in Attachment C of the ESCP permit package).

ATTACHMENT 1
PROJECT LOCATION MAP

M:\GIS\PROJECTS\REGIONAL_ENERGY_ACCESS\PROJECT_LOCATION_MAPPING\REVISED_MAPPING_APRIL_2020\AREA_CompressorStation515_ProjectLocation_8x11.mxd

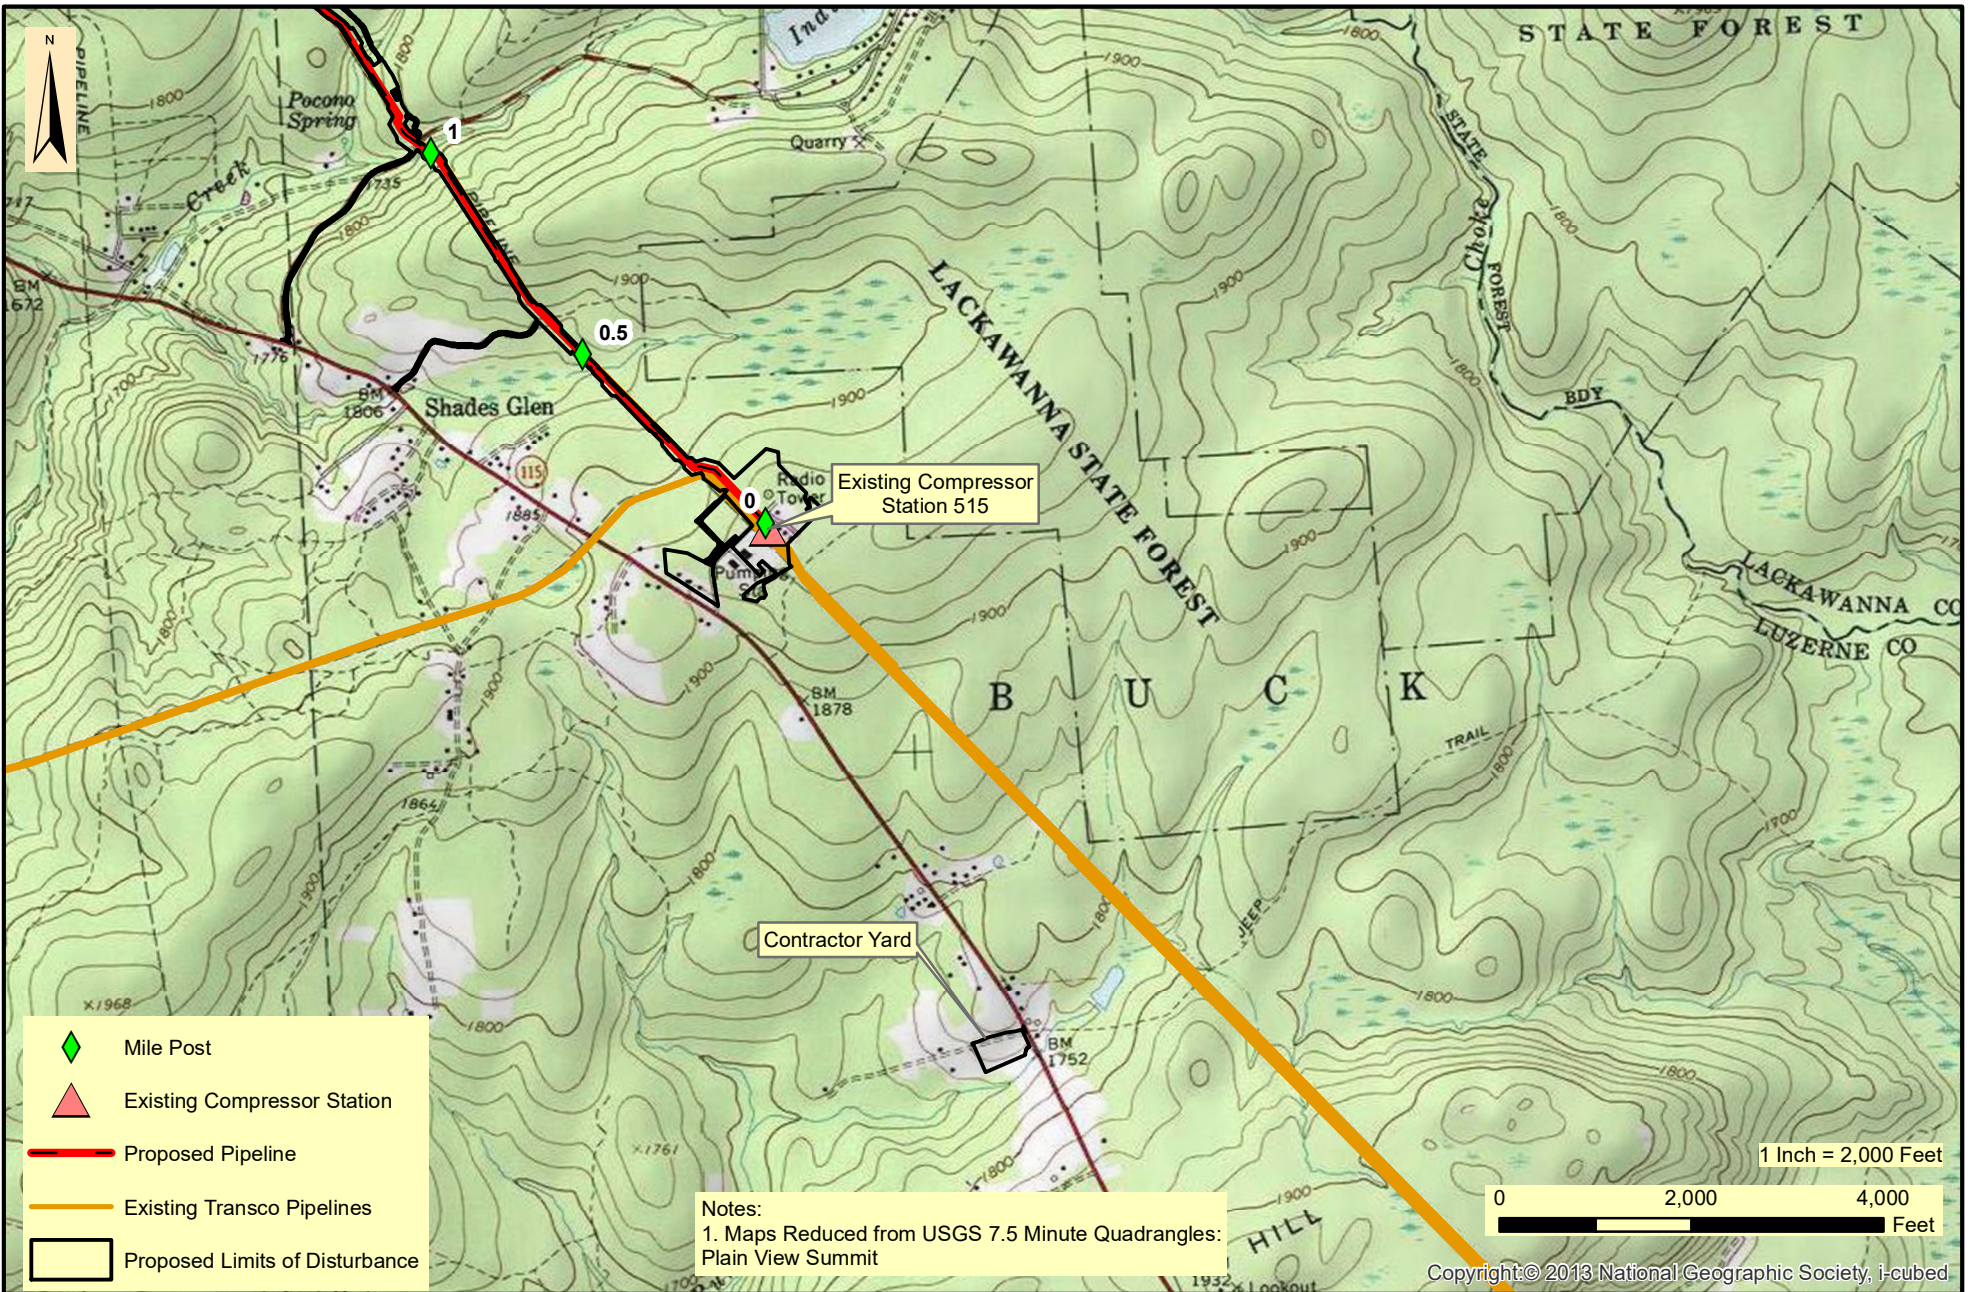

TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC
REGIONAL ENERGY ACCESS EXPANSION PROJECT
EXISTING COMPRESSOR STATION 515
PROJECT LOCATION MAP

BUCK TOWNSHIP

LUZERNE COUNTY

PENNSYLVANIA

Date:
2/10/2022

Drawn By:
FTN

Figure Number:
CS515-1

Copyright © 2013 National Geographic Society, i-cubed

ATTACHMENT 2
SOILS MAP AND REPORT



United States
Department of
Agriculture

NRCS

Natural
Resources
Conservation
Service

A product of the National
Cooperative Soil Survey,
a joint effort of the United
States Department of
Agriculture and other
Federal agencies, State
agencies including the
Agricultural Experiment
Stations, and local
participants

Custom Soil Resource Report for **Luzerne County, Pennsylvania**



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

| | |
|---|----|
| Preface | 2 |
| How Soil Surveys Are Made | 5 |
| Soil Map | 8 |
| Soil Map..... | 9 |
| Legend..... | 10 |
| Map Unit Legend..... | 11 |
| Map Unit Descriptions..... | 11 |
| Luzerne County, Pennsylvania..... | 13 |
| CnB—Chippewa silt loam, 0 to 8 percent slopes, extremely stony..... | 13 |
| MsB—Morris channery silt loam, 0 to 8 percent slopes, extremely stony... | 14 |
| OpD—Oquaga and Lordstown extremely stony silt loams, 8 to 25 percent slopes..... | 15 |
| WmB—Wellsboro channery silt loam, 3 to 8 percent slopes, extremely stony..... | 17 |
| References | 19 |

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.


Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report Soil Map




Map Scale: 1:4,090 if printed on A portrait (8.5" x 11") sheet.




Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 18N WGS84

MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)




















Soils







 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

Special Point Features






-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features


Water Features

 Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:20,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Luzerne County, Pennsylvania
 Survey Area Data: Version 15, Jun 5, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 20, 2010—Jul 7, 2016

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

| Map Unit Symbol | Map Unit Name | Acres in AOI | Percent of AOI |
|------------------------------------|---|--------------|----------------|
| CnB | Chippewa silt loam, 0 to 8 percent slopes, extremely stony | 0.6 | 0.9% |
| MsB | Morris channery silt loam, 0 to 8 percent slopes, extremely stony | 10.3 | 16.8% |
| OpD | Oquaga and Lordstown extremely stony silt loams, 8 to 25 percent slopes | 0.3 | 0.4% |
| WmB | Wellsboro channery silt loam, 3 to 8 percent slopes, extremely stony | 50.1 | 81.8% |
| Totals for Area of Interest | | 61.3 | 100.0% |

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it

Custom Soil Resource Report

was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Luzerne County, Pennsylvania

CnB—Chippewa silt loam, 0 to 8 percent slopes, extremely stony

Map Unit Setting

National map unit symbol: 2vcjf
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Chippewa, extremely stony, and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Chippewa, Extremely Stony

Setting

Landform: Depressions
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Concave
Across-slope shape: Concave
Parent material: Loamy till dominated by siltstone, sandstone, and shale fragments

Typical profile

Oe - 0 to 1 inches: moderately decomposed plant material
A - 1 to 5 inches: silt loam
Eg - 5 to 15 inches: channery silt loam
Bxg - 15 to 45 inches: channery silt loam
C - 45 to 72 inches: channery silt loam

Properties and qualities

Slope: 0 to 8 percent
Surface area covered with cobbles, stones or boulders: 7.0 percent
Depth to restrictive feature: 8 to 20 inches to fragipan
Drainage class: Poorly drained
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: About 0 to 6 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 15 percent
Available water capacity: Low (about 3.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D
Ecological site: F140XY016NY - Mineral Wetlands
Hydric soil rating: Yes

Minor Components

Volusia, extremely stony

Percent of map unit: 8 percent

Landform: Hills, mountains

Landform position (two-dimensional): Footslope, summit

Landform position (three-dimensional): Base slope, interfluve, side slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Chippewa, extremely stony, very poorly drained

Percent of map unit: 7 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

MsB—Morris channery silt loam, 0 to 8 percent slopes, extremely stony

Map Unit Setting

National map unit symbol: 2vxct

Elevation: 330 to 2,460 feet

Mean annual precipitation: 31 to 70 inches

Mean annual air temperature: 39 to 52 degrees F

Frost-free period: 105 to 180 days

Farmland classification: Not prime farmland

Map Unit Composition

Morris, extremely stony, and similar soils: 90 percent

Minor components: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Morris, Extremely Stony

Setting

Landform: Mountains, hills

Landform position (two-dimensional): Summit, footslope

Landform position (three-dimensional): Interfluve, base slope

Down-slope shape: Concave

Across-slope shape: Linear

Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Oe - 0 to 1 inches: moderately decomposed plant material

A - 1 to 5 inches: channery silt loam

Bw - 5 to 12 inches: channery silt loam

Eg - 12 to 16 inches: channery silt loam

Custom Soil Resource Report

Bx - 16 to 60 inches: channery silt loam

C - 60 to 72 inches: channery loam

Properties and qualities

Slope: 0 to 8 percent

Surface area covered with cobbles, stones or boulders: 7.0 percent

Depth to restrictive feature: 10 to 22 inches to fragipan

Drainage class: Somewhat poorly drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: About 6 to 18 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Very low (about 2.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Hydric soil rating: No

Minor Components

Norwich, extremely stony

Percent of map unit: 5 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

Wellsboro, extremely stony

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Backslope, shoulder

Landform position (three-dimensional): Interfluvium, side slope, head slope

Down-slope shape: Convex, concave

Across-slope shape: Convex, linear

Hydric soil rating: No

OpD—Oquaga and Lordstown extremely stony silt loams, 8 to 25 percent slopes

Map Unit Setting

National map unit symbol: 9yhm

Elevation: 700 to 1,800 feet

Mean annual precipitation: 32 to 50 inches

Mean annual air temperature: 45 to 52 degrees F

Frost-free period: 110 to 180 days

Farmland classification: Not prime farmland

Map Unit Composition

Oquaga and similar soils: 60 percent

Lordstown and similar soils: 40 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Oquaga

Setting

Landform: Hillslopes

Landform position (two-dimensional): Shoulder

Landform position (three-dimensional): Side slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Reddish ablation till derived from sandstone and siltstone

Typical profile

A - 0 to 7 inches: channery silt loam

Bw - 7 to 30 inches: very channery silt loam

R - 30 to 42 inches: unweathered bedrock

Properties and qualities

Slope: 8 to 25 percent

Surface area covered with cobbles, stones or boulders: 15.0 percent

Depth to restrictive feature: 20 to 40 inches to lithic bedrock

Drainage class: Well drained

Runoff class: Medium

*Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)*

Depth to water table: More than 80 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Very low (about 2.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: C

Ecological site: F140XY027NY - Well Drained Till Uplands

Hydric soil rating: No

Description of Lordstown

Setting

Landform: Hills

Landform position (two-dimensional): Backslope

Landform position (three-dimensional): Side slope, crest

Down-slope shape: Convex, linear

Across-slope shape: Convex, linear

Typical profile

A - 0 to 7 inches: channery silt loam

Bw - 7 to 26 inches: channery silt loam

C - 26 to 30 inches: very channery loam

2R - 30 to 42 inches: unweathered bedrock

Properties and qualities

Slope: 8 to 25 percent

Custom Soil Resource Report

Surface area covered with cobbles, stones or boulders: 9.0 percent
Depth to restrictive feature: 20 to 40 inches to lithic bedrock
Drainage class: Well drained
Runoff class: Medium
Capacity of the most limiting layer to transmit water (Ksat): Moderately high to high
(0.60 to 2.00 in/hr)
Depth to water table: More than 80 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Low (about 3.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: C
Hydric soil rating: No

WmB—Wellsboro channery silt loam, 3 to 8 percent slopes, extremely stony

Map Unit Setting

National map unit symbol: 2vckl
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Wellsboro, extremely stony, and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Wellsboro, Extremely Stony

Setting

Landform: Hills, mountains
Landform position (two-dimensional): Summit, shoulder
Landform position (three-dimensional): Interfluve, side slope
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Oe - 0 to 1 inches: moderately decomposed plant material
A - 1 to 3 inches: channery silt loam
Bw - 3 to 22 inches: channery silt loam
Bx - 22 to 55 inches: channery loam
C - 55 to 72 inches: very channery loam

Custom Soil Resource Report

Properties and qualities

Slope: 3 to 8 percent

Surface area covered with cobbles, stones or boulders: 7.0 percent

Depth to restrictive feature: 14 to 30 inches to fragipan

Drainage class: Moderately well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: About 13 to 24 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Low (about 3.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Hydric soil rating: No

Minor Components

Morris, extremely stony

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Summit, footslope

Landform position (three-dimensional): Interfluve, base slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Oquaga, extremely stony

Percent of map unit: 5 percent

Landform: Mountains, hills

Landform position (two-dimensional): Shoulder, summit, backslope

Landform position (three-dimensional): Mountaintop, upper third of mountainflank, side slope, crest, nose slope

Down-slope shape: Convex, linear

Across-slope shape: Linear

Hydric soil rating: No

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

Custom Soil Resource Report for Luzerne County, Pennsylvania



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

| | |
|--|----|
| Preface | 2 |
| How Soil Surveys Are Made | 5 |
| Soil Map | 8 |
| Soil Map..... | 9 |
| Legend..... | 10 |
| Map Unit Legend..... | 11 |
| Map Unit Descriptions..... | 11 |
| Luzerne County, Pennsylvania..... | 13 |
| CnB—Chippewa silt loam, 0 to 8 percent slopes, extremely stony..... | 13 |
| MoB—Morris channery silt loam, 0 to 8 percent slopes..... | 14 |
| MsB—Morris channery silt loam, 0 to 8 percent slopes, extremely stony... | 15 |
| WIB—Wellsboro channery silt loam, 3 to 8 percent slopes..... | 17 |
| WIC—Wellsboro channery silt loam, 8 to 15 percent slopes..... | 18 |
| WID—Wellsboro channery silt loam, 15 to 25 percent slopes..... | 20 |
| References | 22 |

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.


Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

Custom Soil Resource Report Soil Map




Map Scale: 1:2,810 if printed on A landscape (11" x 8.5") sheet.



Map projection: Web Mercator Corner coordinates: WGS84 Edge tics: UTM Zone 18N WGS84


MAP LEGEND

Area of Interest (AOI)

 Area of Interest (AOI)




















Soils







 Soil Map Unit Polygons

 Soil Map Unit Lines


 Soil Map Unit Points

Special Point Features






-  Blowout
-  Borrow Pit
-  Clay Spot
-  Closed Depression
-  Gravel Pit
-  Gravelly Spot
-  Landfill
-  Lava Flow
-  Marsh or swamp
-  Mine or Quarry
-  Miscellaneous Water
-  Perennial Water
-  Rock Outcrop
-  Saline Spot
-  Sandy Spot
-  Severely Eroded Spot
-  Sinkhole
-  Slide or Slip
-  Sodic Spot

-  Spoil Area
-  Stony Spot
-  Very Stony Spot
-  Wet Spot
-  Other
-  Special Line Features


Water Features

 Streams and Canals

Transportation

-  Rails
-  Interstate Highways
-  US Routes
-  Major Roads
-  Local Roads

Background

 Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:20,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Luzerne County, Pennsylvania
 Survey Area Data: Version 15, Jun 5, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 20, 2010—Jul 7, 2016

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

| Map Unit Symbol | Map Unit Name | Acres in AOI | Percent of AOI |
|------------------------------------|---|--------------|----------------|
| CnB | Chippewa silt loam, 0 to 8 percent slopes, extremely stony | 8.6 | 23.8% |
| MoB | Morris channery silt loam, 0 to 8 percent slopes | 8.4 | 23.2% |
| MsB | Morris channery silt loam, 0 to 8 percent slopes, extremely stony | 0.4 | 1.0% |
| WIB | Wellsboro channery silt loam, 3 to 8 percent slopes | 11.1 | 30.9% |
| WIC | Wellsboro channery silt loam, 8 to 15 percent slopes | 4.7 | 13.0% |
| WID | Wellsboro channery silt loam, 15 to 25 percent slopes | 2.9 | 8.1% |
| Totals for Area of Interest | | 36.0 | 100.0% |

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor

Custom Soil Resource Report

components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Luzerne County, Pennsylvania

CnB—Chippewa silt loam, 0 to 8 percent slopes, extremely stony

Map Unit Setting

National map unit symbol: 2vcjf
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Chippewa, extremely stony, and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Chippewa, Extremely Stony

Setting

Landform: Depressions
Landform position (two-dimensional): Toeslope
Landform position (three-dimensional): Base slope
Down-slope shape: Concave
Across-slope shape: Concave
Parent material: Loamy till dominated by siltstone, sandstone, and shale fragments

Typical profile

Oe - 0 to 1 inches: moderately decomposed plant material
A - 1 to 5 inches: silt loam
Eg - 5 to 15 inches: channery silt loam
Bxg - 15 to 45 inches: channery silt loam
C - 45 to 72 inches: channery silt loam

Properties and qualities

Slope: 0 to 8 percent
Surface area covered with cobbles, stones or boulders: 7.0 percent
Depth to restrictive feature: 8 to 20 inches to fragipan
Drainage class: Poorly drained
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: About 0 to 6 inches
Frequency of flooding: None
Frequency of ponding: None
Calcium carbonate, maximum content: 15 percent
Available water capacity: Low (about 3.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 7s
Hydrologic Soil Group: D
Ecological site: F140XY016NY - Mineral Wetlands
Hydric soil rating: Yes

Minor Components

Volusia, extremely stony

Percent of map unit: 8 percent

Landform: Hills, mountains

Landform position (two-dimensional): Foothlope, summit

Landform position (three-dimensional): Base slope, interfluve, side slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Chippewa, extremely stony, very poorly drained

Percent of map unit: 7 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

MoB—Morris channery silt loam, 0 to 8 percent slopes

Map Unit Setting

National map unit symbol: 2vclq

Elevation: 330 to 2,460 feet

Mean annual precipitation: 31 to 70 inches

Mean annual air temperature: 39 to 52 degrees F

Frost-free period: 105 to 180 days

Farmland classification: Farmland of statewide importance

Map Unit Composition

Morris and similar soils: 90 percent

Minor components: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Morris

Setting

Landform: Hills, mountains

Landform position (two-dimensional): Summit, foothlope

Landform position (three-dimensional): Interfluve, base slope

Down-slope shape: Concave

Across-slope shape: Linear

Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Ap - 0 to 8 inches: channery silt loam

Bw - 8 to 12 inches: channery silt loam

Eg - 12 to 16 inches: channery silt loam

Bx - 16 to 60 inches: channery silt loam

Custom Soil Resource Report

C - 60 to 72 inches: channery loam

Properties and qualities

Slope: 0 to 8 percent

Surface area covered with cobbles, stones or boulders: 0.0 percent

Depth to restrictive feature: 10 to 22 inches to fragipan

Drainage class: Somewhat poorly drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: About 6 to 18 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Very low (about 2.7 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3w

Hydrologic Soil Group: D

Hydric soil rating: No

Minor Components

Wellsboro

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Backslope, shoulder

Landform position (three-dimensional): Interfluvium, side slope

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

Norwich

Percent of map unit: 5 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

MsB—Morris channery silt loam, 0 to 8 percent slopes, extremely stony

Map Unit Setting

National map unit symbol: 2vxct

Elevation: 330 to 2,460 feet

Mean annual precipitation: 31 to 70 inches

Mean annual air temperature: 39 to 52 degrees F

Frost-free period: 105 to 180 days

Farmland classification: Not prime farmland

Map Unit Composition

Morris, extremely stony, and similar soils: 90 percent

Minor components: 10 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Morris, Extremely Stony

Setting

Landform: Mountains, hills

Landform position (two-dimensional): Summit, footslope

Landform position (three-dimensional): Interfluve, base slope

Down-slope shape: Concave

Across-slope shape: Linear

Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Oe - 0 to 1 inches: moderately decomposed plant material

A - 1 to 5 inches: channery silt loam

Bw - 5 to 12 inches: channery silt loam

Eg - 12 to 16 inches: channery silt loam

Bx - 16 to 60 inches: channery silt loam

C - 60 to 72 inches: channery loam

Properties and qualities

Slope: 0 to 8 percent

Surface area covered with cobbles, stones or boulders: 7.0 percent

Depth to restrictive feature: 10 to 22 inches to fragipan

Drainage class: Somewhat poorly drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: About 6 to 18 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Very low (about 2.9 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 7s

Hydrologic Soil Group: D

Hydric soil rating: No

Minor Components

Norwich, extremely stony

Percent of map unit: 5 percent

Landform: Depressions

Landform position (two-dimensional): Toeslope

Landform position (three-dimensional): Base slope

Down-slope shape: Concave

Across-slope shape: Concave

Hydric soil rating: Yes

Wellsboro, extremely stony

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Backslope, shoulder

Custom Soil Resource Report

Landform position (three-dimensional): Interfluve, side slope, head slope
Down-slope shape: Convex, concave
Across-slope shape: Convex, linear
Hydric soil rating: No

WIB—Wellsboro channery silt loam, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 2vck5
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: All areas are prime farmland

Map Unit Composition

Wellsboro and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Wellsboro

Setting

Landform: Hills, mountains
Landform position (two-dimensional): Summit, shoulder
Landform position (three-dimensional): Interfluve, side slope
Down-slope shape: Convex
Across-slope shape: Convex
Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Ap - 0 to 8 inches: channery silt loam
Bw - 8 to 22 inches: channery silt loam
Bx - 22 to 55 inches: channery loam
C - 55 to 72 inches: very channery loam

Properties and qualities

Slope: 3 to 8 percent
Surface area covered with cobbles, stones or boulders: 0.0 percent
Depth to restrictive feature: 14 to 30 inches to fragipan
Drainage class: Moderately well drained
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: About 13 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Low (about 3.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 2w

Custom Soil Resource Report

Hydrologic Soil Group: D
Hydric soil rating: No

Minor Components

Lackawanna

Percent of map unit: 5 percent
Landform: Mountains, hills
Landform position (two-dimensional): Shoulder, backslope
Landform position (three-dimensional): Interfluve, side slope
Down-slope shape: Convex
Across-slope shape: Linear
Hydric soil rating: No

Morris

Percent of map unit: 5 percent
Landform: Hills, mountains
Landform position (two-dimensional): Summit, footslope
Landform position (three-dimensional): Interfluve, base slope
Down-slope shape: Concave
Across-slope shape: Linear
Hydric soil rating: No

Oquaga

Percent of map unit: 5 percent
Landform: Mountains, hills
Landform position (two-dimensional): Shoulder, backslope
Landform position (three-dimensional): Upper third of mountainflank, crest, nose slope
Down-slope shape: Convex
Across-slope shape: Linear
Hydric soil rating: No

WIC—Wellsboro channery silt loam, 8 to 15 percent slopes

Map Unit Setting

National map unit symbol: 2vck6
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: Farmland of statewide importance

Map Unit Composition

Wellsboro and similar soils: 90 percent
Minor components: 10 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Wellsboro

Setting

Landform: Hills, mountains

Landform position (two-dimensional): Backslope, shoulder

Landform position (three-dimensional): Interfluve, side slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Ap - 0 to 8 inches: channery silt loam

Bw - 8 to 22 inches: channery silt loam

Bx - 22 to 55 inches: channery loam

C - 55 to 72 inches: very channery loam

Properties and qualities

Slope: 8 to 15 percent

Surface area covered with cobbles, stones or boulders: 0.0 percent

Depth to restrictive feature: 14 to 30 inches to fragipan

Drainage class: Moderately well drained

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)

Depth to water table: About 13 to 24 inches

Frequency of flooding: None

Frequency of ponding: None

Available water capacity: Low (about 3.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: D

Hydric soil rating: No

Minor Components

Morris

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Summit, footslope

Landform position (three-dimensional): Interfluve, base slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Lackawanna

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Backslope

Landform position (three-dimensional): Nose slope, side slope

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

WID—Wellsboro channery silt loam, 15 to 25 percent slopes

Map Unit Setting

National map unit symbol: 2vck7
Elevation: 330 to 2,460 feet
Mean annual precipitation: 31 to 70 inches
Mean annual air temperature: 39 to 52 degrees F
Frost-free period: 105 to 180 days
Farmland classification: Not prime farmland

Map Unit Composition

Wellsboro and similar soils: 85 percent
Minor components: 15 percent
Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Wellsboro

Setting

Landform: Hills, mountains
Landform position (two-dimensional): Backslope
Landform position (three-dimensional): Side slope, head slope
Down-slope shape: Concave
Across-slope shape: Linear
Parent material: Loamy till from reddish sandstone, siltstone, and shale

Typical profile

Ap - 0 to 8 inches: channery silt loam
Bw - 8 to 22 inches: channery silt loam
Bx - 22 to 55 inches: channery loam
C - 55 to 72 inches: very channery loam

Properties and qualities

Slope: 15 to 25 percent
Surface area covered with cobbles, stones or boulders: 0.0 percent
Depth to restrictive feature: 14 to 30 inches to fragipan
Drainage class: Moderately well drained
Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately low (0.00 to 0.14 in/hr)
Depth to water table: About 13 to 24 inches
Frequency of flooding: None
Frequency of ponding: None
Available water capacity: Low (about 3.8 inches)

Interpretive groups

Land capability classification (irrigated): None specified
Land capability classification (nonirrigated): 4e
Hydrologic Soil Group: D
Hydric soil rating: No

Minor Components

Oquaga

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Shoulder, backslope

Landform position (three-dimensional): Upper third of mountainflank, crest, nose slope, side slope

Down-slope shape: Convex, linear

Across-slope shape: Linear

Hydric soil rating: No

Morris

Percent of map unit: 5 percent

Landform: Hills, mountains

Landform position (two-dimensional): Footslope

Landform position (three-dimensional): Interfluve, side slope

Down-slope shape: Concave

Across-slope shape: Linear

Hydric soil rating: No

Lackawanna

Percent of map unit: 5 percent

Landform: Mountains, hills

Landform position (two-dimensional): Backslope

Landform position (three-dimensional): Nose slope, side slope

Down-slope shape: Linear

Across-slope shape: Linear

Hydric soil rating: No

References

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

ATTACHMENT 3
SITE EVALUATION AND SOIL INFILTRATION TEST REPORT



March 3, 2022

**TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC.
A SUBSIDIARY OF THE WILLIAMS COMPANIES, INC.
REGIONAL ENERGY ACCESS EXPANSION PROJECT
COMPRESSOR STATION 515 PROJECT**

SITE EVALUATION AND SOIL INFILTRATION TEST REPORT

1.0 SITE SOILS

Based upon mapping provided by the United States Department of Agriculture's Natural Resources Conservation Service (USDA NRCS) Web Soil Survey¹, the project areas under consideration for infiltration BMPs are underlain by the following soil series: Wellsboro channery silt loam, 3 to 8 percent slopes (WIB), Oquaga and Lordstown channery silt loams, 3 to 8 percent loams (OIB), Morris channery silt loam, 0 to 8 percent slopes (MoB), Chippewa silt loam, 0 to 3 percent slopes (CIA) and Chippewa silt loam, 3 to 8 percent slopes (CIB).

WIB soils consist of moderately well drained soils found on hill and mountain shoulders and summits. The parent material is loamy till derived mainly from reddish sandstone, siltstone, and shale. A fragipan is typically located at a depth ranging from 14 to 30 inches below ground surface (bgs). Depth to the water table ranges from 13 to 24 inches. The available water capacity of WIB soils is low and permeability is slow.

OIB soils consist of moderately well drained soils found on hill slopes and shoulders. The parent material is reddish ablated till derived mainly from sandstone and siltstone. Bedrock begins at a depth ranging from 30 to 42 inches. Depth to the water table is more than 80 inches below grade surface. The available water capacity of OIB soils is very low and permeability is high.

MoB soils consist of somewhat poorly drained soils found on hill and mountain footslopes and summits. The parent material is loamy till derived mainly from reddish sandstone, siltstone, and shale. A fragipan is typically located at a depth ranging from 10 to 22 inches. Depth to the water table ranges from 6 to 18 inches. The available water capacity of MoB soils is very low and permeability is very slow.

The soil infiltration testing described in this report focused on WIB, MoB and OIB soils. These soils are anticipated as being the primary soils in the areas of possible best management practices (BMP).

2.0 FIELD INVESTIGATION AND TESTING METHODOLOGY

BAI completed a total of eight test pits and sixteen double-ring infiltrometer tests, two infiltration tests per test pit. Locations were selected to be representative of the main soil series in the areas of potential infiltration BMPs. Figure 1 presents locations of test pits and corresponding double-ring infiltrometer tests.

¹ <http://websoilsurvey.nrcs.usda.gov/app/>

Eight test pits (TP 501 through TP 508) were opened using an excavator for soil characterization up to 36 inches bgs on September 28 and 29, 2020. Infiltration tests were also performed in eight test pits at approximately 31 inches deep to evaluate infiltration rates of shallow soils in the study area. The infiltration tests used double-ring infiltrometer (DRI) tests.

The double-ring infiltrometer consisted of PVC construction with a nine-inch diameter outer ring (OR) and a six-inch diameter inner ring (IR) set two inches deep into the bottom of each borehole (approximately 31 inches below grade). DRI tests were used to determine infiltration rates of shallow soils at various locations across the Site. DRI testing was initiated by completing a one-hour pre-soak which involved adding two inches of head to both the OR and IR. By noting the drop in head in each infiltrometer at 30-minute increments during the pre-soak, BAI determined that 30-minute testing intervals for the infiltration tests would be used for DRI testing as per the Pennsylvania Stormwater Best Management Practices Manual (Document ID 363-0300-002) Appendix C.

Following the pre-soak, the test pits were refilled to a two-inch head level in both the IR and OR. As the water level decreased, the change in head was measured from a fixed reference point in the IR every 10 or 30 minutes for the infiltration tests depending on the infiltration rate during the presoak. The IR and OR were refilled following each reading. Results for DRI tests are discussed in Section 3.0.

3.0 FINDINGS AND CONCLUSIONS

Based upon examination of each test pit, soils beneath the Site consist of brown (10YR 4/3) silty sand to a depth of at least 5 inches bgs. From roughly 5 to 10 inches bgs a brown (10YR 5/6) silty sand or sandy silt was observed. The soil from 10 to 24 inches consisted of a friable brown (10YR 5/6) channery loam. At a depth of 24 inches bgs, a brown (10YR 4/4) silty sand or poorly graded sand layer until bedrock was encountered. The depth to bedrock was consistent throughout the Site, ranging from 23 to 36 inches below grade surface (bgs). Testing was completed within the same soil series at eight locations spread out in the areas of the potential BMP locations.

For the limiting zone investigation each of test pit excavated had a limiting zone at the SHWT or bedrock. TP 502 had a SHWT at 30 inches bgs, where a moderately mottled soil was observed. The other test pits have limiting zone at competent bedrock. TP 508 encountered bedrock at 23 inches bgs. The deepest bedrock limiting zone was in TP 503 at 35 inches bgs. The water table was not encountered in the test pits.

The following table summarizes the limiting zones identified in each test pit.

| Limiting Zone Investigation Results | | | | | |
|--|--------------------|--------------------------------|------------------|--------------|------------------|
| Test Pit | Elevation (MSL ft) | Seasonal High Water Table (in) | Water Table (in) | Bedrock (in) | Total Depth (in) |
| TP 501 | 1923.06 | Not encountered | Not encountered | 28 | 28 |
| TP 502 | 1924.409 | 30 | Not encountered | 36 | 36 |
| TP 503 | 1931.729 | Not encountered | Not encountered | 35 | 35 |
| TP 504 | 1933.762 | Not encountered | Not encountered | 33 | 33 |
| TP 505 | 1934.233 | Not encountered | Not encountered | 34 | 34 |
| TP 506 | 1933.416 | Not encountered | Not encountered | 33 | 33 |
| TP 507 | 1936.626 | Not encountered | Not encountered | 26.5 | 26.5 |
| TP 508 | 1936.604 | Not encountered | Not encountered | 23 | 23 |

Infiltration testing was completed within the same mapped soil series at eight locations spread out in the areas of the potential BMP locations. However, only the infiltration rates for TP 501 and TP 502 were used since they are representative of the area of the proposed BMPs. The following table summarizes the DRI readings for each test pit relevant to the proposed BMP.

| Infiltration Testing Results | | | | | | | | |
|-------------------------------------|---------|-------------------|------------------------|-----------------|-----------------|-----------------|-----------------|----------------------------|
| Test pit | Hole | Testing Elevation | Reading Interval (min) | Reading 1 (in.) | Reading 2 (in.) | Reading 3 (in.) | Reading 4 (in.) | Infiltration Rate (in./hr) |
| TP 501 | IT 501A | 1920.80' | 30 | 1.25 | 1.125 | 1.125 | 1.125 | 2.31 |
| | IT 501B | 1920.80' | 30 | 1.125 | 1.00 | 1.00 | 1.00 | 2.06 |
| TP 502 | IT 502A | 1921.50' | 30 | 0.25 | 0.125 | 0.125 | 0.125 | 0.31 |
| | IT 502B | 1921.50' | 30 | 0.25 | 0.25 | 0.25 | 0.25 | 0.50 |

Bottom Elevation of Proposed BMP = 1925.50'

Based on field observations, the infiltration testing was completed at an appropriate location in the soil profile and is representative to the BMP's infiltration elevation.

TP 501

The infiltration rate within IT 501A was 2.31 inches per hour (iph) based upon an average rate of drop of 1.155 inches over the last four 30-minute infiltration readings. The infiltration rate within IT 501B was 2.06 iph based upon an average rate of drop of 1.03 inches over the last four 30-minute infiltration readings.


TP 502

The infiltration rate within IT 502A was 0.31 iph based upon an average rate of drop of 0.156 inches over the four 30-minute infiltration readings. The infiltration rate within IT 502B was 0.50 iph based upon an average rate of drop of 0.25 inches over the four 30-minute infiltration readings.

4.0 REFERENCES

Pennsylvania Department of Environmental Protection. "Pennsylvania Stormwater Best Management Practices Manual" Document No. 363-0300-02, December 2006.


"Web Soil Survey - Home." Web Soil Survey - Home. United States Department of Agriculture, 6 Dec. 2013. Web. 23 December 2020. <<http://websoilsurvey.nrcs.usda.gov/app/>>.

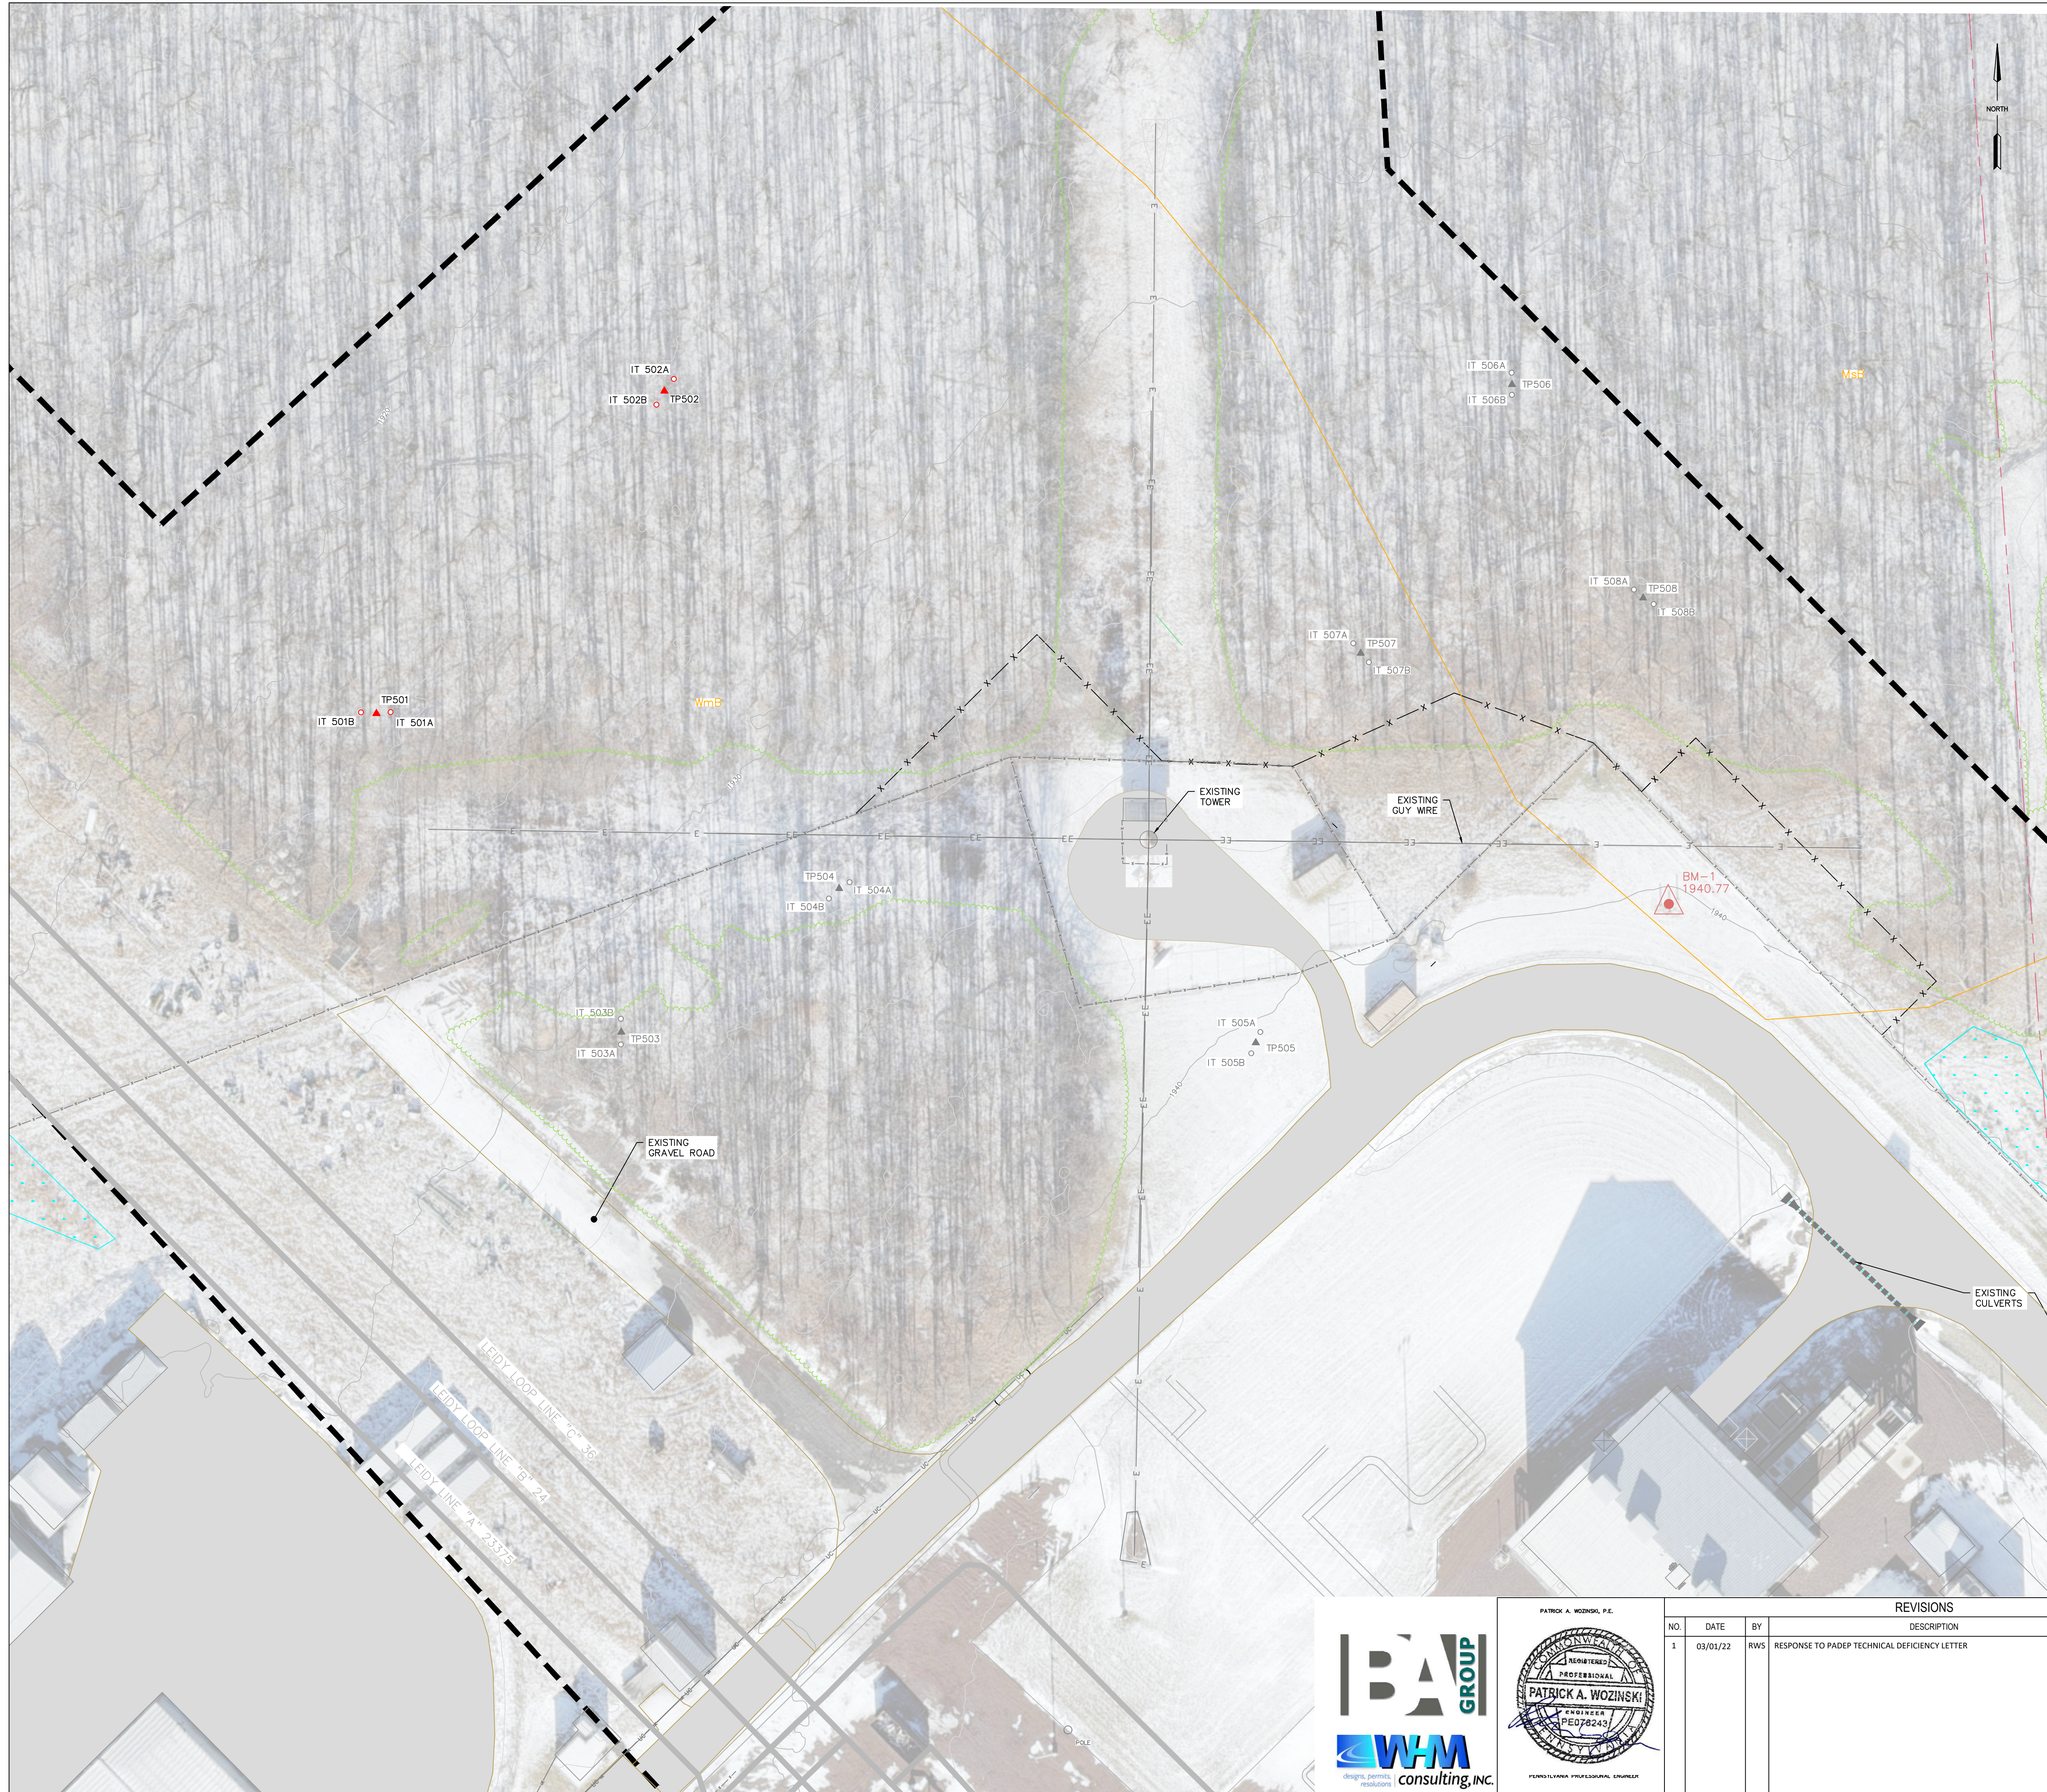

- LEGEND**
- PROPOSED PIPELINE
 - LIMITS OF DISTURBANCE
 - DELINEATED WETLAND
 - DELINEATED WATERWAY / STREAM (TOP OF BANK)
 - ~ STREAM FLOW DIRECTION
 - RIPARIAN BUFFER
 - 50' FEMA FLOODWAY
 - FEMA 100-YEAR FLOODPLAIN
 - M82 SOIL BOUNDARY / TYPE
 - ~ EXISTING TREELINE / TREE/SHRUB
 - PROPERTY LINE
 - EXISTING FENCE
 - PROPOSED FENCE
 - EXISTING LEIDY / TGPL PIPELINES
 - EXISTING FOREIGN PIPELINES
 - EXISTING UTILITY POLE / TOWER
 - EXISTING VALVE
 - EXISTING CULVERT
 - EXISTING ELECTRIC LINE
 - EXISTING UNDERGROUND ELECTRIC LINE
 - EXISTING GAS LINE
 - EXISTING WATER LINE
 - EXISTING SANITARY LINE
 - EXISTING STORM SEWER
 - EXISTING TELEPHONE LINE
 - EXISTING FIBER OPTIC LINE
 - EXISTING UNDERGROUND CABLE LINE
 - EXISTING STORM INLET
 - EXISTING SANITARY MANHOLE
 - EXISTING COMMUNICATION/ELECTRIC MANHOLE
 - EXISTING FIRE HYDRANT
 - EXISTING POWER POLE
 - EXISTING STRUCTURE
 - EXISTING ROAD (GRAVEL)
 - EXISTING ROAD (PAVED)
 - EXISTING GRAVEL AREAS
 - PROPOSED GRAVEL
 - EXISTING GRADE MAJOR CONTOURS (10' C.I.)
 - EXISTING GRADE MINOR CONTOURS (2' C.I.)
 - ▲ TP505 TEST PIT USED FOR BMP DESIGN
 - IT 505A INFILTRATION TEST USED FOR BMP DESIGN
 - ▲ TP505 TEST PIT NOT USED FOR BMP DESIGN
 - IT 505A INFILTRATION TEST NOT USED FOR BMP DESIGN

- SOIL LEGEND**
- M8B MORRIS CHANNERY SILT LOAM, 0 TO 8 PERCENT SLOPES, EXTREMELY STONY
 - WmB WELLSBORO CHANNERY SILT LOAM, 3 TO 8 PERCENT SLOPES
 - CnB CHIPPEWA VERY STONY SILT LOAM, 0 TO 8 PERCENT SLOPES
 - OpD OQUAGA AND LORDSTOWN EXTREMELY STONY SILT LOAMS, 8 TO 25 PERCENT SLOPES

- EXISTING CONDITION NOTES/SOURCES**
1. EXISTING ROADWAYS, CONTOURS, PROPERTY LINE, TREE LINE, ETC. ARE DERIVED FROM A FIELD SURVEY PERFORMED BY TRANSCO BETWEEN MARCH 2019 AND 2020.
 2. PROPERTY BOUNDARIES BASED EITHER ON TAX PARCEL INFORMATION PROVIDED BY TRANSCO OR A COMBINATION OF DEED REFERENCE AND FIELD LOCATED EVIDENCE. PROPERTY BOUNDARY LOCATIONS BASED ON TAX PARCEL INFORMATION ARE APPROXIMATE.
 3. PIPELINE ALIGNMENTS AND LIMITS OF DISTURBANCE PROVIDED BY TRANSCO.
 4. STREAM AND WETLAND BOUNDARIES BASED ON SURVEYS CONDUCTED BY WHM CONSULTING FROM MARCH 2020 TO OCTOBER, 2020.
 5. DATUM BASED ON PENNSYLVANIA STATE PLANE COORDINATE SYSTEM, NAD 83 NORTH ZONE, NAVD88, ELEVATION MSL, DERIVED FROM GPS OBSERVATION.



| REVISIONS | | | | W.O. NO. | CHK. | APP. |
|-----------|----------|-----|---|----------|------|------|
| NO. | DATE | BY | DESCRIPTION | | | |
| 1 | 03/01/22 | RWS | RESPONSE TO PADEP TECHNICAL DEFICIENCY LETTER | | | |

TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC
REGIONAL ENERGY ACCESS EXPANSION PROJECT
CS515
SOIL TEST PIT LOCATIONS
EXISTING CONDITIONS
 BUCK TOWNSHIP, LUZERNE COUNTY, PENNSYLVANIA

| | | | |
|-----------------|----------------|---------------------------------|-----------------|
| DRAWN BY: DRV | DATE: 03/31/21 | ISSUED FOR BID: | SCALE: AS NOTED |
| CHECKED BY: PW | DATE: 03/31/21 | ISSUED FOR CONSTRUCTION: | REVISION: |
| APPROVED BY: PW | DATE: 03/31/21 | DRAWING NUMBER: 26-1000-70-28-D | SHEET 1 OF 1 |
| W.O. 1222639 | RID: 305 | | |

ATTACHMENT 4
PCSM PLAN BMP DESIGN WORKSHEETS
AND CALCULATIONS

TABLE OF CONTENTS

Attachment 4

- 4.1 CN Table
- 4.2 Stormwater BMP Manual Appendix D Worksheet
- 4.3 BMP HydroCAD Report
- 4.4 Channel Design Worksheets
- 4.5 Channel HydroCAD Reports
- 4.6 Riprap Apron Worksheet
- 4.7 BMP Erosion Control Blanket Reports

ATTACHMENT 4.1
CN TABLE

Table 2-2a Runoff curve numbers for urban areas ^{1/}

| Cover description | Average percent impervious area ^{2/} | Curve numbers for hydrologic soil group | | | |
|---|---|---|----|----|----|
| | | A | B | C | D |
| <i>Fully developed urban areas (vegetation established)</i> | | | | | |
| Open space (lawns, parks, golf courses, cemeteries, etc.) ^{3/} : | | | | | |
| Poor condition (grass cover < 50%) | | 68 | 79 | 86 | 89 |
| Fair condition (grass cover 50% to 75%) | | 49 | 69 | 79 | 84 |
| Good condition (grass cover > 75%) | | 39 | 61 | 74 | 80 |
| Impervious areas: | | | | | |
| Paved parking lots, roofs, driveways, etc. (excluding right-of-way) | | 98 | 98 | 98 | 98 |
| Streets and roads: | | | | | |
| Paved; curbs and storm sewers (excluding right-of-way) | | 98 | 98 | 98 | 98 |
| Paved; open ditches (including right-of-way) | | 83 | 89 | 92 | 93 |
| Gravel (including right-of-way) | | 76 | 85 | 89 | 91 |
| Dirt (including right-of-way) | | 72 | 82 | 87 | 89 |
| Western desert urban areas: | | | | | |
| Natural desert landscaping (pervious areas only) ^{4/} | | 63 | 77 | 85 | 88 |
| Artificial desert landscaping (impervious weedbarrier, desert shrub with 1- to 2-inch sand or gravel mulch and basin borders) | | 96 | 96 | 96 | 96 |
| Urban districts: | | | | | |
| Commercial and business | 85 | 89 | 92 | 94 | 95 |
| Industrial | 72 | 81 | 88 | 91 | 93 |
| Residential districts by average lot size: | | | | | |
| 1/8 acre or less (town houses) | 65 | 77 | 85 | 90 | 92 |
| 1/4 acre | 38 | 61 | 75 | 83 | 87 |
| 1/3 acre | 30 | 57 | 72 | 81 | 86 |
| 1/2 acre | 25 | 54 | 70 | 80 | 85 |
| 1 acre | 20 | 51 | 68 | 79 | 84 |
| 2 acres | 12 | 46 | 65 | 77 | 82 |
| <i>Developing urban areas</i> | | | | | |
| Newly graded areas (pervious areas only, no vegetation) ^{5/} | | 77 | 86 | 91 | 94 |
| Idle lands (CN's are determined using cover types similar to those in table 2-2c). | | | | | |

¹ Average runoff condition, and $I_a = 0.2S$.² The average percent impervious area shown was used to develop the composite CN's. Other assumptions are as follows: impervious areas are directly connected to the drainage system, impervious areas have a CN of 98, and pervious areas are considered equivalent to open space in good hydrologic condition. CN's for other combinations of conditions may be computed using figure 2-3 or 2-4.³ CN's shown are equivalent to those of pasture. Composite CN's may be computed for other combinations of open space cover type.⁴ Composite CN's for natural desert landscaping should be computed using figures 2-3 or 2-4 based on the impervious area percentage (CN = 98) and the pervious area CN. The pervious area CN's are assumed equivalent to desert shrub in poor hydrologic condition.⁵ Composite CN's to use for the design of temporary measures during grading and construction should be computed using figure 2-3 or 2-4 based on the degree of development (impervious area percentage) and the CN's for the newly graded pervious areas.

Table 2-2b Runoff curve numbers for cultivated agricultural lands ^{1/}

| Cover description | | | Curve numbers for hydrologic soil group | | | |
|--|----------------------------|------------------------------------|---|----|----|----|
| Cover type | Treatment ^{2/} | Hydrologic condition ^{3/} | A | B | C | D |
| Fallow | Bare soil | — | 77 | 86 | 91 | 94 |
| | Crop residue cover (CR) | Poor | 76 | 85 | 90 | 93 |
| | | Good | 74 | 83 | 88 | 90 |
| Row crops | Straight row (SR) | Poor | 72 | 81 | 88 | 91 |
| | | Good | 67 | 78 | 85 | 89 |
| | SR + CR | Poor | 71 | 80 | 87 | 90 |
| | | Good | 64 | 75 | 82 | 85 |
| | Contoured (C) | Poor | 70 | 79 | 84 | 88 |
| | | Good | 65 | 75 | 82 | 86 |
| | C + CR | Poor | 69 | 78 | 83 | 87 |
| | | Good | 64 | 74 | 81 | 85 |
| | Contoured & terraced (C&T) | Poor | 66 | 74 | 80 | 82 |
| | | Good | 62 | 71 | 78 | 81 |
| C&T+ CR | | Poor | 65 | 73 | 79 | 81 |
| | | Good | 61 | 70 | 77 | 80 |
| Small grain | SR | Poor | 65 | 76 | 84 | 88 |
| | | Good | 63 | 75 | 83 | 87 |
| | SR + CR | Poor | 64 | 75 | 83 | 86 |
| | | Good | 60 | 72 | 80 | 84 |
| | C | Poor | 63 | 74 | 82 | 85 |
| | | Good | 61 | 73 | 81 | 84 |
| | C + CR | Poor | 62 | 73 | 81 | 84 |
| | | Good | 60 | 72 | 80 | 83 |
| | C&T | Poor | 61 | 72 | 79 | 82 |
| | | Good | 59 | 70 | 78 | 81 |
| C&T+ CR | Poor | 60 | 71 | 78 | 81 | |
| | Good | 58 | 69 | 77 | 80 | |
| Close-seeded or broadcast legumes or rotation meadow | SR | Poor | 66 | 77 | 85 | 89 |
| | | Good | 58 | 72 | 81 | 85 |
| | C | Poor | 64 | 75 | 83 | 85 |
| | | Good | 55 | 69 | 78 | 83 |
| | C&T | Poor | 63 | 73 | 80 | 83 |
| | | Good | 51 | 67 | 76 | 80 |

^{1/} Average runoff condition, and $I_a=0.2S$

^{2/} Crop residue cover applies only if residue is on at least 5% of the surface throughout the year.

^{3/} Hydraulic condition is based on combination factors that affect infiltration and runoff, including (a) density and canopy of vegetative areas, (b) amount of year-round cover, (c) amount of grass or close-seeded legumes, (d) percent of residue cover on the land surface (good $\geq 20\%$), and (e) degree of surface roughness.

Poor: Factors impair infiltration and tend to increase runoff.

Good: Factors encourage average and better than average infiltration and tend to decrease runoff.

Table 2-2c Runoff curve numbers for other agricultural lands ^{1/}

| Cover description | Hydrologic condition | Curve numbers for hydrologic soil group | | | |
|--|----------------------|---|----|----|----|
| | | A | B | C | D |
| Pasture, grassland, or range—continuous forage for grazing. ^{2/} | Poor | 68 | 79 | 86 | 89 |
| | Fair | 49 | 69 | 79 | 84 |
| | Good | 39 | 61 | 74 | 80 |
| Meadow—continuous grass, protected from grazing and generally mowed for hay. | — | 30 | 58 | 71 | 78 |
| Brush—brush-weed-grass mixture with brush the major element. ^{3/} | Poor | 48 | 67 | 77 | 83 |
| | Fair | 35 | 56 | 70 | 77 |
| | Good | 30 ^{4/} | 48 | 65 | 73 |
| Woods—grass combination (orchard or treefarm). ^{5/} | Poor | 57 | 73 | 82 | 86 |
| | Fair | 43 | 65 | 76 | 82 |
| | Good | 32 | 58 | 72 | 79 |
| Woods. ^{6/} | Poor | 45 | 66 | 77 | 83 |
| | Fair | 36 | 60 | 73 | 79 |
| | Good | 30 ^{4/} | 55 | 70 | 77 |
| Farmsteads—buildings, lanes, driveways, and surrounding lots. | — | 59 | 74 | 82 | 86 |

¹ Average runoff condition, and $I_a = 0.2S$.

² *Poor*: <50% ground cover or heavily grazed with no mulch.

Fair: 50 to 75% ground cover and not heavily grazed.

Good: > 75% ground cover and lightly or only occasionally grazed.

³ *Poor*: <50% ground cover.

Fair: 50 to 75% ground cover.

Good: >75% ground cover.

⁴ Actual curve number is less than 30; use CN = 30 for runoff computations.

⁵ CN's shown were computed for areas with 50% woods and 50% grass (pasture) cover. Other combinations of conditions may be computed from the CN's for woods and pasture.

⁶ *Poor*: Forest litter, small trees, and brush are destroyed by heavy grazing or regular burning.

Fair: Woods are grazed but not burned, and some forest litter covers the soil.

Good: Woods are protected from grazing, and litter and brush adequately cover the soil.

Table 2-2d Runoff curve numbers for arid and semiarid rangelands ^{1/}

| Cover description | Hydrologic condition ^{2/} | Curve numbers for hydrologic soil group | | | |
|--|---------------------------------------|--|----|----|----|
| | | A ^{3/} | B | C | D |
| Herbaceous—mixture of grass, weeds, and low-growing brush, with brush the minor element. | Poor | | 80 | 87 | 93 |
| | Fair | | 71 | 81 | 89 |
| | Good | | 62 | 74 | 85 |
| Oak-aspen—mountain brush mixture of oak brush, aspen, mountain mahogany, bitter brush, maple, and other brush. | Poor | | 66 | 74 | 79 |
| | Fair | | 48 | 57 | 63 |
| | Good | | 30 | 41 | 48 |
| Pinyon-juniper—pinyon, juniper, or both; grass understory. | Poor | | 75 | 85 | 89 |
| | Fair | | 58 | 73 | 80 |
| | Good | | 41 | 61 | 71 |
| Sagebrush with grass understory. | Poor | | 67 | 80 | 85 |
| | Fair | | 51 | 63 | 70 |
| | Good | | 35 | 47 | 55 |
| Desert shrub—major plants include saltbush, greasewood, creosotebush, blackbrush, bursage, palo verde, mesquite, and cactus. | Poor | 63 | 77 | 85 | 88 |
| | Fair | 55 | 72 | 81 | 86 |
| | Good | 49 | 68 | 79 | 84 |

¹ Average runoff condition, and I_a , = 0.2S. For range in humid regions, use table 2-2c.

² Poor: <30% ground cover (litter, grass, and brush overstory).

Fair: 30 to 70% ground cover.

Good: > 70% ground cover.

³ Curve numbers for group A have been developed only for desert shrub.

ATTACHMENT 4.2
STORMWATER BMP MANUAL
APPENDIX D WORKSHEET

General Information

Instructions **General** Volume Rate Quality

Project Name: Application Type:

County: Municipality:

Project Type: New Project Minor / Major Amendment

Area: acres (In Watershed) Total Earth Disturbance: acres (In Watershed)

No. of Post-Construction Discharge Points: Start DP Numbering at:

| Discharge Point (DP) No. | Drainage Area (DA) (acres) | Earth Disturbance in DA (acres) | Existing Impervious in DA (acres) | Proposed Impervious in DA (acres) | Receiving Waters | Ch. 93 Class | Structural BMP(s) |
|--------------------------|----------------------------|---------------------------------|-----------------------------------|-----------------------------------|---------------------------------|--------------|-------------------|
| 001 | 4.54 | 4.54 | 0.36 | 2.46 | Discharge to Non-Surface Waters | HQ-CWF, MF | Yes |
| Undetained Areas | | | | | | | |
| Totals: | 4.54 | 4.54 | 0.36 | 2.46 | | | |

Volume Management

Project: Compressor Station 515

Instructions **General** **Volume** Rate Quality

2-Year / 24-Hour Storm Event (NOAA Atlas 14): inches Alternative 2-Year / 24-Hour Storm Even inches

Alternative Source:

Pre-Construction Conditions: No. Rows: Exempt from Meadow in Good Condition Automatically Calculate CN, Ia, Runoff and Volume

| Land Cover | Area (acres) | Soil Group | CN | Ia (in) | Q Runoff (in) | Runoff Volume (cf) |
|--|--------------|-------------|----|---------|--------------------|--------------------|
| Pervious as Meadow | 4.18 | D | 78 | 0.564 | 1.42 | 21,574 |
| Impervious as Meadow | 0.07 | D | 78 | 0.564 | 1.42 | 361 |
| Impervious Areas: Paved Parking Lots, Roofs, Driveways, Etc. (Excluding ROW) | 0.29 | D | 98 | 0.041 | 3.17 | 3,334 |
| TOTAL (ACRES): | | 4.54 | | | TOTAL (CF): | 25,269 |

Post-Construction Conditions: No. Rows:

| Land Cover | Area (acres) | Soil Group | CN | Ia (in) | Q Runoff (in) | Runoff Volume (cf) |
|---|--------------|-------------|----|---------|--------------------|--------------------|
| Impervious Areas: Streets and Roads - Paved; Curbs and Storm Sewers (Excluding ROW) | 2.46 | D | 98 | 0.041 | 3.17 | 28,279 |
| Meadow-Continuous Grass, Protected from Grazing and Generally Mowed for Hay | 2.08 | D | 78 | 0.564 | 1.42 | 10,735 |
| TOTAL (ACRES): | | 4.54 | | | TOTAL (CF): | 39,014 |

ET CHANGE IN VOLUME TO MANAGE (CF):

Non-Structural BMP Volume Credits:

Tree Planting Credit

Other (attach calculations):

Structural BMP Volume Credits:

No. Structural BMPs:

Start BMP Numbering at:

| DP No. | BMP No. | BMP Name | MRC? | Discharge | Incremental BMP DA (acres) | Volume Routed to BMP (CF) | Infiltration / Vegetated Area (SF) | Infiltration Rate (in/hr) | Infiltration Period (hrs) | Vegetated? | Media Depth (ft) | Storage Volume (CF) | Infiltration Credit (CF) | ET Credit (CF) |
|--------|---------|---------------------------------------|------|--------------|----------------------------|---------------------------|------------------------------------|---------------------------|---------------------------|------------|------------------|---------------------|--------------------------|----------------|
| 001 | 1 | Vegetated Filter Strip | - | to BMP No. 2 | 3.82 | 19,412 | 35,512 | 0.31 | 12 | No | | | | |
| 001 | 2 | Infiltration Berm & Retentive Grading | - | Off-Site | 0.72 | 37,577 | 17,763 | 0.31 | 43 | No | | 16,220 | 17,759 | |

Totals: 17,759

INFILTRATION & ET CREDITS (CF):

NET CHANGE IN VOLUME TO MANAGE (CF):

TOTAL CREDITS (CF):

VOLUME REQUIREMENT SATISFIED

Rate Control

Project: Compressor Station 515

Instructions
General
Volume
Rate
Quality

Precipitation Amounts:

| | | | |
|---|-------------|--|--|
| NOAA 2-Year 24-Hour Storm Event (in): | 3.4 | Alternative 2-Year 24-Hour Storm Event (in): | |
| NOAA 10-Year 24-Hour Storm Event (in): | 5 | Alternative 10-Year 24-Hour Storm Event (in): | |
| NOAA 50-Year 24-Hour Storm Event (in): | 7.16 | Alternative 50-Year 24-Hour Storm Event (in): | |
| NOAA 100-Year 24-Hour Storm Event (in): | 8.43 | Alternative 100-Year 24-Hour Storm Event (in): | |

Report Summary of Peak Rates Only

Attach model input and output data or other calculations to support the rates reported below.

| <i>Peak Discharge Rates (cfs)</i> | | | | |
|-----------------------------------|------------------|-------------------|--------------|-------------------------------|
| | Pre-Construction | Post-Construction | Net Change | |
| 2-Year Storm: | 6.19 | 2.55 | -3.64 | <i>Rate Control Satisfied</i> |
| 10-Year Storm: | 11.74 | 10.18 | -1.56 | <i>Rate Control Satisfied</i> |
| 50-Year Storm: | 19.64 | 19.57 | -0.07 | <i>Rate Control Satisfied</i> |
| 100-Year Storm: | 24.34 | 24.23 | -0.11 | <i>Rate Control Satisfied</i> |

Water Quality

Project: Compressor Station 515

PRINT

Instructions General Volume Rate **Quality**

Pre-Construction Pollutant Loads:

| Land Cover (from Volume Worksheet) | Land Cover for Water Quality | Area (acres) | Soil Group | Runoff Volume (cf) | Pollutant Conc. (mg/L) | | | Pollutant Loads (lbs) | | |
|--|------------------------------|--------------|------------|--------------------|------------------------|------|------|-----------------------|-------------|-------------|
| | | | | | TSS | TP | TN | TSS | TP | TN |
| Pervious as Meadow | Grassland/Herbaceous | 4.18 | D | 21,574 | 48.8 | 0.22 | 2.30 | 65.74 | 0.30 | 3.10 |
| Impervious as Meadow | Grassland/Herbaceous | 0.07 | D | 361 | 48.8 | 0.22 | 2.30 | 1.10 | 0.00 | 0.05 |
| Impervious Areas: Paved Parking Lots, Roofs, Driveways, Etc. (Excluding ROW) | Residential | 0.29 | D | 3,334 | 65.0 | 0.29 | 2.05 | 13.53 | 0.06 | 0.43 |
| TOTAL (ACRES): | | 4.54 | | | TOTALS: | | | 80.37 | 0.36 | 3.58 |

Post-Construction Pollutant Loads (without BMPs):

| Land Cover (from Volume Worksheet) | Land Cover for Water Quality | Area (acres) | Soil Group | Runoff Volume (cf) | Pollutant Conc. (mg/L) | | | Pollutant Loads (lbs) | | |
|---|------------------------------|--------------|------------|--------------------|------------------------|------|------|-----------------------|-------------|-------------|
| | | | | | TSS | TP | TN | TSS | TP | TN |
| Impervious Areas: Streets and Roads - Paved; Curbs and Storm Sewers (Excluding ROW) | Urban Highway | 2.46 | D | 28,279 | 142.0 | 0.32 | 3.00 | 250.74 | 0.57 | 5.30 |
| Meadow-Continuous Grass, Protected from Grazing and Generally Mowed for Hay | Grassland/Herbaceous | 2.08 | D | 10,735 | 48.8 | 0.22 | 2.30 | 32.71 | 0.15 | 1.54 |
| TOTAL (ACRES): | | 4.54 | | | TOTALS: | | | 283.46 | 0.71 | 6.84 |

POLLUTANT LOAD REDUCTION REQUIREMENTS (LBS): **203.09** **0.35** **3.26**

Characterize Undetained Areas (for Untreated Stormwater)

| Land Cover | Area (acres) | Soil Group | CN | Ia (in) | Q Runoff (in) | Runoff Volume (cf) |
|------------|--------------|------------|----|---------|---------------|--------------------|
| | | | | | | |

Non-Structural BMP Water Quality Credits:

- Pervious Undetained Area Credit
- Other (attach calculations)

Structural BMP Water Quality Credits:

Use default BMP Outflows and Median BMP Outflow Concentrations

| DP No. | BMP No. | BMP Name | MRC? | BMP DA (acres) | Vol. Routed to BMP (CF) | Inf. & ET Credits (CF) | Capture & Buffer Credits (CF) | Outflow (CF) | Outflow Conc. (mg/L) | | | Pollutant Loads (lbs) | | |
|--------|---------|---------------------------------------|------|----------------|-------------------------|------------------------|-------------------------------|--------------|----------------------|------|------|-----------------------|------|------|
| | | | | | | | | | TSS | TP | TN | TSS | TP | TN |
| 001 | 1 | Vegetated Filter Strip | - | 3.82 | 19,412 | | | 19,412 | - | - | - | - | - | - |
| 001 | 2 | Infiltration Berm & Retentive Grading | - | 0.72 | 37,577 | 17,759 | | 19,818 | 10.00 | 0.24 | 0.96 | 12.38 | 0.30 | 1.19 |

POLLUTANT LOADS FROM STRUCTURAL BMP (TREATED) OUTFLOWS (LBS):

POLLUTANT LOADS FROM UNTREATED STORMWATER (LBS):

NON-STRUCTURAL BMP WATER QUALITY CREDITS (LBS):

NET POLLUTANT LOADS FROM SITE, POST-CONSTRUCTION (LBS):

POLLUTANT LOADS FROM SITE, PRE-CONSTRUCTION (LBS):

| TSS | TP | TN |
|-------|------|------|
| 12.38 | 0.30 | 1.19 |
| 10.44 | 0.03 | 0.25 |
| | | |
| 22.82 | 0.32 | 1.44 |
| 80.37 | 0.36 | 3.58 |

WATER QUALITY REQUIREMENT SATISFIED

CERTIFICATION

I certify under penalty of law and subject to the penalties of 18 Pa.C.S. § 4904 (relating to unsworn falsification to authorities) that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I further certify that the structure, function, and calculations contained in this spreadsheet have not been modified in comparison to the spreadsheet DEP has posted to its website or, if modifications were made, an explanation of the modifications made is attached to this spreadsheet.

Patrick Wozinski

Spreadsheet User Name

2/14/2022

Date

DEP PCSM SPREADSHEET

SUPPLEMENTAL CALCULATIONS FOR LOADING
RATIOS AND INFILTRATION PERIOD

Transcontinental Gas Pipe Line Company, LLC
Regional Energy Access Expansion Project
PCSM Ratio Table - Compressor Station 515

Ratio Calculations

| Site | Drainage Area (SF) | Impervious Area (SF) | Infiltration Area (SF) | Drainage Area : Infiltration Area Ratio ¹ | Impervious Area : Infiltration Area Ratio ² |
|------------------------|--------------------|----------------------|------------------------|--|--|
| Compressor Station 515 | | | | | |
| Infiltration Berm | 197,674 | 107,090 | 53,275 | 3.7 : 1 | 2.0 : 1 |

1. PADEP Stormwater BMP Manual recommends that BMPs be designed with a maximum total loading ratio
2. PADEP Stormwater BMP Manual requires BMPs to be designed with a maximum impervious loading ratio

Ratio 1= Drainage area/Infiltration Area

Ratio 2= Impervious Area/ Infiltration Area

Infiltration Period (hrs) Calculations

| Site | Spillway (ft) | Bottom (ft) | Depth (ft) | Infiltration rate (in/h) | Infiltration rate (ft/h) | Infiltration Period (hrs) |
|------------------------|---------------|-------------|------------|--------------------------|--------------------------|---------------------------|
| Compressor Station 515 | | | | | | |
| Infiltration Berm | 1926.62 | 1925.50 | 1.12 | 0.30 | 0.025 | 44.80 |

Infiltration Period(hrs) = Depth(ft)/ Infiltration Rate(ft/h)

Depth = Spillway - Bottom




ATTACHMENT 4.3
BMP HYDROCAD REPORT



CS515-pre



CS515-post

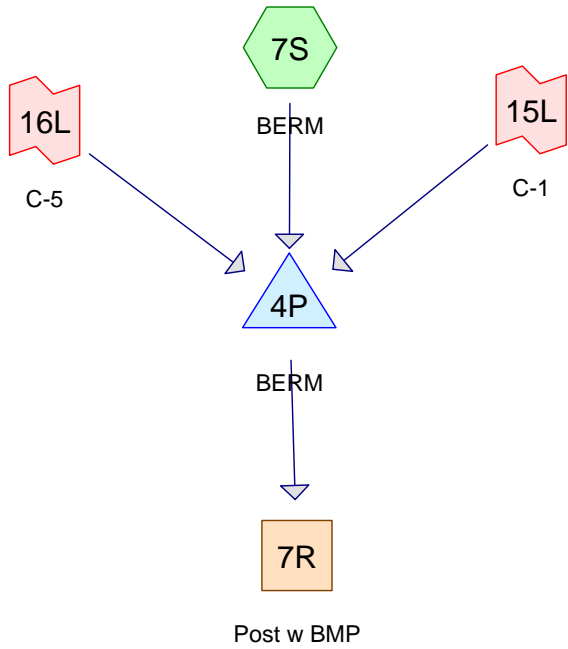

Project Notes

Rainfall events imported from "NRCS-Rain.txt" for 7639 PA Luzerne-C

CS515 - Pre, Post, Post w BMP

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 3

Area Listing (all nodes)

| Area (sq-ft) | CN | Description (subcatchment-numbers) |
|-----------------|-----------|--|
| 3,135 | 78 | Meadow, (20% existing impervious) (1S) |
| 334,430 | 78 | Meadow, non-grazed, HSG D (1S, 2S, 7S) |
| 122,950 | 98 | Paved parking, HSG D (2S, 7S) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D (1S) |
| 473,053 | 84 | TOTAL AREA |

CS515 - Pre, Post, Post w BMP

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 4

Soil Listing (all nodes)

| Area (sq-ft) | Soil Group | Subcatchment Numbers |
|-----------------|---------------|-------------------------|
| 0 | HSG A | |
| 0 | HSG B | |
| 0 | HSG C | |
| 469,918 | HSG D | 1S, 2S, 7S |
| 3,135 | Other | 1S |
| 473,053 | | TOTAL AREA |

CS515 - Pre, Post, Post w BMP

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 5

Ground Covers (all nodes)

| HSG-A (sq-ft) | HSG-B (sq-ft) | HSG-C (sq-ft) | HSG-D (sq-ft) | Other (sq-ft) | Total (sq-ft) | Ground Cover |
|------------------|------------------|------------------|------------------|------------------|------------------|---|
| 0 | 0 | 0 | 0 | 3,135 | 3,135 | Meadow, (20% existing impervious) |
| 0 | 0 | 0 | 334,430 | 0 | 334,430 | Meadow, non-grazed |
| 0 | 0 | 0 | 122,950 | 0 | 122,950 | Paved parking |
| 0 | 0 | 0 | 12,538 | 0 | 12,538 | Paved roads w/curbs & sewers |
| 0 | 0 | 0 | 469,918 | 3,135 | 473,053 | TOTAL AREA |

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 1-Year Rainfall=2.90"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 6

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>1.11"
Flow Length=458' Tc=16.5 min CN=79 Runoff=4.58 cfs 18,291 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>1.81"
Flow Length=458' Tc=2.6 min CN=89 Runoff=11.55 cfs 29,801 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>1.30"
Tc=5.0 min CN=82 Runoff=3.15 cfs 8,409 cf

Reach 7R: Post w BMP

Inflow=1.04 cfs 11,100 cf
Outflow=1.04 cfs 11,100 cf

Pond 4P: BERM

Peak Elev=1,926.73' Storage=18,125 cf Inflow=8.69 cfs 30,277 cf
Discarded=0.06 cfs 2,708 cf Primary=1.04 cfs 11,100 cf Outflow=1.10 cfs 13,808 cf

Link 15L: C-1

1-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=2.87 cfs 9,048 cf
Area= 48,290 sf 81.96% Imperv. Primary=2.87 cfs 9,048 cf

Link 16L: C-5

1-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=3.44 cfs 12,820 cf
Area= 71,709 sf 72.02% Imperv. Primary=3.44 cfs 12,820 cf

Total Runoff Area = 473,053 sf Runoff Volume = 56,502 cf Average Runoff Depth = 1.43"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf

Summary for Subcatchment 1S: CS515-pre

Runoff = 4.58 cfs @ 12.26 hrs, Volume= 18,291 cf, Depth> 1.11"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

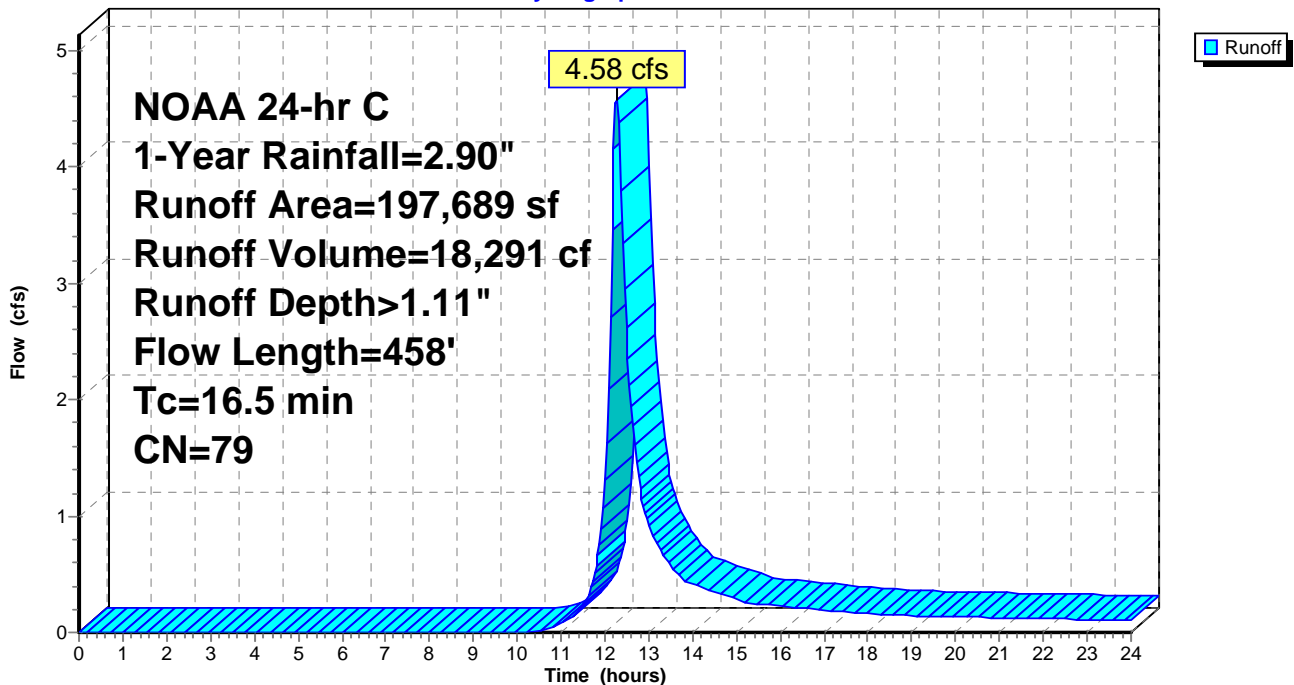

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 11.55 cfs @ 12.09 hrs, Volume= 29,801 cf, Depth > 1.81"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

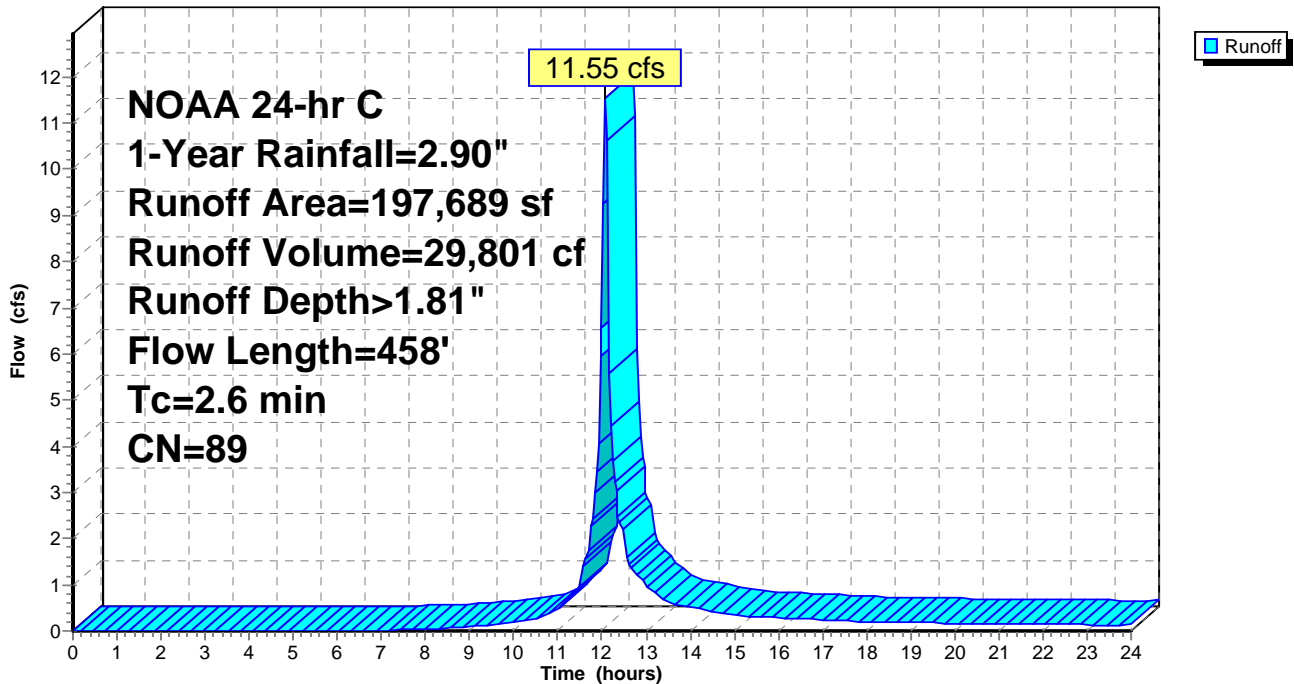

Summary for Subcatchment 7S: BERM


Runoff = 3.15 cfs @ 12.12 hrs, Volume= 8,409 cf, Depth> 1.30"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

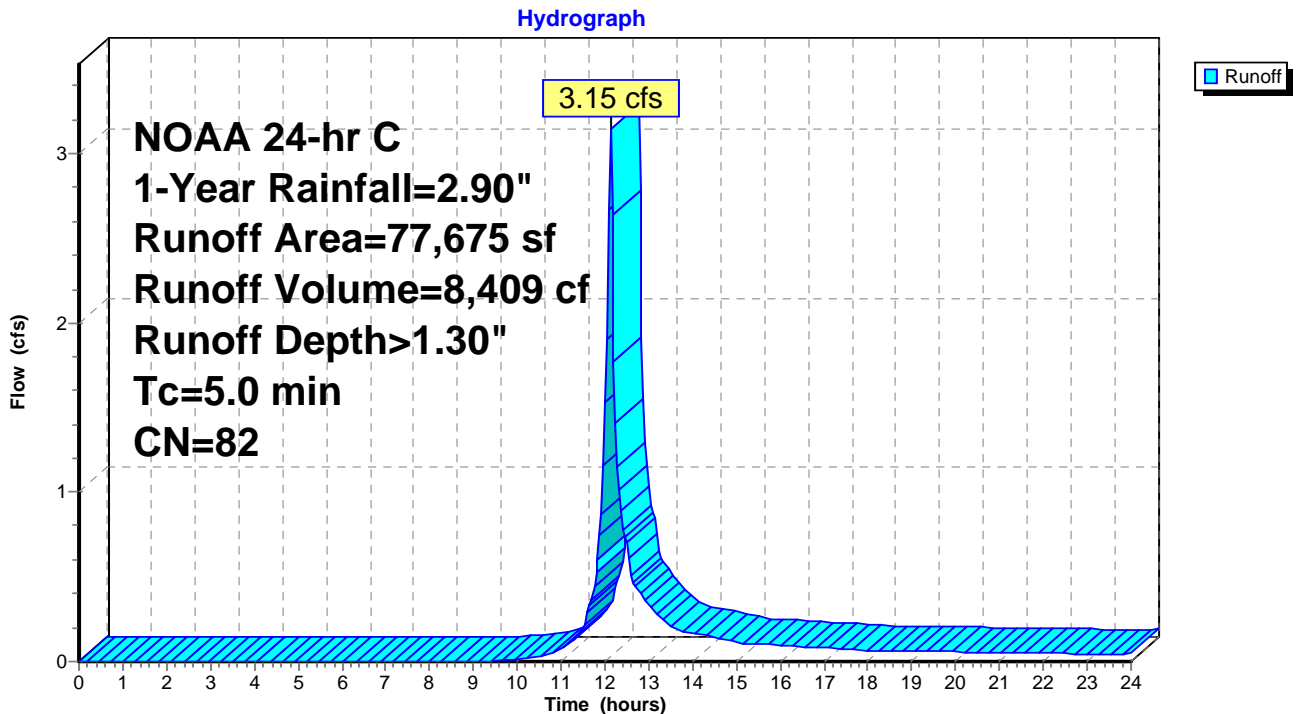


Summary for Reach 7R: Post w BMP

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 0.67" for 1-Year event
Inflow = 1.04 cfs @ 12.99 hrs, Volume= 11,100 cf
Outflow = 1.04 cfs @ 12.99 hrs, Volume= 11,100 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

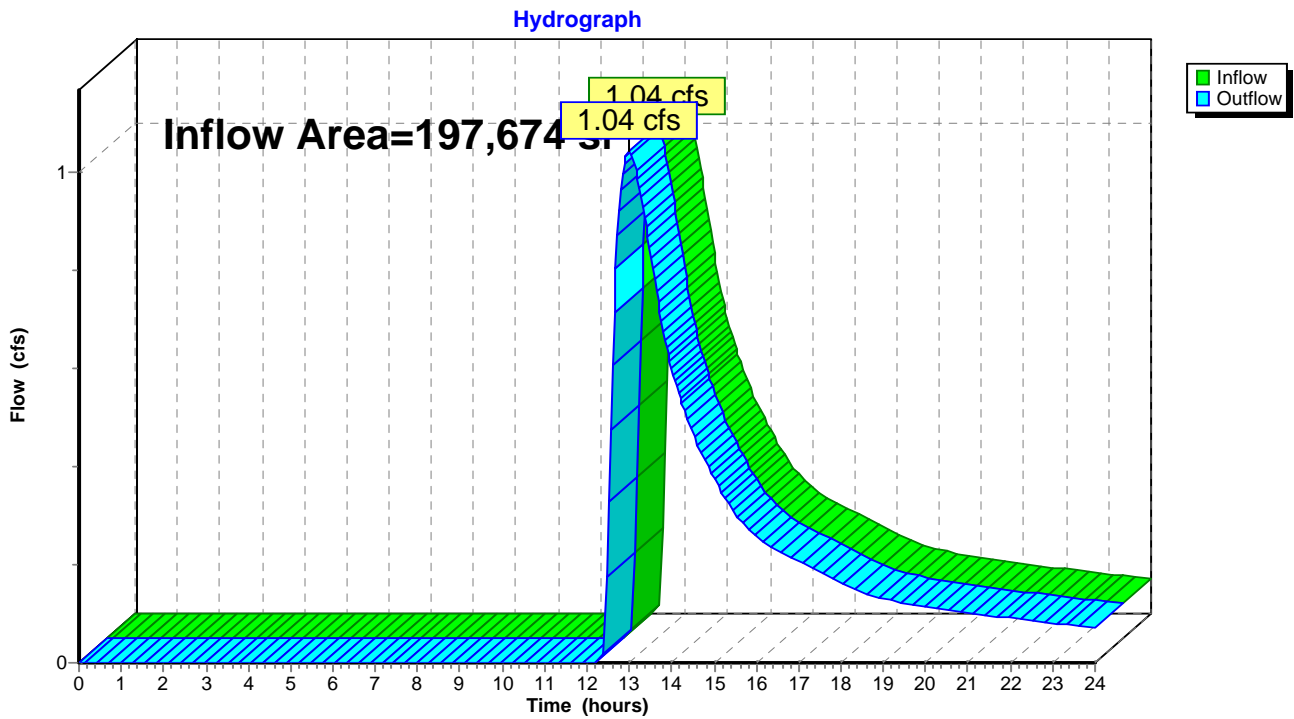

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 1.84" for 1-Year event
 Inflow = 8.69 cfs @ 12.14 hrs, Volume= 30,277 cf
 Outflow = 1.10 cfs @ 12.99 hrs, Volume= 13,808 cf, Atten= 87%, Lag= 51.4 min
 Discarded = 0.06 cfs @ 12.99 hrs, Volume= 2,708 cf
 Primary = 1.04 cfs @ 12.99 hrs, Volume= 11,100 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,926.73' @ 12.99 hrs Surf.Area= 18,752 sf Storage= 18,125 cf

Plug-Flow detention time= 282.1 min calculated for 13,785 cf (46% of inflow)
 Center-of-Mass det. time= 157.3 min (963.0 - 805.7)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.06 cfs @ 12.99 hrs HW=1,926.73' (Free Discharge)

↑1=Exfiltration (Controls 0.06 cfs)


Primary OutFlow Max=1.04 cfs @ 12.99 hrs HW=1,926.73' (Free Discharge)

↑2=Spillway (Weir Controls 1.04 cfs @ 0.80 fps)

↑3=Top of Berm (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

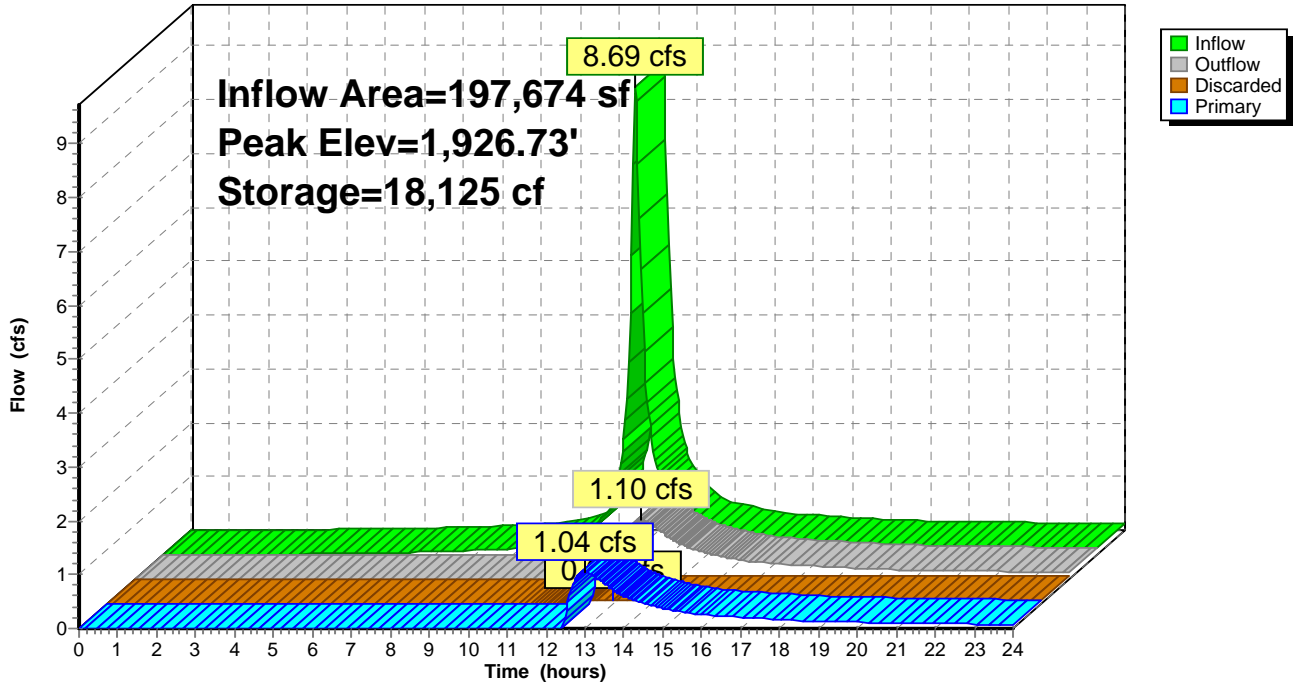

CS515 - Pre, Post, Post w BMP

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

NOAA 24-hr C 1-Year Rainfall=2.90"

Printed 2/24/2022

Page 13

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 2.25" for 1-Year event
Inflow = 2.87 cfs @ 12.13 hrs, Volume= 9,048 cf
Primary = 2.87 cfs @ 12.13 hrs, Volume= 9,048 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

1-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

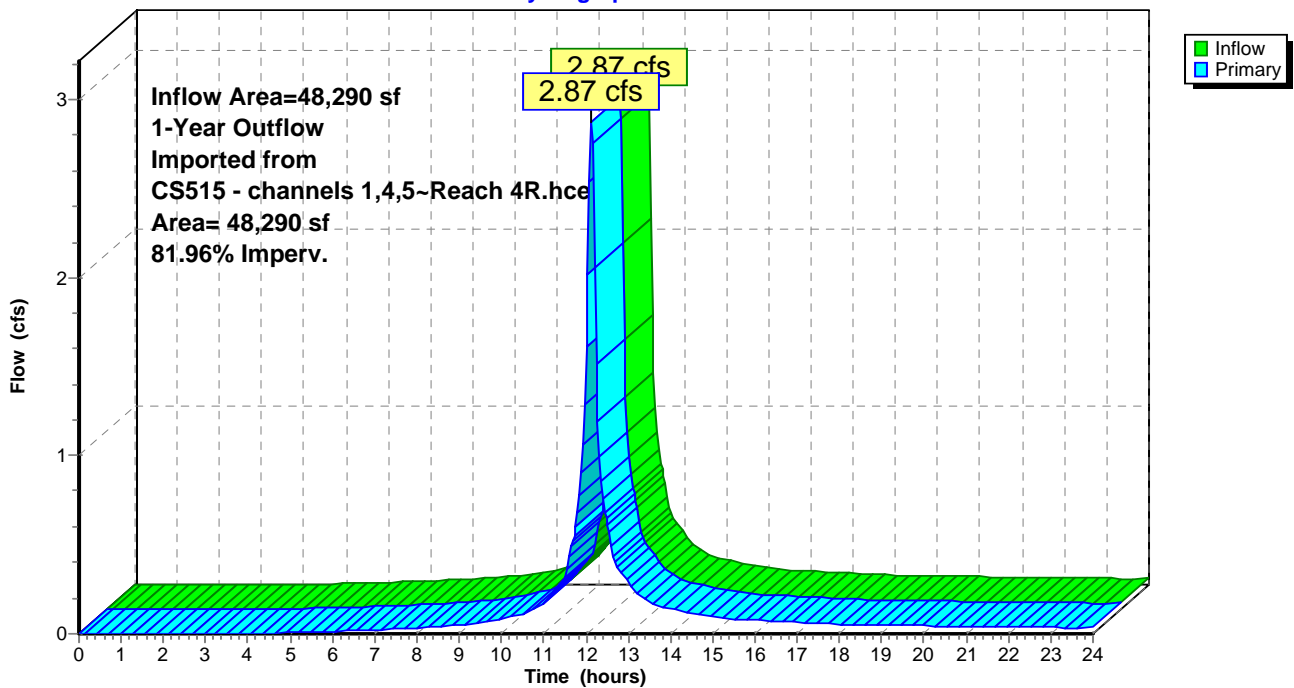

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 2.15" for 1-Year event
Inflow = 3.44 cfs @ 12.21 hrs, Volume= 12,820 cf
Primary = 3.44 cfs @ 12.21 hrs, Volume= 12,820 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

1-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

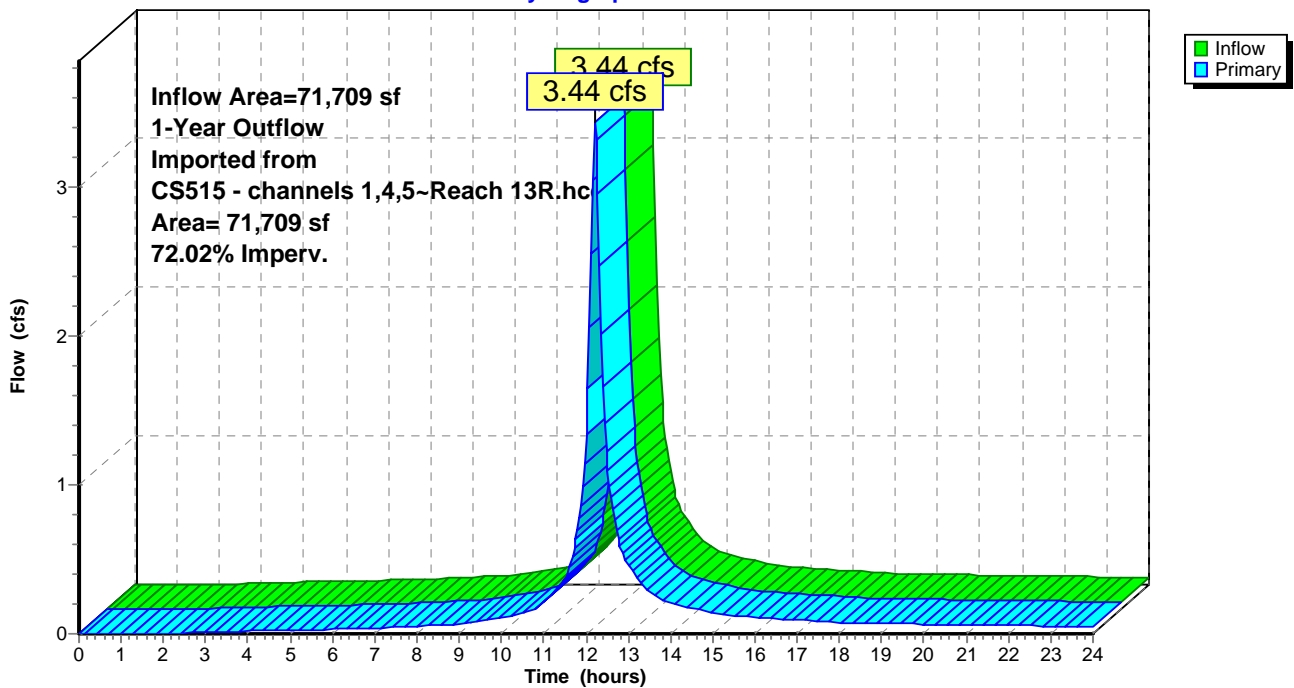

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 2-Year Rainfall=3.40"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 15

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>1.48"
Flow Length=458' Tc=16.5 min CN=79 Runoff=6.19 cfs 24,410 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>2.26"
Flow Length=458' Tc=2.6 min CN=89 Runoff=14.31 cfs 37,299 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>1.70"
Tc=5.0 min CN=82 Runoff=4.12 cfs 10,993 cf

Reach 7R: Post w BMP

Inflow=2.55 cfs 18,257 cf
Outflow=2.55 cfs 18,257 cf

Pond 4P: BERM

Peak Elev=1,926.82' Storage=19,820 cf Inflow=10.89 cfs 37,577 cf
Discarded=0.06 cfs 2,778 cf Primary=2.55 cfs 18,257 cf Outflow=2.61 cfs 21,035 cf

Link 15L: C-1

2-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=3.46 cfs 10,995 cf
Area= 48,290 sf 81.96% Imperv. Primary=3.46 cfs 10,995 cf

Link 16L: C-5

2-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=4.21 cfs 15,589 cf
Area= 71,709 sf 72.02% Imperv. Primary=4.21 cfs 15,589 cf

**Total Runoff Area = 473,053 sf Runoff Volume = 72,702 cf Average Runoff Depth = 1.84"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf**

Summary for Subcatchment 1S: CS515-pre

Runoff = 6.19 cfs @ 12.26 hrs, Volume= 24,410 cf, Depth> 1.48"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

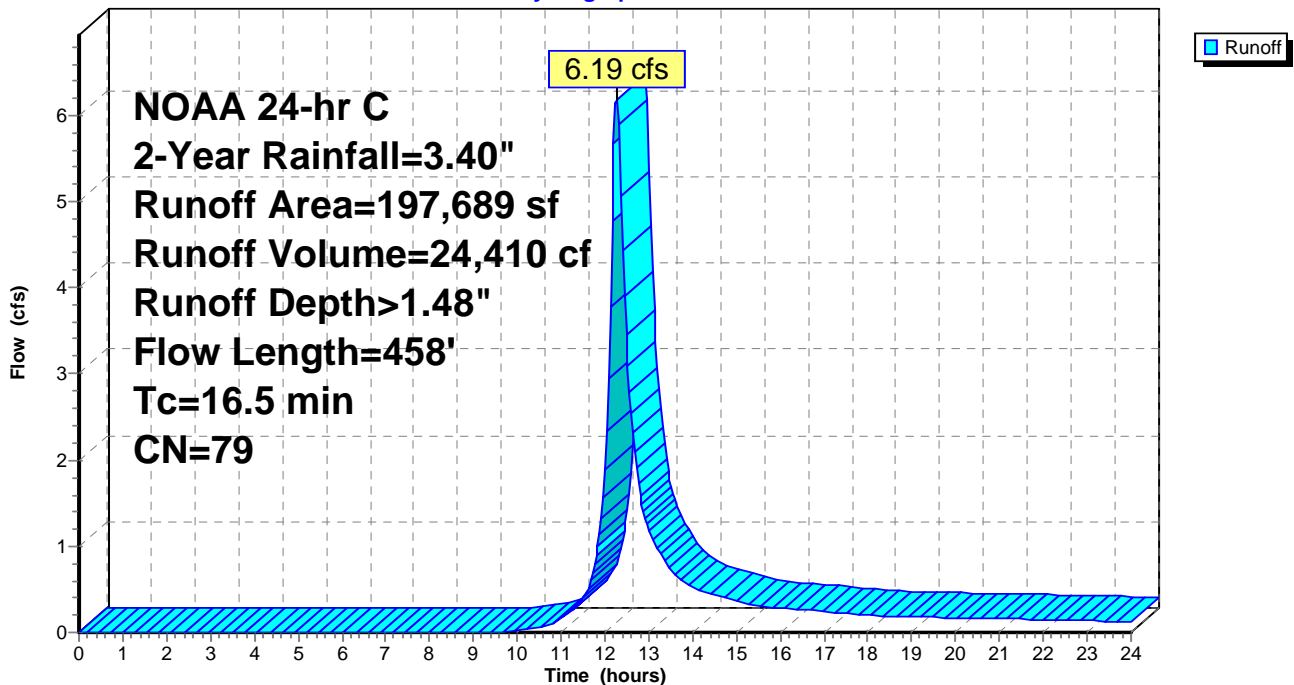

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 14.31 cfs @ 12.09 hrs, Volume= 37,299 cf, Depth> 2.26"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.04$ hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

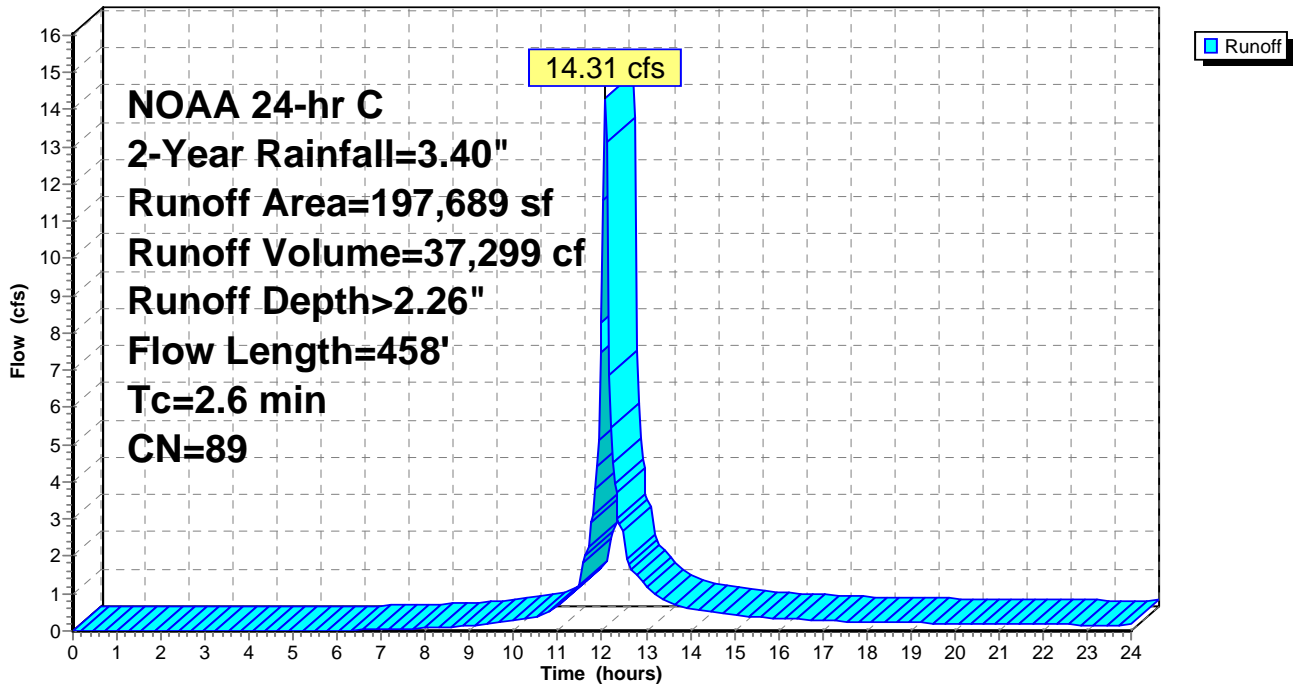

Summary for Subcatchment 7S: BERM


Runoff = 4.12 cfs @ 12.12 hrs, Volume= 10,993 cf, Depth> 1.70"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

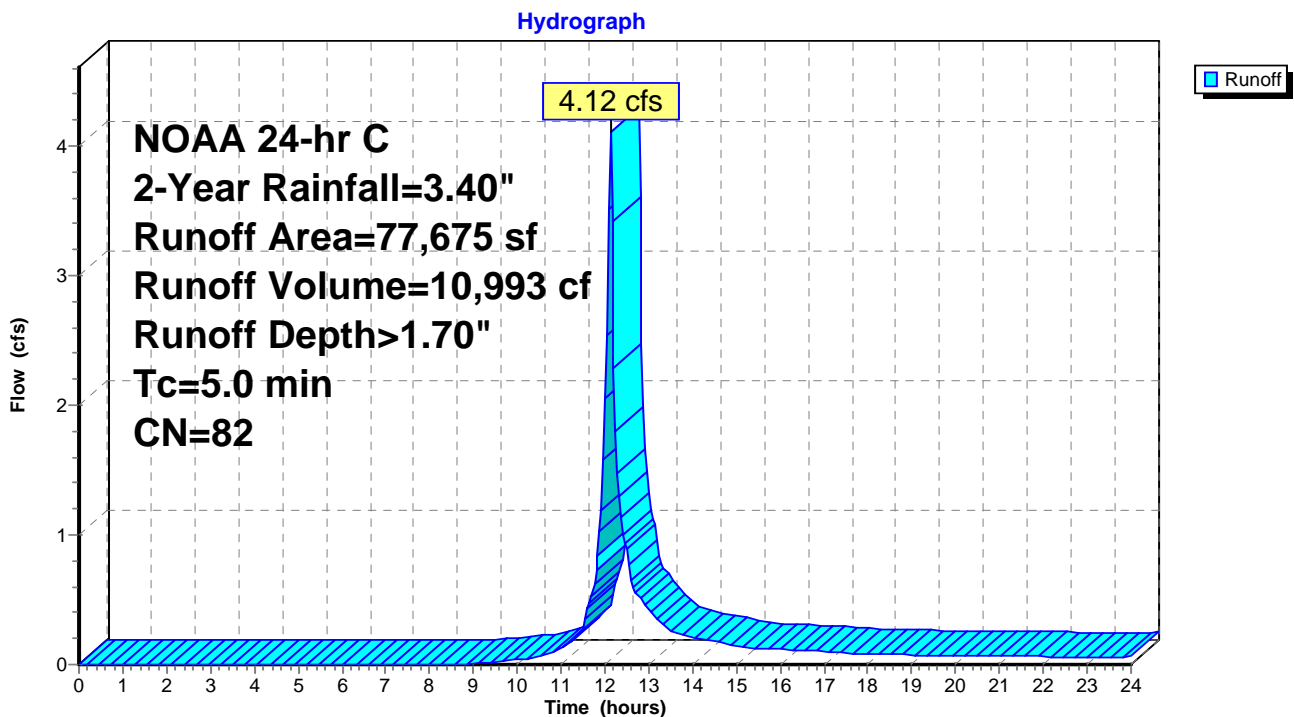


Summary for Reach 7R: Post w BMP

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 1.11" for 2-Year event
Inflow = 2.55 cfs @ 12.56 hrs, Volume= 18,257 cf
Outflow = 2.55 cfs @ 12.56 hrs, Volume= 18,257 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

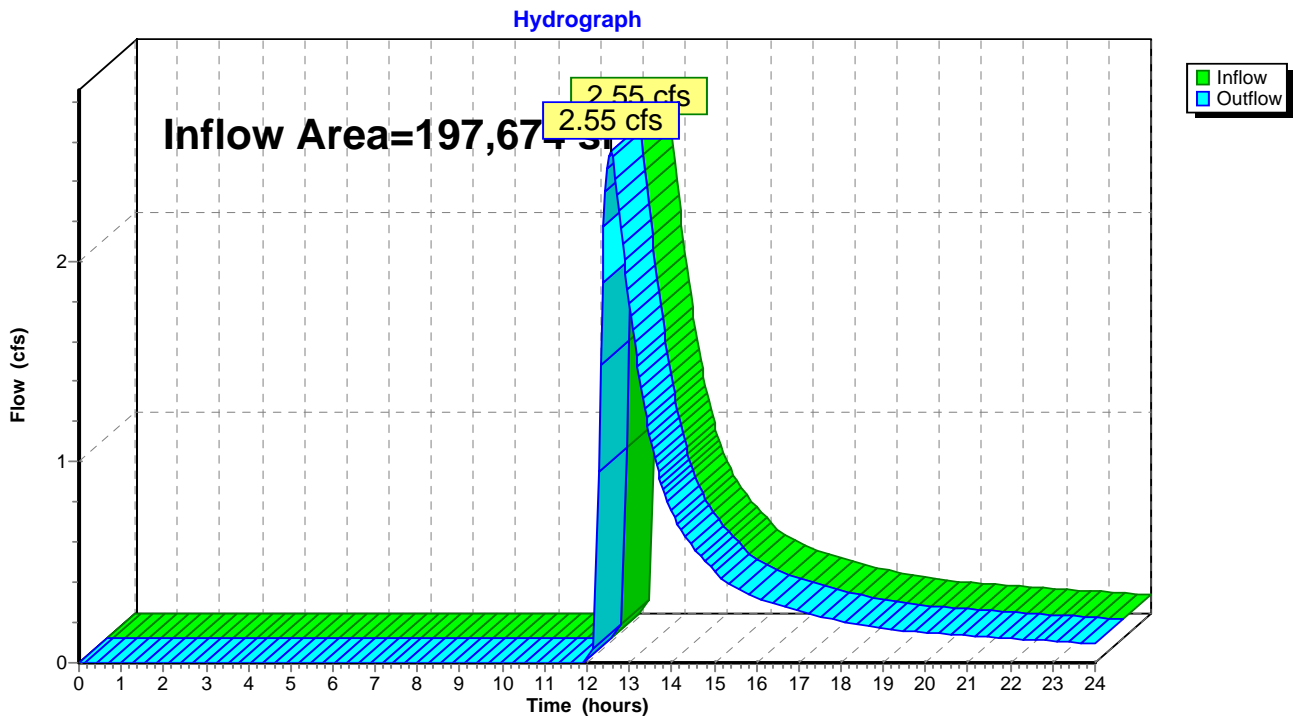

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 2.28" for 2-Year event
 Inflow = 10.89 cfs @ 12.13 hrs, Volume= 37,577 cf
 Outflow = 2.61 cfs @ 12.56 hrs, Volume= 21,035 cf, Atten= 76%, Lag= 25.6 min
 Discarded = 0.06 cfs @ 12.56 hrs, Volume= 2,778 cf
 Primary = 2.55 cfs @ 12.56 hrs, Volume= 18,257 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,926.82' @ 12.56 hrs Surf.Area= 19,562 sf Storage= 19,820 cf

Plug-Flow detention time= 231.0 min calculated for 21,000 cf (56% of inflow)
 Center-of-Mass det. time= 118.4 min (919.3 - 800.9)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.06 cfs @ 12.56 hrs HW=1,926.82' (Free Discharge)

↑ **1=Exfiltration** (Controls 0.06 cfs)


Primary OutFlow Max=2.55 cfs @ 12.56 hrs HW=1,926.82' (Free Discharge)

↑ **2=Spillway** (Weir Controls 2.55 cfs @ 1.08 fps)

↑ **3=Top of Berm** (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

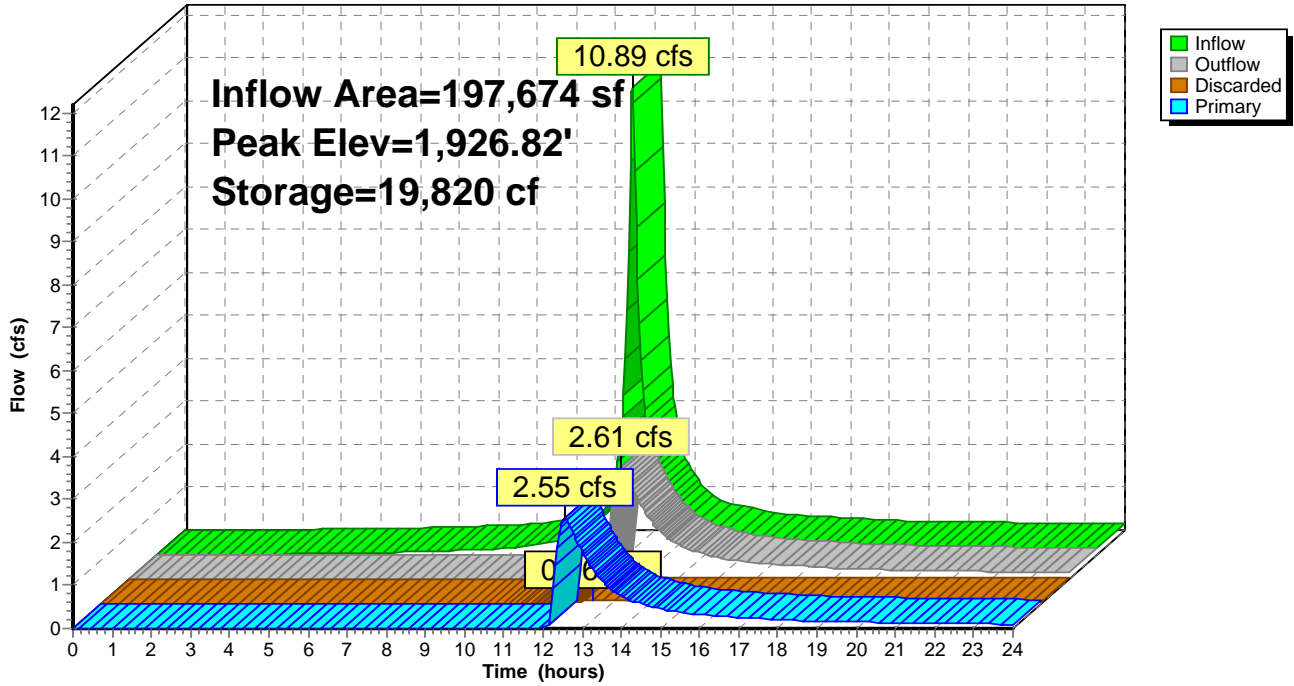

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 2.73" for 2-Year event
Inflow = 3.46 cfs @ 12.13 hrs, Volume= 10,995 cf
Primary = 3.46 cfs @ 12.13 hrs, Volume= 10,995 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

2-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

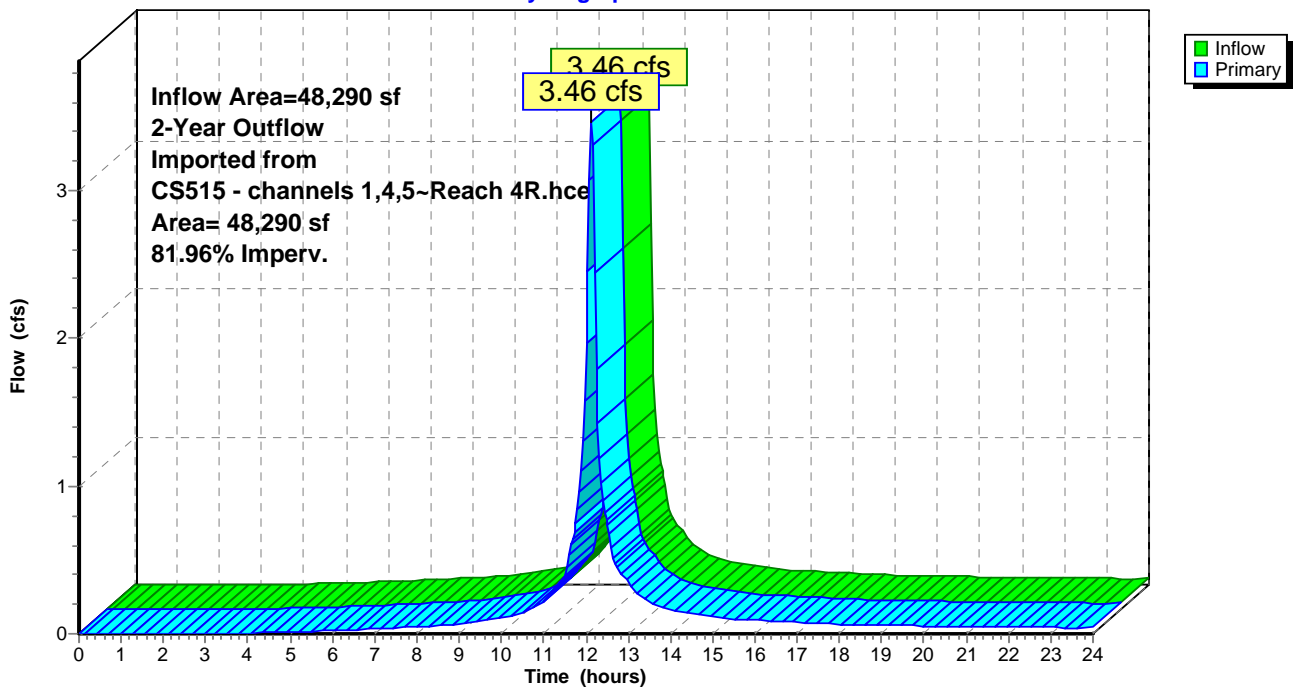

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 2.61" for 2-Year event
Inflow = 4.21 cfs @ 12.21 hrs, Volume= 15,589 cf
Primary = 4.21 cfs @ 12.21 hrs, Volume= 15,589 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

2-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

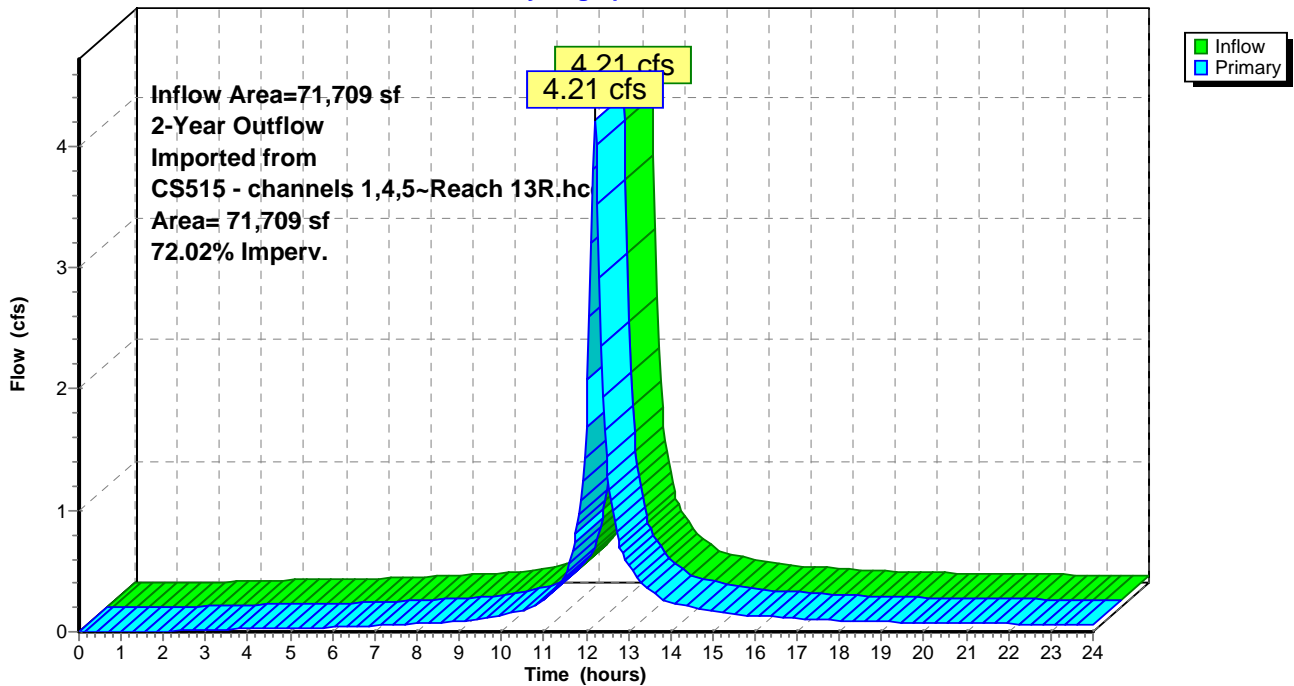

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 10-Year Rainfall=5.00"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 24

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>2.79"
Flow Length=458' Tc=16.5 min CN=79 Runoff=11.74 cfs 45,965 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>3.77"
Flow Length=458' Tc=2.6 min CN=89 Runoff=23.16 cfs 62,118 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>3.08"
Tc=5.0 min CN=82 Runoff=7.35 cfs 19,910 cf

Reach 7R: Post w BMP

Inflow=10.18 cfs 42,141 cf
Outflow=10.18 cfs 42,141 cf

Pond 4P: BERM

Peak Elev=1,927.09' Storage=25,580 cf Inflow=18.13 cfs 61,879 cf
Discarded=0.07 cfs 2,998 cf Primary=10.18 cfs 42,141 cf Outflow=10.25 cfs 45,139 cf

Link 15L: C-1

10-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=5.30 cfs 17,300 cf
Area= 48,290 sf 81.96% Imperv. Primary=5.30 cfs 17,300 cf

Link 16L:

10-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=6.72 cfs 24,669 cf
Area= 71,709 sf 72.02% Imperv. Primary=6.72 cfs 24,669 cf

Total Runoff Area = 473,053 sf Runoff Volume = 127,993 cf Average Runoff Depth = 3.25"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf

Summary for Subcatchment 1S: CS515-pre

Runoff = 11.74 cfs @ 12.25 hrs, Volume= 45,965 cf, Depth> 2.79"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

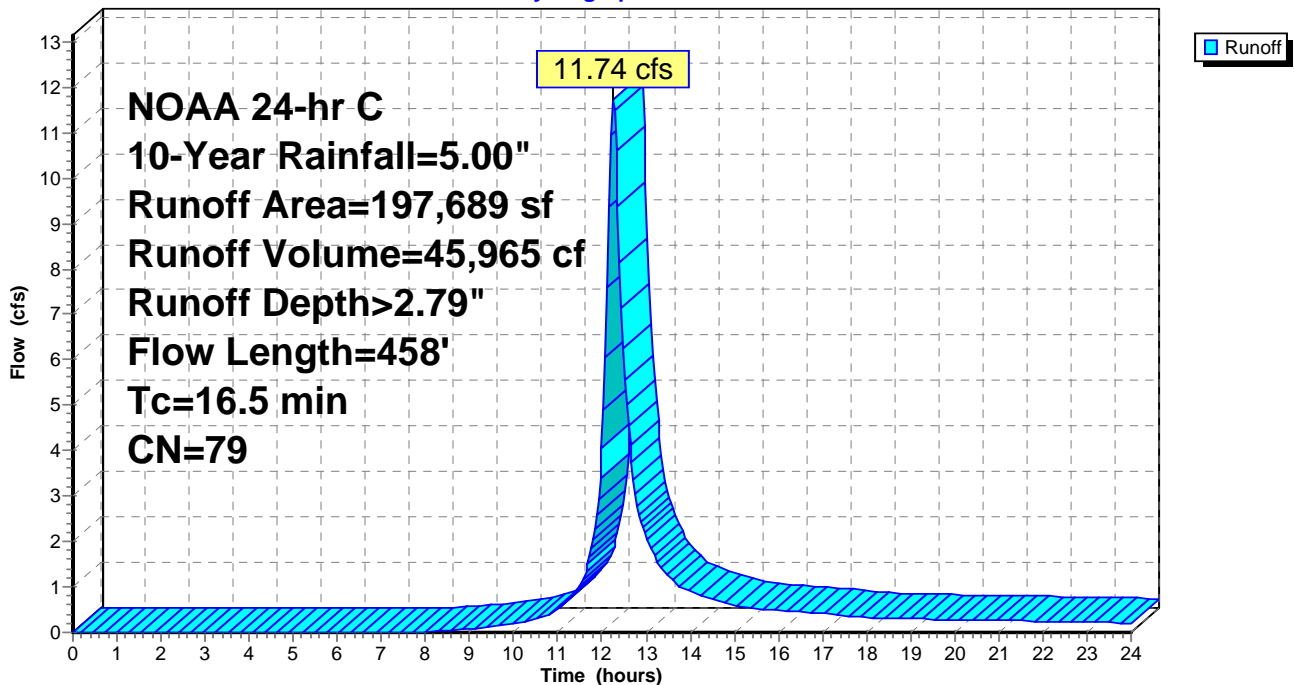

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 23.16 cfs @ 12.09 hrs, Volume= 62,118 cf, Depth> 3.77"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

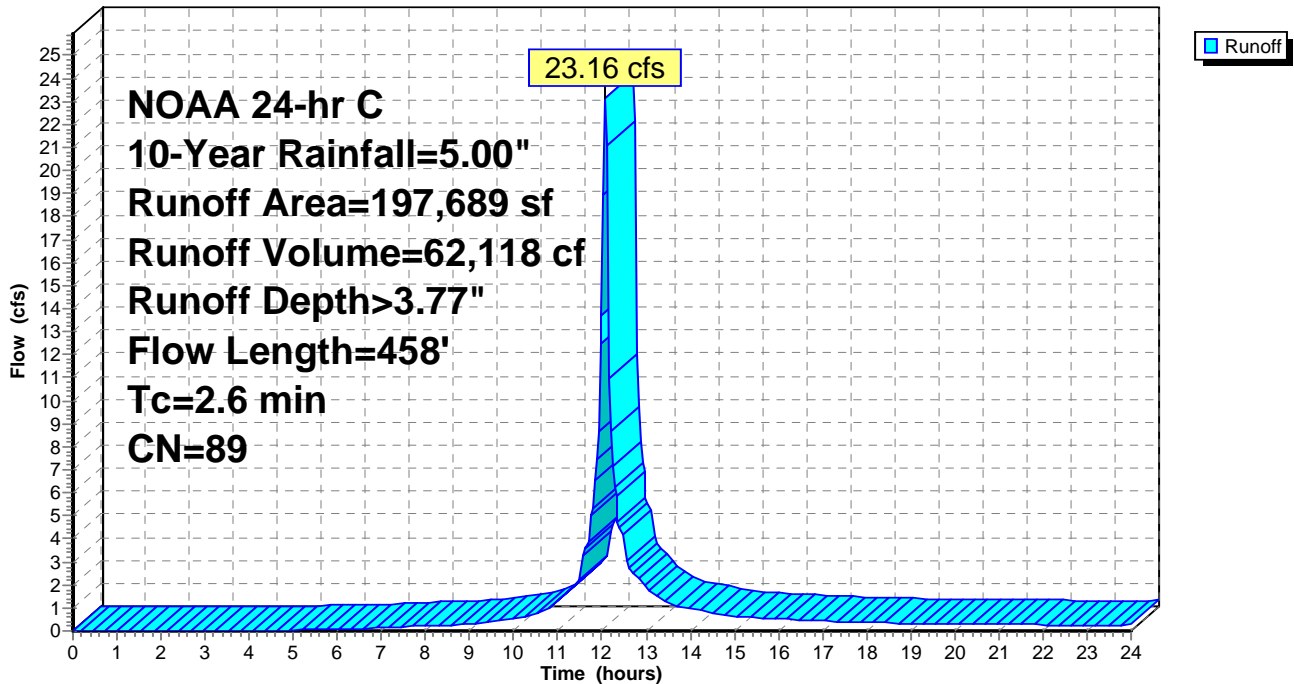

Summary for Subcatchment 7S: BERM


Runoff = 7.35 cfs @ 12.12 hrs, Volume= 19,910 cf, Depth> 3.08"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

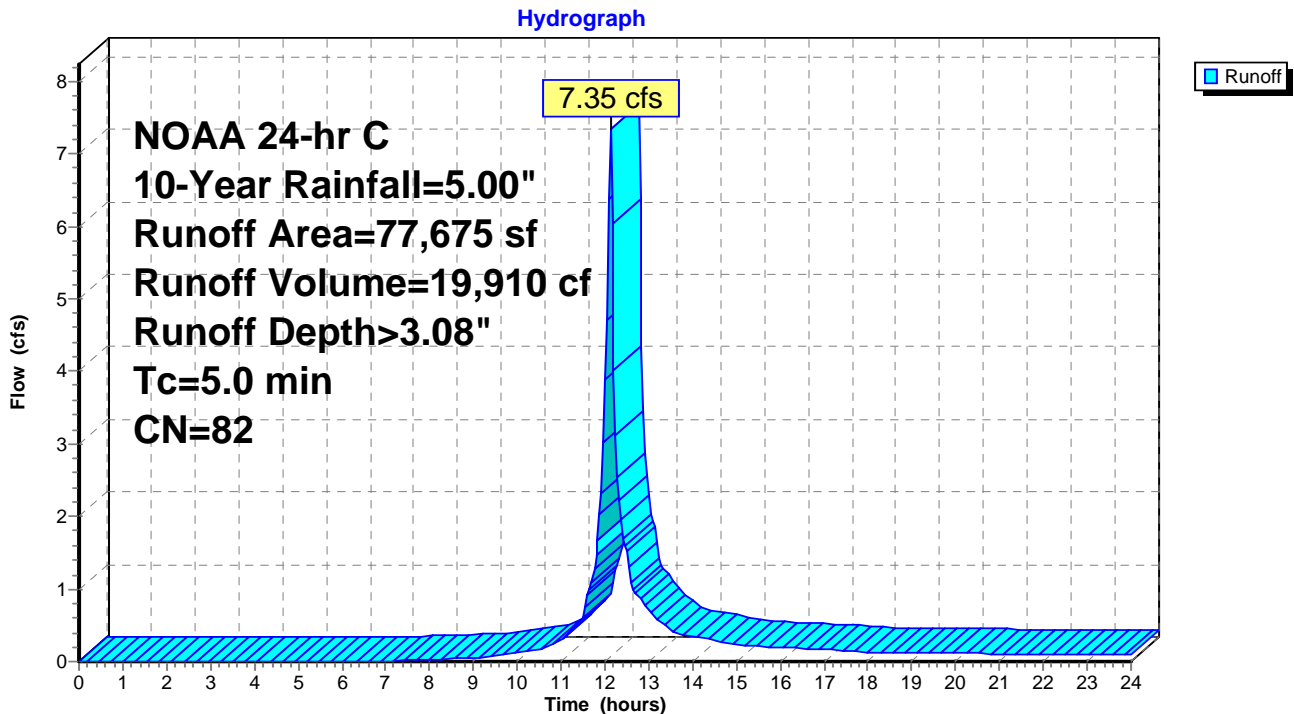


Summary for Reach 7R: Post w BMP

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 2.56" for 10-Year event
Inflow = 10.18 cfs @ 12.28 hrs, Volume= 42,141 cf
Outflow = 10.18 cfs @ 12.28 hrs, Volume= 42,141 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

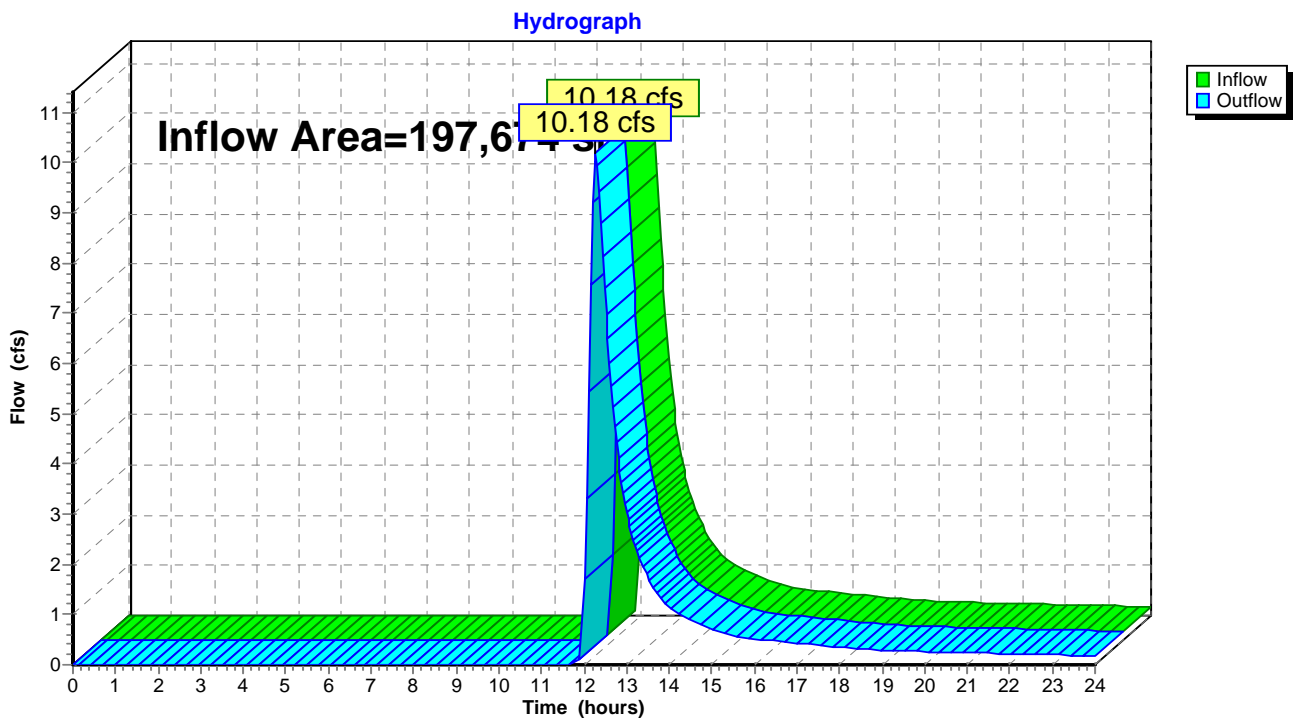

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 3.76" for 10-Year event
 Inflow = 18.13 cfs @ 12.13 hrs, Volume= 61,879 cf
 Outflow = 10.25 cfs @ 12.28 hrs, Volume= 45,139 cf, Atten= 43%, Lag= 8.7 min
 Discarded = 0.07 cfs @ 12.28 hrs, Volume= 2,998 cf
 Primary = 10.18 cfs @ 12.28 hrs, Volume= 42,141 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,927.09' @ 12.28 hrs Surf.Area= 21,556 sf Storage= 25,580 cf

Plug-Flow detention time= 168.6 min calculated for 45,063 cf (73% of inflow)
 Center-of-Mass det. time= 77.4 min (867.1 - 789.7)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.07 cfs @ 12.28 hrs HW=1,927.09' (Free Discharge)

↑1=Exfiltration (Controls 0.07 cfs)


Primary OutFlow Max=10.17 cfs @ 12.28 hrs HW=1,927.09' (Free Discharge)

↑2=Spillway (Weir Controls 10.17 cfs @ 1.79 fps)

↑3=Top of Berm (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

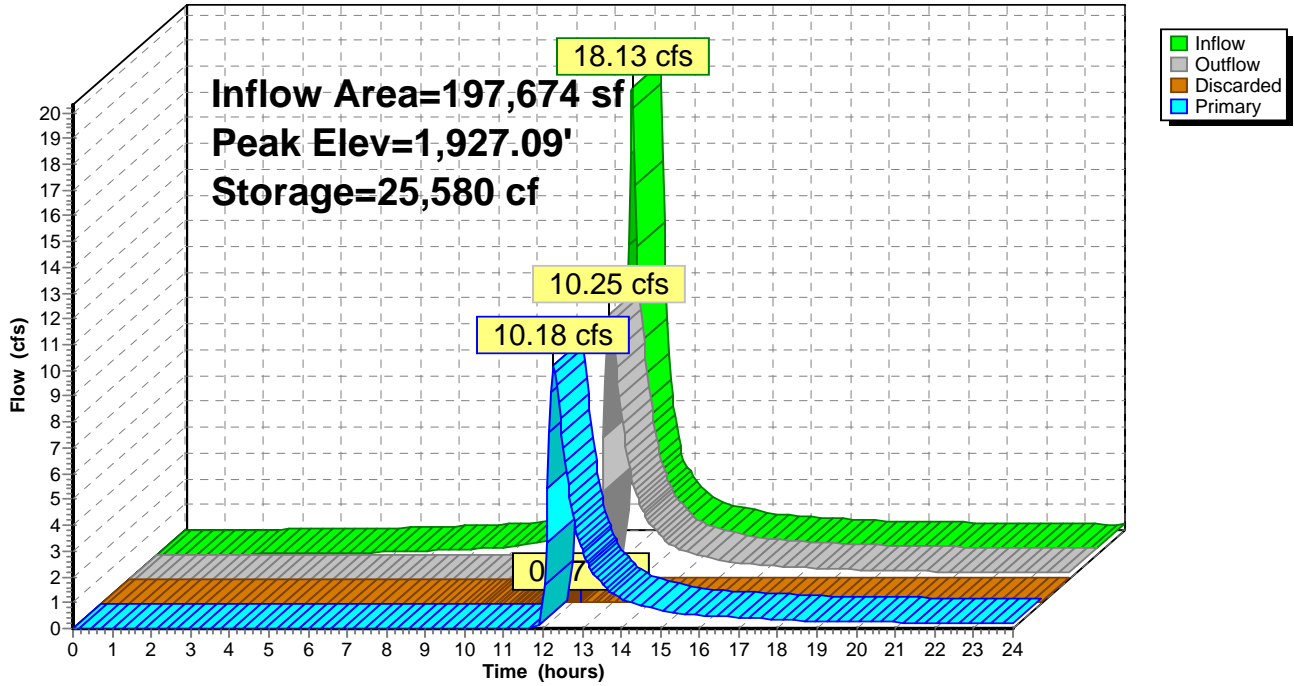

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 4.30" for 10-Year event
Inflow = 5.30 cfs @ 12.13 hrs, Volume= 17,300 cf
Primary = 5.30 cfs @ 12.13 hrs, Volume= 17,300 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

10-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

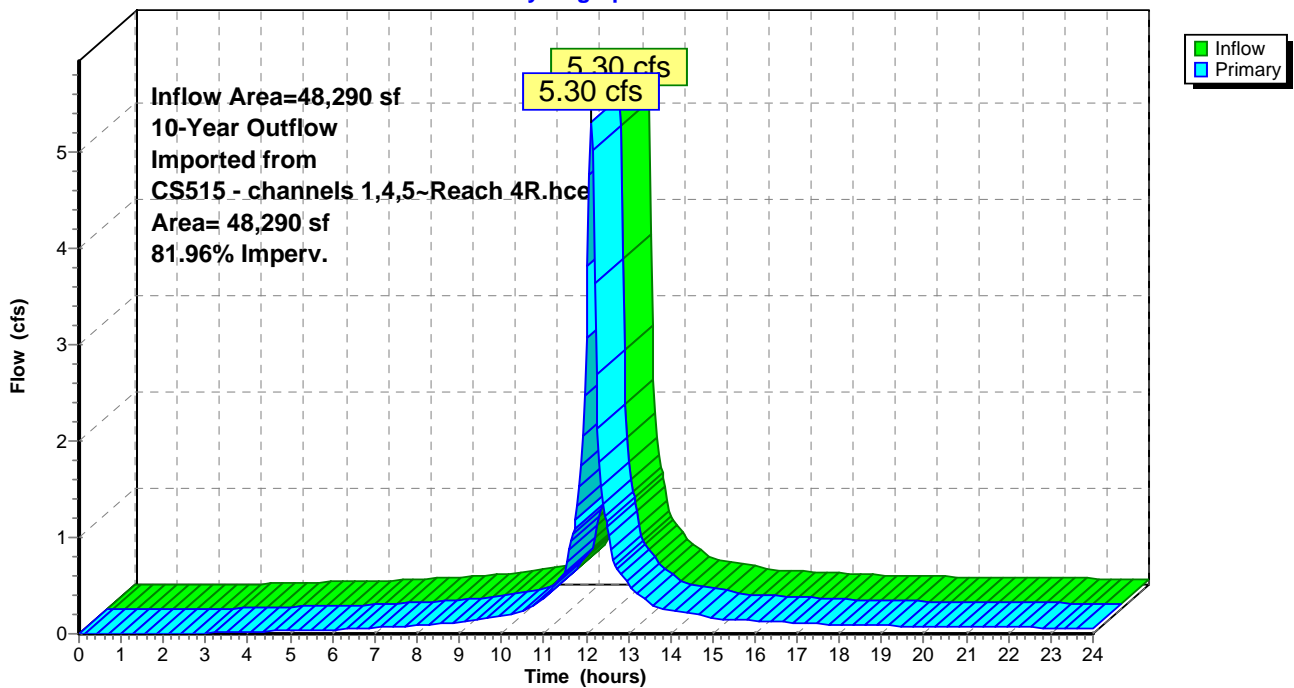

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 4.13" for 10-Year event
Inflow = 6.72 cfs @ 12.20 hrs, Volume= 24,669 cf
Primary = 6.72 cfs @ 12.20 hrs, Volume= 24,669 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

10-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

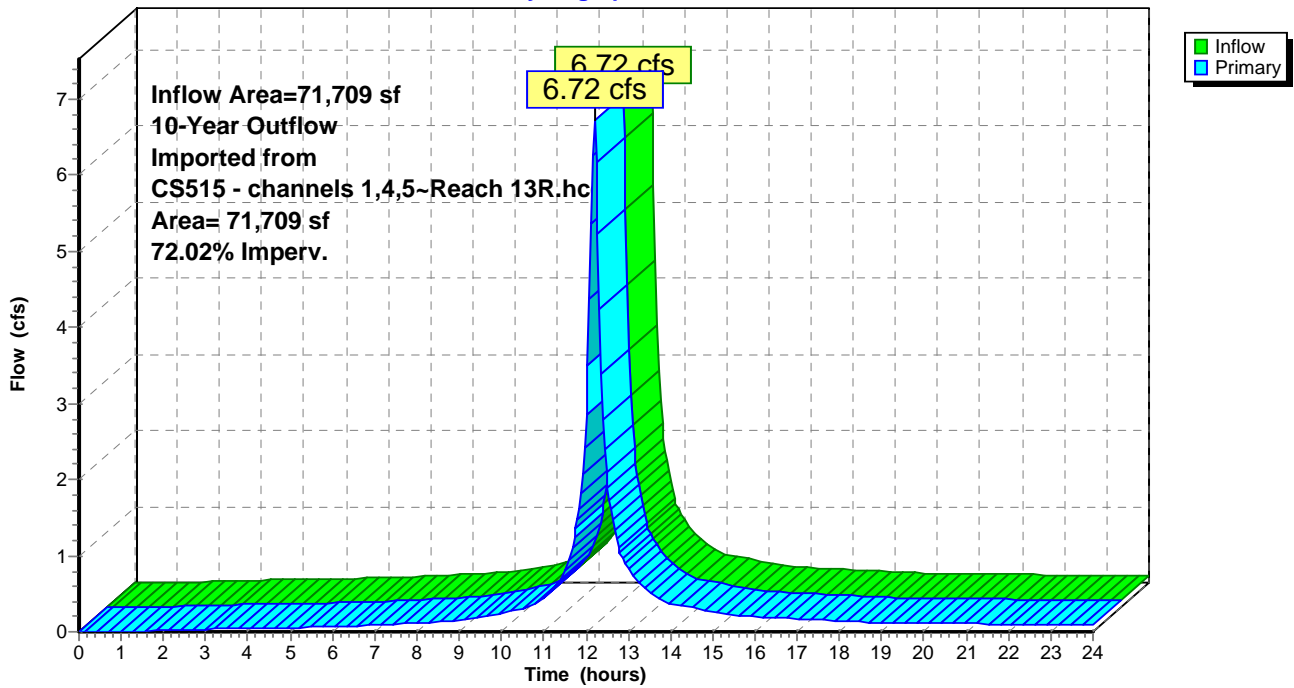

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 25-Year Rainfall=6.20"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 33

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>3.84"
Flow Length=458' Tc=16.5 min CN=79 Runoff=16.10 cfs 63,324 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>4.93"
Flow Length=458' Tc=2.6 min CN=89 Runoff=29.76 cfs 81,180 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>4.17"
Tc=5.0 min CN=82 Runoff=9.83 cfs 26,975 cf

Reach 7R: Post w BMP

Inflow=15.89 cfs 60,603 cf
Outflow=15.89 cfs 60,603 cf

Pond 4P: BERM

Peak Elev=1,927.24' Storage=28,804 cf Inflow=23.66 cfs 80,646 cf
Discarded=0.07 cfs 3,164 cf Primary=15.89 cfs 60,603 cf Outflow=15.96 cfs 63,767 cf

Link 15L: C-1 25-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=6.67 cfs 22,067 cf
Area= 48,290 sf 81.96% Imperv. Primary=6.67 cfs 22,067 cf

Link 16L: 25-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=8.62 cfs 31,604 cf
Area= 71,709 sf 72.02% Imperv. Primary=8.62 cfs 31,604 cf

Total Runoff Area = 473,053 sf Runoff Volume = 171,479 cf Average Runoff Depth = 4.35"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf

Summary for Subcatchment 1S: CS515-pre

Runoff = 16.10 cfs @ 12.25 hrs, Volume= 63,324 cf, Depth> 3.84"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

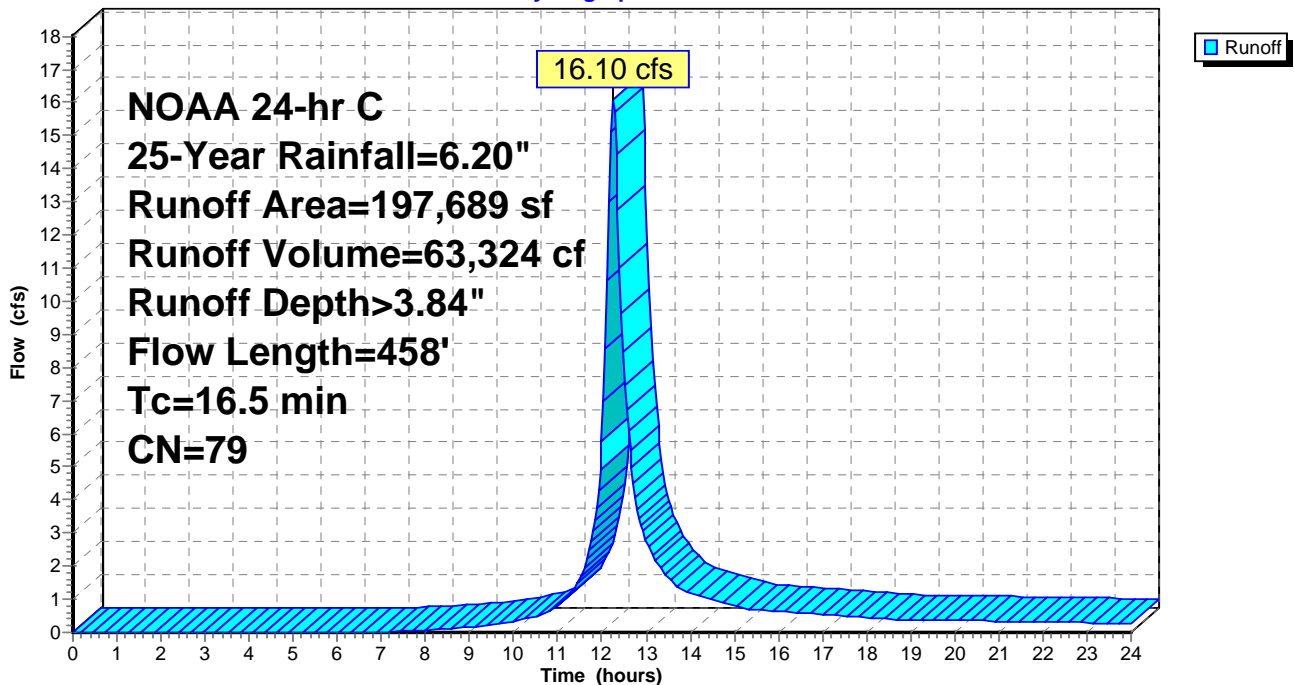

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 29.76 cfs @ 12.09 hrs, Volume= 81,180 cf, Depth> 4.93"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

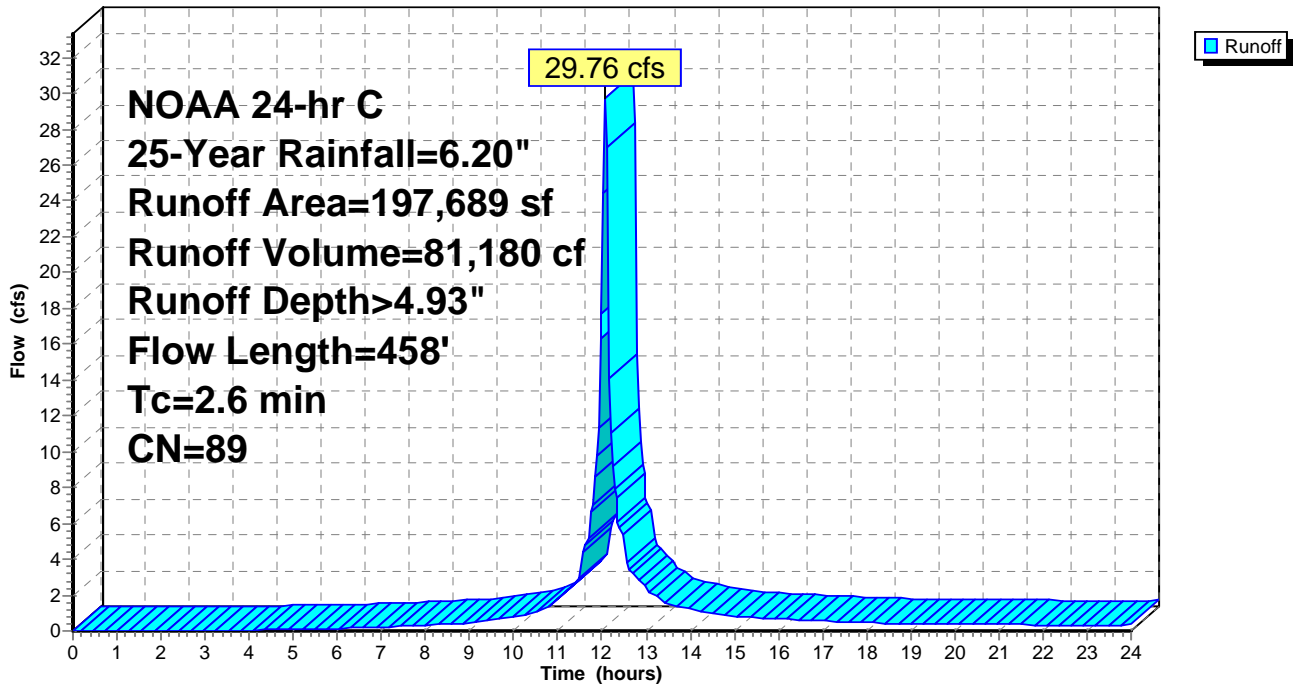

Summary for Subcatchment 7S: BERM


Runoff = 9.83 cfs @ 12.12 hrs, Volume= 26,975 cf, Depth> 4.17"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

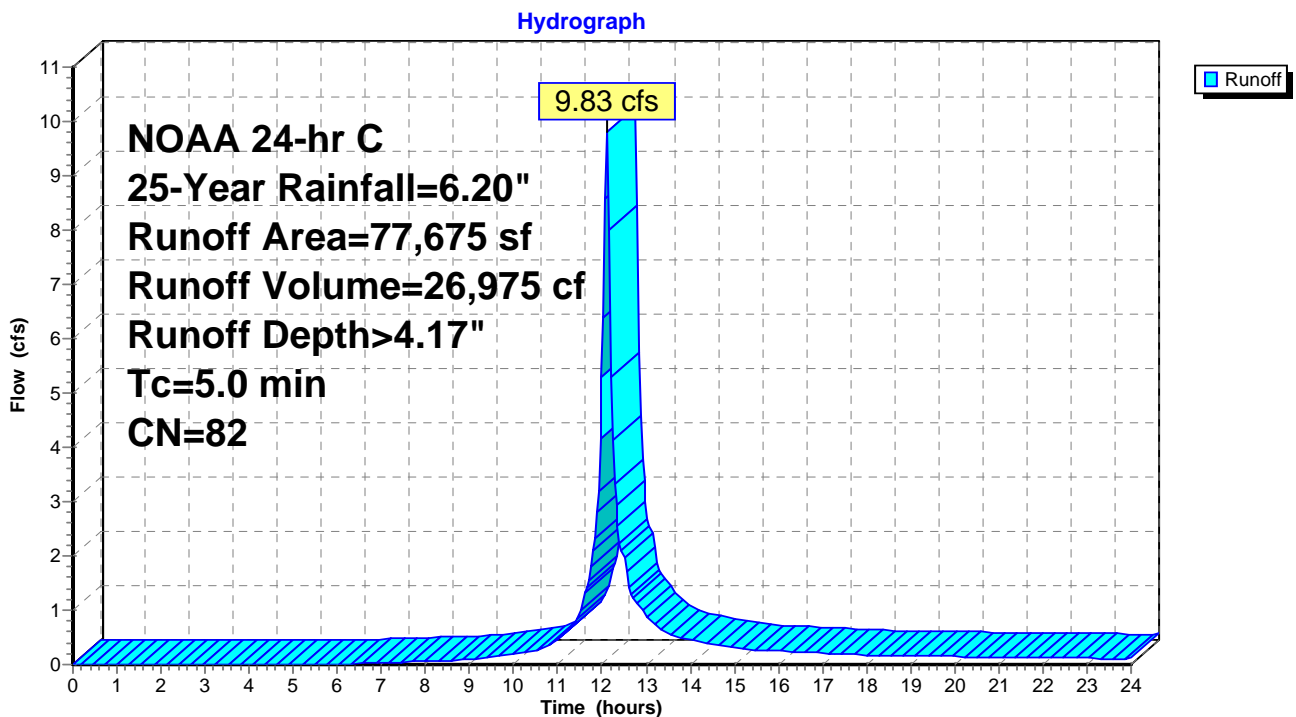

Summary for Reach 7R: Post w BMP


[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 3.68" for 25-Year event
Inflow = 15.89 cfs @ 12.23 hrs, Volume= 60,603 cf
Outflow = 15.89 cfs @ 12.23 hrs, Volume= 60,603 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

Hydrograph

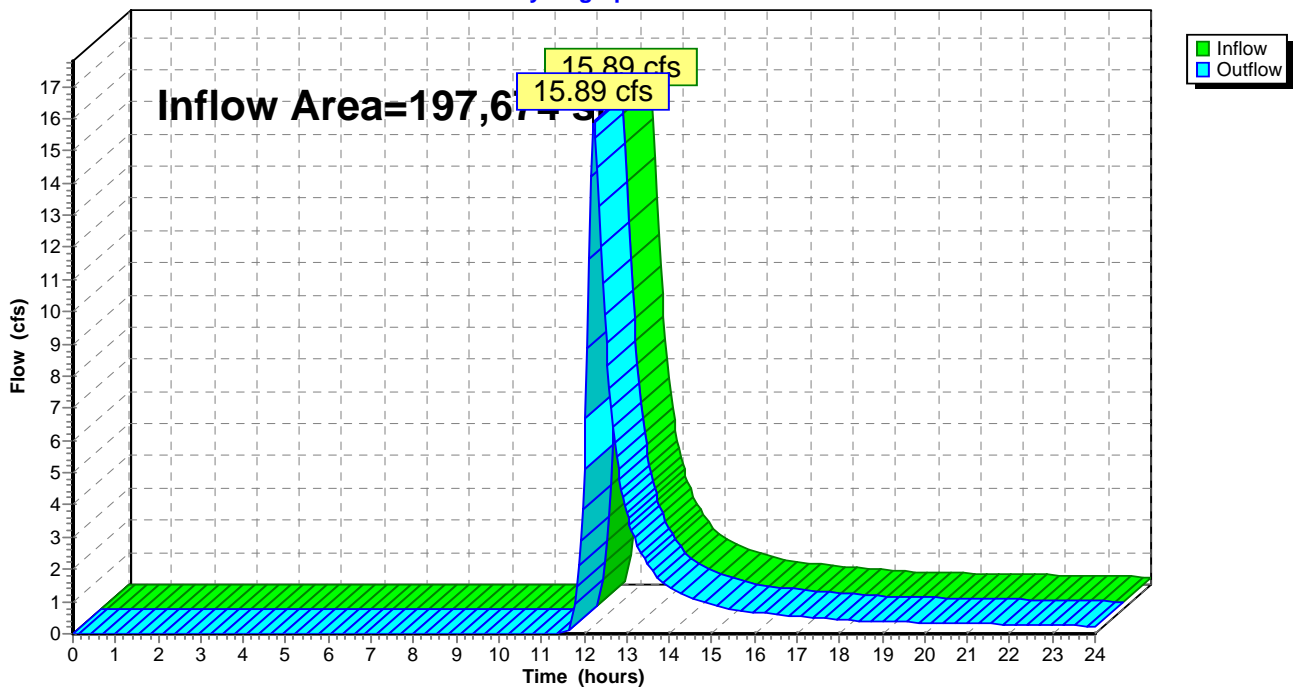

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 4.90" for 25-Year event
 Inflow = 23.66 cfs @ 12.13 hrs, Volume= 80,646 cf
 Outflow = 15.96 cfs @ 12.23 hrs, Volume= 63,767 cf, Atten= 33%, Lag= 6.3 min
 Discarded = 0.07 cfs @ 12.23 hrs, Volume= 3,164 cf
 Primary = 15.89 cfs @ 12.23 hrs, Volume= 60,603 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,927.24' @ 12.23 hrs Surf.Area= 22,045 sf Storage= 28,804 cf

Plug-Flow detention time= 148.1 min calculated for 63,767 cf (79% of inflow)
 Center-of-Mass det. time= 67.1 min (850.8 - 783.7)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.07 cfs @ 12.23 hrs HW=1,927.24' (Free Discharge)

↑1=Exfiltration (Controls 0.07 cfs)


Primary OutFlow Max=15.84 cfs @ 12.23 hrs HW=1,927.24' (Free Discharge)

↑2=Spillway (Weir Controls 15.84 cfs @ 2.13 fps)

↑3=Top of Berm (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

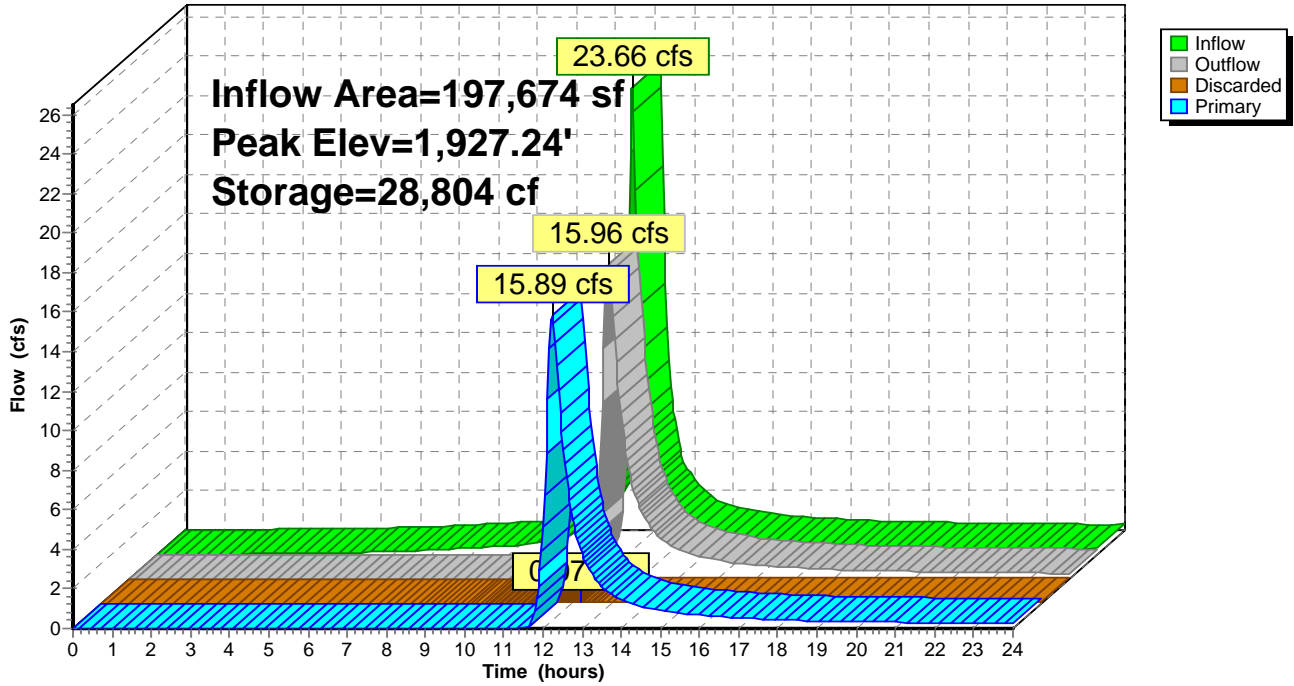

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 5.48" for 25-Year event
Inflow = 6.67 cfs @ 12.12 hrs, Volume= 22,067 cf
Primary = 6.67 cfs @ 12.12 hrs, Volume= 22,067 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

25-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

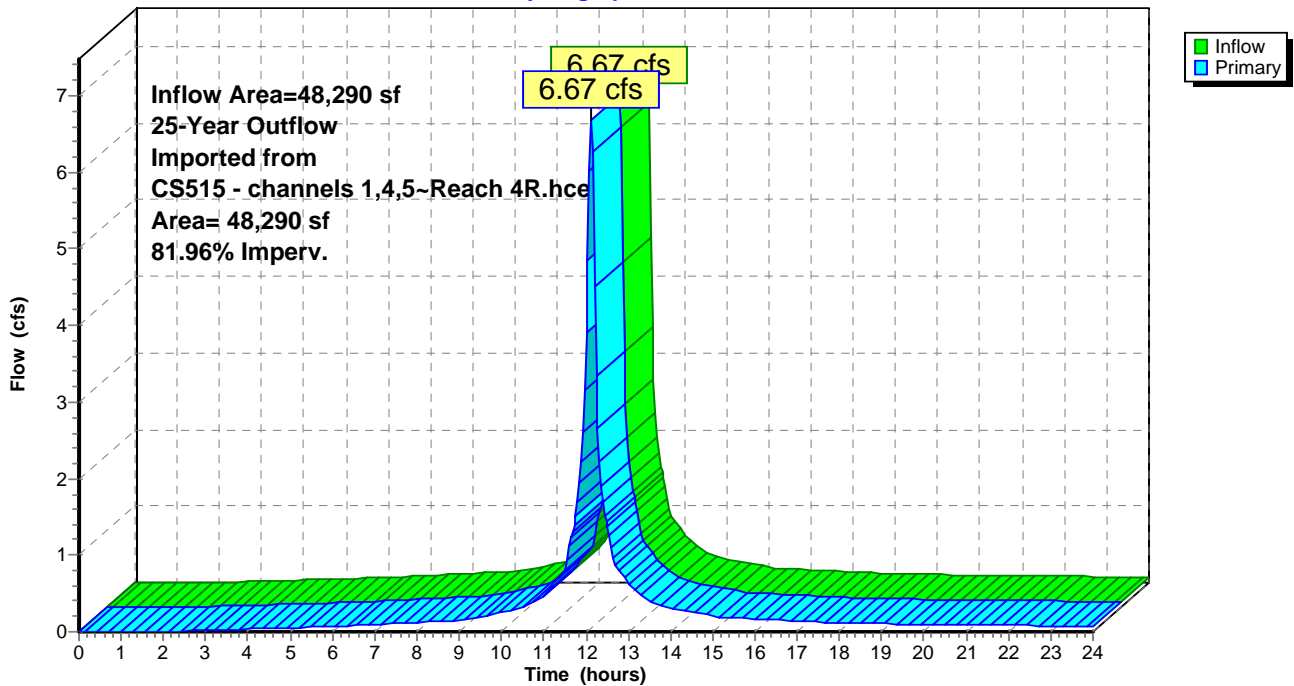

CS515 - Pre, Post, Post w BMP

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

NOAA 24-hr C 25-Year Rainfall=6.20"

Printed 2/24/2022

Page 41

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 5.29" for 25-Year event
Inflow = 8.62 cfs @ 12.19 hrs, Volume= 31,604 cf
Primary = 8.62 cfs @ 12.19 hrs, Volume= 31,604 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

25-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

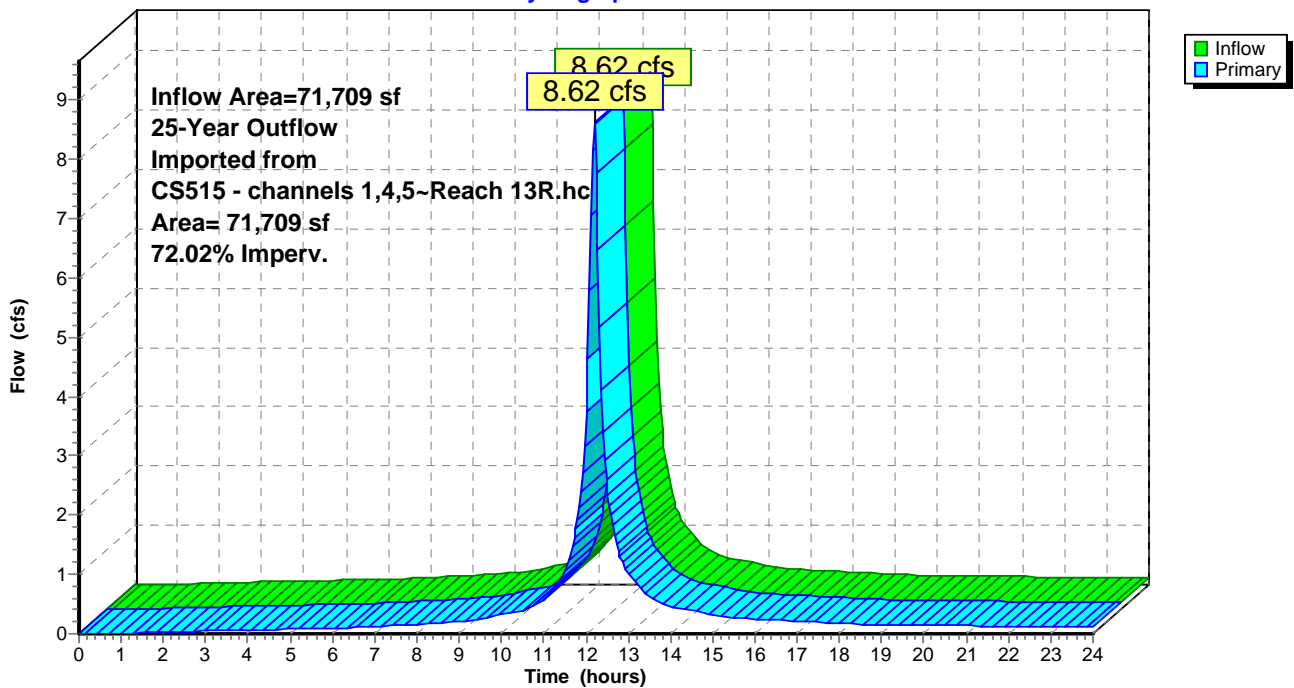

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 50-Year Rainfall=7.16"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 42

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>4.71"
Flow Length=458' Tc=16.5 min CN=79 Runoff=19.64 cfs 77,650 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>5.86"
Flow Length=458' Tc=2.6 min CN=89 Runoff=35.00 cfs 96,579 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>5.06"
Tc=5.0 min CN=82 Runoff=11.83 cfs 32,762 cf

Reach 7R: Post w BMP

Inflow=19.57 cfs 75,588 cf
Outflow=19.57 cfs 75,588 cf

Pond 4P: BERM

Peak Elev=1,927.34' Storage=30,882 cf Inflow=28.10 cfs 95,851 cf
Discarded=0.07 cfs 3,293 cf Primary=19.57 cfs 75,588 cf Outflow=19.64 cfs 78,881 cf

Link 15L: C-1 50-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=7.77 cfs 25,892 cf
Area= 48,290 sf 81.96% Imperv. Primary=7.77 cfs 25,892 cf

Link 16L: 50-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=10.15 cfs 37,197 cf
Area= 71,709 sf 72.02% Imperv. Primary=10.15 cfs 37,197 cf

Total Runoff Area = 473,053 sf Runoff Volume = 206,990 cf Average Runoff Depth = 5.25"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf

Summary for Subcatchment 1S: CS515-pre

Runoff = 19.64 cfs @ 12.25 hrs, Volume= 77,650 cf, Depth> 4.71"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

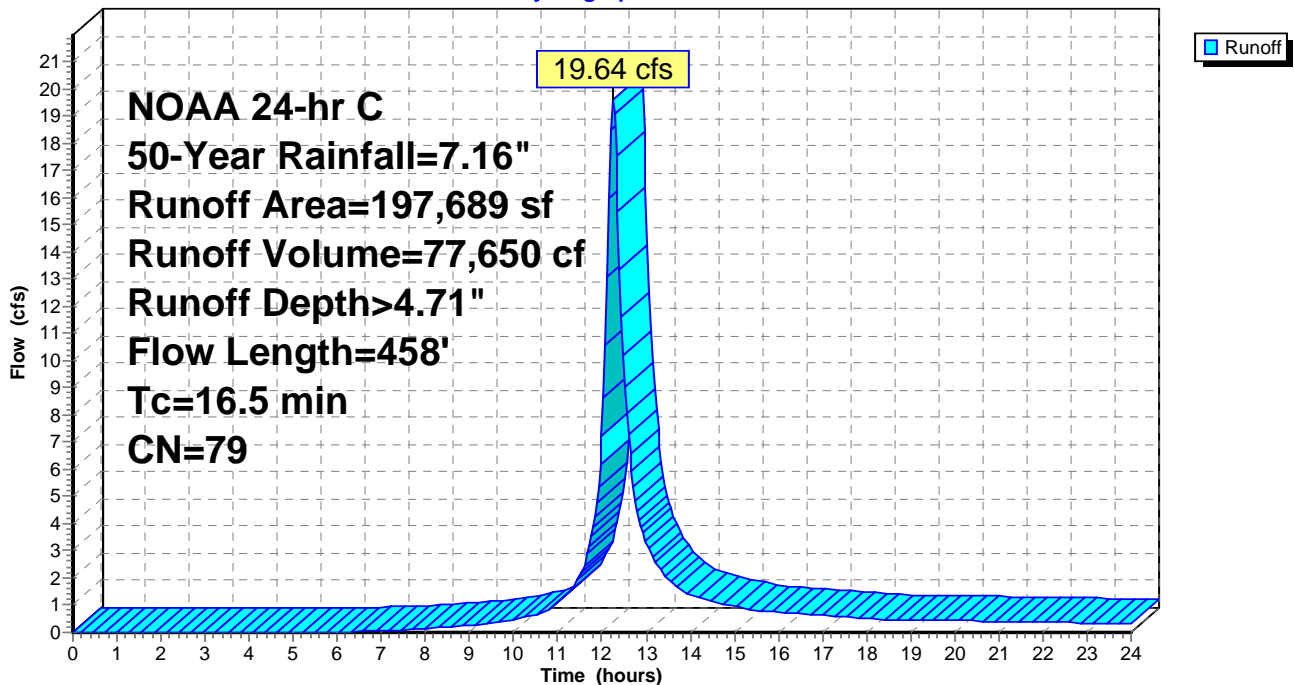

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 35.00 cfs @ 12.09 hrs, Volume= 96,579 cf, Depth> 5.86"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

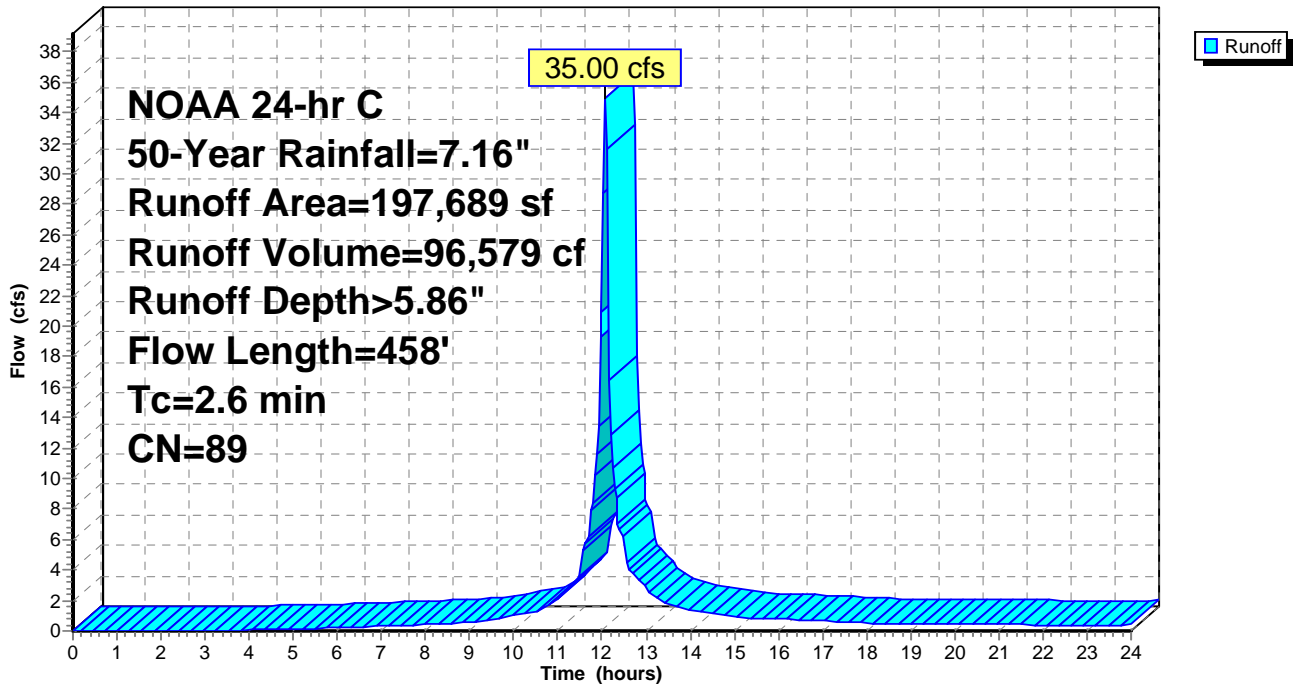

Summary for Subcatchment 7S: BERM

Runoff = 11.83 cfs @ 12.12 hrs, Volume= 32,762 cf, Depth> 5.06"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

Hydrograph

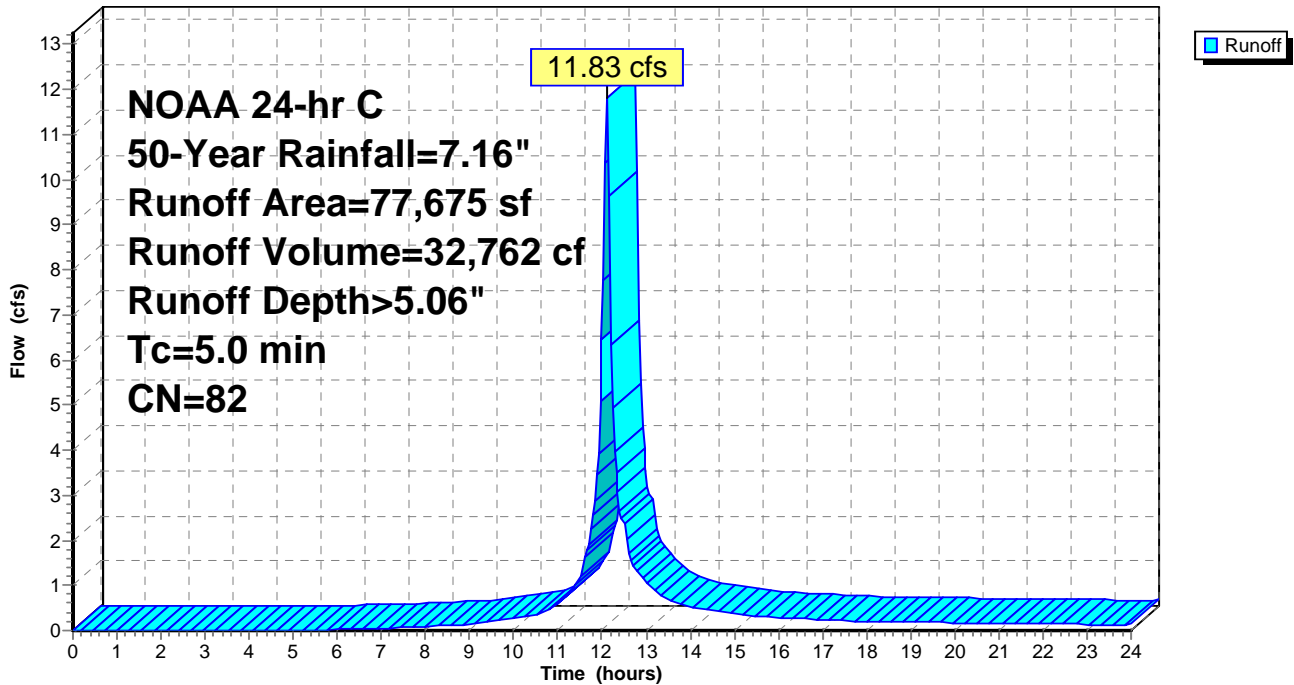

Summary for Reach 7R: Post w BMP


[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 4.59" for 50-Year event
Inflow = 19.57 cfs @ 12.22 hrs, Volume= 75,588 cf
Outflow = 19.57 cfs @ 12.22 hrs, Volume= 75,588 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

Hydrograph

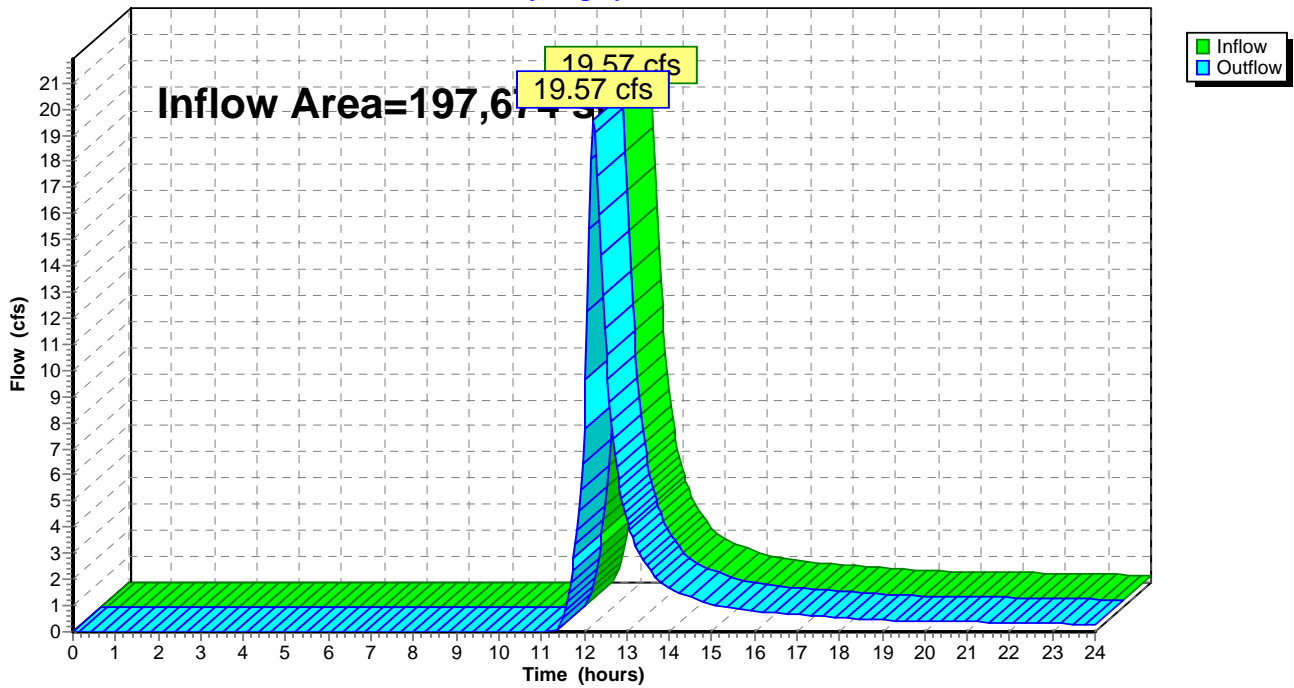

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 5.82" for 50-Year event
 Inflow = 28.10 cfs @ 12.13 hrs, Volume= 95,851 cf
 Outflow = 19.64 cfs @ 12.22 hrs, Volume= 78,881 cf, Atten= 30%, Lag= 5.6 min
 Discarded = 0.07 cfs @ 12.22 hrs, Volume= 3,293 cf
 Primary = 19.57 cfs @ 12.22 hrs, Volume= 75,588 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,927.34' @ 12.22 hrs Surf.Area= 22,356 sf Storage= 30,882 cf

Plug-Flow detention time= 135.6 min calculated for 78,750 cf (82% of inflow)
 Center-of-Mass det. time= 62.4 min (842.2 - 779.8)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.07 cfs @ 12.22 hrs HW=1,927.33' (Free Discharge)

↑1=Exfiltration (Controls 0.07 cfs)


Primary OutFlow Max=19.47 cfs @ 12.22 hrs HW=1,927.33' (Free Discharge)

↑2=Spillway (Weir Controls 19.47 cfs @ 2.28 fps)

↑3=Top of Berm (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

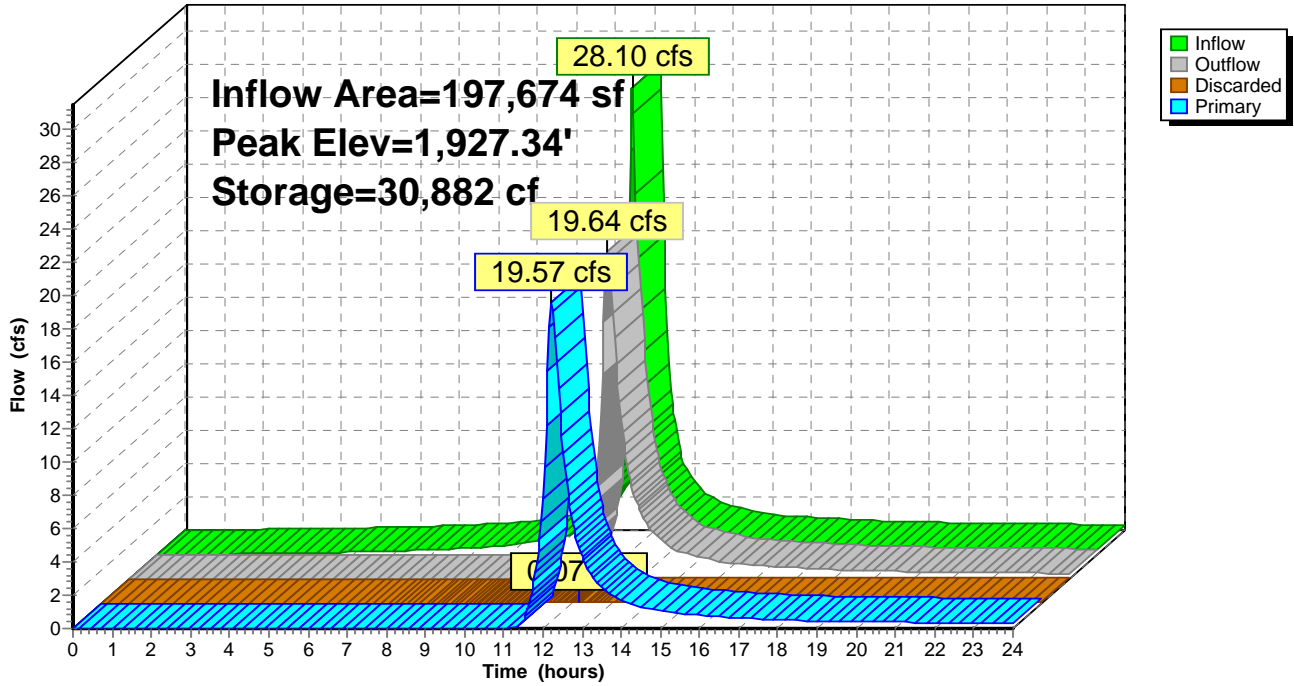

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 6.43" for 50-Year event
Inflow = 7.77 cfs @ 12.12 hrs, Volume= 25,892 cf
Primary = 7.77 cfs @ 12.12 hrs, Volume= 25,892 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

50-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

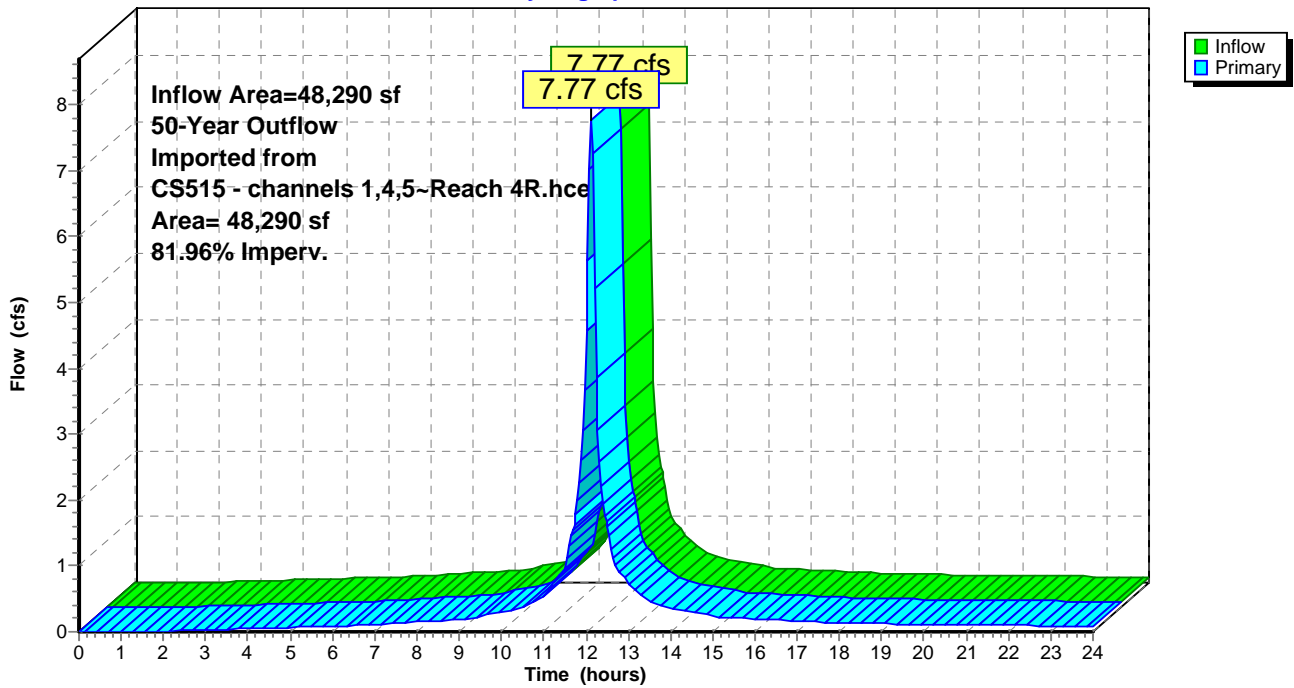

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 6.22" for 50-Year event
Inflow = 10.15 cfs @ 12.19 hrs, Volume= 37,197 cf
Primary = 10.15 cfs @ 12.19 hrs, Volume= 37,197 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

50-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

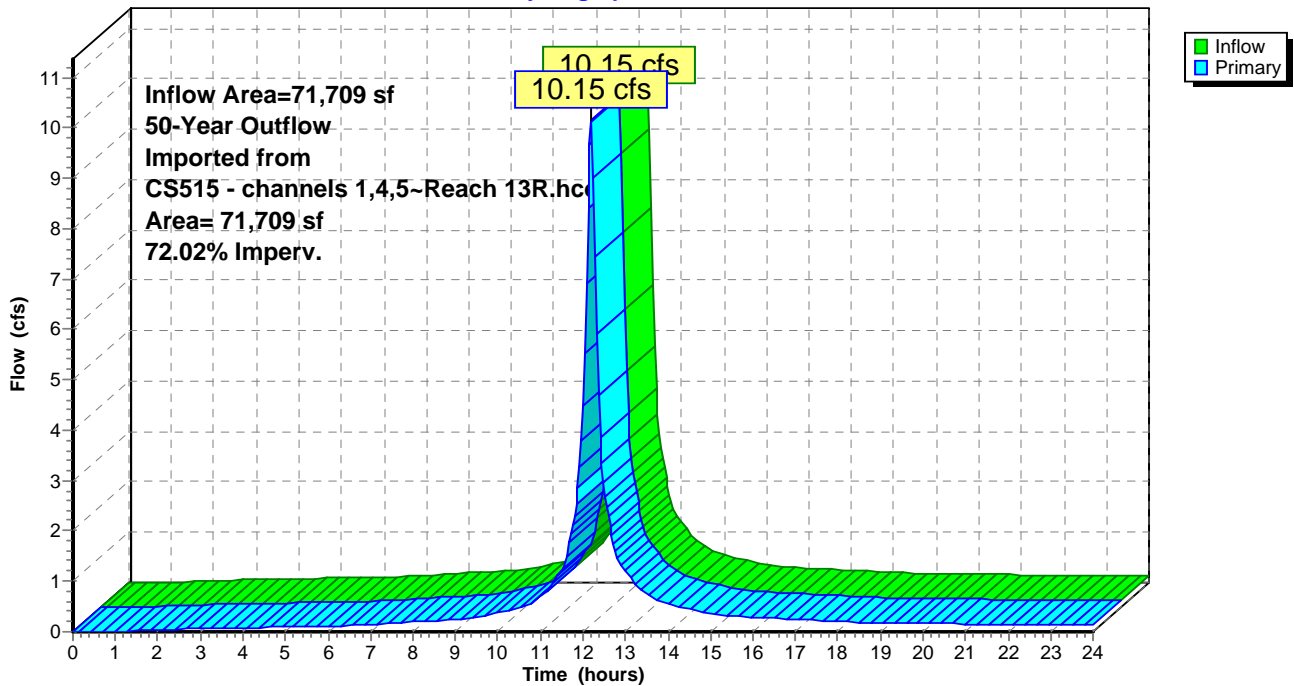

CS515 - Pre, Post, Post w BMP

NOAA 24-hr C 100-Year Rainfall=8.43"

Prepared by Microsoft

Printed 2/24/2022

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Page 51

Time span=0.00-24.00 hrs, dt=0.04 hrs, 601 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 1S: CS515-pre

Runoff Area=197,689 sf 6.34% Impervious Runoff Depth>5.89"
Flow Length=458' Tc=16.5 min CN=79 Runoff=24.34 cfs 97,005 cf

Subcatchment 2S: CS515-post

Runoff Area=197,689 sf 54.17% Impervious Runoff Depth>7.11"
Flow Length=458' Tc=2.6 min CN=89 Runoff=41.89 cfs 117,079 cf

Subcatchment 7S: BERM

Runoff Area=77,675 sf 20.42% Impervious Runoff Depth>6.26"
Tc=5.0 min CN=82 Runoff=14.46 cfs 40,540 cf

Reach 7R: Post w BMP

Inflow=24.23 cfs 95,592 cf
Outflow=24.23 cfs 95,592 cf

Pond 4P: BERM

Peak Elev=1,927.45' Storage=33,378 cf Inflow=33.98 cfs 116,138 cf
Discarded=0.07 cfs 3,456 cf Primary=24.23 cfs 95,592 cf Outflow=24.31 cfs 99,048 cf

Link 15L:

100-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce Inflow=9.21 cfs 30,964 cf
Area= 48,290 sf 81.96% Imperv. Primary=9.21 cfs 30,964 cf

Link 16L:

100-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce Inflow=12.15 cfs 44,634 cf
Area= 71,709 sf 72.02% Imperv. Primary=12.15 cfs 44,634 cf

Total Runoff Area = 473,053 sf Runoff Volume = 254,625 cf Average Runoff Depth = 6.46"
71.36% Pervious = 337,565 sf 28.64% Impervious = 135,488 sf

Summary for Subcatchment 1S: CS515-pre

Runoff = 24.34 cfs @ 12.25 hrs, Volume= 97,005 cf, Depth> 5.89"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|-------------------------------------|
| 182,016 | 78 | Meadow, non-grazed, HSG D |
| * 3,135 | 78 | Meadow, (20% existing impervious) |
| 12,538 | 98 | Paved roads w/curbs & sewers, HSG D |
| 197,689 | 79 | Weighted Average |
| 185,151 | | 93.66% Pervious Area |
| 12,538 | | 6.34% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---|
| 12.5 | 100 | 0.0100 | 0.13 | | Sheet Flow, Sheet Flow Grass: Short n= 0.150 P2= 3.40" |
| 4.0 | 358 | 0.0446 | 1.48 | | Shallow Concentrated Flow, shallow concentrated Short Grass Pasture Kv= 7.0 fps |
| 16.5 | 458 | Total | | | |

Subcatchment 1S: CS515-pre

Hydrograph

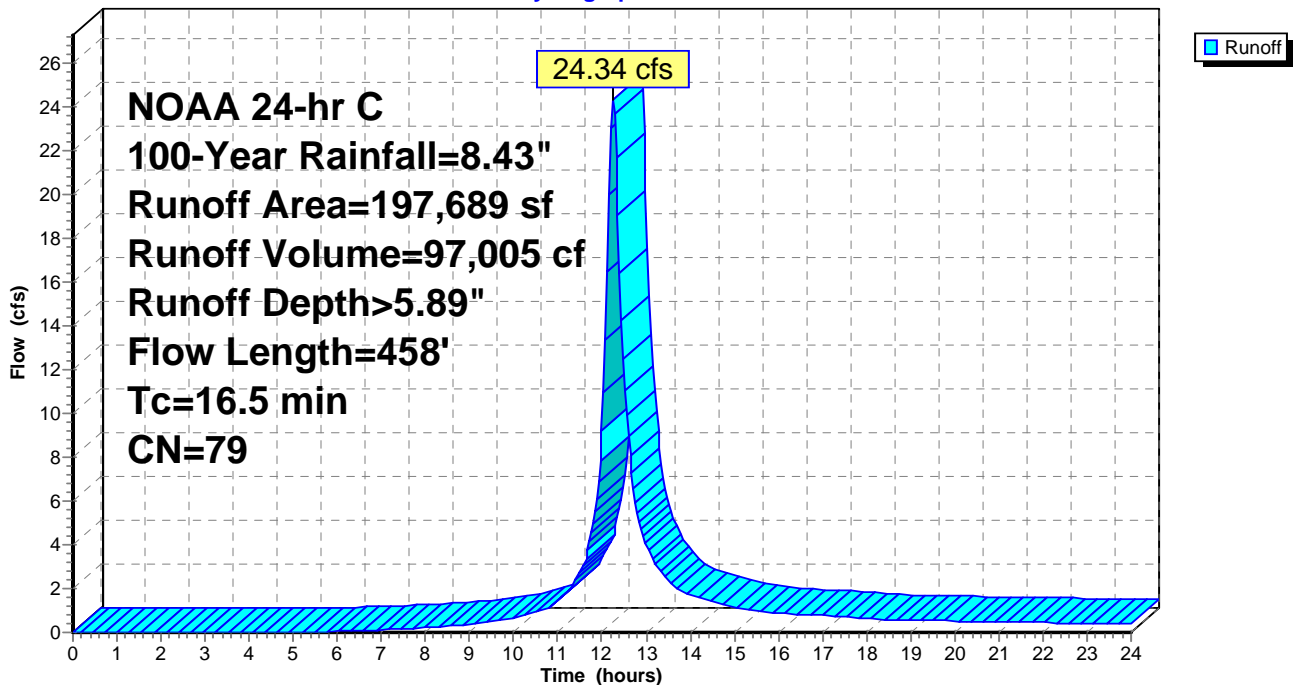

Summary for Subcatchment 2S: CS515-post

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 41.89 cfs @ 12.09 hrs, Volume= 117,079 cf, Depth > 7.11"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt=0.04$ hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 107,087 | 98 | Paved parking, HSG D |
| 90,602 | 78 | Meadow, non-grazed, HSG D |
| 197,689 | 89 | Weighted Average |
| 90,602 | | 45.83% Pervious Area |
| 107,087 | | 54.17% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|--|
| 1.2 | 100 | 0.0200 | 1.42 | | Sheet Flow, sheet flow Smooth surfaces n= 0.011 P2= 3.40" |
| 1.4 | 358 | 0.0446 | 4.29 | | Shallow Concentrated Flow, shallow concentrated Paved Kv= 20.3 fps |
| 2.6 | 458 | Total | | | |

Subcatchment 2S: CS515-post

Hydrograph

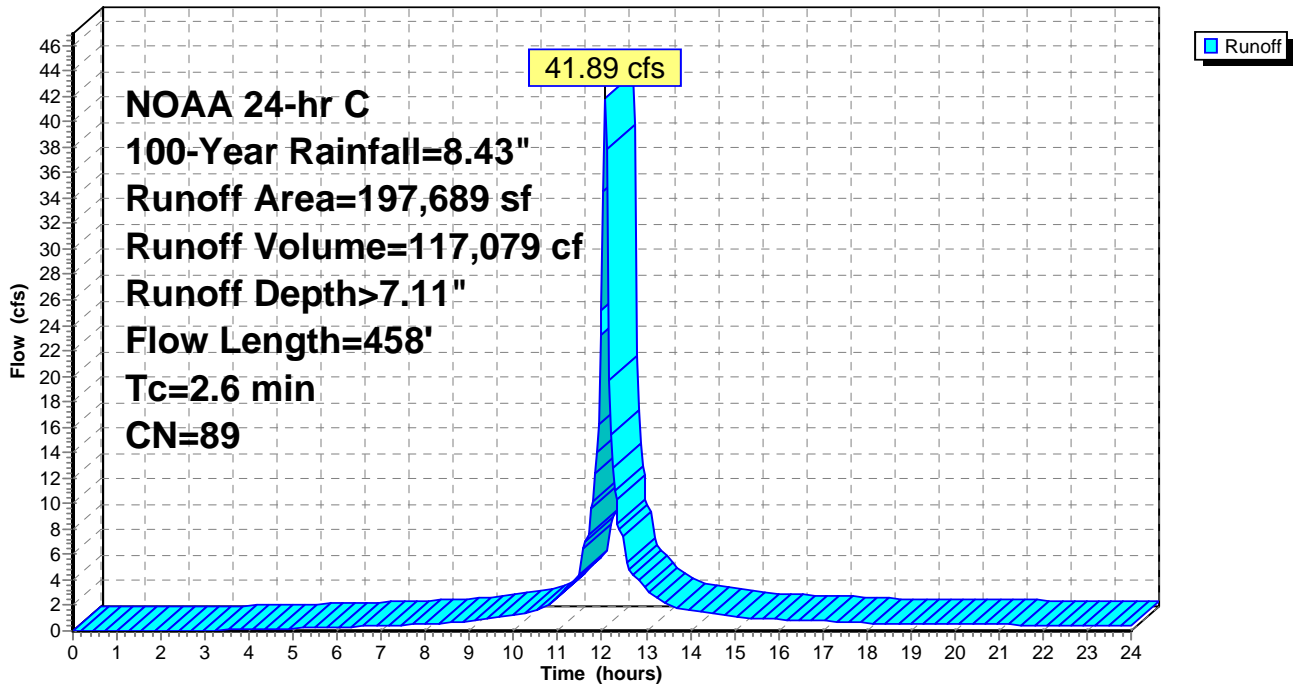

Summary for Subcatchment 7S: BERM

Runoff = 14.46 cfs @ 12.12 hrs, Volume= 40,540 cf, Depth> 6.26"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 15,863 | 98 | Paved parking, HSG D |
| 61,812 | 78 | Meadow, non-grazed, HSG D |
| 77,675 | 82 | Weighted Average |
| 61,812 | | 79.58% Pervious Area |
| 15,863 | | 20.42% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 7S: BERM

Hydrograph

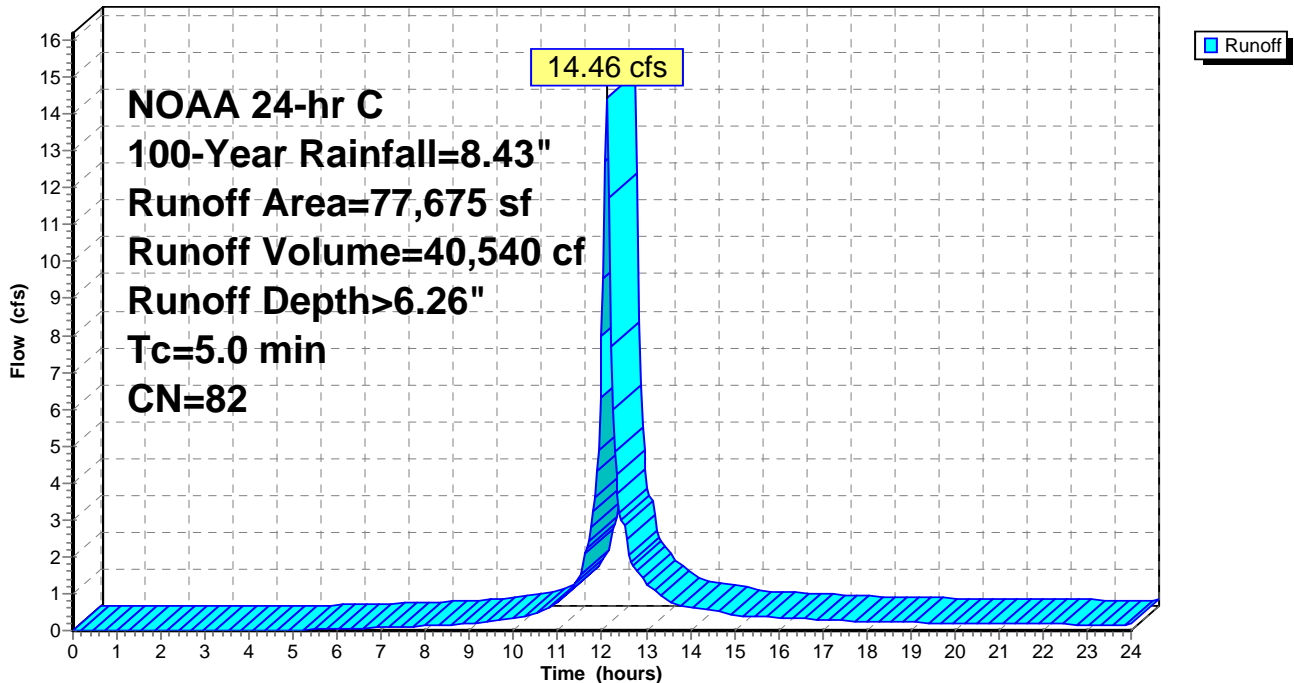


Summary for Reach 7R: Post w BMP

[40] Hint: Not Described (Outflow=Inflow)

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 5.80" for 100-Year event
Inflow = 24.23 cfs @ 12.22 hrs, Volume= 95,592 cf
Outflow = 24.23 cfs @ 12.22 hrs, Volume= 95,592 cf, Atten= 0%, Lag= 0.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

Reach 7R: Post w BMP

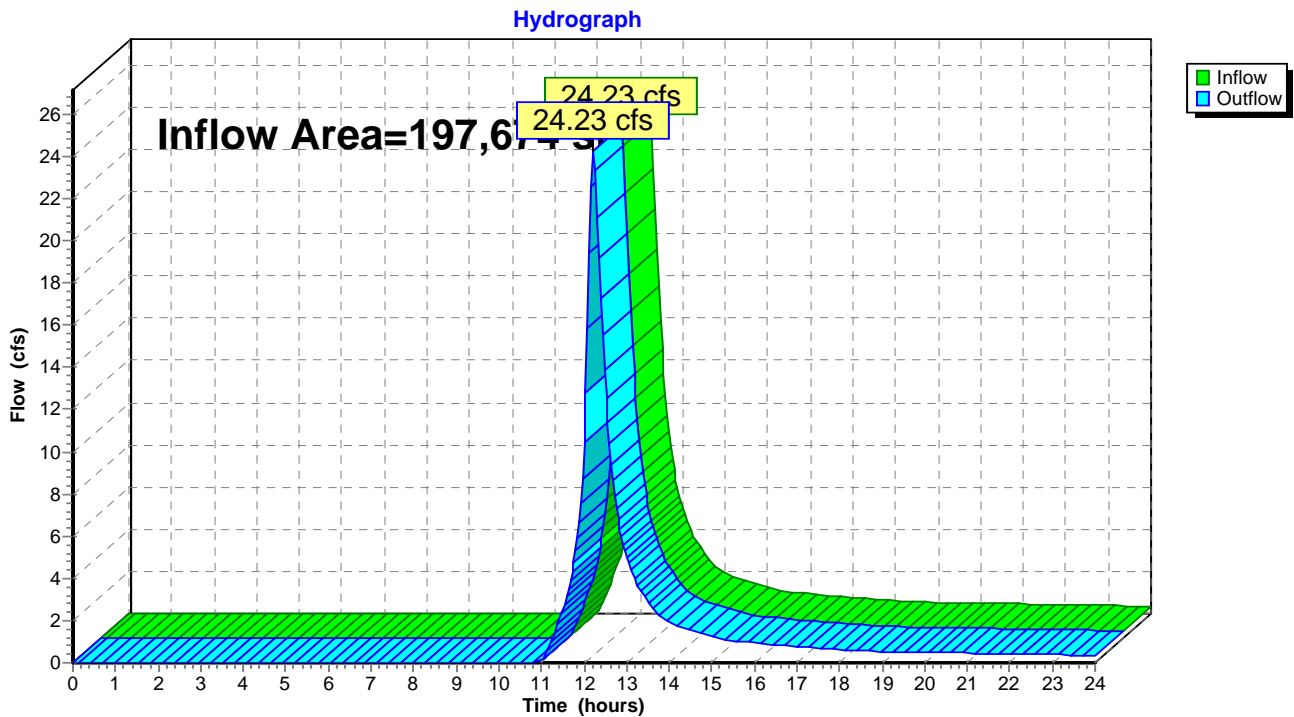

Summary for Pond 4P: BERM

[92] Warning: Device #3 is above defined storage

Inflow Area = 197,674 sf, 54.18% Impervious, Inflow Depth > 7.05" for 100-Year event
 Inflow = 33.98 cfs @ 12.13 hrs, Volume= 116,138 cf
 Outflow = 24.31 cfs @ 12.22 hrs, Volume= 99,048 cf, Atten= 28%, Lag= 5.3 min
 Discarded = 0.07 cfs @ 12.22 hrs, Volume= 3,456 cf
 Primary = 24.23 cfs @ 12.22 hrs, Volume= 95,592 cf

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs
 Peak Elev= 1,927.45' @ 12.22 hrs Surf.Area= 22,722 sf Storage= 33,378 cf

Plug-Flow detention time= 123.6 min calculated for 98,883 cf (85% of inflow)
 Center-of-Mass det. time= 58.0 min (833.5 - 775.5)

| Volume | Invert | Avail.Storage | Storage Description |
|------------------|-------------------|------------------------|--|
| #1 | 1,925.50' | 34,602 cf | Custom Stage Data (Prismatic) Listed below (Recalc) |
| Elevation (feet) | Surf.Area (sq-ft) | Inc.Store (cubic-feet) | Cum.Store (cubic-feet) |
| 1,925.50 | 11,085 | 0 | 0 |
| 1,926.62 | 17,763 | 16,155 | 16,155 |
| 1,927.00 | 21,244 | 7,411 | 23,566 |
| 1,927.50 | 22,900 | 11,036 | 34,602 |

| Device | Routing | Invert | Outlet Devices |
|--------|-----------|-----------|---|
| #1 | Discarded | 1,925.50' | 0.310 in/hr Exfiltration over Surface area from 1,925.50' - 1,926.62' Conductivity to Groundwater Elevation = 1,923.50' Excluded Surface area = 11,085 sf |
| #2 | Primary | 1,926.62' | 12.0' long x 8.3' breadth Spillway Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 5.00 5.50 Coef. (English) 2.44 2.54 2.70 2.69 2.68 2.68 2.66 2.64 2.64 2.64 2.65 2.65 2.65 2.66 2.67 2.69 2.72 |
| #3 | Primary | 1,927.50' | 420.0' long x 3.0' breadth Top of Berm Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32 |

Discarded OutFlow Max=0.07 cfs @ 12.22 hrs HW=1,927.44' (Free Discharge)

↑1=Exfiltration (Controls 0.07 cfs)


Primary OutFlow Max=24.03 cfs @ 12.22 hrs HW=1,927.44' (Free Discharge)

↑2=Spillway (Weir Controls 24.03 cfs @ 2.44 fps)

↑3=Top of Berm (Controls 0.00 cfs)

Pond 4P: BERM

Hydrograph

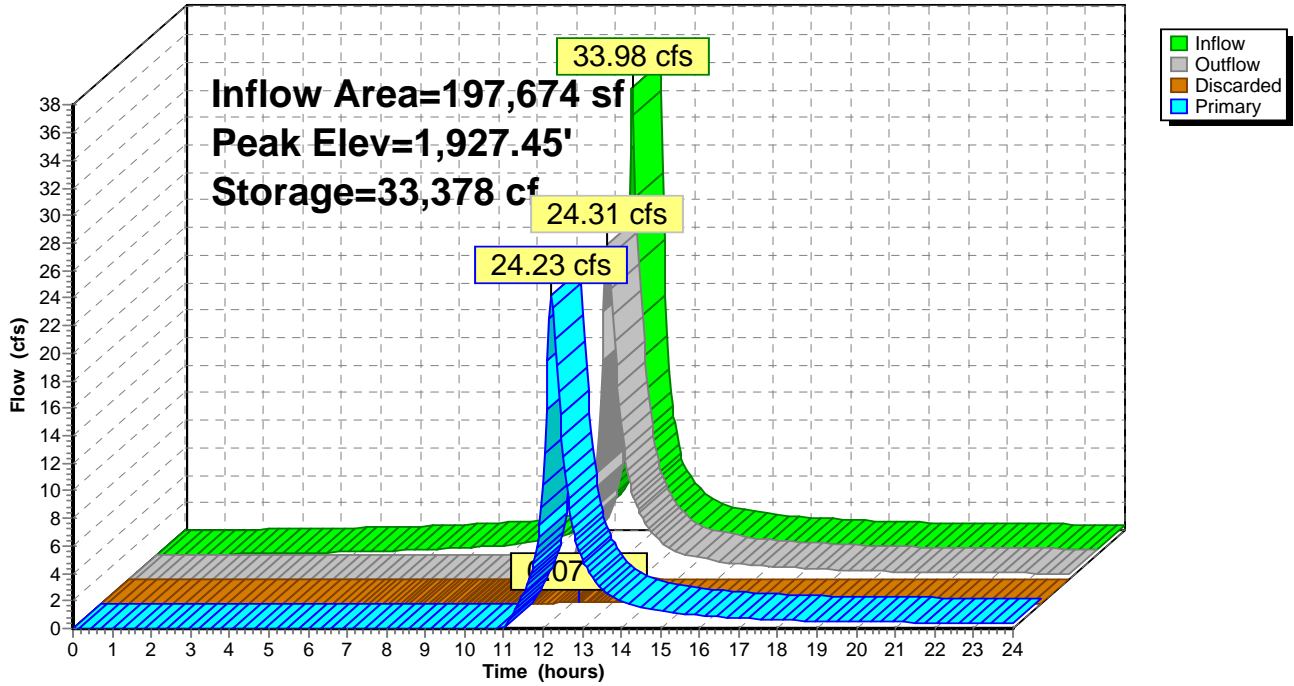

Summary for Link 15L: C-1


Inflow Area = 48,290 sf, 81.96% Impervious, Inflow Depth > 7.69" for 100-Year event
Inflow = 9.21 cfs @ 12.12 hrs, Volume= 30,964 cf
Primary = 9.21 cfs @ 12.12 hrs, Volume= 30,964 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

100-Year Outflow Imported from CS515 - channels 1,4,5~Reach 4R.hce

Link 15L: C-1

Hydrograph

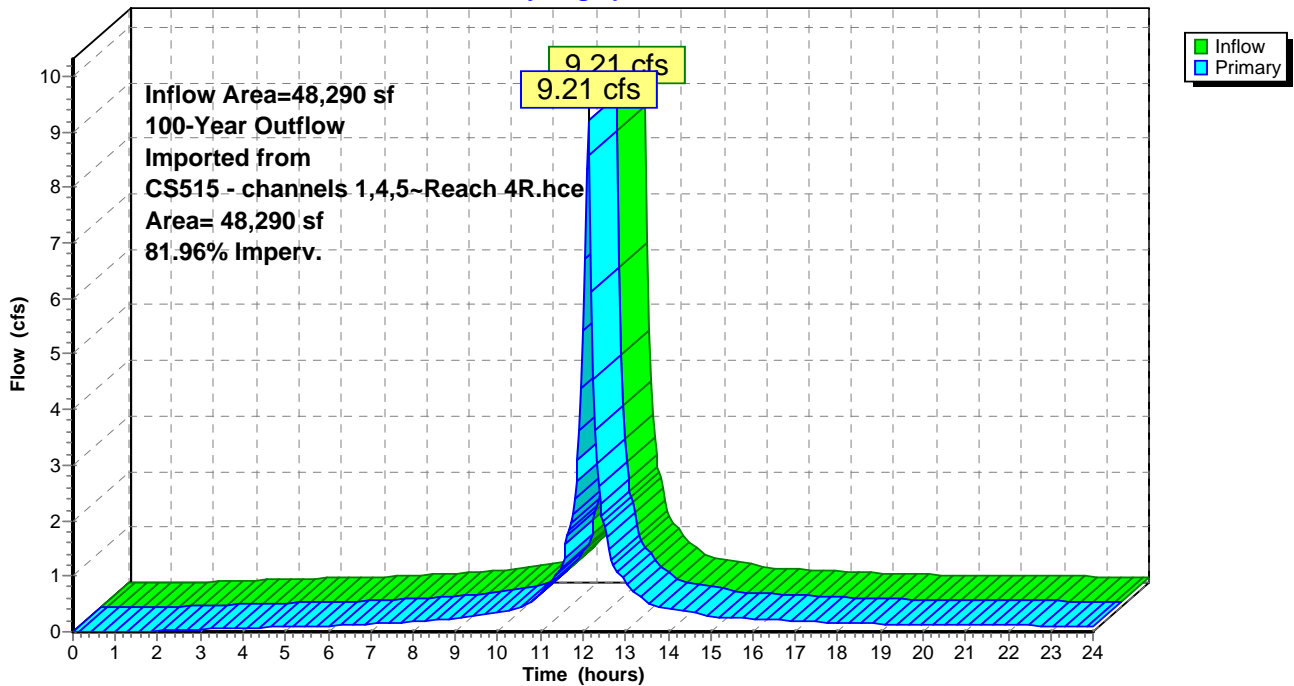

Summary for Link 16L: C-5


Inflow Area = 71,709 sf, 72.02% Impervious, Inflow Depth > 7.47" for 100-Year event
Inflow = 12.15 cfs @ 12.19 hrs, Volume= 44,634 cf
Primary = 12.15 cfs @ 12.19 hrs, Volume= 44,634 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.04 hrs

100-Year Outflow Imported from CS515 - channels 1,4,5~Reach 13R.hce

Link 16L: C-5

Hydrograph

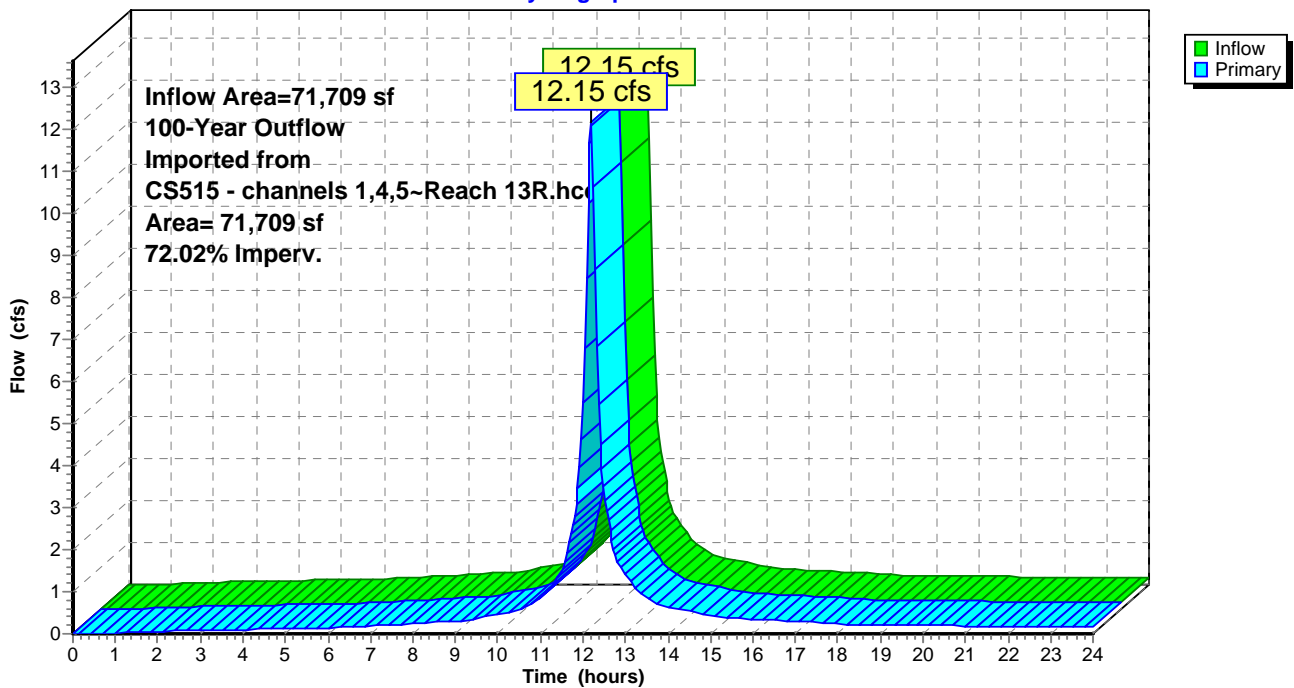

ATTACHMENT 4.4
CHANNEL DESIGN WORKSHEETS

STANDARD E&S WORKSHEET # 9
Time of Concentration

PROJECT NAME: Williams REAE – Compressor Station 515

LOCATION: Luzerne County, PA

PREPARED BY: CD

DATE: 03/02/2021 [Rev 02/2022]

CHECKED BY: PW

DATE: 03/02/2021 [Rev 02/2022]

Direct Entry Method

| Path Number | Time (min) |
|-------------|------------|
| C-1 | 5.0 |
| C-2 | 5.0 |
| C-3 | 5.0 |
| C-4 | 5.0 |
| C-5 | 5.0 |

Channel Dimensions

| Path Number | Bottom Width (ft) | Left Side Slope (H:V) | Right Side Slope (H:V) | Total Depth (ft) | Top Width (ft) |
|-------------|-------------------|-----------------------|------------------------|------------------|----------------|
| C-1 | 4 | 3 | 3 | 1.25 | 11.5 |
| C-2 | 2 | 3 | 3 | 1.00 | 8.0 |
| C-3 | 2 | 3 | 3 | 1.00 | 8.0 |
| C-4 | 2 | 3 | 3 | 1.25 | 9.5 |
| C-5 | 4 | 3 | 3 | 1.25 | 11.5 |
| Spillway | 12 | 2 | 2 | 1.00 | 16.0 |

STANDARD E&S WORKSHEET # 11

Channel Design Data

PROJECT NAME: Williams REAE – Compressor Station 515

LOCATION: Luzerne County, PA

PREPARED BY: CD

DATE: 03/01/2021 [Rev 02/2022]

CHECKED BY: PW

DATE: 03/01/2021 [Rev 02/2022]


| CHANNEL OR CHANNEL SECTION | | C-1 | C-1 | C-2 | C-3 | C-4 |
|---|--|---------|-------|------------|------------|---------|
| TEMPORARY OR PERMANENT? (T OR P) | | P | P | P | P | P |
| DESIGN STORM (2, 5, OR 10 YR) | | 10 YR | 10 YR | 10 YR | 10 YR | 10 YR |
| ACRES (AC) | | 1.11 | 1.11 | 0.63 | 0.27 | 0.51 |
| MULTIPLIER (1.6, 2.25, or 2.75) ¹ | | N/A | N/A | N/A | N/A | N/A |
| Q _r (REQUIRED CAPACITY) (CFS) | | 5.68 | 5.68 | 3.34 | 1.44 | 2.37 |
| Q (CALCULATED AT FLOW DEPTH d) (CFS) | | 5.68 | 5.68 | 3.34 | 1.44 | 2.37 |
| PROTECTIVE LINING ² | | SC150BN | Grass | R-3 Riprap | R-3 Riprap | SC150BN |
| n (MANNING'S COEFFICIENT) ² | | 0.050 | 0.050 | 0.0435 | 0.0566 | 0.050 |
| V _a (ALLOWABLE VELOCITY) (FPS) | | 8.0 | 4.5 | 6.5 | 6.5 | 8.0 |
| V (CALCULATED AT FLOW DEPTH d) (FPS) | | 2.8 | 2.8 | 1.9 | 2.1 | 1.7 |
| τ _a (MAX ALLOWABLE SHEAR STRESS) (LB/FT ²) | | - | - | - | - | - |
| τ _d (CALC'D SHEAR STRESS AT FLOW DEPTH d) (LB/FT ²) | | - | - | - | - | - |
| CHANNEL BOTTOM WIDTH (FT) | | 4 | 4 | 2 | 2 | 2 |
| CHANNEL SIDE SLOPES (H:V) | | 3 | 3 | 3 | 3 | 3 |
| D (TOTAL DEPTH) (FT) | | 1.25 | 1.25 | 1.00 | 1.00 | 1.25 |
| CHANNEL TOP WIDTH @ D (FT) | | 11.50 | 11.50 | 8.00 | 8.00 | 9.5 |
| d (CALCULATED FLOW DEPTH) (FT) | | 0.39 | 0.39 | 0.50 | 0.25 | 0.42 |
| CHANNEL TOP WIDTH @ FLOW DEPTH d (FT) | | 6.36 | 6.36 | 4.99 | 3.50 | 4.52 |
| BOTTOM WIDTH: FLOW DEPTH RATIO (12:1 MAX) | | 10.16 | 10.16 | 4.01 | 7.97 | 4.77 |
| d ₅₀ STONE SIZE (IN) | | - | - | 3 | 3 | - |
| A (CROSS-SECTIONAL AREA) (SQ. FT.) | | 2.039 | 2.039 | 1.741 | 0.690 | 1.368 |
| R (HYDRAULIC RADIUS) (FT) | | 0.314 | 0.314 | 0.338 | 0.193 | 0.294 |
| S (BED SLOPE) ³ (FT/FT) | | 0.041 | 0.041 | 0.013 | 0.057 | 0.017 |
| S _c (CRITICAL SLOPE) (FT/FT) | | 0.055 | 0.055 | 0.041 | 0.083 | 0.056 |
| .7S _c (FT/FT) | | 0.04 | 0.04 | 0.03 | 0.06 | 0.04 |
| 1.3S _c (FT/FT) | | 0.07 | 0.07 | 0.05 | 0.11 | 0.07 |
| STABLE FLOW? (Y/N) | | N | N | Y | Y | Y |
| FREEBOARD BASED ON UNSTABLE FLOW (FT) | | 0.08 | 0.08 | - | - | - |
| FREEBOARD BASED ON STABLE FLOW (FT) | | - | - | 0.13 | 0.06 | 0.10 |
| MINIMUM REQUIRED FREEBOARD ⁴ (FT) | | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| DESIGN METHOD FOR PROTECTIVE LINING ⁵ PERMISSIBLE VELOCITY (V) OR SHEAR STRESS (S) | | V | V | V | V | V |

1. Use 1.6 for Temporary Channels; 2.25 for Temporary Channels in Special Protection (HQ or EV) Watersheds; 2.75 for Permanent Channels. For Rational Method, enter "N/A" and attach E&S Worksheets 9 and 10. For TR-55 enter "N/A" and attach appropriate Worksheets.
2. Adjust "n" value for changes in channel liner and flow depth. For vegetated channels, provide data for manufactured linings without vegetation and with vegetation in separate columns.
3. Slopes may not be averaged.
4. Minimum Freeboard is 0.5 ft. or ¼ Total Channel Depth, whichever is greater
5. Permissible velocity lining design method is not acceptable for channels with a bed slope of 10% or greater. Shear stress lining design method is required for channels with a bed slope of 10% or greater. Shear stress lining design method may be used for any channel bed slope.

| | | | | | |
|---|--|-------|---------|-------|------------|
| CHANNEL OR CHANNEL SECTION | | C-4 | C-5 | C-5 | Spillway |
| TEMPORARY OR PERMANENT? (T OR P) | | P | P | P | P |
| DESIGN STORM (2, 5, OR 10 YR) | | 10 YR | 10 YR | 10 YR | 100 YR |
| ACRES (AC) | | 0.51 | 1.64 | 1.64 | 4.54 |
| MULTIPLIER (1.6, 2.25, or 2.75) ¹ | | N/A | N/A | N/A | N/A |
| Q _r (REQUIRED CAPACITY) (CFS) | | 2.37 | 7.04 | 7.04 | 24.23 |
| Q (CALCULATED AT FLOW DEPTH d) (CFS) | | 2.37 | 7.04 | 7.04 | 24.8 |
| PROTECTIVE LINING ² | | Grass | SC150BN | Grass | R-4 Riprap |
| n (MANNING'S COEFFICIENT) ² | | 0.07 | 0.050 | 0.050 | 0.074 |
| V _a (ALLOWABLE VELOCITY) (FPS) | | 4.5 | 8.0 | 4.5 | 9 |
| V (CALCULATED AT FLOW DEPTH d) (FPS) | | 1.3 | 3.0 | 3.0 | 5.1 |
| τ _a (MAX ALLOWABLE SHEAR STRESS) (LB/FT ²) | | - | - | - | - |
| τ _d (CALC'D SHEAR STRESS AT FLOW DEPTH d) (LB/FT ²) | | - | - | - | - |
| CHANNEL BOTTOM WIDTH (FT) | | 2 | 4 | 4 | 12 |
| CHANNEL SIDE SLOPES (H:V) | | 3 | 3 | 3 | 2 |
| D (TOTAL DEPTH) (FT) | | 1.25 | 1.25 | 1.25 | 1.00 |
| CHANNEL TOP WIDTH @ D (FT) | | 9.50 | 11.50 | 11.50 | 16.00 |
| d (CALCULATED FLOW DEPTH) (FT) | | 0.51 | 0.45 | 0.45 | 0.38 |
| CHANNEL TOP WIDTH @ FLOW DEPTH d (FT) | | 5.06 | 6.67 | 6.67 | 13.54 |
| BOTTOM WIDTH: FLOW DEPTH RATIO (12:1 MAX) | | 3.93 | 8.99 | 8.99 | 31.25 |
| d ₅₀ STONE SIZE (IN) | | - | - | - | 6 |
| A (CROSS-SECTIONAL AREA) (SQ. FT.) | | 1.797 | 2.374 | 2.374 | 4.903 |
| R (HYDRAULIC RADIUS) (FT) | | 0.344 | 0.348 | 0.348 | 0.357 |
| S (BED SLOPE) ³ (FT/FT) | | 0.017 | 0.041 | 0.041 | 0.250 |
| S _c (CRITICAL SLOPE) (FT/FT) | | 0.114 | 0.053 | 0.053 | 0.114 |
| .7S _c (FT/FT) | | 0.08 | 0.04 | 0.04 | 0.08 |
| 1.3S _c (FT/FT) | | 0.15 | 0.07 | 0.07 | 0.15 |
| STABLE FLOW? (Y/N) | | Y | N | N | Y |
| FREEBOARD BASED ON UNSTABLE FLOW (FT) | | - | 0.10 | 0.10 | - |
| FREEBOARD BASED ON STABLE FLOW (FT) | | 0.13 | - | - | 0.1 |
| MINIMUM REQUIRED FREEBOARD ⁴ (FT) | | 0.5 | 0.5 | 0.5 | 0.5 |
| DESIGN METHOD FOR PROTECTIVE LINING ⁵ PERMISSIBLE VELOCITY (V) OR SHEAR STRESS (S) | | V | V | V | V |

1. Use 1.6 for Temporary Channels; 2.25 for Temporary Channels in Special Protection (HQ or EV) Watersheds; 2.75 for Permanent Channels. For Rational Method, enter "N/A" and attach E&S Worksheets 9 and 10. For TR-55 enter "N/A" and attach appropriate Worksheets.
2. Adjust "n" value for changes in channel liner and flow depth. For vegetated channels, provide data for manufactured linings without vegetation and with vegetation in separate columns.
3. Slopes may not be averaged.
4. Minimum Freeboard is 0.5 ft. or ¼ Total Channel Depth, whichever is greater
5. Permissible velocity lining design method is not acceptable for channels with a bed slope of 10% or greater. Shear stress lining design method is required for channels with a bed slope of 10% or greater. Shear stress lining design method may be used for any channel bed slope.

ATTACHMENT 4.5
CHANNEL HYDROCAD REPORTS



C-4




C-4



C-5



Culvert 1





C-1



C-1



C-5



Routing Diagram for CS515 - channels 1,4,5
 Prepared by Microsoft, Printed 2/24/2022
 HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Project Notes

Rainfall events imported from "NRCS-Rain.txt" for 7639 PA Luzerne-C

CS515 - channels 1,4,5

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 3

Area Listing (all nodes)

| Area (acres) | CN | Description (subcatchment-numbers) |
|-----------------|-----------|--|
| 0.661 | 78 | Meadow, non-grazed, HSG D (5S, 14S, 15S) |
| 1.193 | 98 | Paved parking, HSG D (5S, 14S, 15S) |
| 1.854 | 91 | TOTAL AREA |

CS515 - channels 1,4,5

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 4

Soil Listing (all nodes)

| Area (acres) | Soil Group | Subcatchment Numbers |
|-----------------|---------------|-------------------------|
| 0.000 | HSG A | |
| 0.000 | HSG B | |
| 0.000 | HSG C | |
| 1.854 | HSG D | 5S, 14S, 15S |
| 0.000 | Other | |
| 1.854 | | TOTAL AREA |

CS515 - channels 1,4,5

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 5

Ground Covers (all nodes)

| HSG-A (acres) | HSG-B (acres) | HSG-C (acres) | HSG-D (acres) | Other (acres) | Total (acres) | Ground Cover | Subcatchment Numbers |
|------------------|------------------|------------------|------------------|------------------|------------------|--------------------|-------------------------|
| 0.000 | 0.000 | 0.000 | 0.661 | 0.000 | 0.661 | Meadow, non-grazed | 5S, 14S, 15S |
| 0.000 | 0.000 | 0.000 | 1.193 | 0.000 | 1.193 | Paved parking | 5S, 14S, 15S |
| 0.000 | 0.000 | 0.000 | 1.854 | 0.000 | 1.854 | TOTAL AREA | |

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>2.25"
Tc=5.0 min CN=94 Runoff=3.10 cfs 0.208 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>1.73"
Tc=5.0 min CN=88 Runoff=1.16 cfs 0.074 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>1.11"
Tc=5.0 min CN=79 Runoff=0.34 cfs 0.021 af

Reach 4R: C-1 Avg. Flow Depth=0.28' Max Vel=2.20 fps Inflow=3.10 cfs 0.208 af
n=0.050 L=72.0' S=0.0382 '/ Capacity=49.04 cfs Outflow=3.00 cfs 0.208 af

Reach 8R: C-4 Avg. Flow Depth=0.27' Max Vel=1.35 fps Inflow=1.16 cfs 0.074 af
n=0.050 L=345.8' S=0.0174 '/ Capacity=22.72 cfs Outflow=0.97 cfs 0.074 af

Reach 13R: C-5 Avg. Flow Depth=0.30' Max Vel=2.37 fps Inflow=3.61 cfs 0.295 af
n=0.050 L=258.5' S=0.0406 '/ Capacity=50.57 cfs Outflow=3.44 cfs 0.294 af

Link 14L: 1-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=2.53 cfs 0.200 af
Area= 0.901 ac 100.00% Imperv. Primary=2.53 cfs 0.200 af

Total Runoff Area = 1.854 ac Runoff Volume = 0.303 af Average Runoff Depth = 1.96"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 3.10 cfs @ 12.11 hrs, Volume= 0.208 af, Depth> 2.25"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

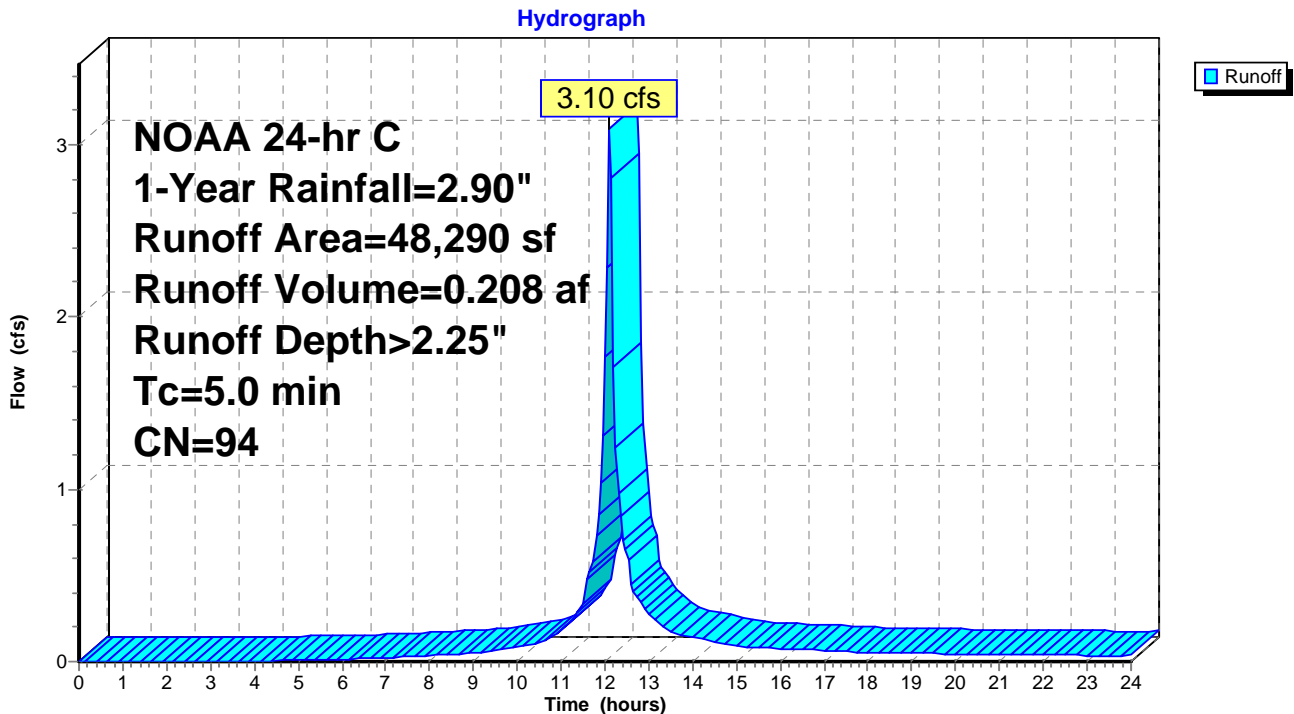

Summary for Subcatchment 14S: C-4

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.16 cfs @ 12.12 hrs, Volume= 0.074 af, Depth> 1.73"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

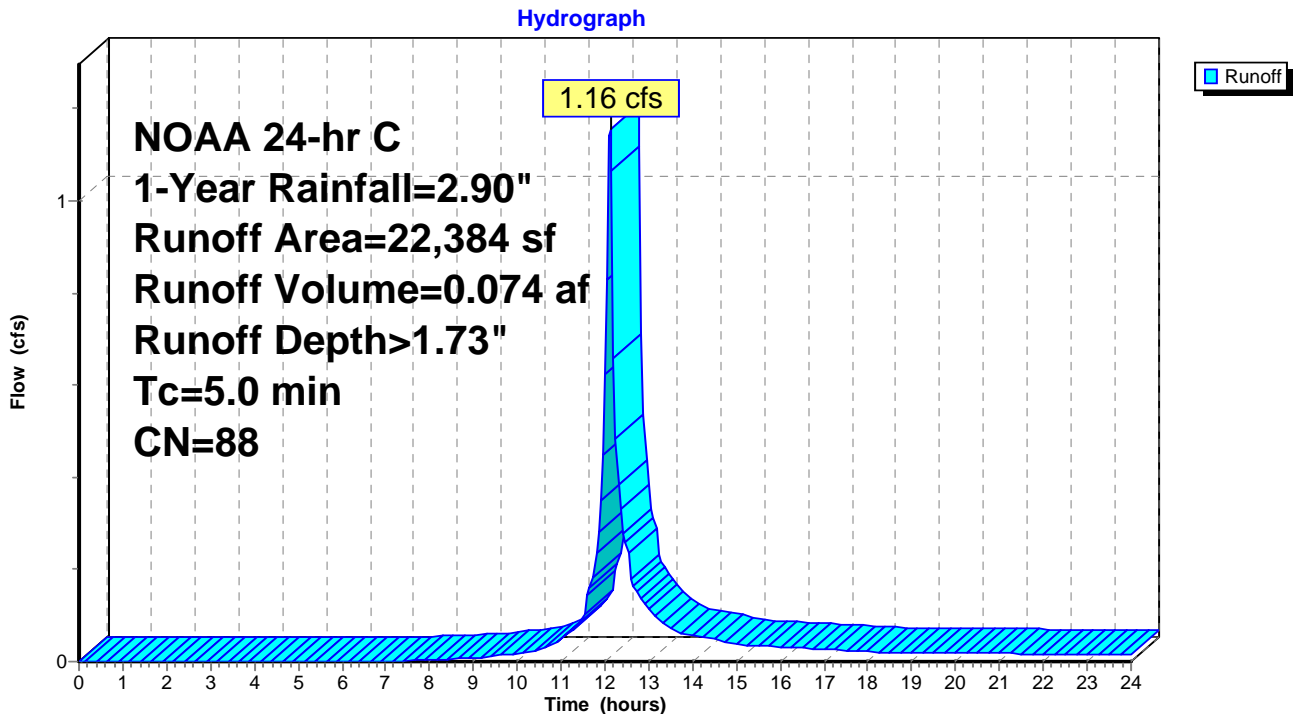

Summary for Subcatchment 15S: C-5

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.34 cfs @ 12.12 hrs, Volume= 0.021 af, Depth> 1.11"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

Hydrograph

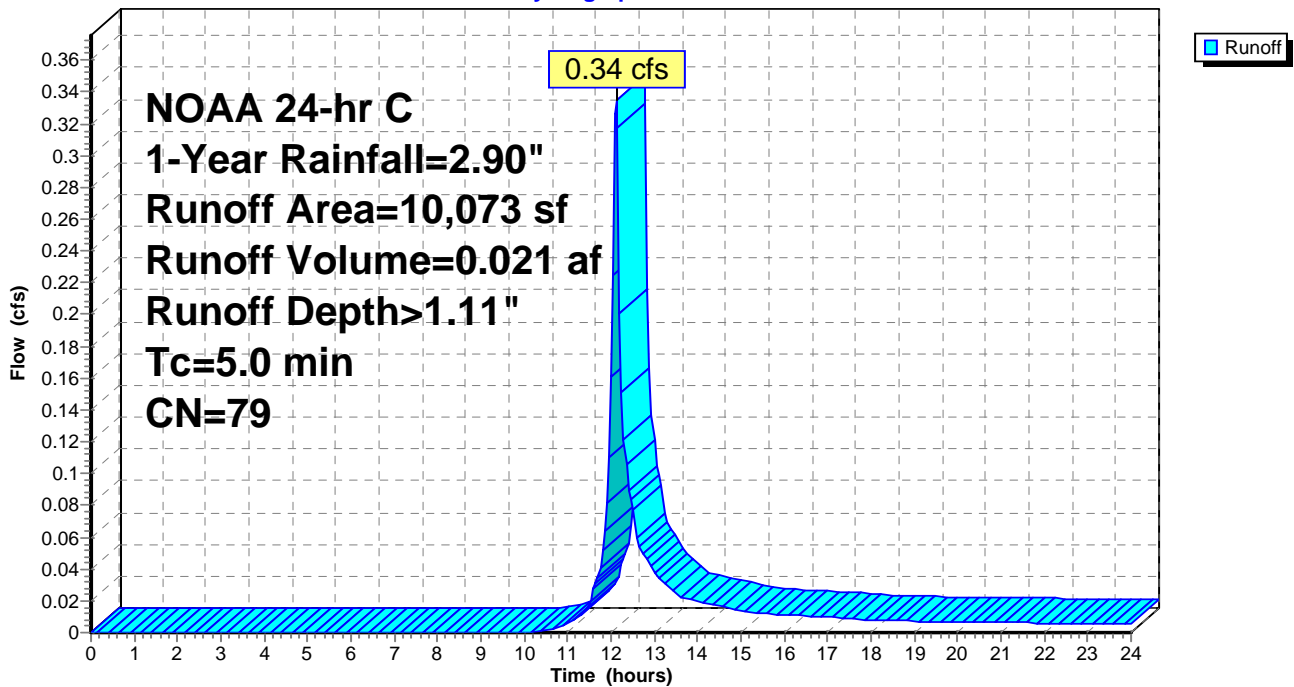

Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 2.25" for 1-Year event
 Inflow = 3.10 cfs @ 12.11 hrs, Volume= 0.208 af
 Outflow = 3.00 cfs @ 12.13 hrs, Volume= 0.208 af, Atten= 3%, Lag= 1.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.20 fps, Min. Travel Time= 0.5 min
 Avg. Velocity = 0.57 fps, Avg. Travel Time= 2.1 min


Peak Storage= 98 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.28'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'



Reach 4R: C-1

Hydrograph

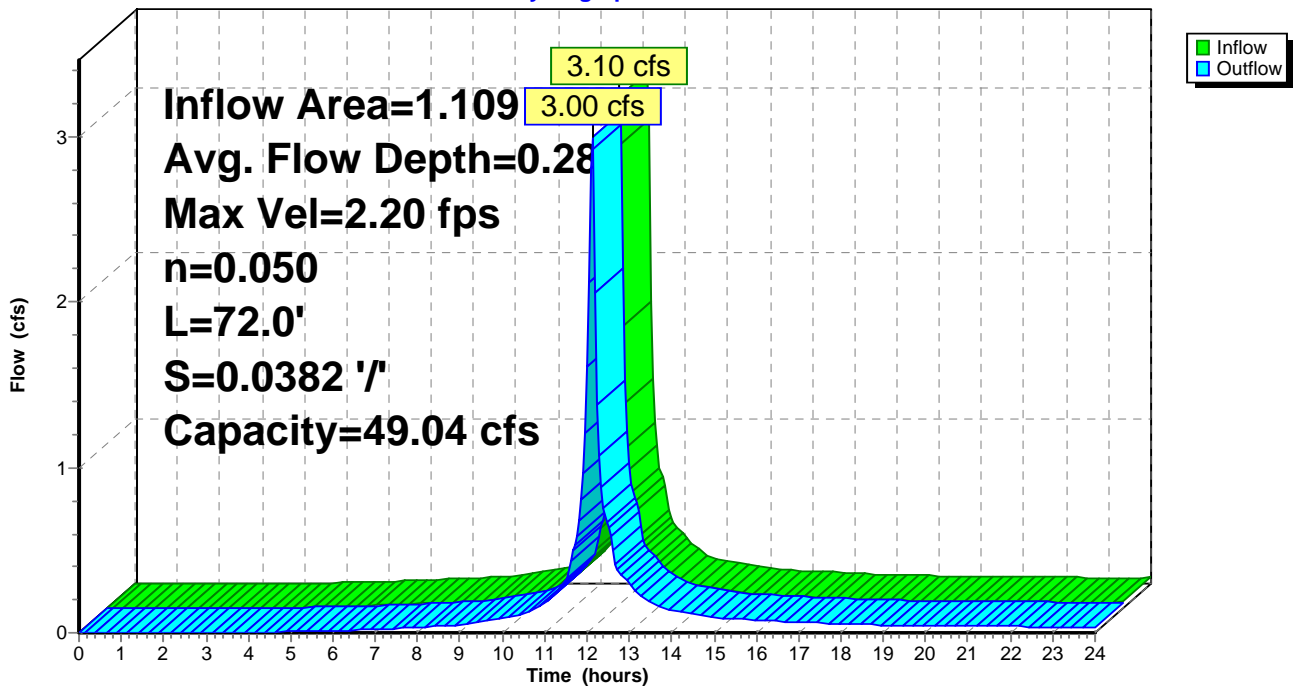

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 1.73" for 1-Year event
 Inflow = 1.16 cfs @ 12.12 hrs, Volume= 0.074 af
 Outflow = 0.97 cfs @ 12.23 hrs, Volume= 0.074 af, Atten= 16%, Lag= 6.8 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.35 fps, Min. Travel Time= 4.3 min
 Avg. Velocity = 0.41 fps, Avg. Travel Time= 14.1 min


Peak Storage= 260 cf @ 12.16 hrs
 Average Depth at Peak Storage= 0.27'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

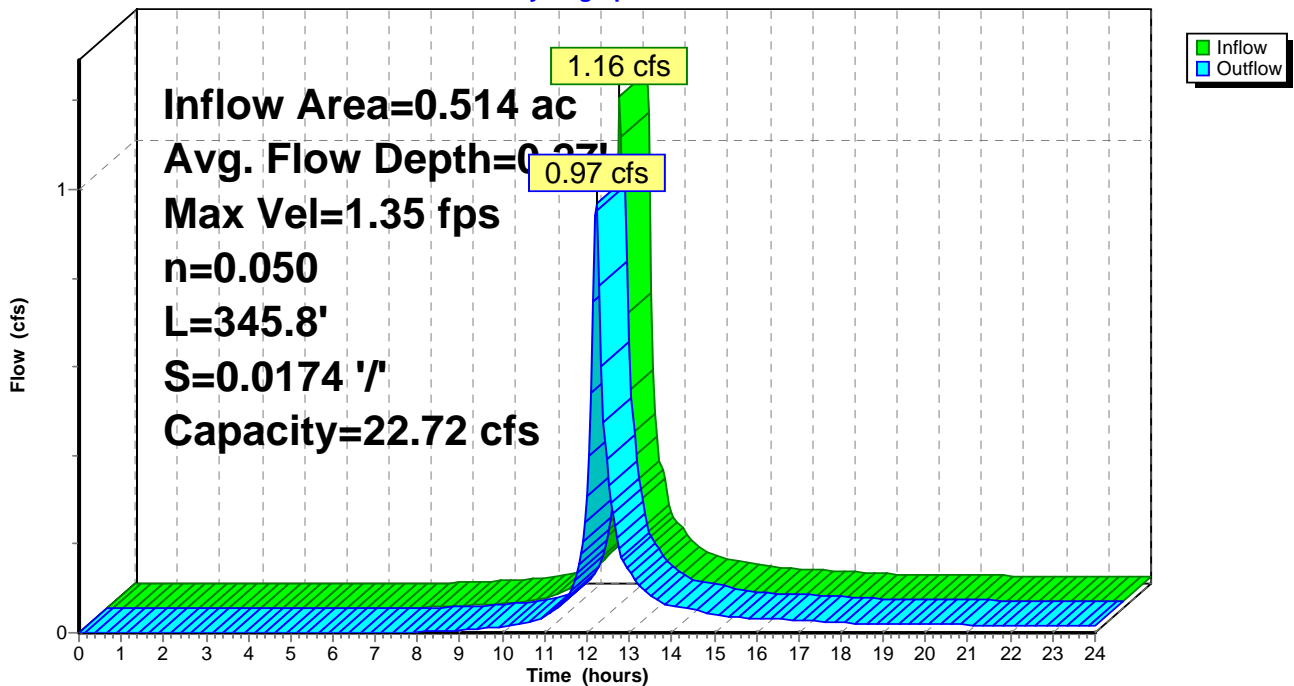

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.56' @ 12.25 hrs

Inflow Area = 1.646 ac, 72.02% Impervious, Inflow Depth > 2.15" for 1-Year event
 Inflow = 3.61 cfs @ 12.16 hrs, Volume= 0.295 af
 Outflow = 3.44 cfs @ 12.21 hrs, Volume= 0.294 af, Atten= 5%, Lag= 3.2 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.37 fps, Min. Travel Time= 1.8 min
 Avg. Velocity = 0.63 fps, Avg. Travel Time= 6.8 min


Peak Storage= 383 cf @ 12.18 hrs
 Average Depth at Peak Storage= 0.30'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/'
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

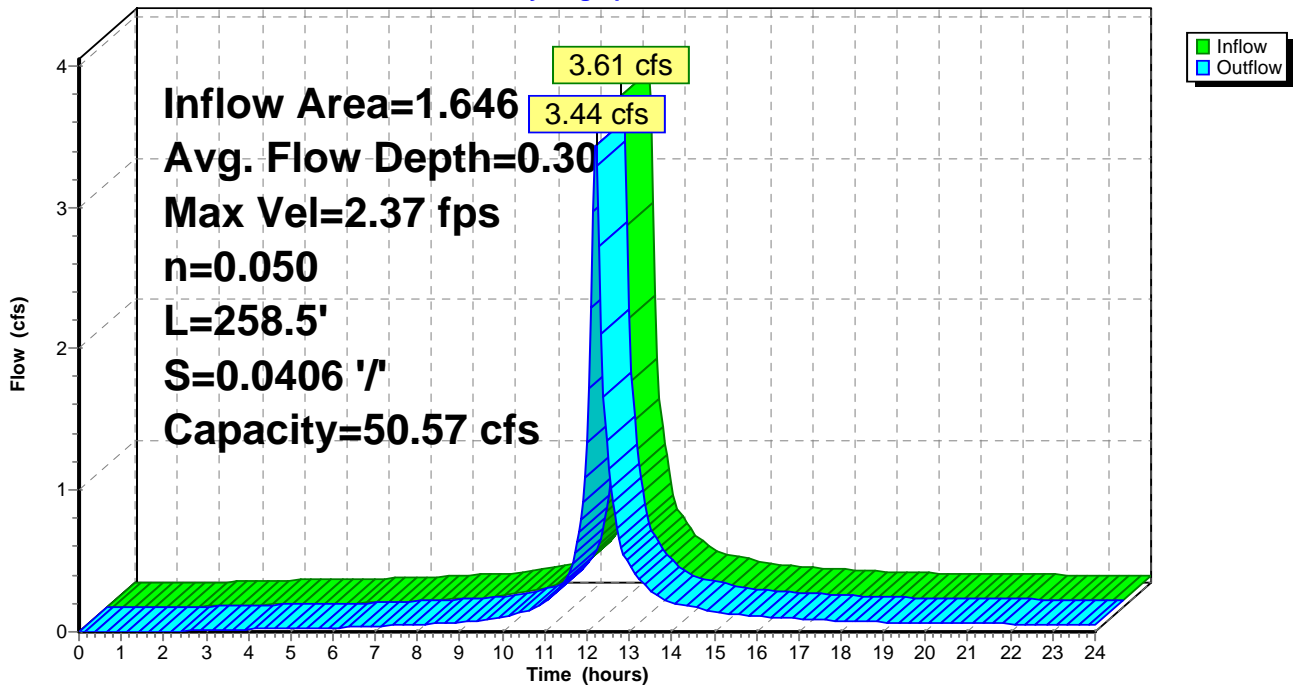

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 2.66" for 1-Year event
Inflow = 2.53 cfs @ 12.15 hrs, Volume= 0.200 af
Primary = 2.53 cfs @ 12.15 hrs, Volume= 0.200 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

1-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

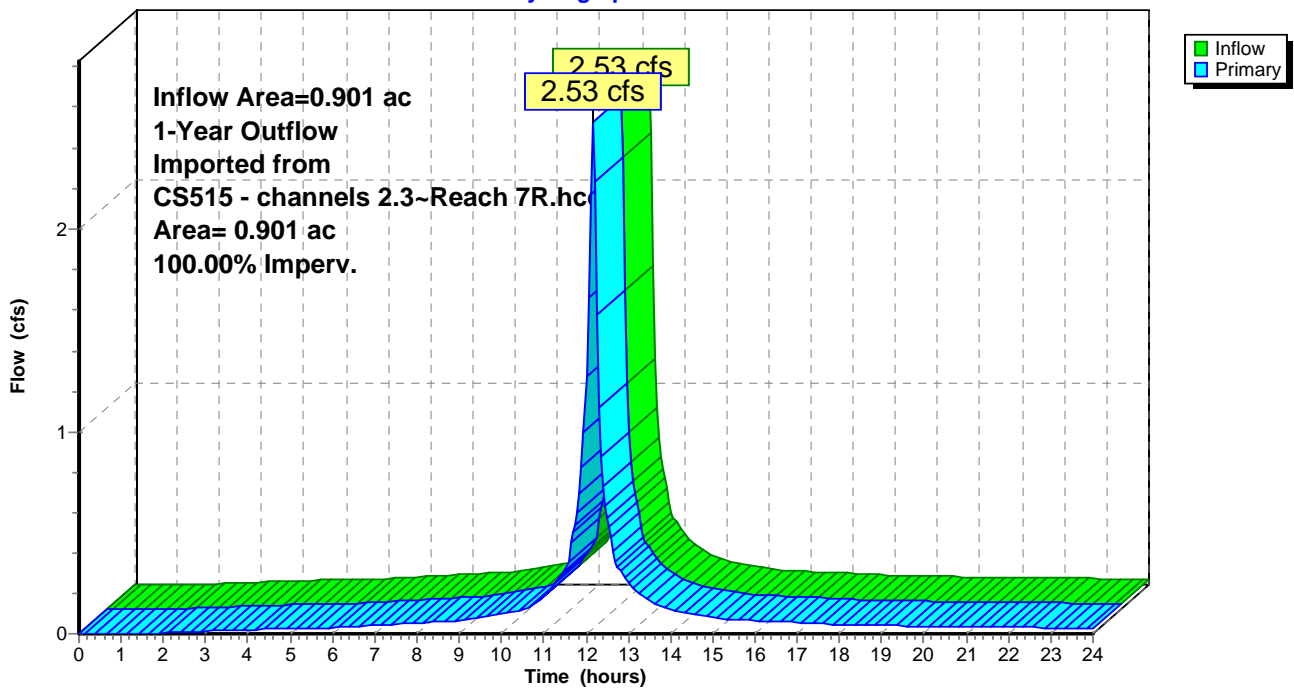

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>2.74"
Tc=5.0 min CN=94 Runoff=3.72 cfs 0.253 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>2.18"
Tc=5.0 min CN=88 Runoff=1.44 cfs 0.093 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>1.49"
Tc=5.0 min CN=79 Runoff=0.45 cfs 0.029 af

Reach 4R: C-1 Avg. Flow Depth=0.31' Max Vel=2.34 fps Inflow=3.72 cfs 0.253 af
n=0.050 L=72.0' S=0.0382 '/' Capacity=49.04 cfs Outflow=3.61 cfs 0.253 af

Reach 8R: C-4 Avg. Flow Depth=0.30' Max Vel=1.45 fps Inflow=1.44 cfs 0.093 af
n=0.050 L=345.8' S=0.0174 '/' Capacity=22.72 cfs Outflow=1.24 cfs 0.093 af

Reach 13R: C-5 Avg. Flow Depth=0.34' Max Vel=2.53 fps Inflow=4.41 cfs 0.359 af
n=0.050 L=258.5' S=0.0406 '/' Capacity=50.57 cfs Outflow=4.21 cfs 0.358 af

Link 14L: 2-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=2.99 cfs 0.237 af
Area= 0.901 ac 100.00% Imperv. Primary=2.99 cfs 0.237 af

Total Runoff Area = 1.854 ac Runoff Volume = 0.375 af Average Runoff Depth = 2.42"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 3.72 cfs @ 12.11 hrs, Volume= 0.253 af, Depth> 2.74"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

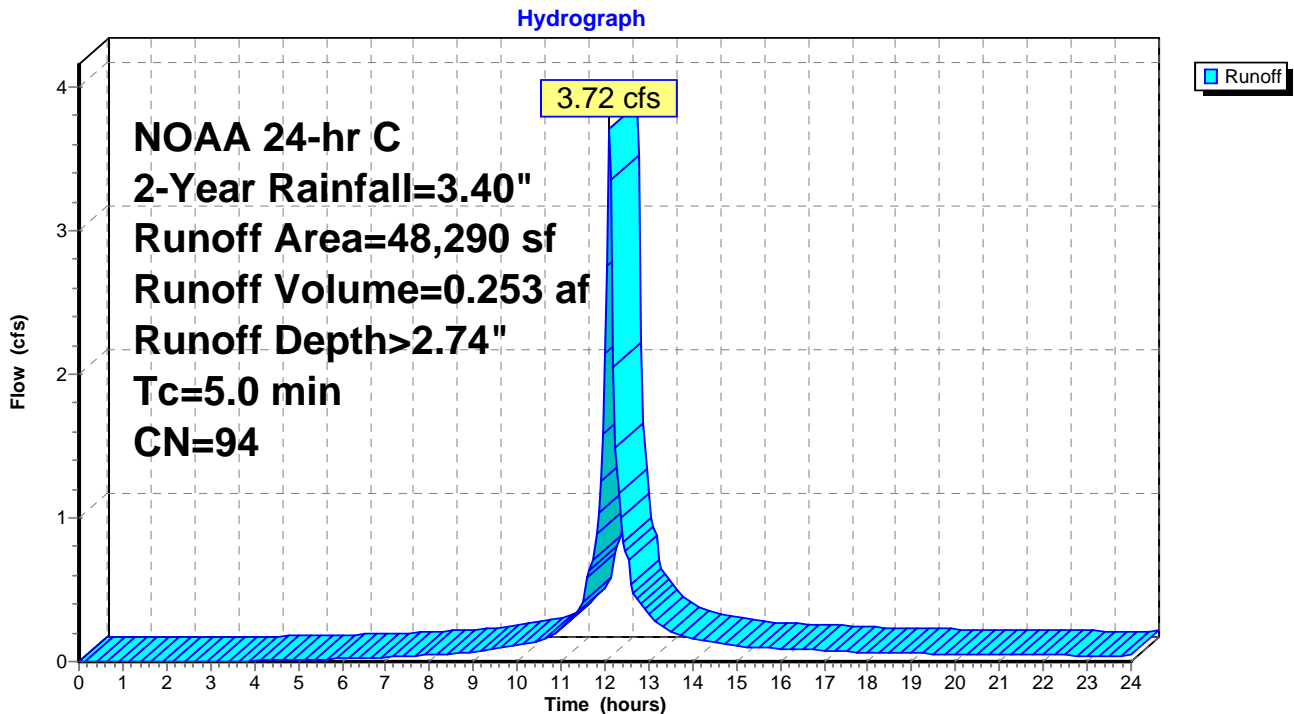

Summary for Subcatchment 14S: C-4

[49] Hint: Tc<2dt may require smaller dt


Runoff = 1.44 cfs @ 12.11 hrs, Volume= 0.093 af, Depth> 2.18"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

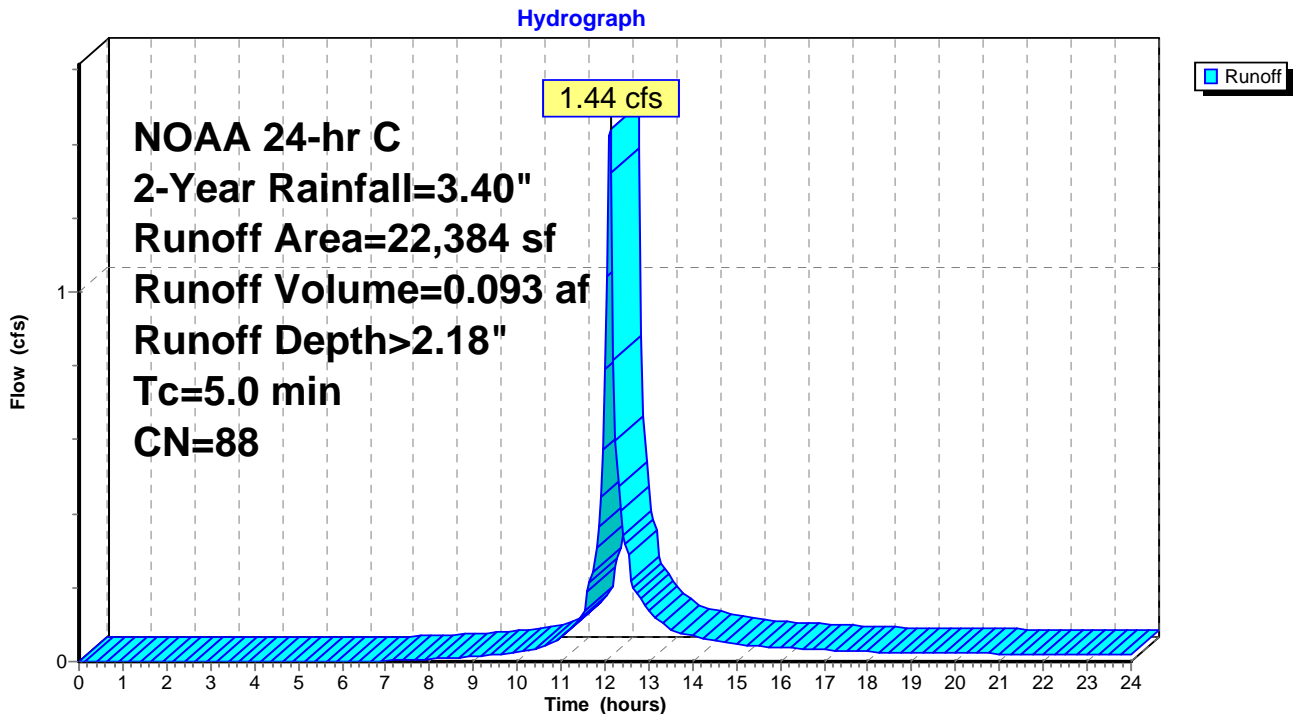

Summary for Subcatchment 15S: C-5

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.45 cfs @ 12.12 hrs, Volume= 0.029 af, Depth> 1.49"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

Hydrograph

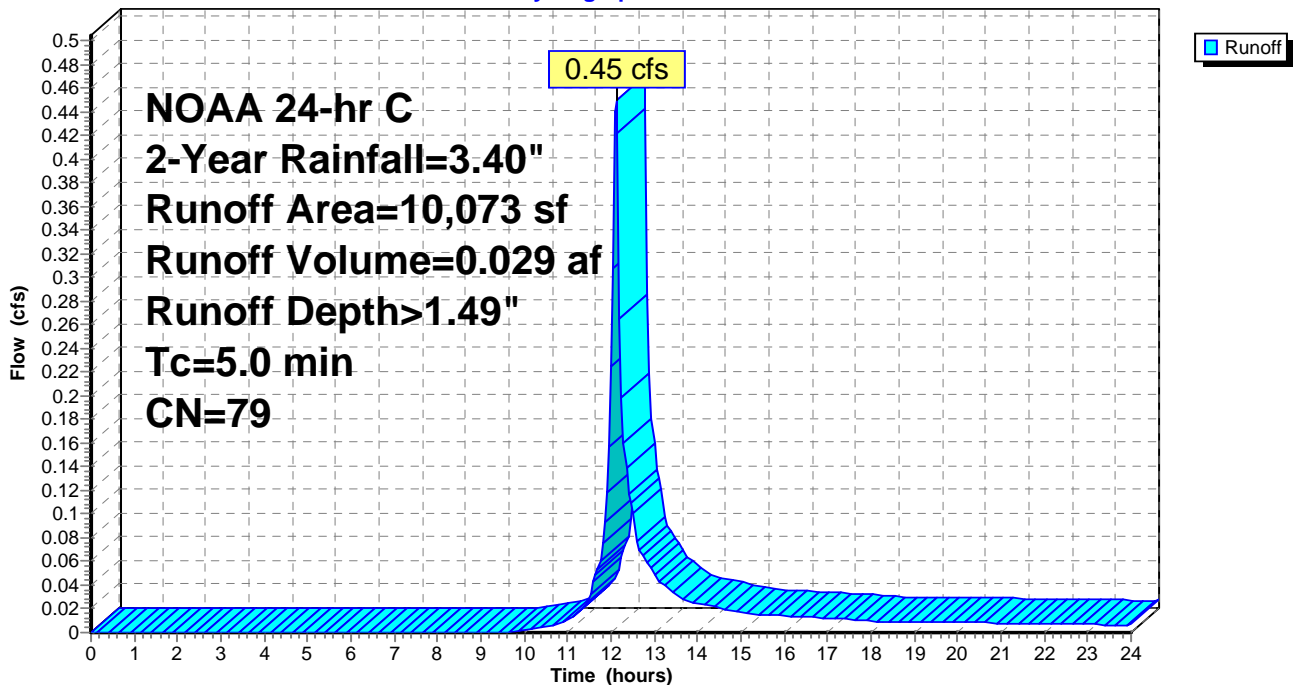

Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 2.74" for 2-Year event
 Inflow = 3.72 cfs @ 12.11 hrs, Volume= 0.253 af
 Outflow = 3.61 cfs @ 12.13 hrs, Volume= 0.253 af, Atten= 3%, Lag= 1.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.34 fps, Min. Travel Time= 0.5 min
 Avg. Velocity = 0.61 fps, Avg. Travel Time= 2.0 min


Peak Storage= 111 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.31'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'



Reach 4R: C-1

Hydrograph

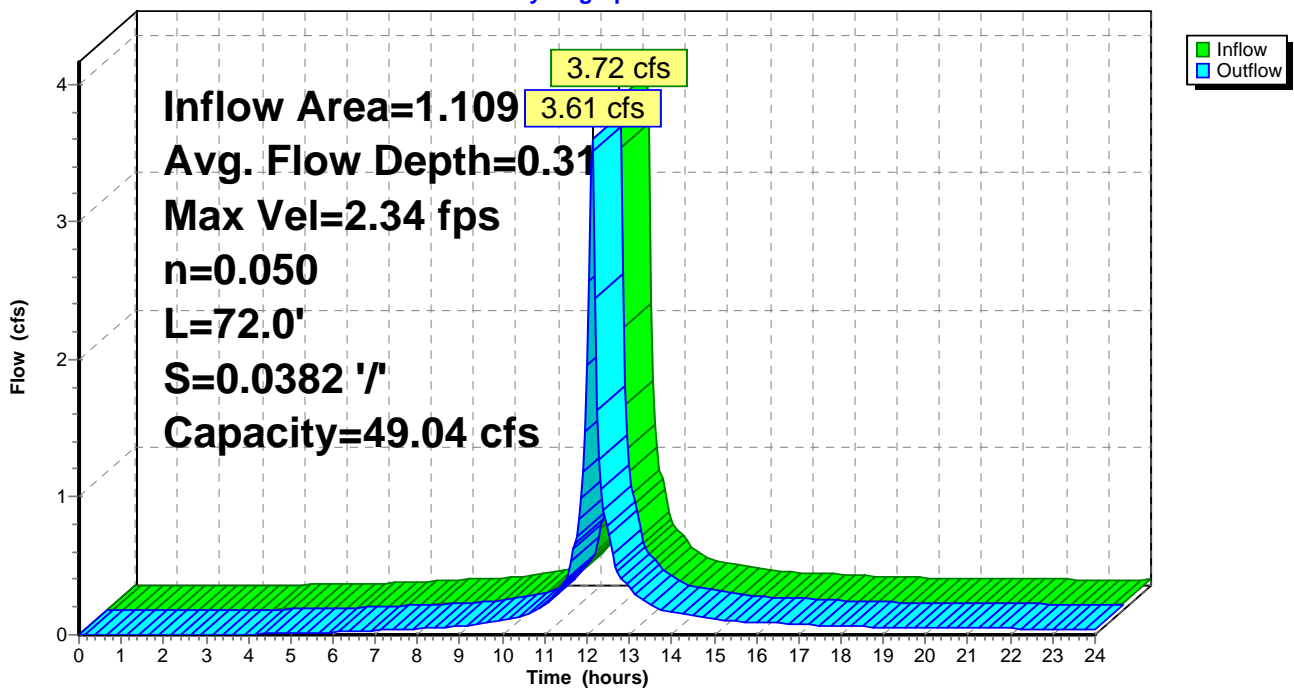

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 2.18" for 2-Year event
 Inflow = 1.44 cfs @ 12.11 hrs, Volume= 0.093 af
 Outflow = 1.24 cfs @ 12.22 hrs, Volume= 0.093 af, Atten= 14%, Lag= 6.2 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.45 fps, Min. Travel Time= 4.0 min
 Avg. Velocity = 0.44 fps, Avg. Travel Time= 13.2 min


Peak Storage= 306 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.30'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/'
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

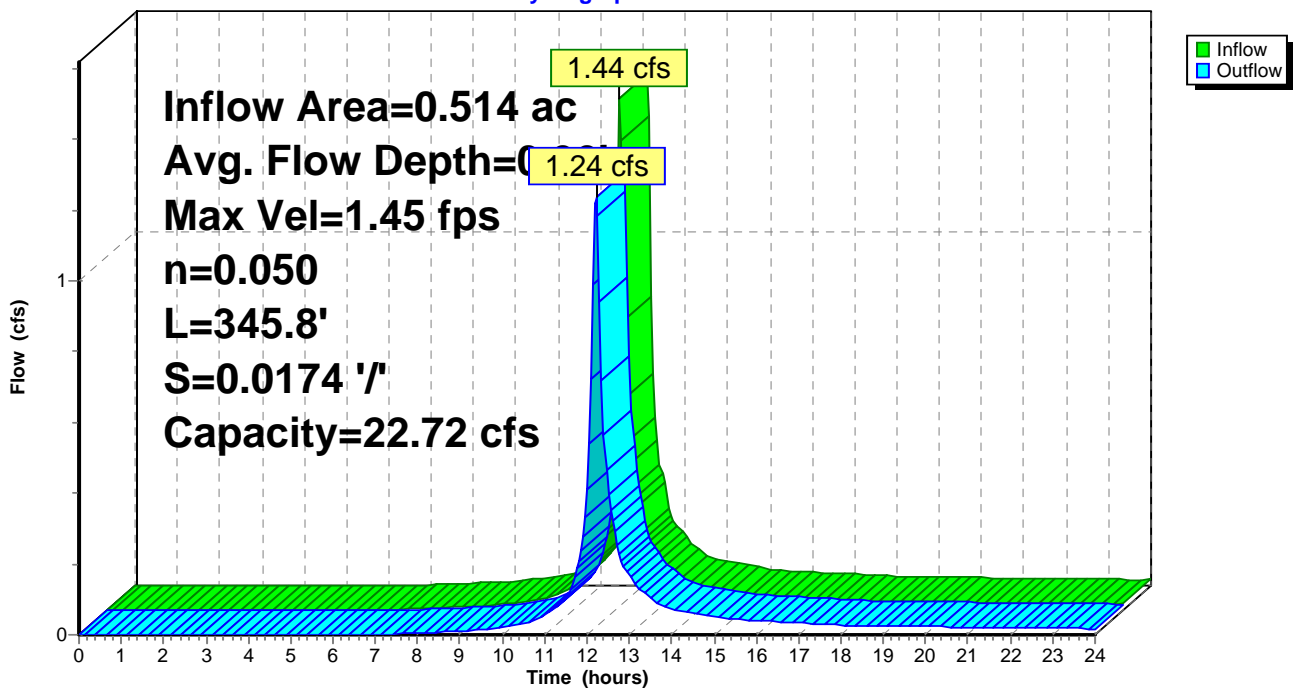

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.56' @ 12.25 hrs

Inflow Area = 1.646 ac, 72.02% Impervious, Inflow Depth > 2.61" for 2-Year event
 Inflow = 4.41 cfs @ 12.16 hrs, Volume= 0.359 af
 Outflow = 4.21 cfs @ 12.21 hrs, Volume= 0.358 af, Atten= 5%, Lag= 3.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.53 fps, Min. Travel Time= 1.7 min
 Avg. Velocity = 0.68 fps, Avg. Travel Time= 6.3 min


Peak Storage= 439 cf @ 12.18 hrs
 Average Depth at Peak Storage= 0.34'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/'
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

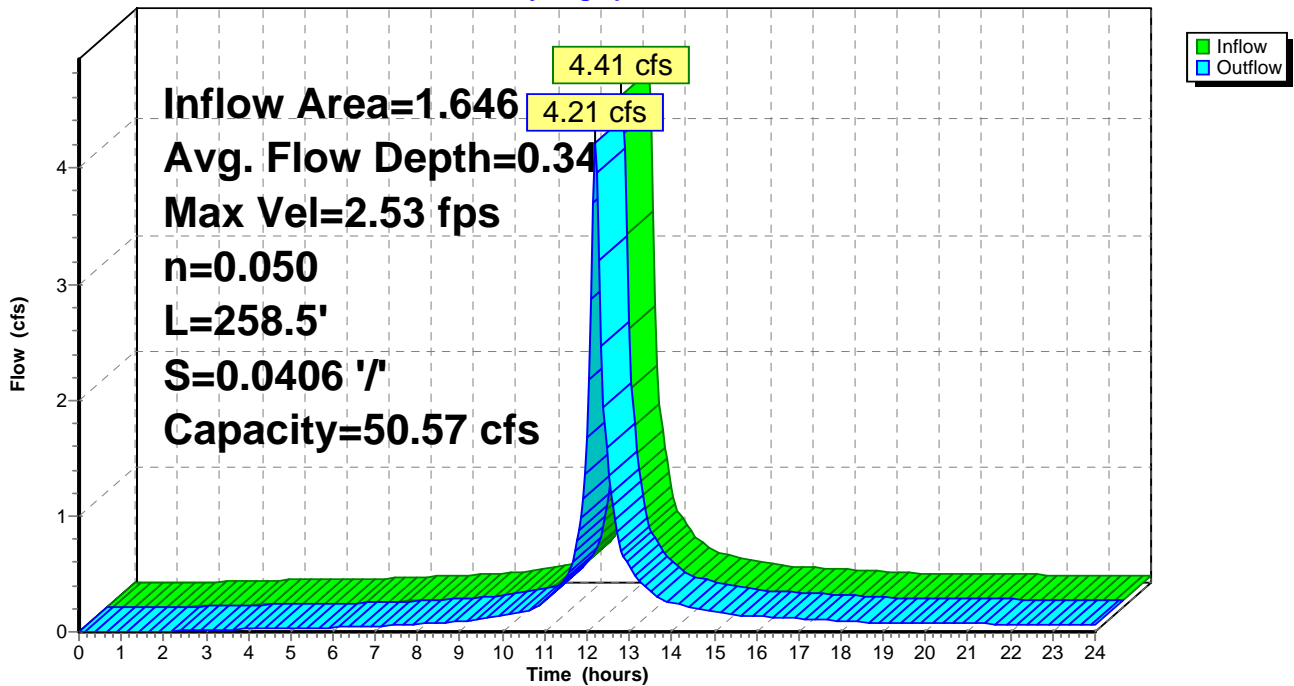

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 3.16" for 2-Year event
Inflow = 2.99 cfs @ 12.15 hrs, Volume= 0.237 af
Primary = 2.99 cfs @ 12.15 hrs, Volume= 0.237 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

2-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

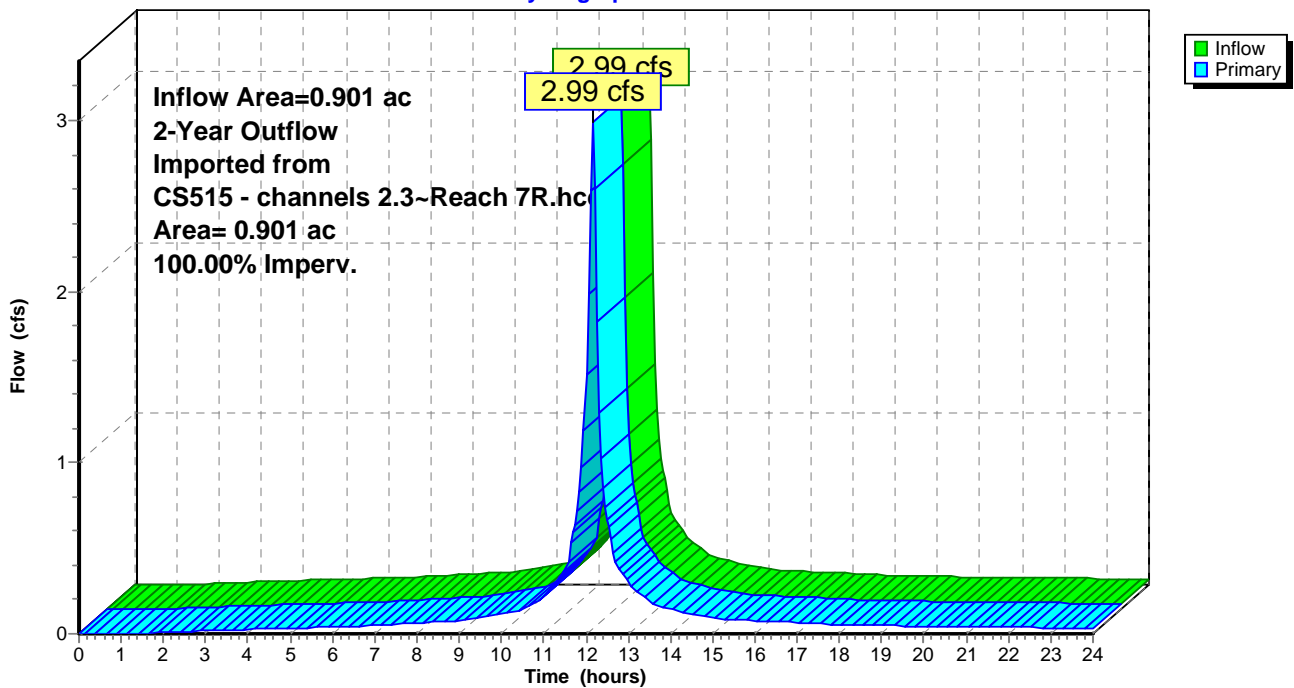

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>4.30"
Tc=5.0 min CN=94 Runoff=5.68 cfs 0.398 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>3.67"
Tc=5.0 min CN=88 Runoff=2.37 cfs 0.157 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>2.80"
Tc=5.0 min CN=79 Runoff=0.85 cfs 0.054 af

Reach 4R: C-1 Avg. Flow Depth=0.40' Max Vel=2.68 fps Inflow=5.68 cfs 0.398 af
n=0.050 L=72.0' S=0.0382 '/' Capacity=49.04 cfs Outflow=5.53 cfs 0.397 af

Reach 8R: C-4 Avg. Flow Depth=0.40' Max Vel=1.69 fps Inflow=2.37 cfs 0.157 af
n=0.050 L=345.8' S=0.0174 '/' Capacity=22.72 cfs Outflow=2.12 cfs 0.156 af

Reach 13R: C-5 Avg. Flow Depth=0.44' Max Vel=2.93 fps Inflow=7.04 cfs 0.567 af
n=0.050 L=258.5' S=0.0406 '/' Capacity=50.57 cfs Outflow=6.72 cfs 0.566 af

Link 14L: 10-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=4.46 cfs 0.357 af
Area= 0.901 ac 100.00% Imperv. Primary=4.46 cfs 0.357 af

Total Runoff Area = 1.854 ac Runoff Volume = 0.609 af Average Runoff Depth = 3.94"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 5.68 cfs @ 12.11 hrs, Volume= 0.398 af, Depth> 4.30"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

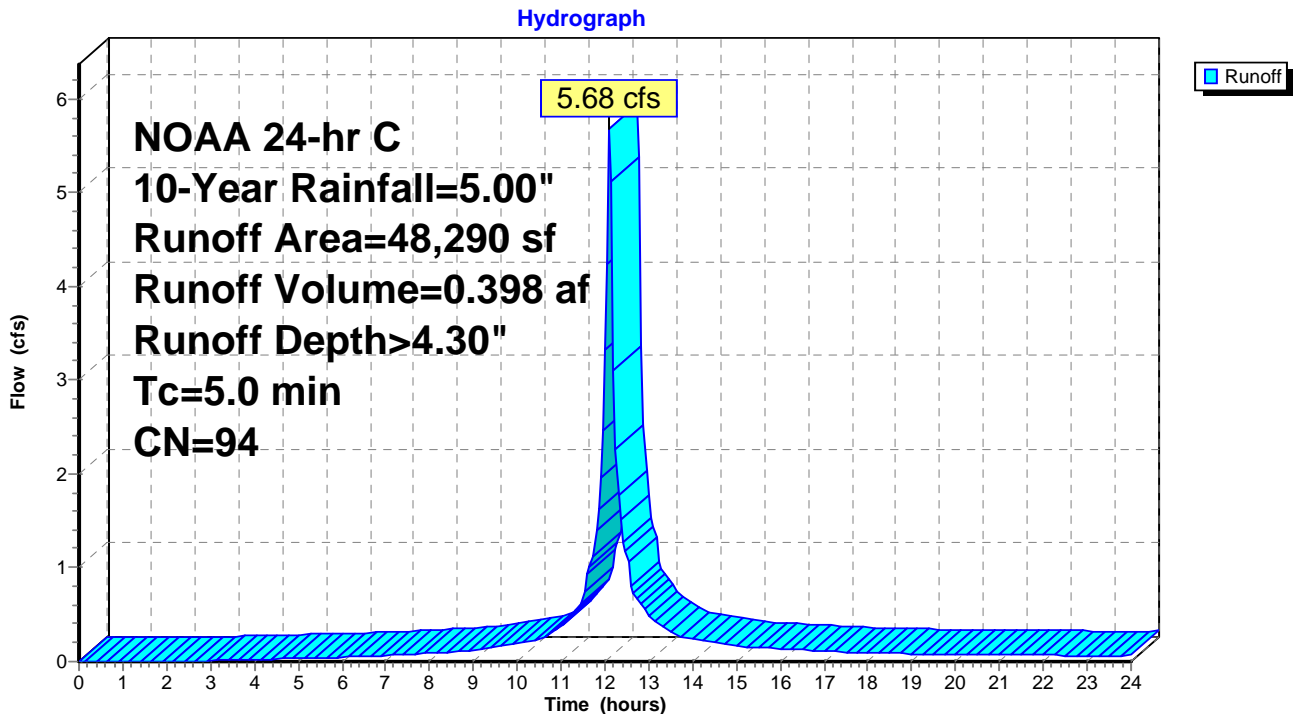

Summary for Subcatchment 14S: C-4

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 2.37 cfs @ 12.11 hrs, Volume= 0.157 af, Depth> 3.67"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

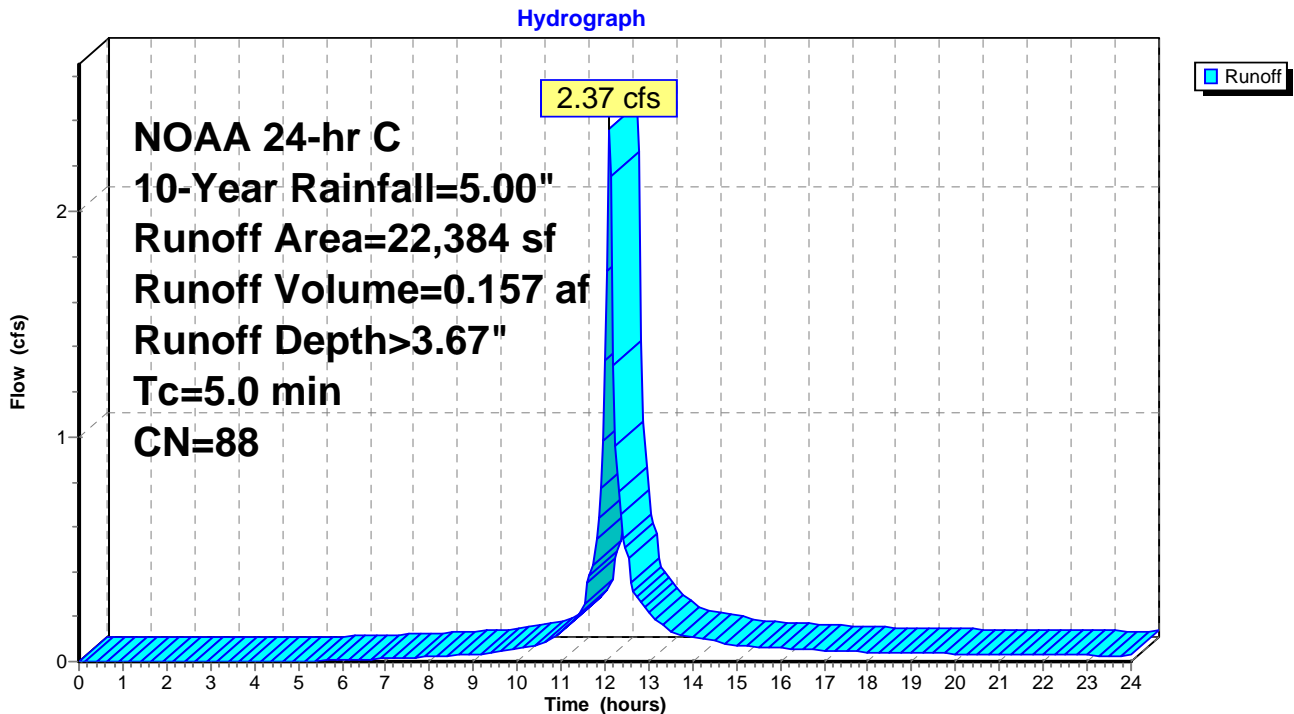

Summary for Subcatchment 15S: C-5

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.85 cfs @ 12.12 hrs, Volume= 0.054 af, Depth> 2.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

Hydrograph

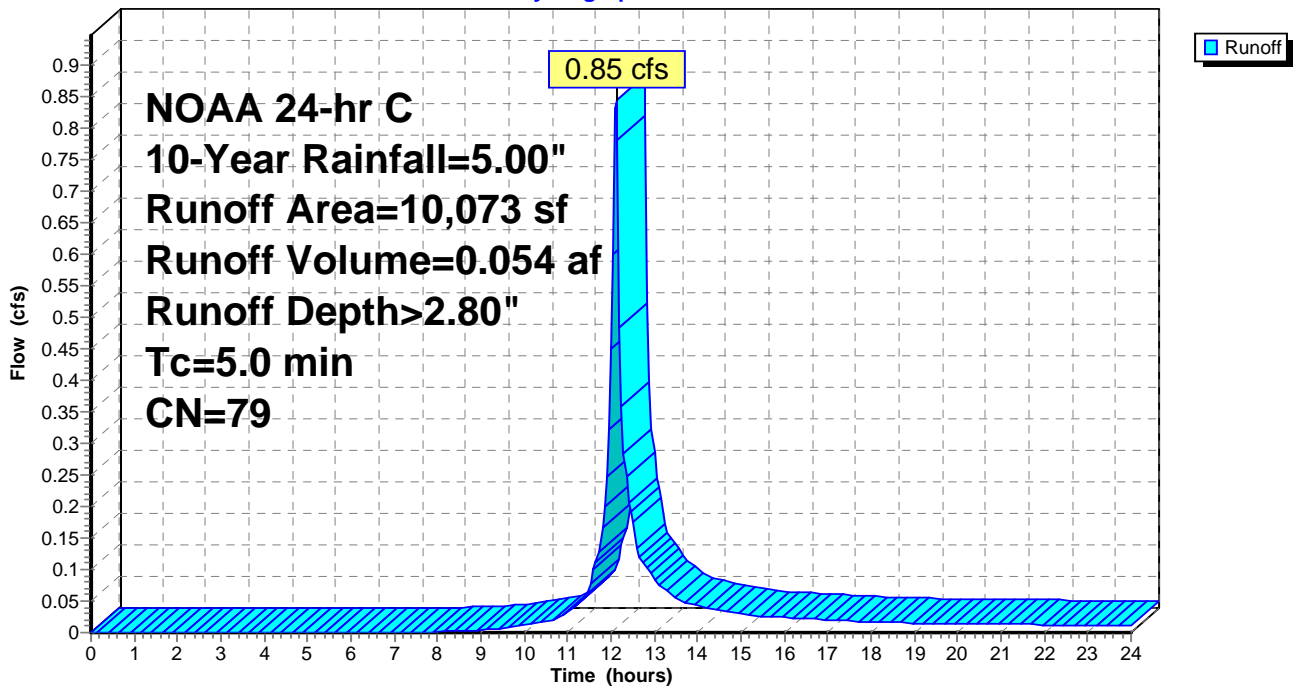

Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 4.30" for 10-Year event
 Inflow = 5.68 cfs @ 12.11 hrs, Volume= 0.398 af
 Outflow = 5.53 cfs @ 12.13 hrs, Volume= 0.397 af, Atten= 3%, Lag= 1.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.68 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.71 fps, Avg. Travel Time= 1.7 min


Peak Storage= 149 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.40'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'



Reach 4R: C-1

Hydrograph

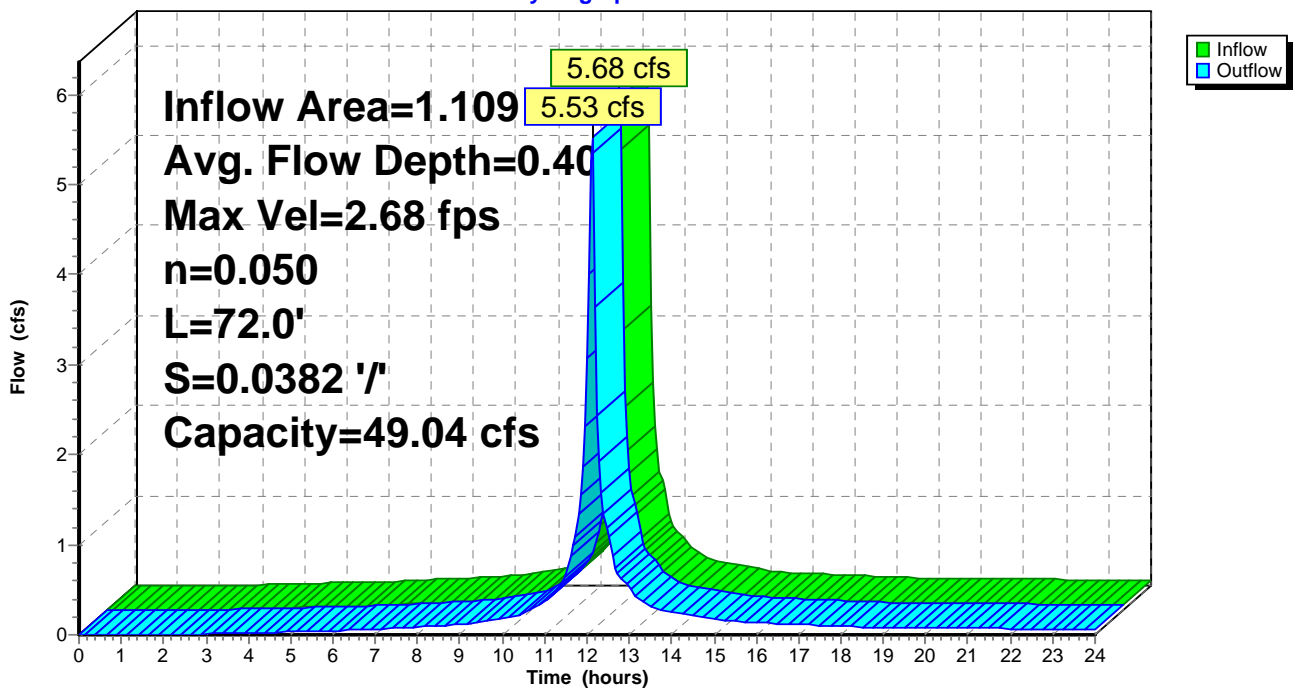

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 3.67" for 10-Year event
 Inflow = 2.37 cfs @ 12.11 hrs, Volume= 0.157 af
 Outflow = 2.12 cfs @ 12.20 hrs, Volume= 0.156 af, Atten= 11%, Lag= 5.5 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.69 fps, Min. Travel Time= 3.4 min
 Avg. Velocity = 0.50 fps, Avg. Travel Time= 11.5 min


Peak Storage= 442 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.40'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/'
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

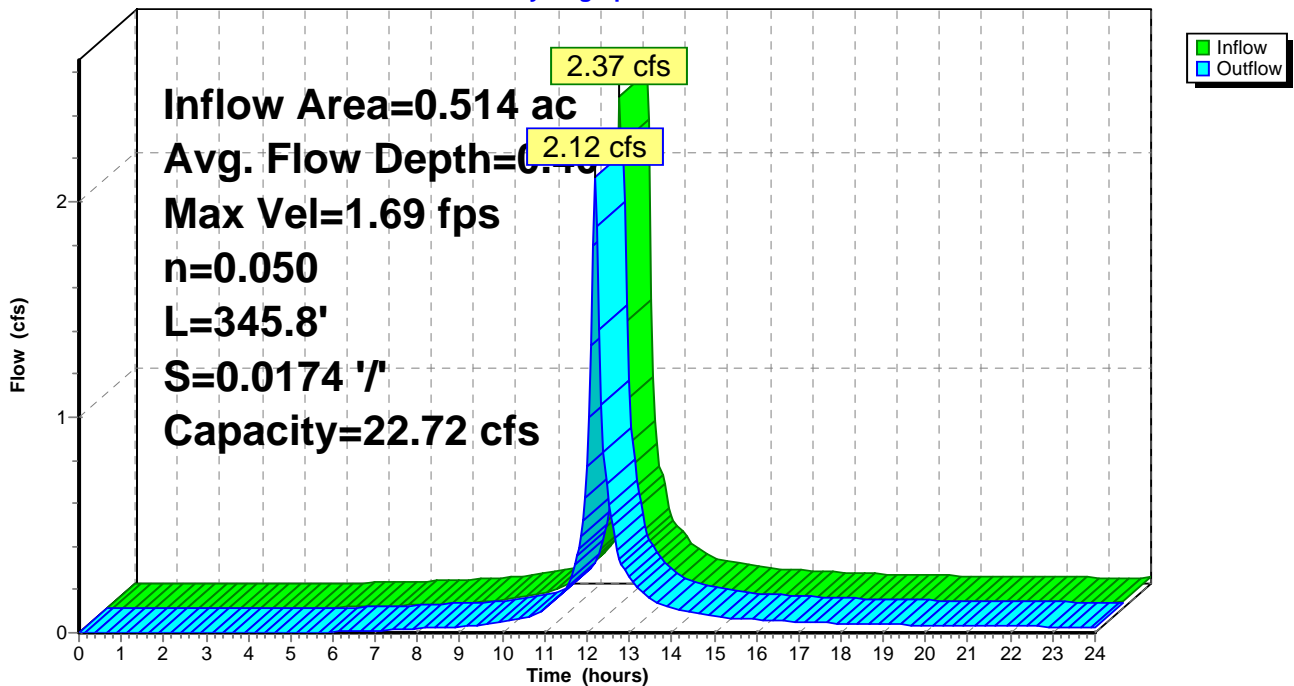

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.57' @ 12.25 hrs

| | | |
|---------------|---|-----------------------------------|
| Inflow Area = | 1.646 ac, 72.02% Impervious, Inflow Depth > 4.13" | for 10-Year event |
| Inflow = | 7.04 cfs @ 12.15 hrs, Volume= | 0.567 af |
| Outflow = | 6.72 cfs @ 12.20 hrs, Volume= | 0.566 af, Atten= 5%, Lag= 2.6 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.93 fps, Min. Travel Time= 1.5 min
 Avg. Velocity = 0.80 fps, Avg. Travel Time= 5.4 min


Peak Storage= 604 cf @ 12.17 hrs
 Average Depth at Peak Storage= 0.44'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/'
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

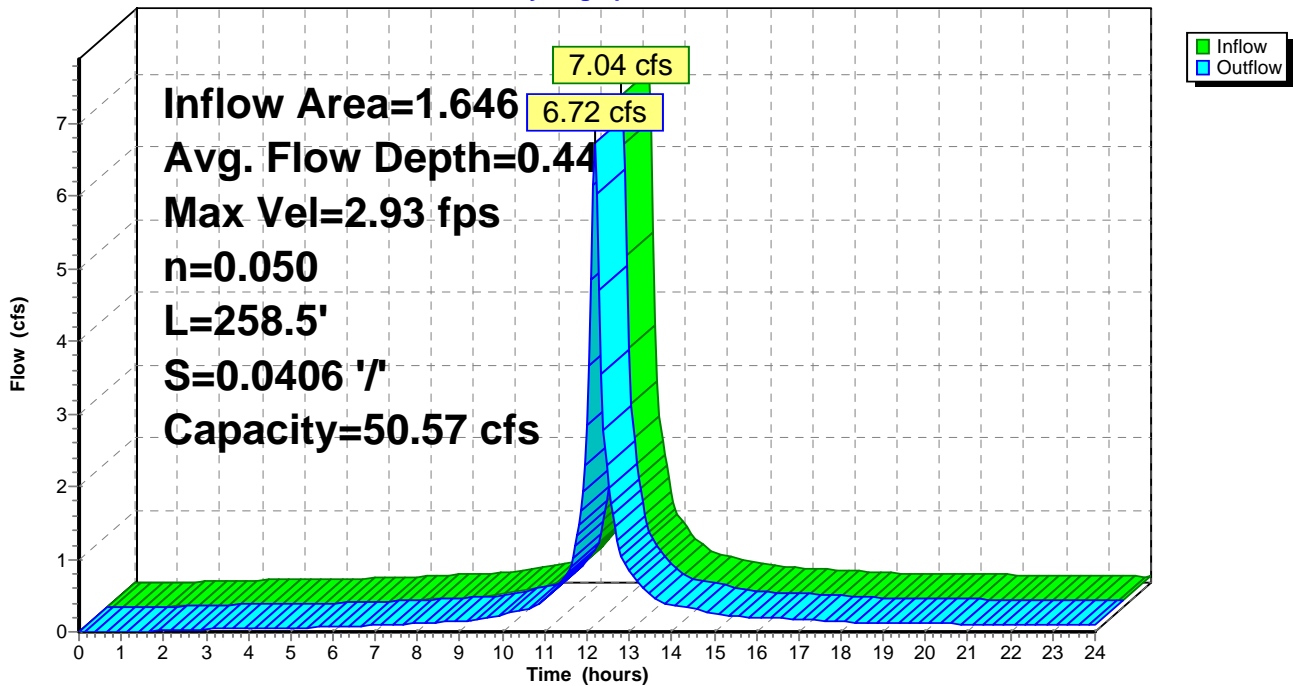

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 4.75" for 10-Year event
Inflow = 4.46 cfs @ 12.15 hrs, Volume= 0.357 af
Primary = 4.46 cfs @ 12.15 hrs, Volume= 0.357 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

10-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

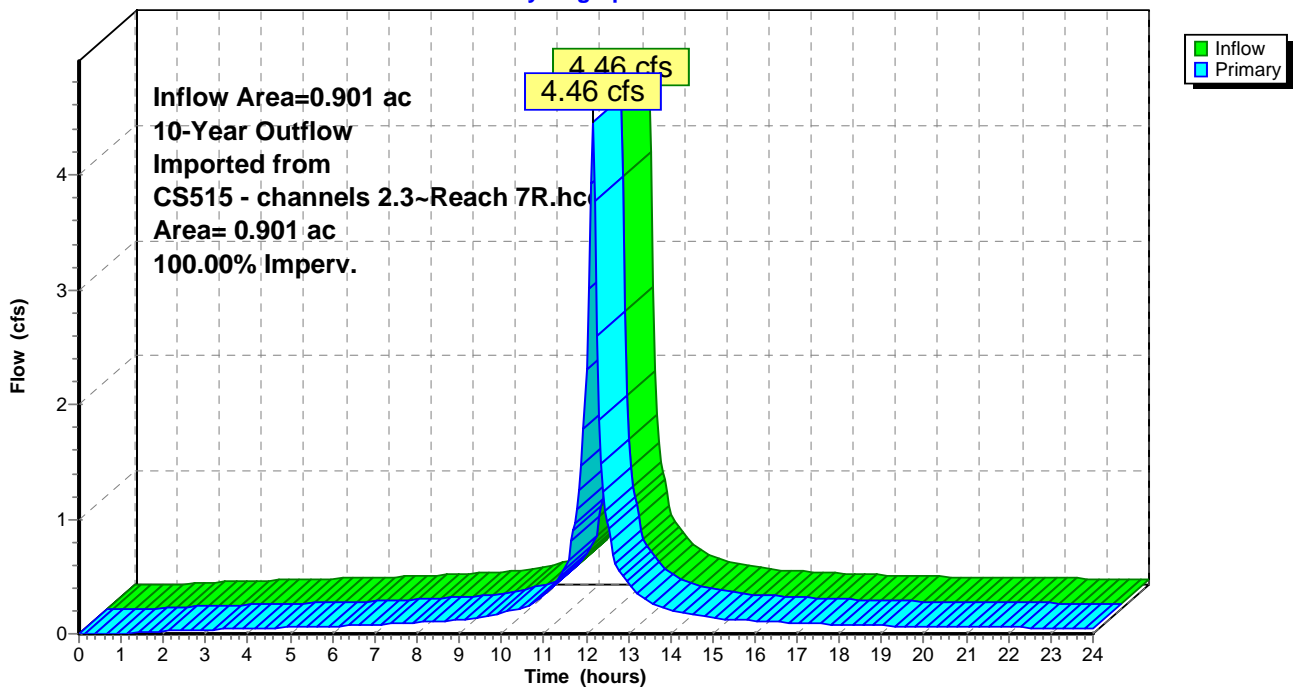

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>5.49"
Tc=5.0 min CN=94 Runoff=7.14 cfs 0.507 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>4.81"
Tc=5.0 min CN=88 Runoff=3.07 cfs 0.206 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>3.86"
Tc=5.0 min CN=79 Runoff=1.16 cfs 0.074 af

Reach 4R: C-1 Avg. Flow Depth=0.45' Max Vel=2.88 fps Inflow=7.14 cfs 0.507 af
n=0.050 L=72.0' S=0.0382 '/' Capacity=49.04 cfs Outflow=6.96 cfs 0.507 af

Reach 8R: C-4 Avg. Flow Depth=0.46' Max Vel=1.82 fps Inflow=3.07 cfs 0.206 af
n=0.050 L=345.8' S=0.0174 '/' Capacity=22.72 cfs Outflow=2.79 cfs 0.205 af

Reach 13R: C-5 Avg. Flow Depth=0.50' Max Vel=3.17 fps Inflow=9.04 cfs 0.726 af
n=0.050 L=258.5' S=0.0406 '/' Capacity=50.57 cfs Outflow=8.63 cfs 0.725 af

Link 14L: 25-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=5.56 cfs 0.447 af
Area= 0.901 ac 100.00% Imperv. Primary=5.56 cfs 0.447 af

Total Runoff Area = 1.854 ac Runoff Volume = 0.788 af Average Runoff Depth = 5.10"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 7.14 cfs @ 12.11 hrs, Volume= 0.507 af, Depth> 5.49"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

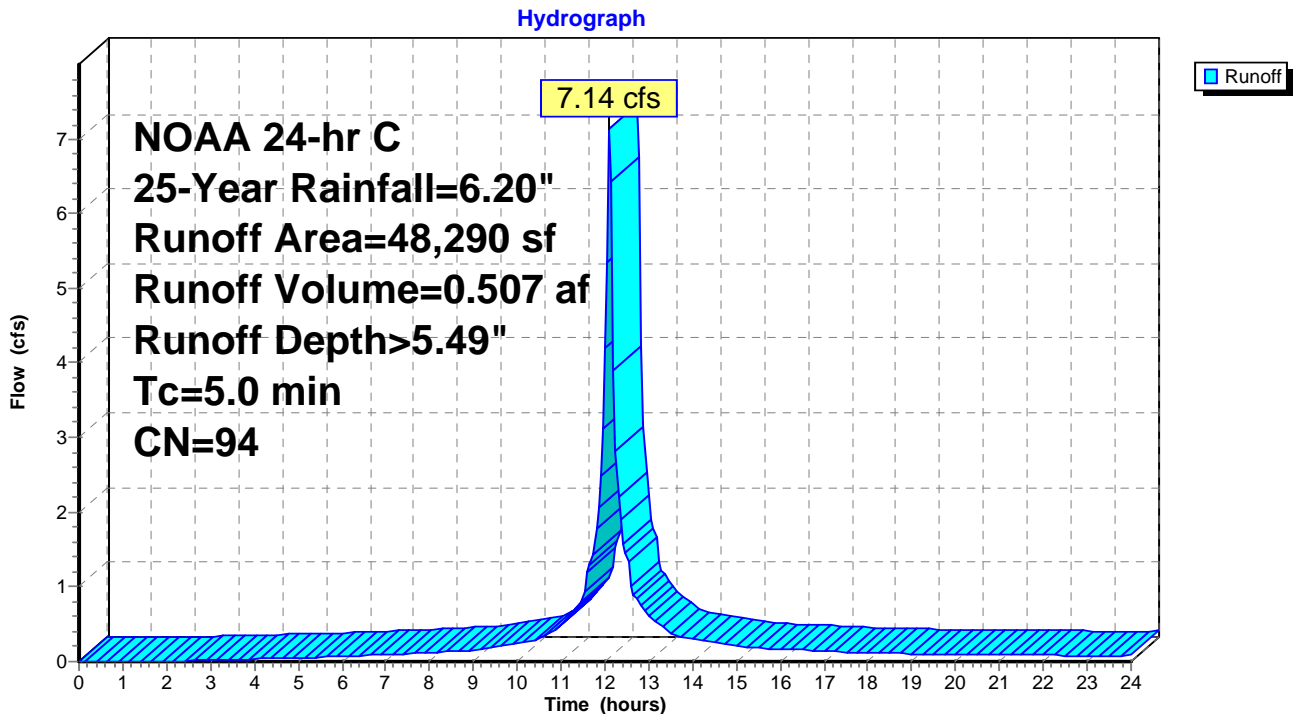

Summary for Subcatchment 14S: C-4

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 3.07 cfs @ 12.11 hrs, Volume= 0.206 af, Depth> 4.81"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

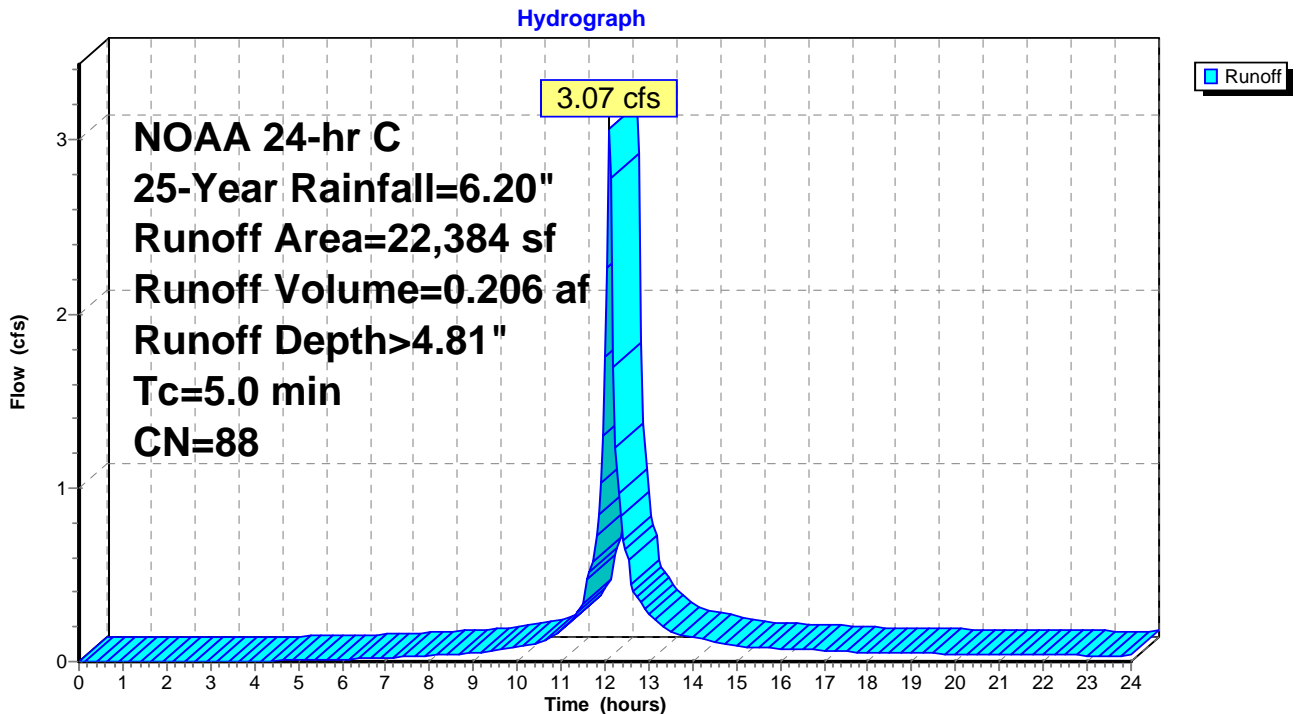

Summary for Subcatchment 15S: C-5

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.16 cfs @ 12.11 hrs, Volume= 0.074 af, Depth> 3.86"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

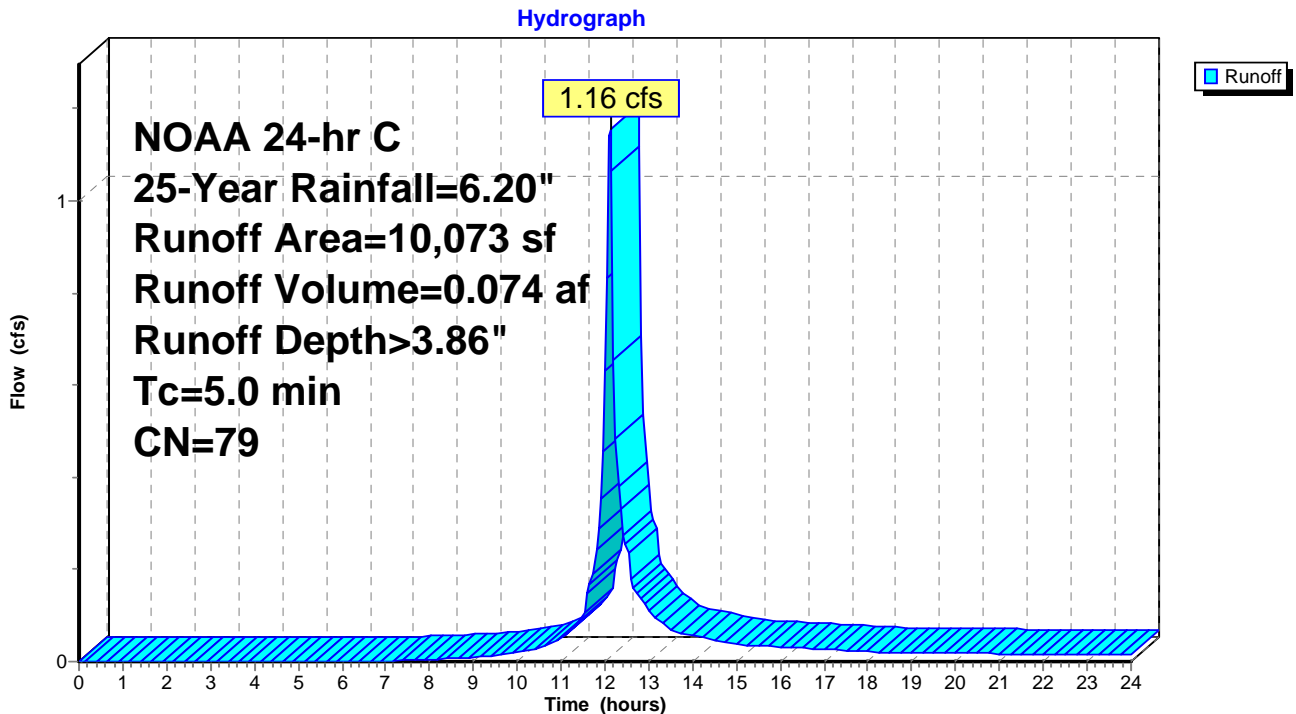


Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 5.49" for 25-Year event
 Inflow = 7.14 cfs @ 12.11 hrs, Volume= 0.507 af
 Outflow = 6.96 cfs @ 12.13 hrs, Volume= 0.507 af, Atten= 3%, Lag= 0.9 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.88 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.77 fps, Avg. Travel Time= 1.6 min


Peak Storage= 174 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.45'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/'
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'

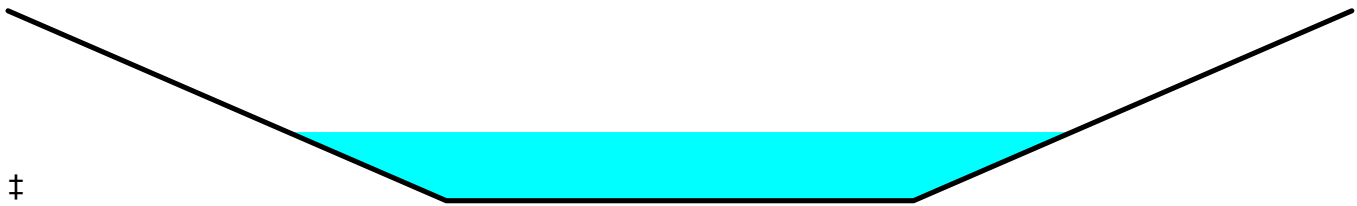

Reach 4R: C-1

Hydrograph

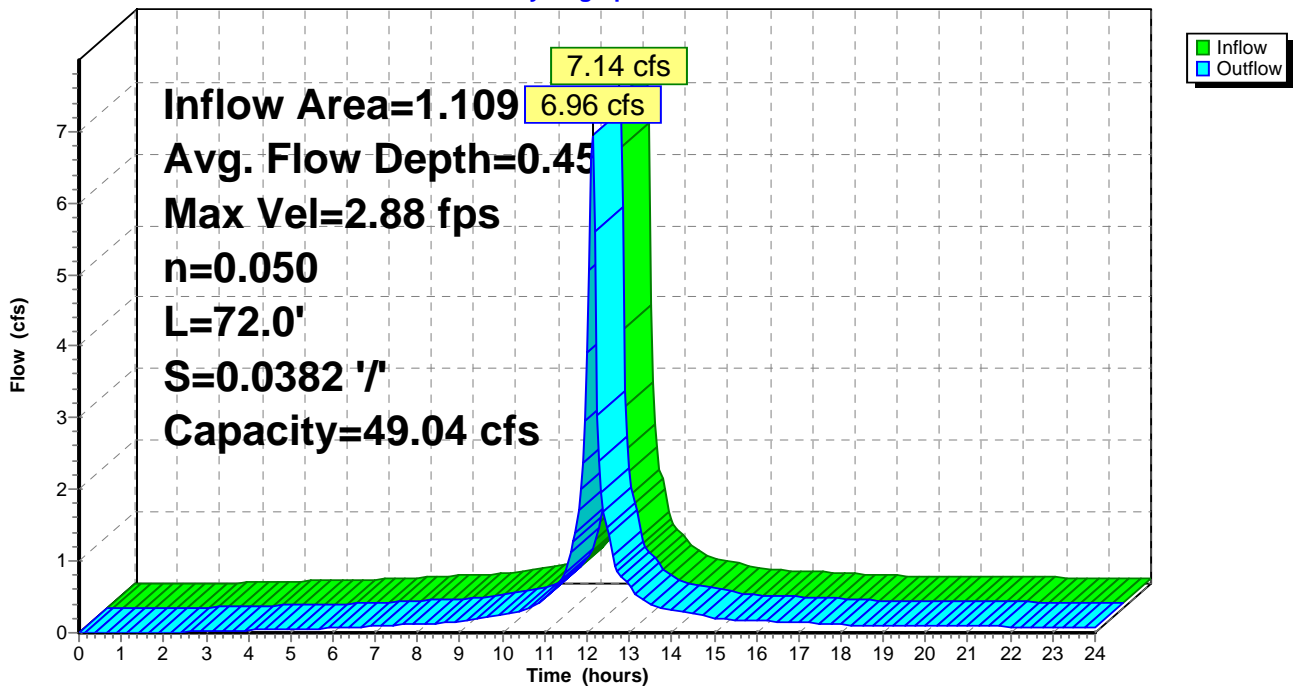

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 4.81" for 25-Year event
 Inflow = 3.07 cfs @ 12.11 hrs, Volume= 0.206 af
 Outflow = 2.79 cfs @ 12.20 hrs, Volume= 0.205 af, Atten= 9%, Lag= 5.2 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.82 fps, Min. Travel Time= 3.2 min
 Avg. Velocity = 0.54 fps, Avg. Travel Time= 10.6 min


Peak Storage= 535 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.46'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

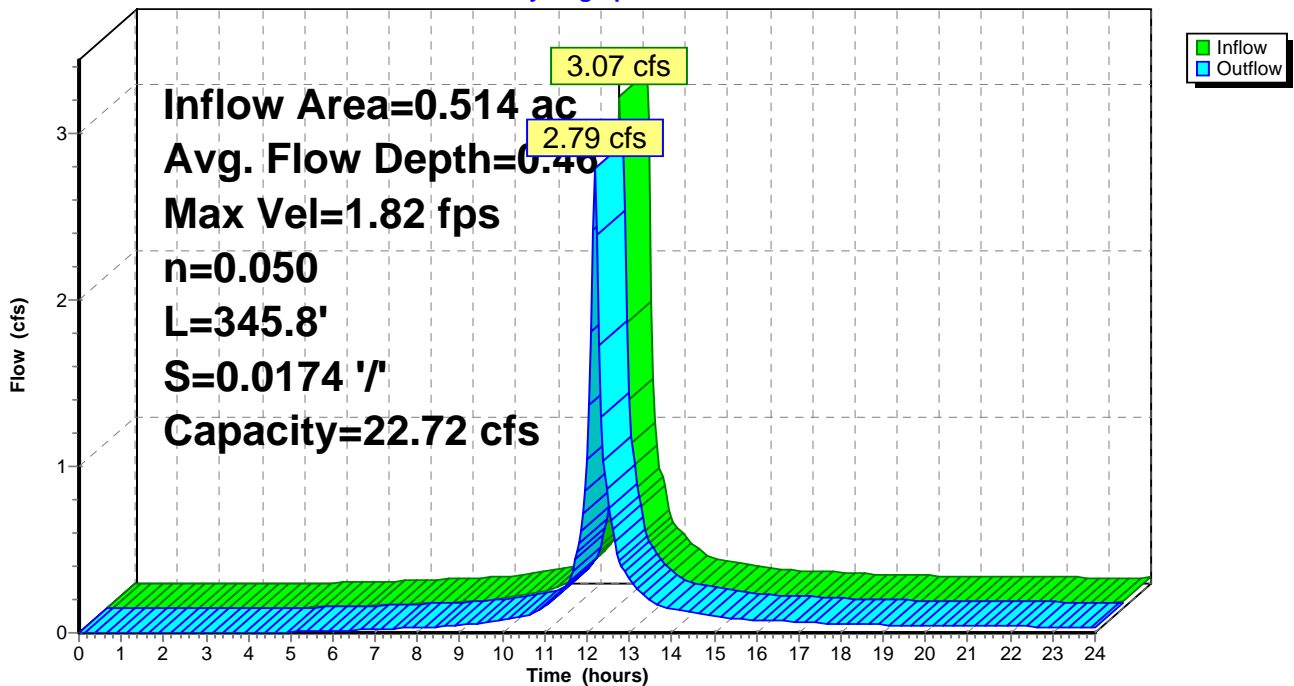

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.58' @ 12.25 hrs

Inflow Area = 1.646 ac, 72.02% Impervious, Inflow Depth > 5.30" for 25-Year event
 Inflow = 9.04 cfs @ 12.15 hrs, Volume= 0.726 af
 Outflow = 8.63 cfs @ 12.19 hrs, Volume= 0.725 af, Atten= 5%, Lag= 2.4 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.17 fps, Min. Travel Time= 1.4 min
 Avg. Velocity = 0.87 fps, Avg. Travel Time= 4.9 min


Peak Storage= 719 cf @ 12.17 hrs
 Average Depth at Peak Storage= 0.50'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/'
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

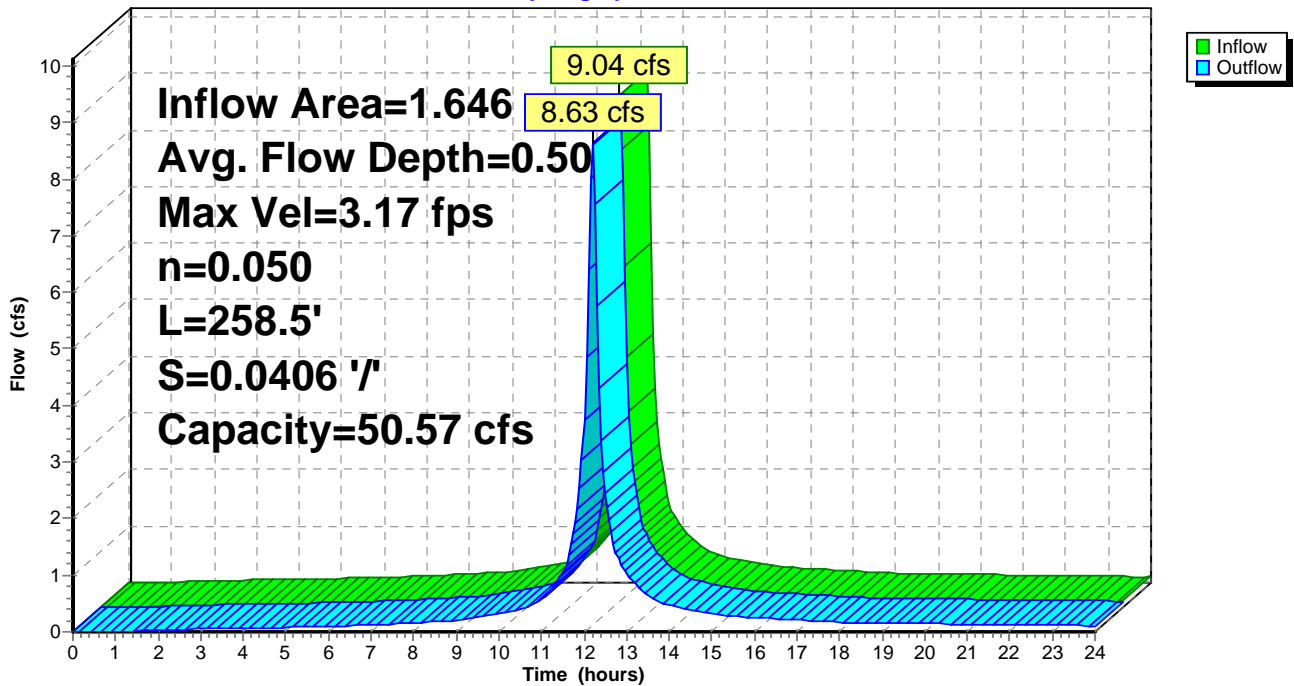

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 5.95" for 25-Year event
Inflow = 5.56 cfs @ 12.15 hrs, Volume= 0.447 af
Primary = 5.56 cfs @ 12.15 hrs, Volume= 0.447 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

25-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

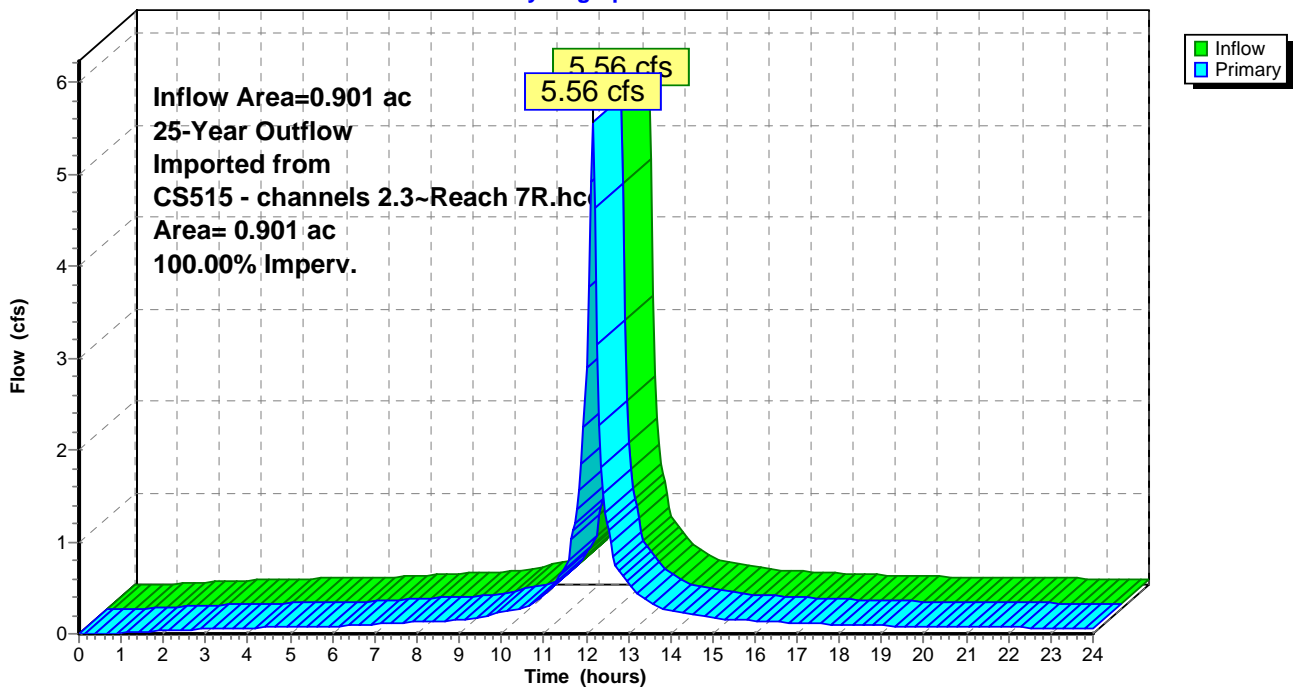

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>6.44"
Tc=5.0 min CN=94 Runoff=8.30 cfs 0.595 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>5.74"
Tc=5.0 min CN=88 Runoff=3.62 cfs 0.246 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>4.73"
Tc=5.0 min CN=79 Runoff=1.41 cfs 0.091 af

Reach 4R: C-1 Avg. Flow Depth=0.49' Max Vel=3.02 fps Inflow=8.30 cfs 0.595 af
n=0.050 L=72.0' S=0.0382 '/' Capacity=49.04 cfs Outflow=8.09 cfs 0.595 af

Reach 8R: C-4 Avg. Flow Depth=0.50' Max Vel=1.90 fps Inflow=3.62 cfs 0.246 af
n=0.050 L=345.8' S=0.0174 '/' Capacity=22.72 cfs Outflow=3.33 cfs 0.245 af

Reach 13R: C-5 Avg. Flow Depth=0.55' Max Vel=3.33 fps Inflow=10.64 cfs 0.855 af
n=0.050 L=258.5' S=0.0406 '/' Capacity=50.57 cfs Outflow=10.16 cfs 0.854 af

Link 14L: 50-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=6.45 cfs 0.519 af
Area= 0.901 ac 100.00% Imperv. Primary=6.45 cfs 0.519 af

Total Runoff Area = 1.854 ac Runoff Volume = 0.932 af Average Runoff Depth = 6.03"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: Tc<2dt may require smaller dt


Runoff = 8.30 cfs @ 12.11 hrs, Volume= 0.595 af, Depth> 6.44"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

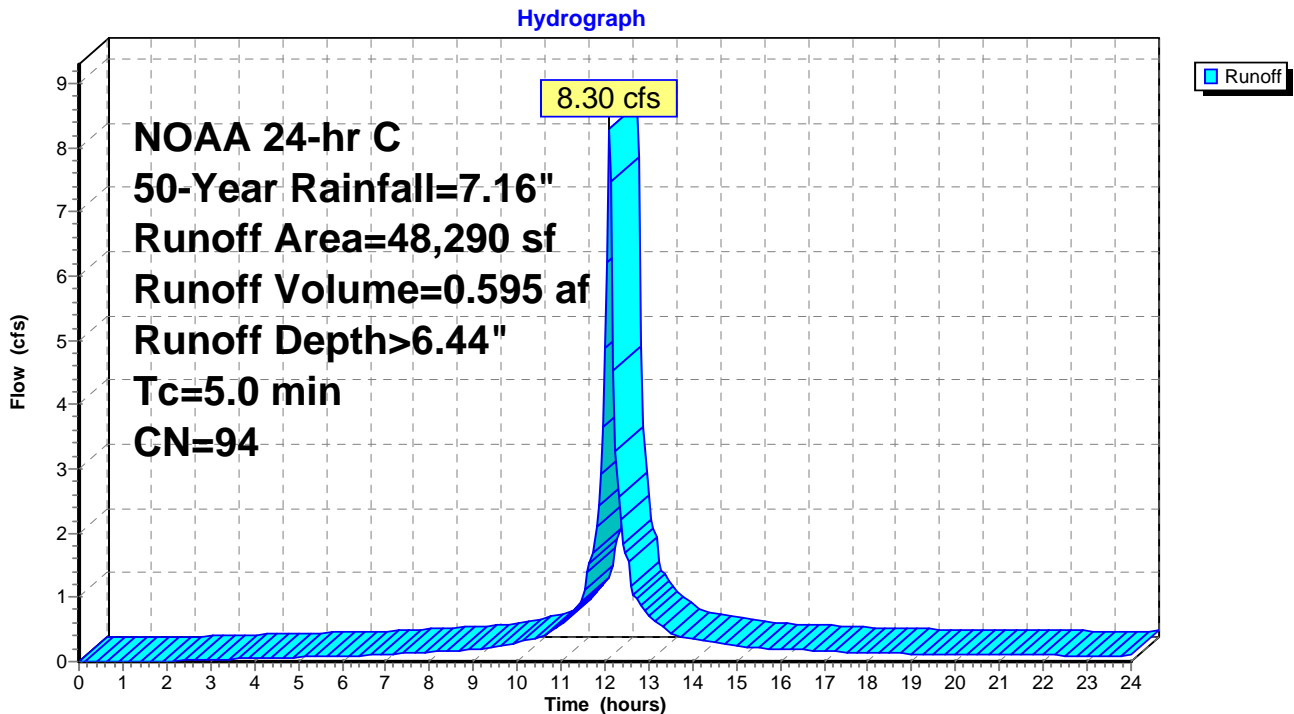

Summary for Subcatchment 14S: C-4

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 3.62 cfs @ 12.11 hrs, Volume= 0.246 af, Depth> 5.74"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

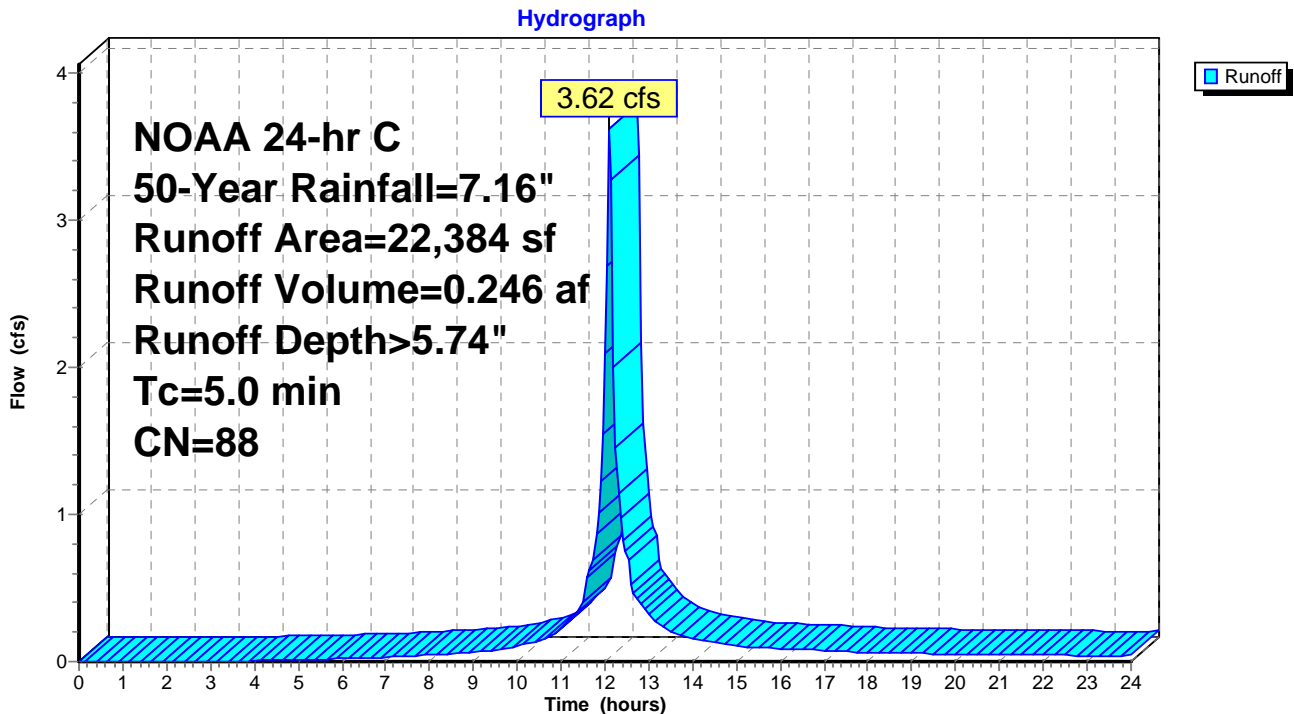

Summary for Subcatchment 15S: C-5

[49] Hint: Tc<2dt may require smaller dt


Runoff = 1.41 cfs @ 12.11 hrs, Volume= 0.091 af, Depth> 4.73"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

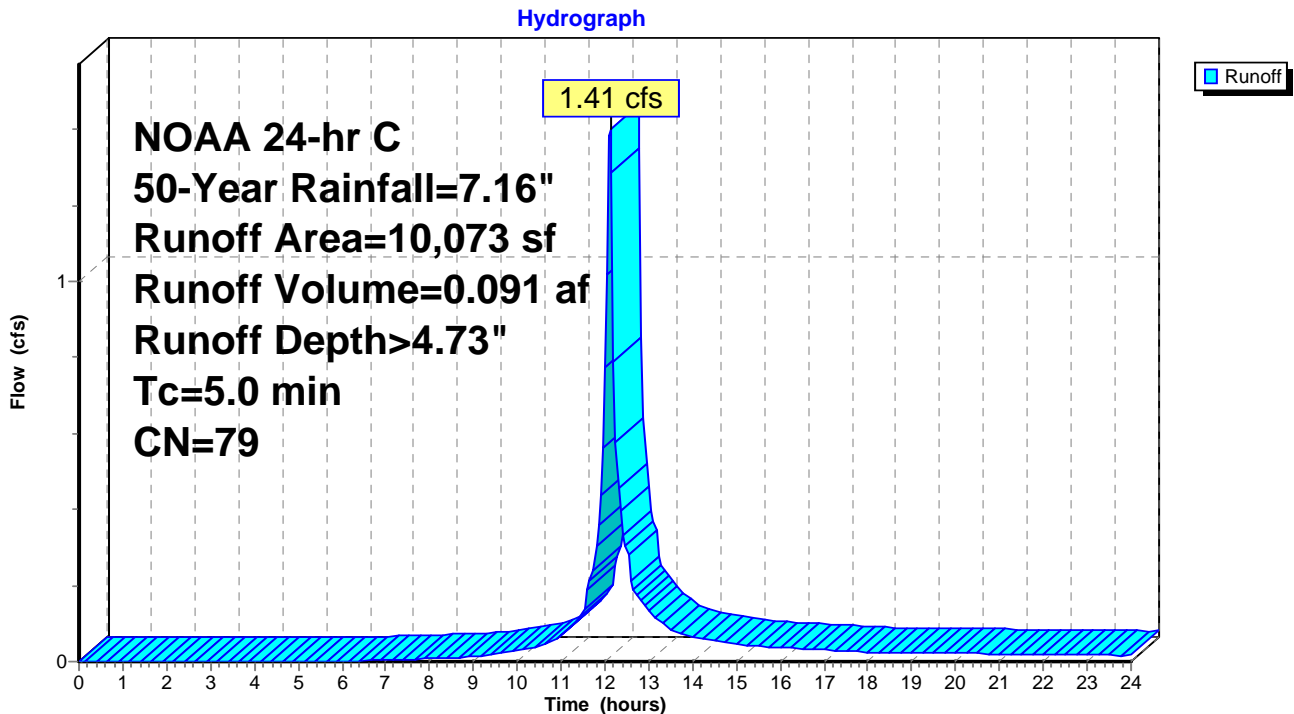

Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 6.44" for 50-Year event
 Inflow = 8.30 cfs @ 12.11 hrs, Volume= 0.595 af
 Outflow = 8.09 cfs @ 12.13 hrs, Volume= 0.595 af, Atten= 3%, Lag= 0.9 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.02 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.81 fps, Avg. Travel Time= 1.5 min


Peak Storage= 193 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.49'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'



Reach 4R: C-1

Hydrograph

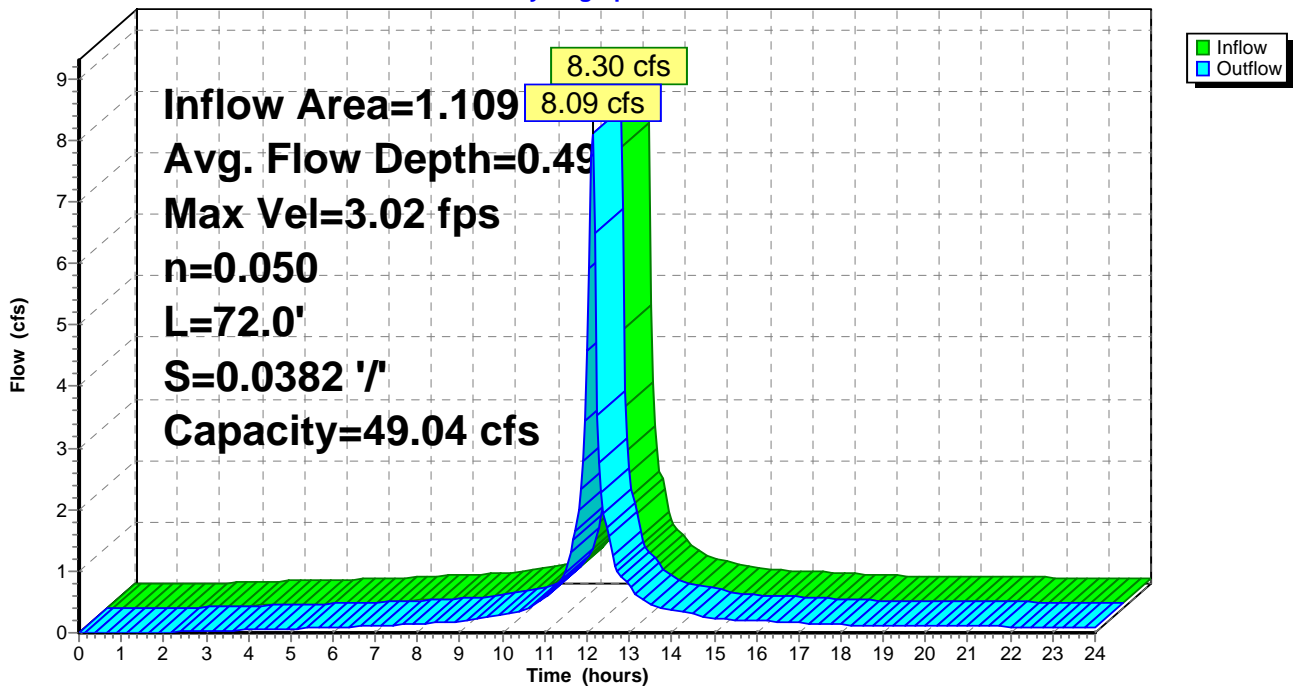

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 5.74" for 50-Year event
 Inflow = 3.62 cfs @ 12.11 hrs, Volume= 0.246 af
 Outflow = 3.33 cfs @ 12.20 hrs, Volume= 0.245 af, Atten= 8%, Lag= 5.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.90 fps, Min. Travel Time= 3.0 min
 Avg. Velocity = 0.57 fps, Avg. Travel Time= 10.1 min


Peak Storage= 606 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.50'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

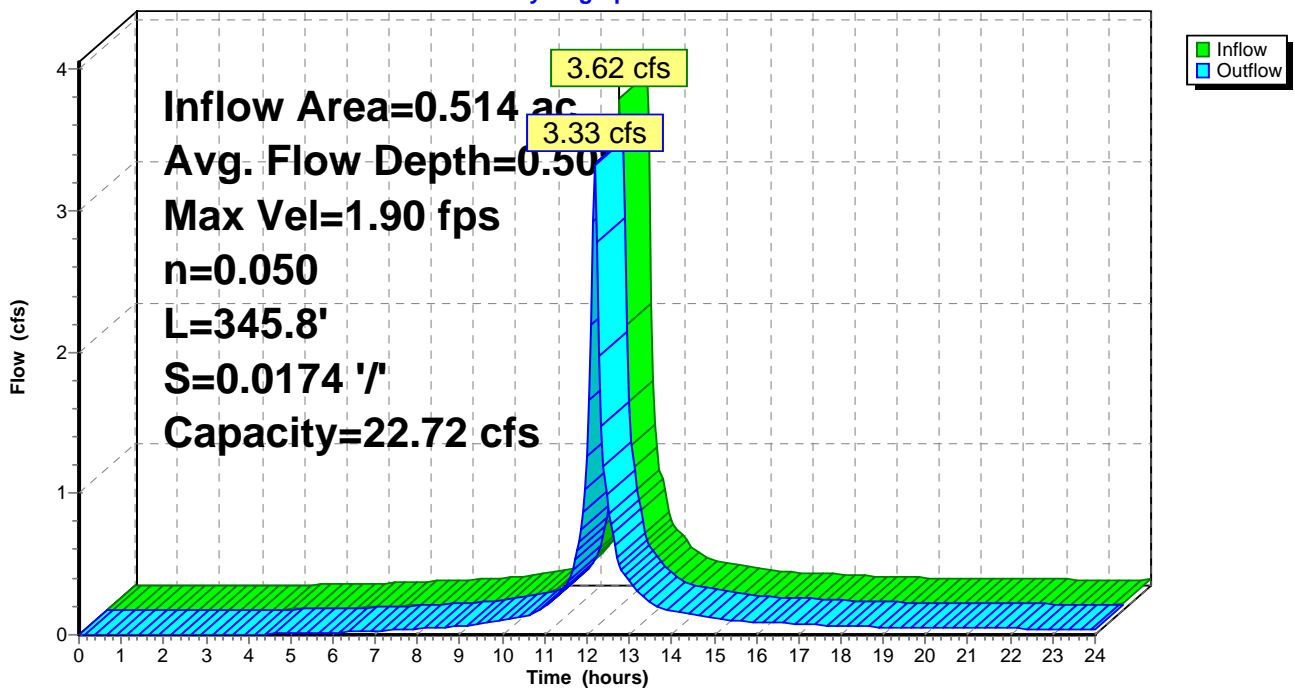

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.59' @ 12.25 hrs

Inflow Area = 1.646 ac, 72.02% Impervious, Inflow Depth > 6.23" for 50-Year event
 Inflow = 10.64 cfs @ 12.15 hrs, Volume= 0.855 af
 Outflow = 10.16 cfs @ 12.19 hrs, Volume= 0.854 af, Atten= 5%, Lag= 2.3 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.33 fps, Min. Travel Time= 1.3 min
 Avg. Velocity = 0.93 fps, Avg. Travel Time= 4.6 min


Peak Storage= 807 cf @ 12.17 hrs
 Average Depth at Peak Storage= 0.55'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

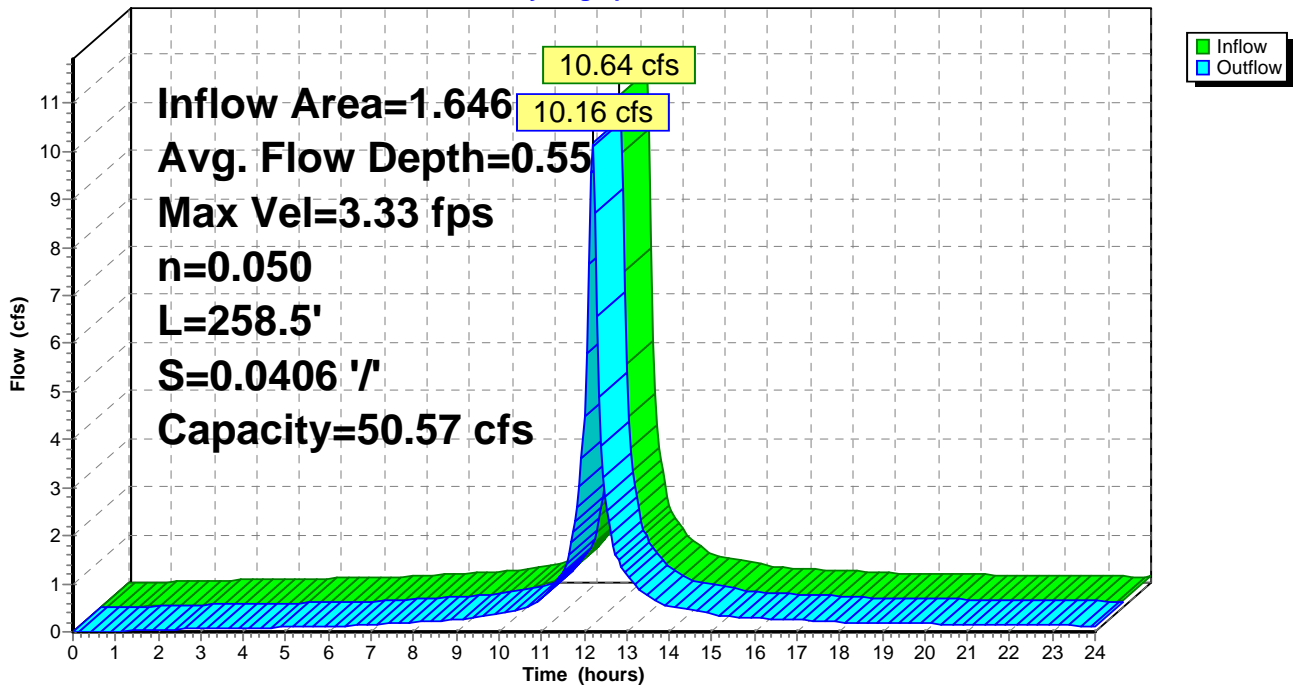

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 6.91" for 50-Year event
Inflow = 6.45 cfs @ 12.14 hrs, Volume= 0.519 af
Primary = 6.45 cfs @ 12.14 hrs, Volume= 0.519 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

50-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

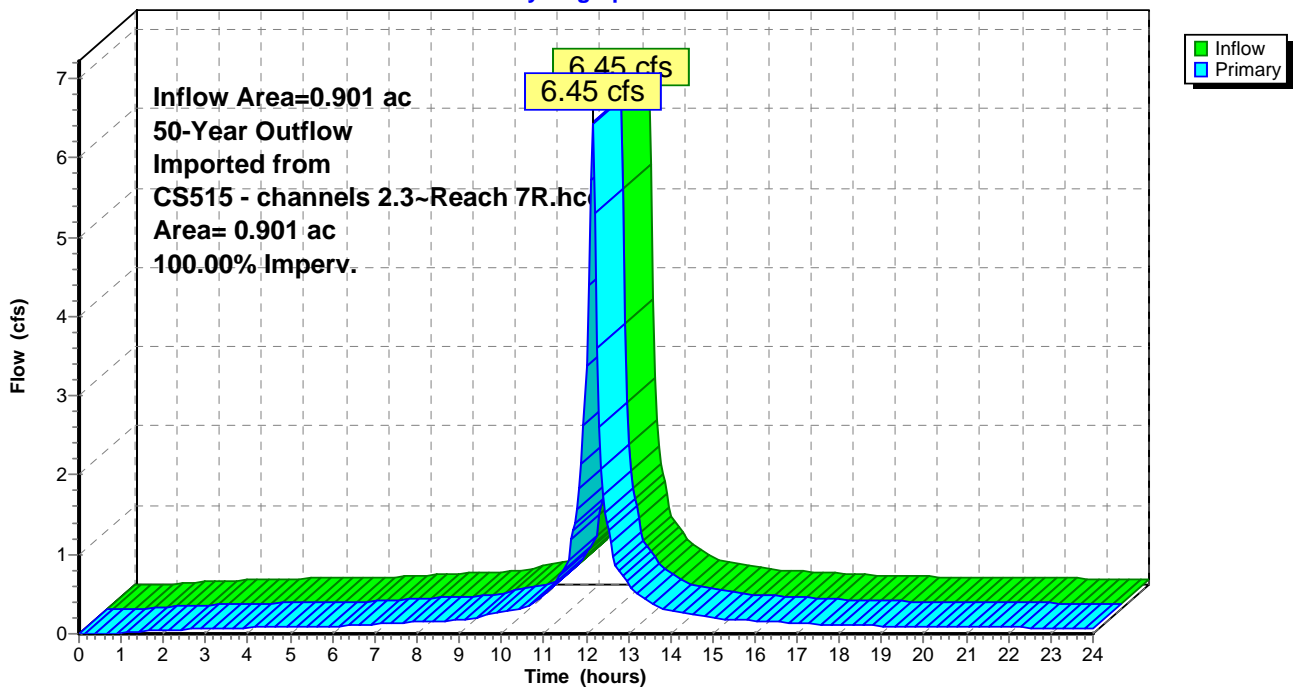

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 5S: C-1 Runoff Area=48,290 sf 81.96% Impervious Runoff Depth>7.70"
Tc=5.0 min CN=94 Runoff=9.83 cfs 0.712 af

Subcatchment 14S: C-4 Runoff Area=22,384 sf 52.25% Impervious Runoff Depth>6.98"
Tc=5.0 min CN=88 Runoff=4.35 cfs 0.299 af

Subcatchment 15S: C-5 Runoff Area=10,073 sf 6.95% Impervious Runoff Depth>5.90"
Tc=5.0 min CN=79 Runoff=1.74 cfs 0.114 af

Reach 4R: C-1 Avg. Flow Depth=0.54' Max Vel=3.18 fps Inflow=9.83 cfs 0.712 af
n=0.050 L=72.0' S=0.0382 '/' Capacity=49.04 cfs Outflow=9.59 cfs 0.711 af

Reach 8R: C-4 Avg. Flow Depth=0.55' Max Vel=2.00 fps Inflow=4.35 cfs 0.299 af
n=0.050 L=345.8' S=0.0174 '/' Capacity=22.72 cfs Outflow=4.00 cfs 0.298 af

Reach 13R: C-5 Avg. Flow Depth=0.61' Max Vel=3.52 fps Inflow=12.75 cfs 1.026 af
n=0.050 L=258.5' S=0.0406 '/' Capacity=50.57 cfs Outflow=12.17 cfs 1.024 af

Link 14L: 100-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce Inflow=7.61 cfs 0.614 af
Area= 0.901 ac 100.00% Imperv. Primary=7.61 cfs 0.614 af

Total Runoff Area = 1.854 ac Runoff Volume = 1.125 af Average Runoff Depth = 7.28"
35.63% Pervious = 0.661 ac 64.37% Impervious = 1.193 ac

Summary for Subcatchment 5S: C-1

[49] Hint: Tc<2dt may require smaller dt


Runoff = 9.83 cfs @ 12.11 hrs, Volume= 0.712 af, Depth> 7.70"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| | Area (sf) | CN | Description |
|---|-----------|----|---------------------------|
| * | 39,580 | 98 | Paved parking, HSG D |
| | 8,710 | 78 | Meadow, non-grazed, HSG D |
| | 48,290 | 94 | Weighted Average |
| | 8,710 | | 18.04% Pervious Area |
| | 39,580 | | 81.96% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 5S: C-1

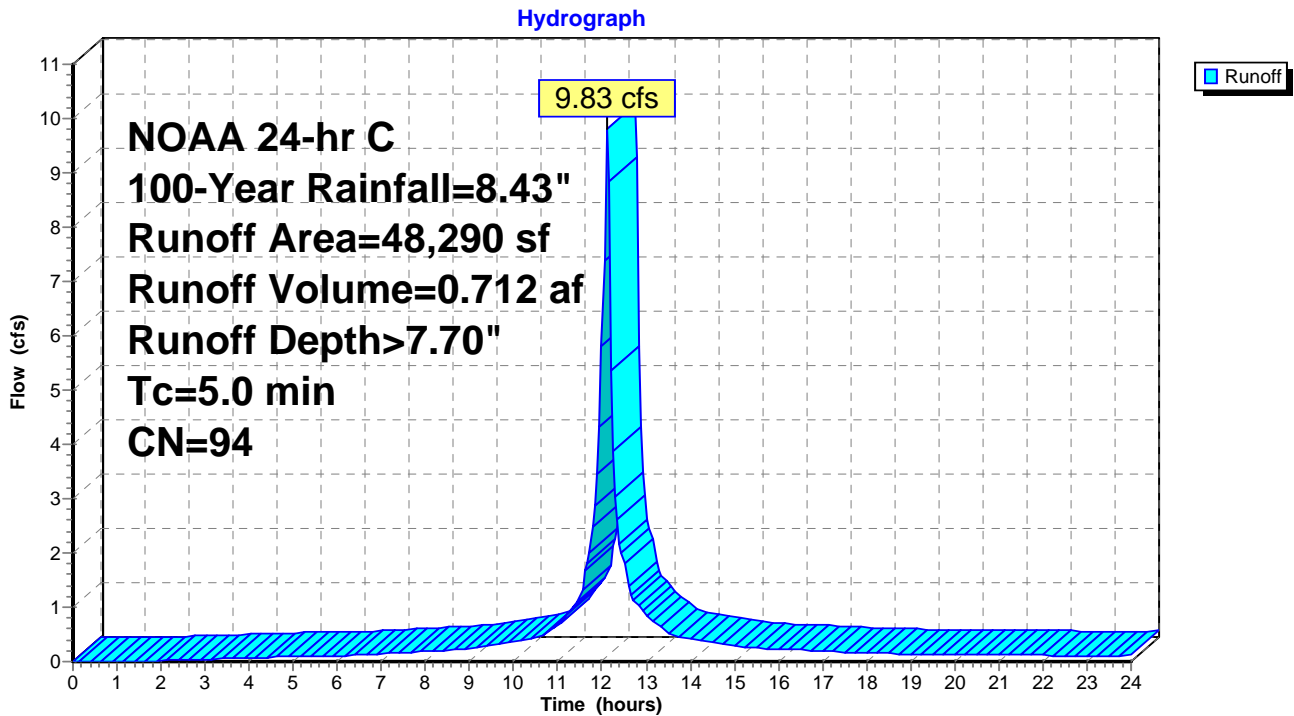

Summary for Subcatchment 14S: C-4

[49] Hint: Tc<2dt may require smaller dt


Runoff = 4.35 cfs @ 12.11 hrs, Volume= 0.299 af, Depth> 6.98"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 11,695 | 98 | Paved parking, HSG D |
| 10,689 | 78 | Meadow, non-grazed, HSG D |
| 22,384 | 88 | Weighted Average |
| 10,689 | | 47.75% Pervious Area |
| 11,695 | | 52.25% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 14S: C-4

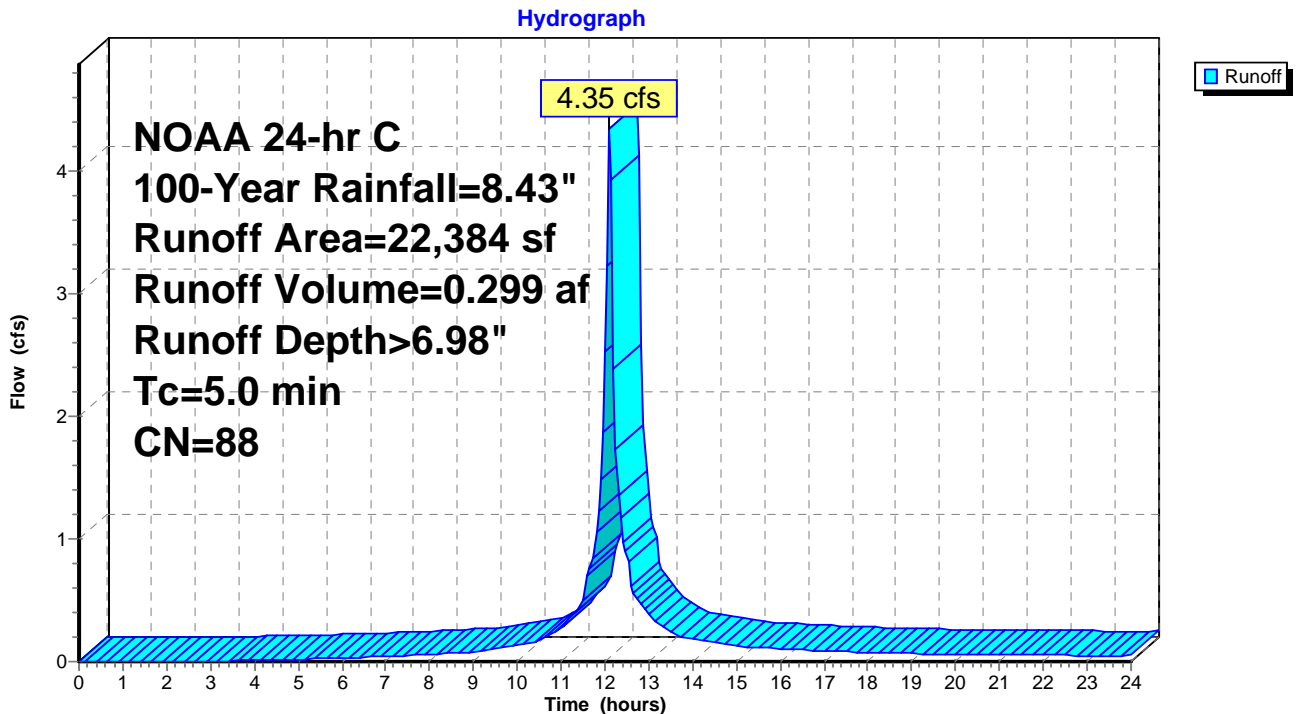

Summary for Subcatchment 15S: C-5

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.74 cfs @ 12.11 hrs, Volume= 0.114 af, Depth> 5.90"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|---------------------------|
| 700 | 98 | Paved parking, HSG D |
| 9,373 | 78 | Meadow, non-grazed, HSG D |
| 10,073 | 79 | Weighted Average |
| 9,373 | | 93.05% Pervious Area |
| 700 | | 6.95% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: C-5

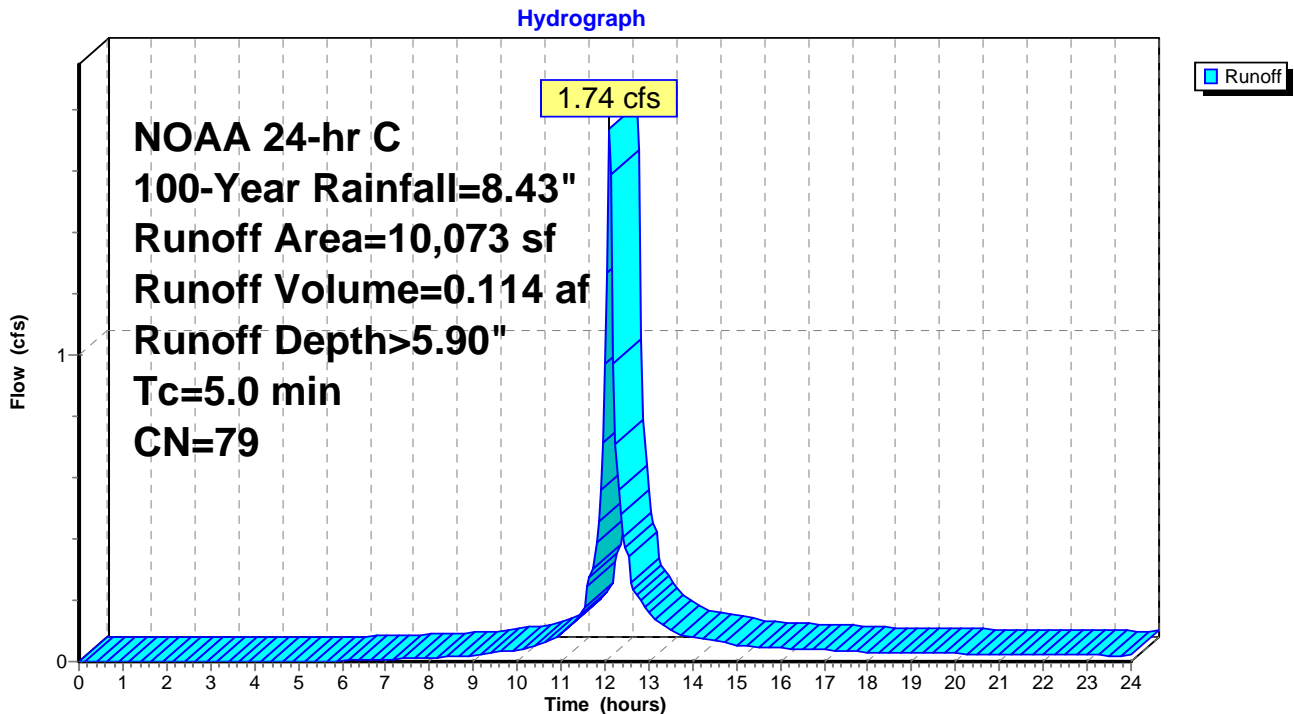

Summary for Reach 4R: C-1

Inflow Area = 1.109 ac, 81.96% Impervious, Inflow Depth > 7.70" for 100-Year event
 Inflow = 9.83 cfs @ 12.11 hrs, Volume= 0.712 af
 Outflow = 9.59 cfs @ 12.13 hrs, Volume= 0.711 af, Atten= 2%, Lag= 0.8 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.18 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.87 fps, Avg. Travel Time= 1.4 min


Peak Storage= 218 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.54'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 49.04 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 11.50'
 Length= 72.0' Slope= 0.0382 '/
 Inlet Invert= 1,937.75', Outlet Invert= 1,935.00'



Reach 4R: C-1

Hydrograph

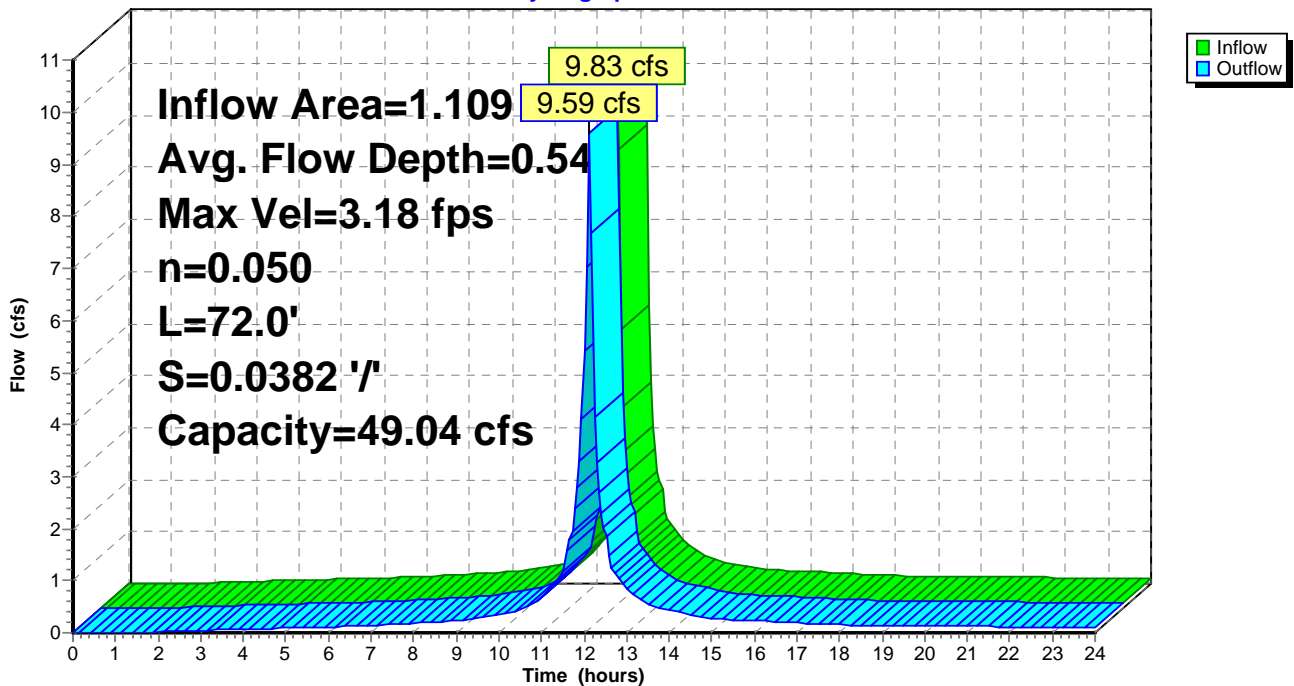

Summary for Reach 8R: C-4

Inflow Area = 0.514 ac, 52.25% Impervious, Inflow Depth > 6.98" for 100-Year event
 Inflow = 4.35 cfs @ 12.11 hrs, Volume= 0.299 af
 Outflow = 4.00 cfs @ 12.19 hrs, Volume= 0.298 af, Atten= 8%, Lag= 4.9 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.00 fps, Min. Travel Time= 2.9 min
 Avg. Velocity = 0.61 fps, Avg. Travel Time= 9.5 min


Peak Storage= 695 cf @ 12.14 hrs
 Average Depth at Peak Storage= 0.55'
 Bank-Full Depth= 1.25' Flow Area= 7.2 sf, Capacity= 22.72 cfs

2.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/ Top Width= 9.50'
 Length= 345.8' Slope= 0.0174 '/
 Inlet Invert= 1,940.00', Outlet Invert= 1,934.00'



Reach 8R: C-4

Hydrograph

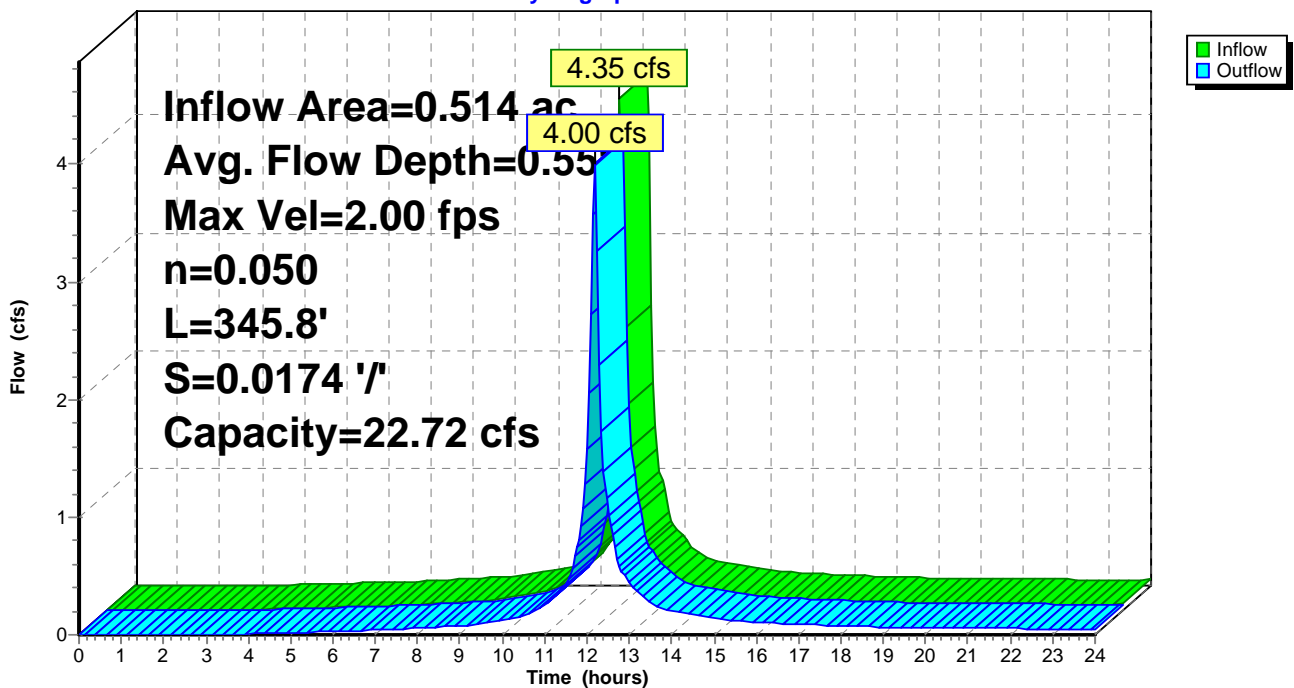

Summary for Reach 13R: C-5

[62] Hint: Exceeded Reach 8R OUTLET depth by 1.60' @ 12.25 hrs

Inflow Area = 1.646 ac, 72.02% Impervious, Inflow Depth > 7.48" for 100-Year event
 Inflow = 12.75 cfs @ 12.15 hrs, Volume= 1.026 af
 Outflow = 12.17 cfs @ 12.19 hrs, Volume= 1.024 af, Atten= 5%, Lag= 2.2 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.52 fps, Min. Travel Time= 1.2 min
 Avg. Velocity = 0.99 fps, Avg. Travel Time= 4.3 min


Peak Storage= 917 cf @ 12.16 hrs
 Average Depth at Peak Storage= 0.61'
 Bank-Full Depth= 1.25' Flow Area= 9.7 sf, Capacity= 50.57 cfs

4.00' x 1.25' deep channel, n= 0.050
 Side Slope Z-value= 3.0 '/' Top Width= 11.50'
 Length= 258.5' Slope= 0.0406 '/'
 Inlet Invert= 1,935.50', Outlet Invert= 1,925.00'



Reach 13R: C-5

Hydrograph

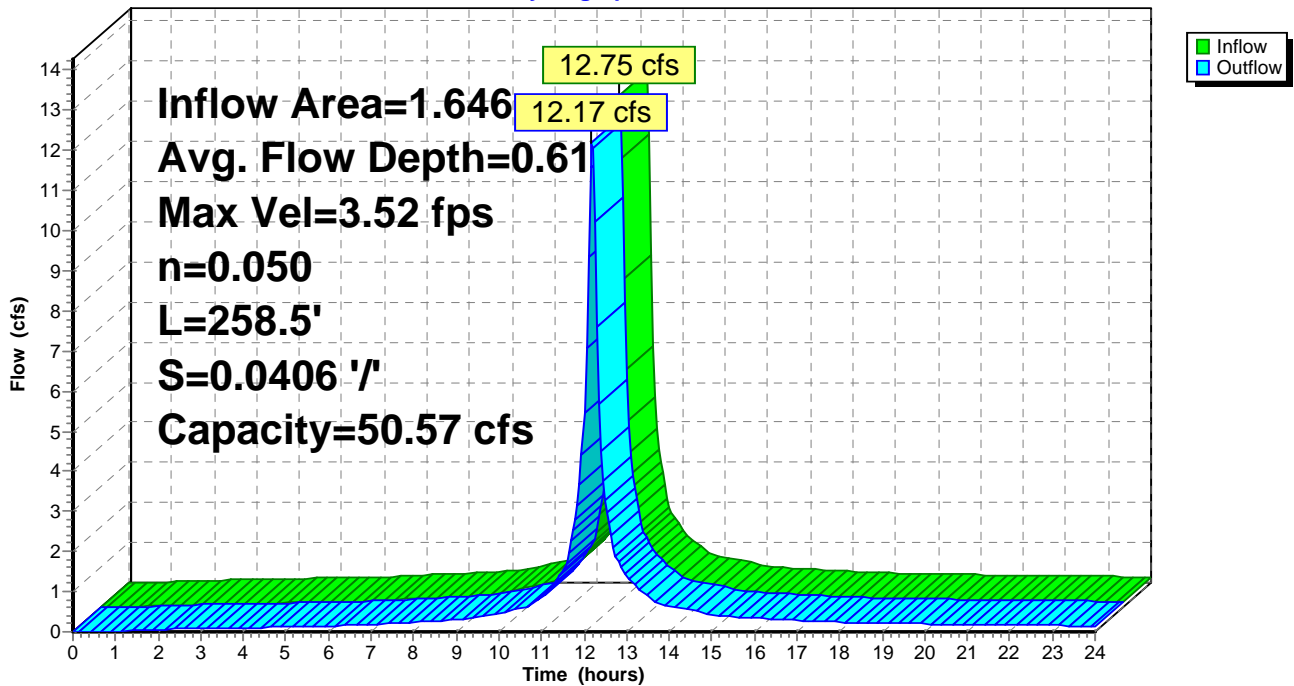

Summary for Link 14L: Culvert 1


Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 8.17" for 100-Year event
Inflow = 7.61 cfs @ 12.14 hrs, Volume= 0.614 af
Primary = 7.61 cfs @ 12.14 hrs, Volume= 0.614 af, Atten= 0%, Lag= 0.0 min



Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

100-Year Outflow Imported from CS515 - channels 2.3~Reach 7R.hce

Link 14L: Culvert 1

Hydrograph

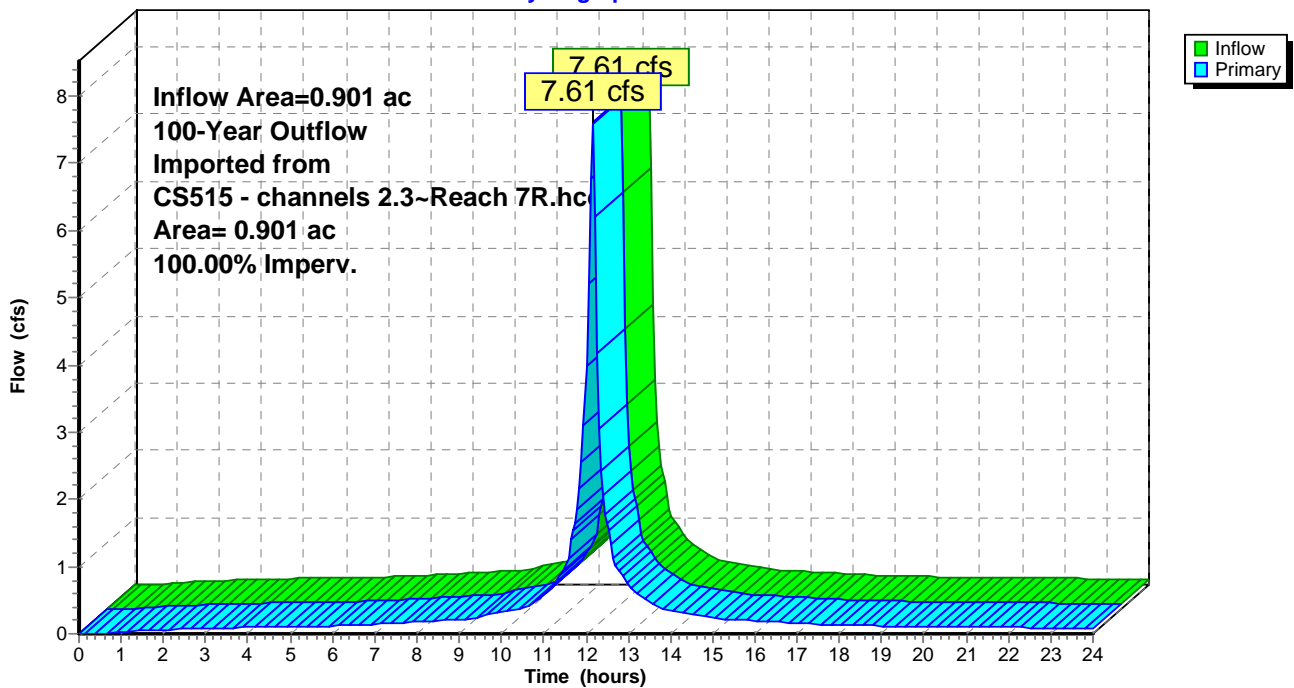


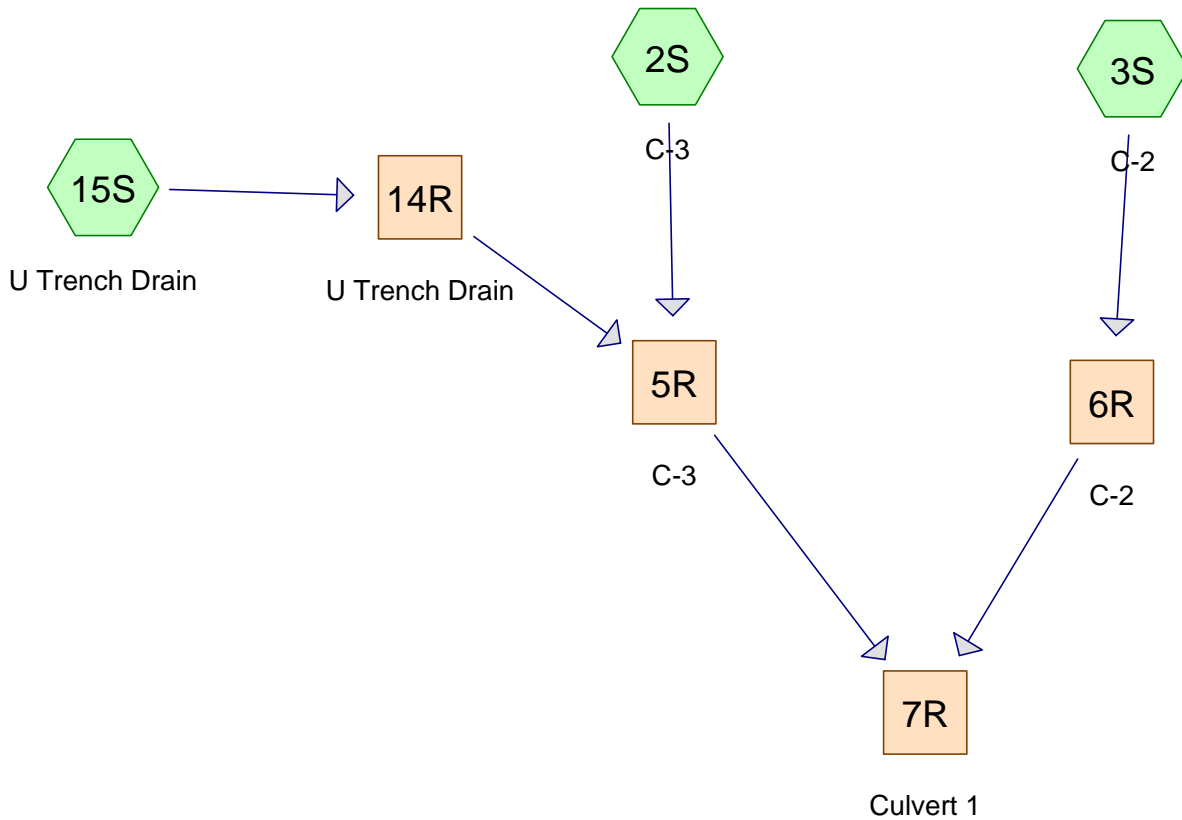

Subcat



Reach



Pond



Link

Project Notes

Rainfall events imported from "NRCS-Rain.txt" for 7639 PA Luzerne-C

CS515 - channels 2.3

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 3

Area Listing (all nodes)

| Area (acres) | CN | Description (subcatchment-numbers) |
|-----------------|-----------|---------------------------------------|
| 0.901 | 98 | Paved parking, HSG D (2S, 3S, 15S) |
| 0.901 | 98 | TOTAL AREA |

CS515 - channels 2.3

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 4

Soil Listing (all nodes)

| Area (acres) | Soil Group | Subcatchment Numbers |
|-----------------|---------------|-------------------------|
| 0.000 | HSG A | |
| 0.000 | HSG B | |
| 0.000 | HSG C | |
| 0.901 | HSG D | 2S, 3S, 15S |
| 0.000 | Other | |
| 0.901 | | TOTAL AREA |

CS515 - channels 2.3

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 5

Ground Covers (all nodes)

| HSG-A (acres) | HSG-B (acres) | HSG-C (acres) | HSG-D (acres) | Other (acres) | Total (acres) | Ground Cover | Subcatchment Numbers |
|------------------|------------------|------------------|------------------|------------------|------------------|-------------------|-------------------------|
| 0.000 | 0.000 | 0.000 | 0.901 | 0.000 | 0.901 | Paved parking | 2S, 3S, 15S |
| 0.000 | 0.000 | 0.000 | 0.901 | 0.000 | 0.901 | TOTAL AREA | |

CS515 - channels 2.3

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

Printed 2/24/2022

Page 6

Pipe Listing (all nodes)

| Line# | Node Number | In-Invert (feet) | Out-Invert (feet) | Length (feet) | Slope (ft/ft) | n | Diam/Width (inches) | Height (inches) | Inside-Fill (inches) |
|-------|-------------|------------------|-------------------|---------------|---------------|-------|---------------------|-----------------|----------------------|
| 1 | 7R | 1,935.75 | 1,935.44 | 63.0 | 0.0049 | 0.012 | 18.0 | 0.0 | 0.0 |
| 2 | 14R | 1,941.00 | 1,939.40 | 70.0 | 0.0229 | 0.013 | 10.0 | 10.0 | 0.0 |

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>2.67"
Tc=5.0 min CN=98 Runoff=0.57 cfs 0.042 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>2.67"
Tc=5.0 min CN=98 Runoff=1.92 cfs 0.140 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>2.67"
Tc=5.0 min CN=98 Runoff=0.26 cfs 0.019 af

Reach 5R: C-3 Avg. Flow Depth=0.19' Max Vel=1.72 fps Inflow=0.82 cfs 0.061 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=0.80 cfs 0.061 af

Reach 6R: C-2 Avg. Flow Depth=0.37' Max Vel=1.63 fps Inflow=1.92 cfs 0.140 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=1.78 cfs 0.139 af

Reach 7R: Culvert 1 Avg. Flow Depth=0.58' Max Vel=4.02 fps Inflow=2.57 cfs 0.200 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=2.53 cfs 0.200 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.10' Max Vel=3.16 fps Inflow=0.26 cfs 0.019 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.25 cfs 0.019 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.200 af Average Runoff Depth = 2.67"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.57 cfs @ 12.11 hrs, Volume= 0.042 af, Depth> 2.67"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

Hydrograph

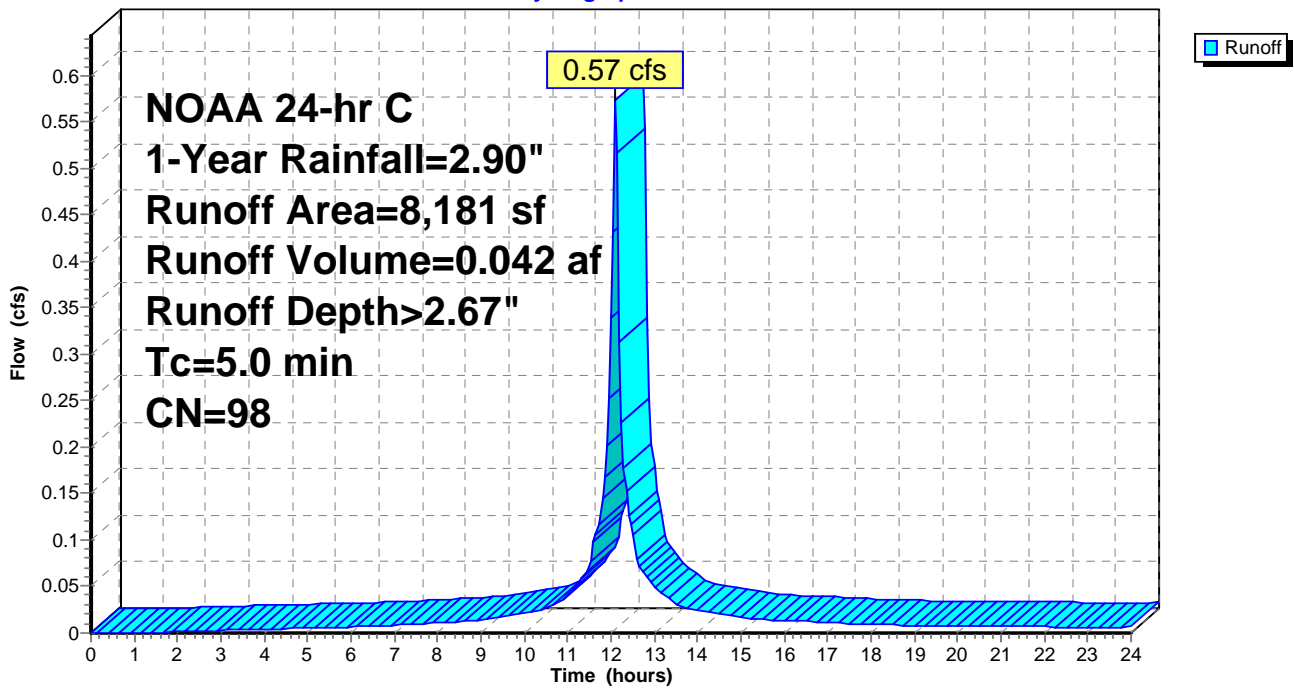

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 1.92 cfs @ 12.11 hrs, Volume= 0.140 af, Depth> 2.67"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

Hydrograph

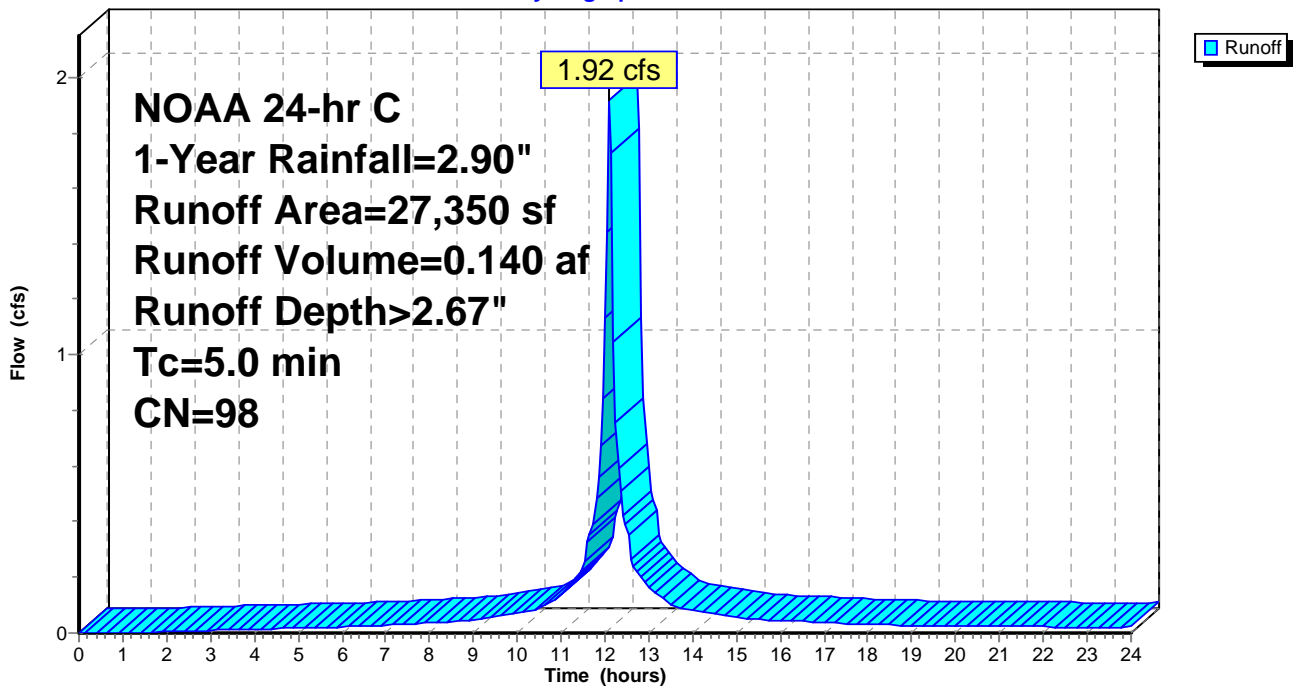

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 0.26 cfs @ 12.11 hrs, Volume= 0.019 af, Depth> 2.67"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 1-Year Rainfall=2.90"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

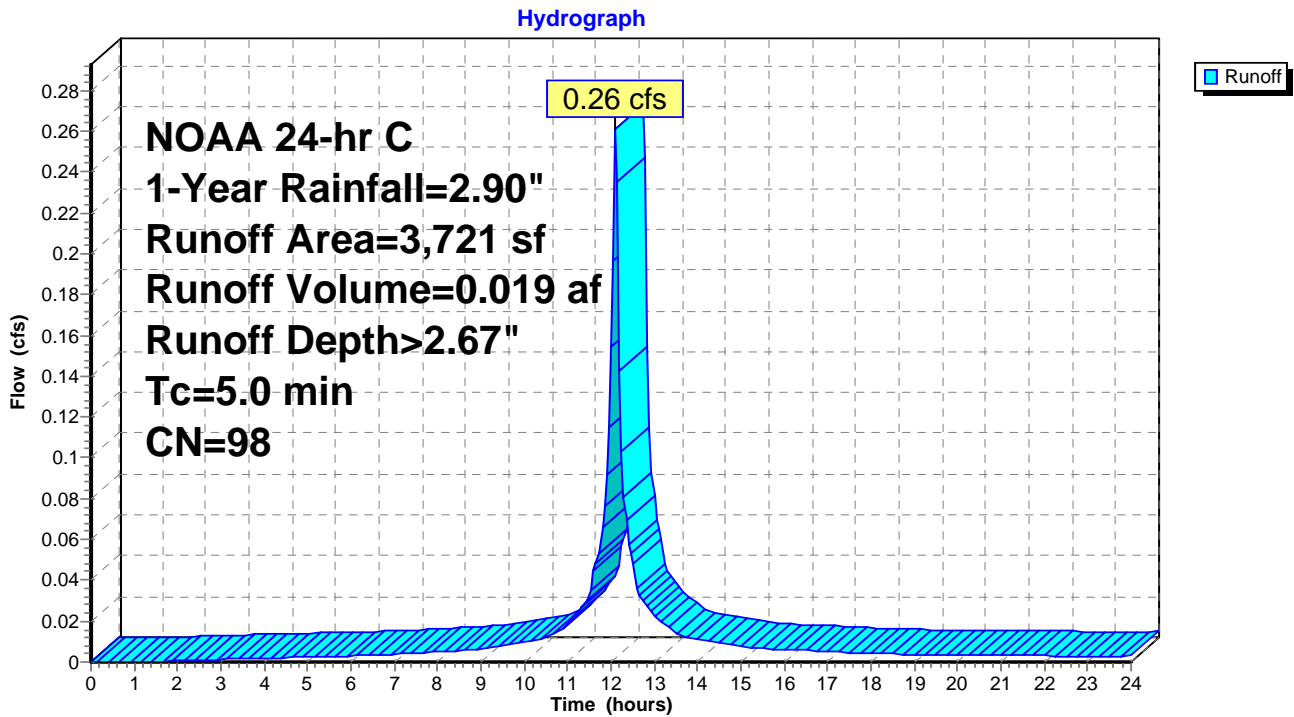

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.09' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 2.67" for 1-Year event
 Inflow = 0.82 cfs @ 12.11 hrs, Volume= 0.061 af
 Outflow = 0.80 cfs @ 12.13 hrs, Volume= 0.061 af, Atten= 3%, Lag= 1.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.72 fps, Min. Travel Time= 0.6 min
 Avg. Velocity = 0.47 fps, Avg. Travel Time= 2.1 min


Peak Storage= 28 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.19'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

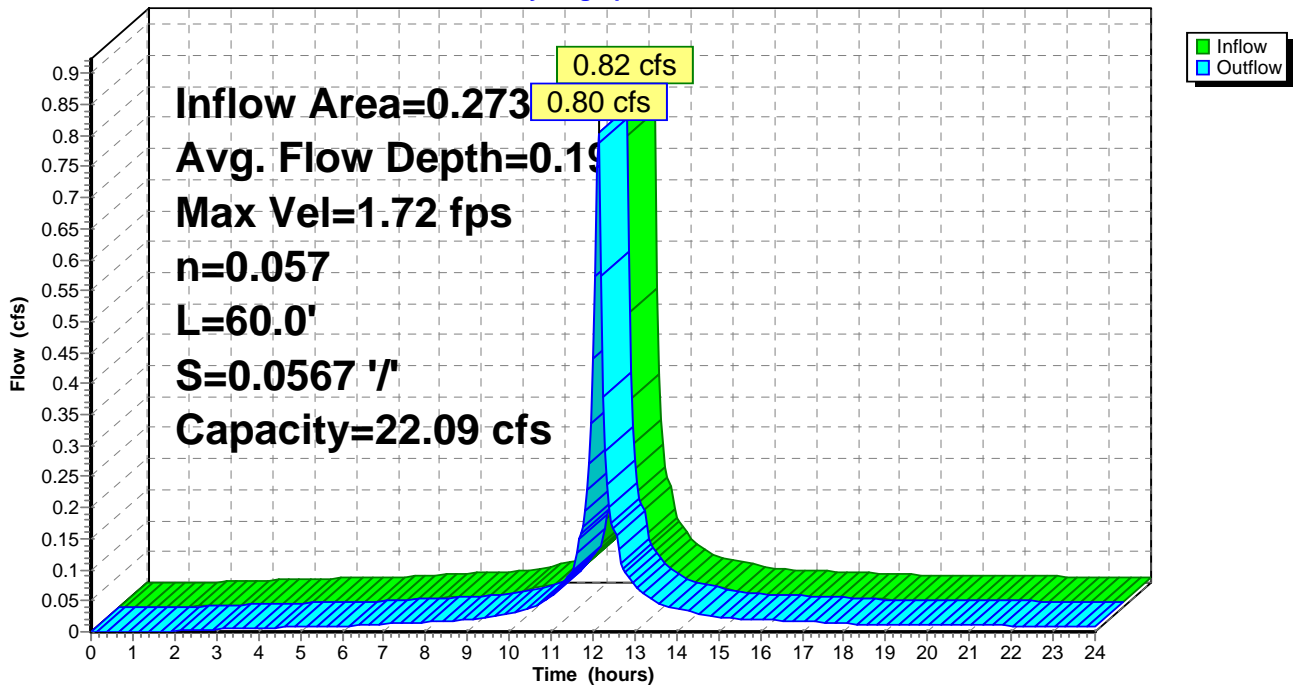

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 2.67" for 1-Year event
 Inflow = 1.92 cfs @ 12.11 hrs, Volume= 0.140 af
 Outflow = 1.78 cfs @ 12.15 hrs, Volume= 0.139 af, Atten= 8%, Lag= 2.6 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.63 fps, Min. Travel Time= 1.5 min
 Avg. Velocity = 0.47 fps, Avg. Travel Time= 5.3 min


Peak Storage= 170 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.37'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

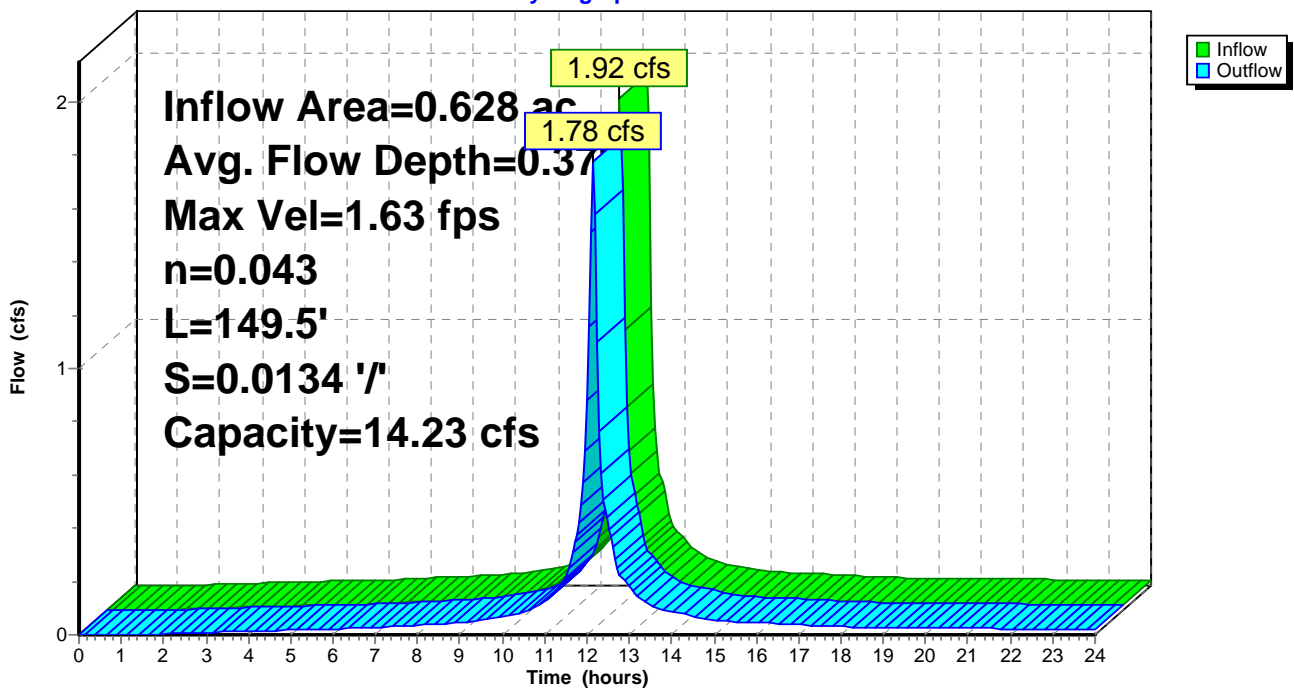

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.15' @ 12.15 hrs


[61] Hint: Exceeded Reach 6R outlet invert by 0.33' @ 12.15 hrs

Inflow Area = 0.901 ac, 100.00% Impervious, Inflow Depth > 2.66" for 1-Year event
 Inflow = 2.57 cfs @ 12.15 hrs, Volume= 0.200 af
 Outflow = 2.53 cfs @ 12.15 hrs, Volume= 0.200 af, Atten= 1%, Lag= 0.4 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.02 fps, Min. Travel Time= 0.3 min
 Avg. Velocity= 1.33 fps, Avg. Travel Time= 0.8 min


Peak Storage= 40 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.58'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

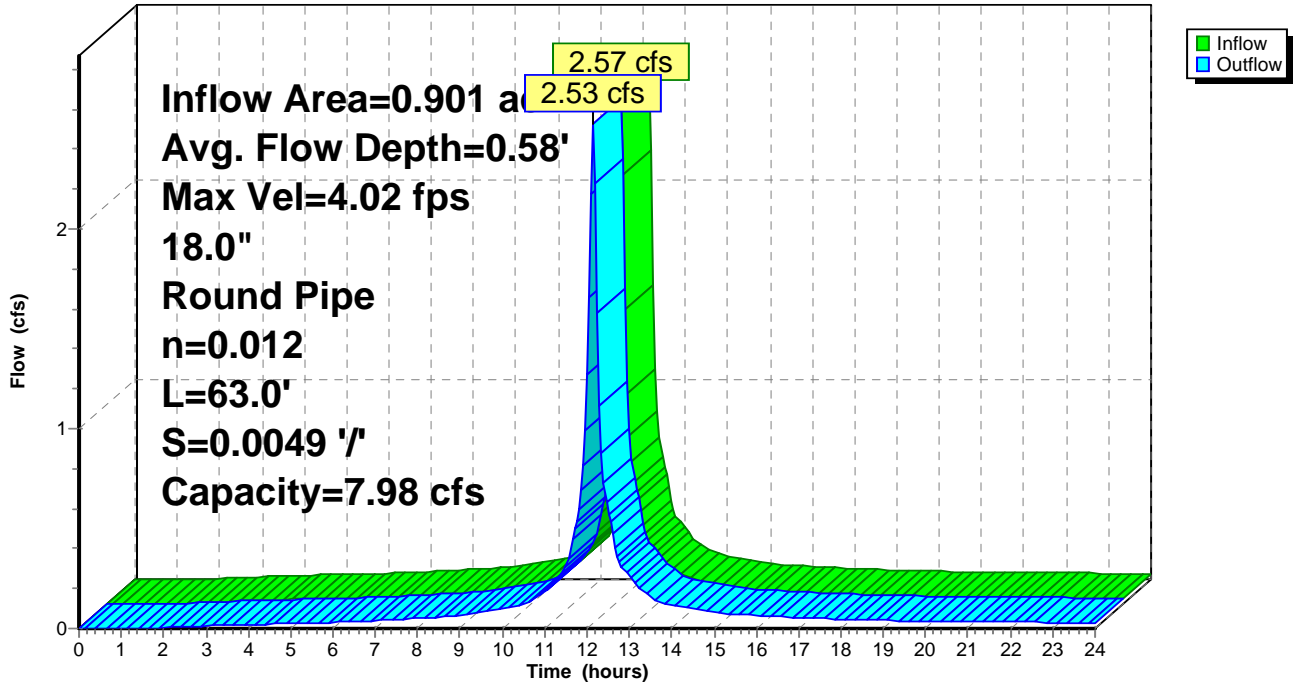

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 2.67" for 1-Year event
 Inflow = 0.26 cfs @ 12.11 hrs, Volume= 0.019 af
 Outflow = 0.25 cfs @ 12.12 hrs, Volume= 0.019 af, Atten= 4%, Lag= 0.8 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.16 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.86 fps, Avg. Travel Time= 1.4 min


Peak Storage= 6 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.10'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'



Reach 14R: U Trench Drain

Hydrograph

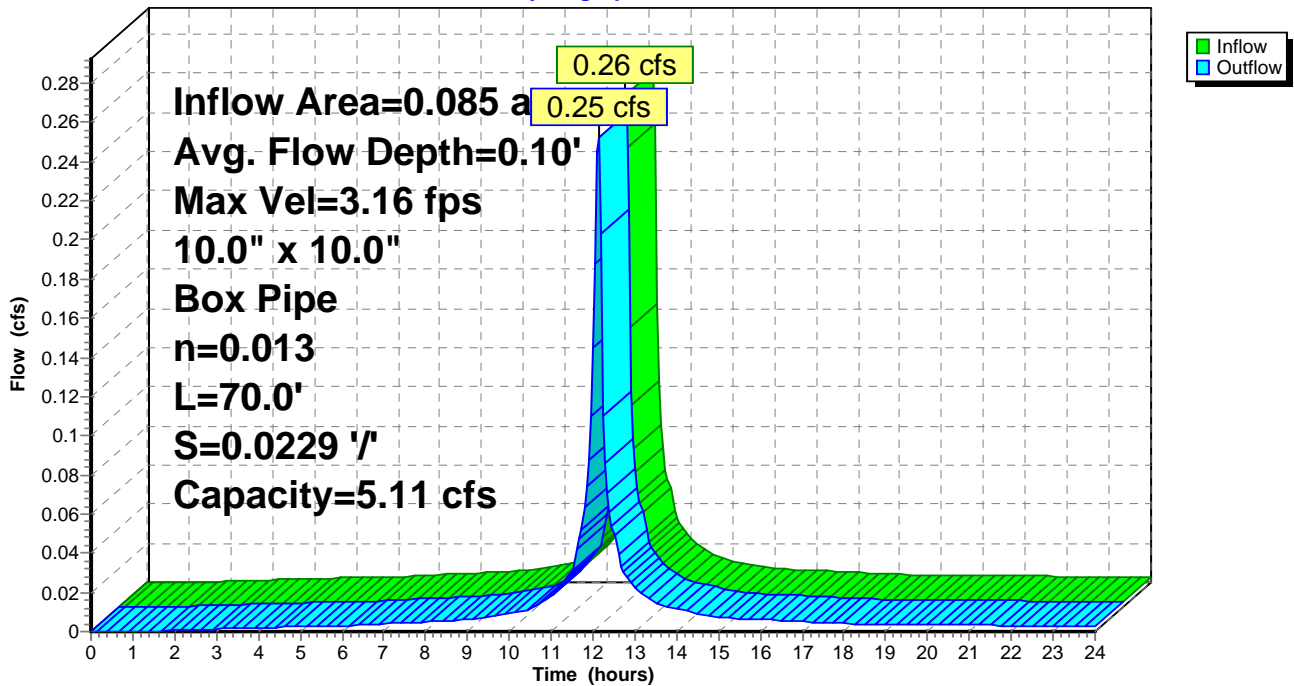

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>3.16"
Tc=5.0 min CN=98 Runoff=0.68 cfs 0.050 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>3.16"
Tc=5.0 min CN=98 Runoff=2.26 cfs 0.166 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>3.16"
Tc=5.0 min CN=98 Runoff=0.31 cfs 0.023 af

Reach 5R: C-3 Avg. Flow Depth=0.20' Max Vel=1.81 fps Inflow=0.97 cfs 0.072 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=0.95 cfs 0.072 af

Reach 6R: C-2 Avg. Flow Depth=0.40' Max Vel=1.71 fps Inflow=2.26 cfs 0.166 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=2.10 cfs 0.165 af

Reach 7R: Culvert 1 Avg. Flow Depth=0.64' Max Vel=4.20 fps Inflow=3.03 cfs 0.237 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=2.99 cfs 0.237 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.11' Max Vel=3.34 fps Inflow=0.31 cfs 0.023 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.30 cfs 0.023 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.238 af Average Runoff Depth = 3.16"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.68 cfs @ 12.11 hrs, Volume= 0.050 af, Depth> 3.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

Hydrograph

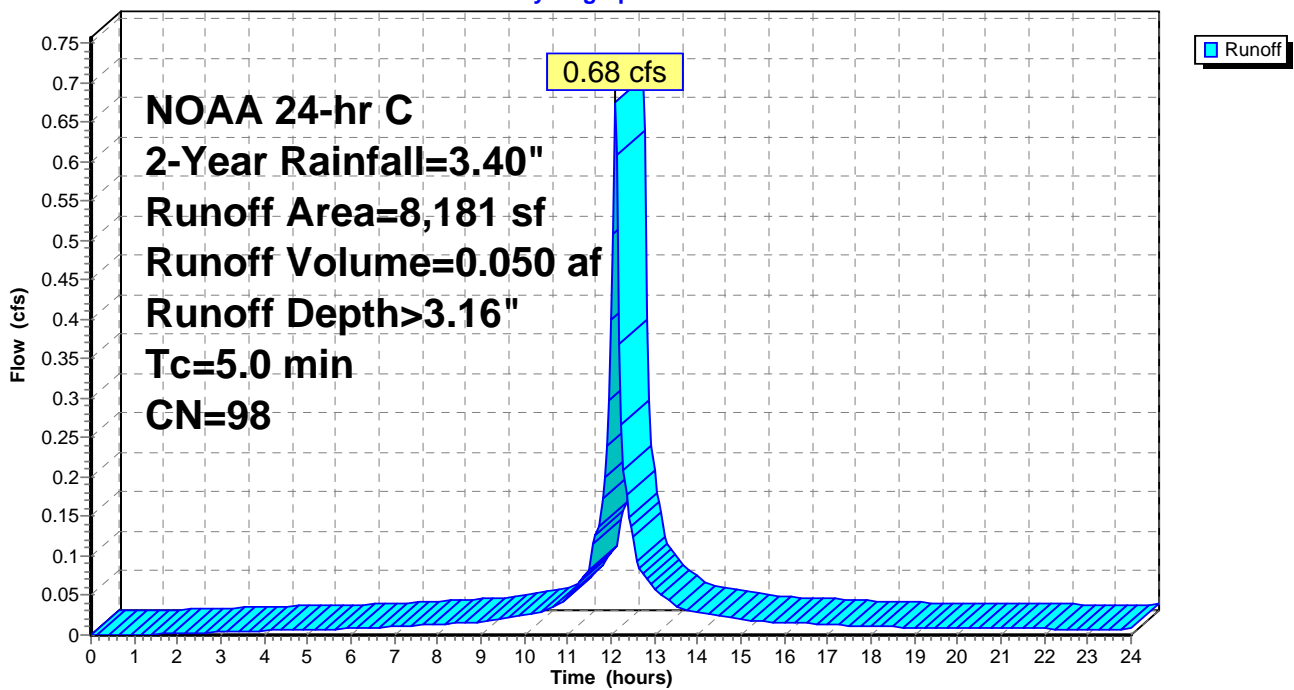

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 2.26 cfs @ 12.11 hrs, Volume= 0.166 af, Depth> 3.16"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

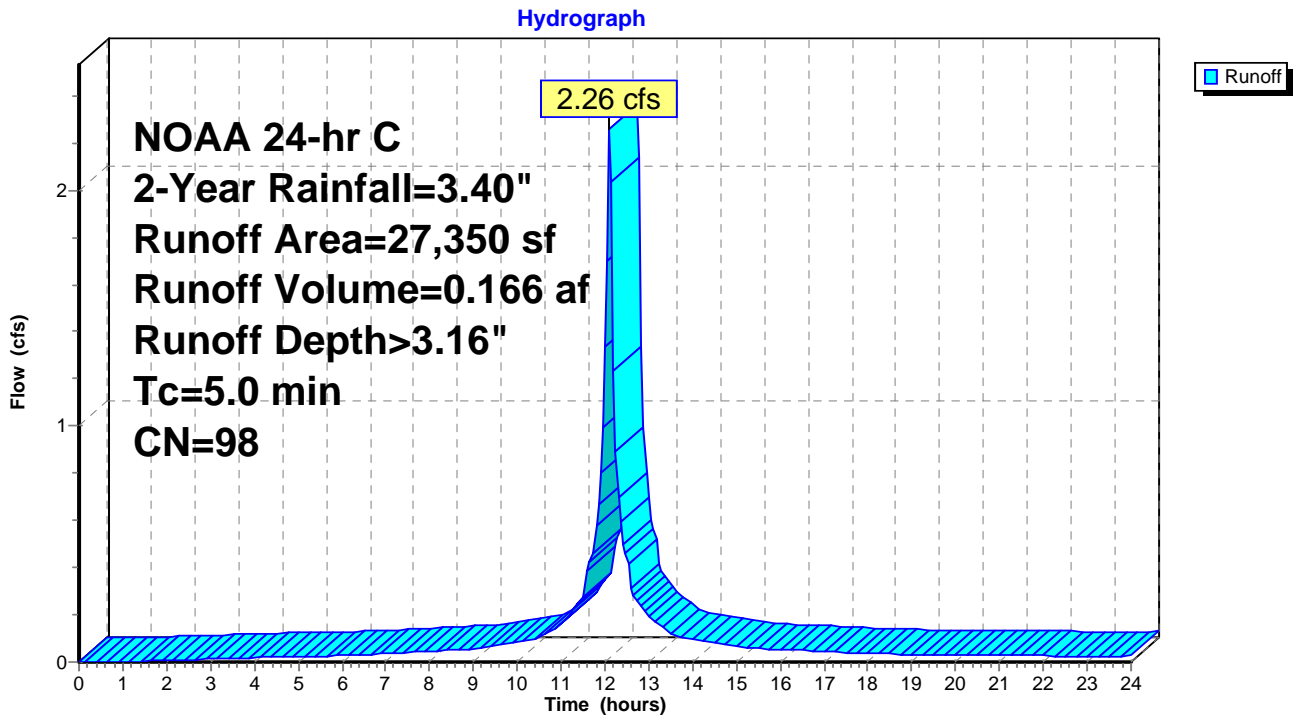

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.31 cfs @ 12.11 hrs, Volume= 0.023 af, Depth> 3.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 2-Year Rainfall=3.40"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

Hydrograph

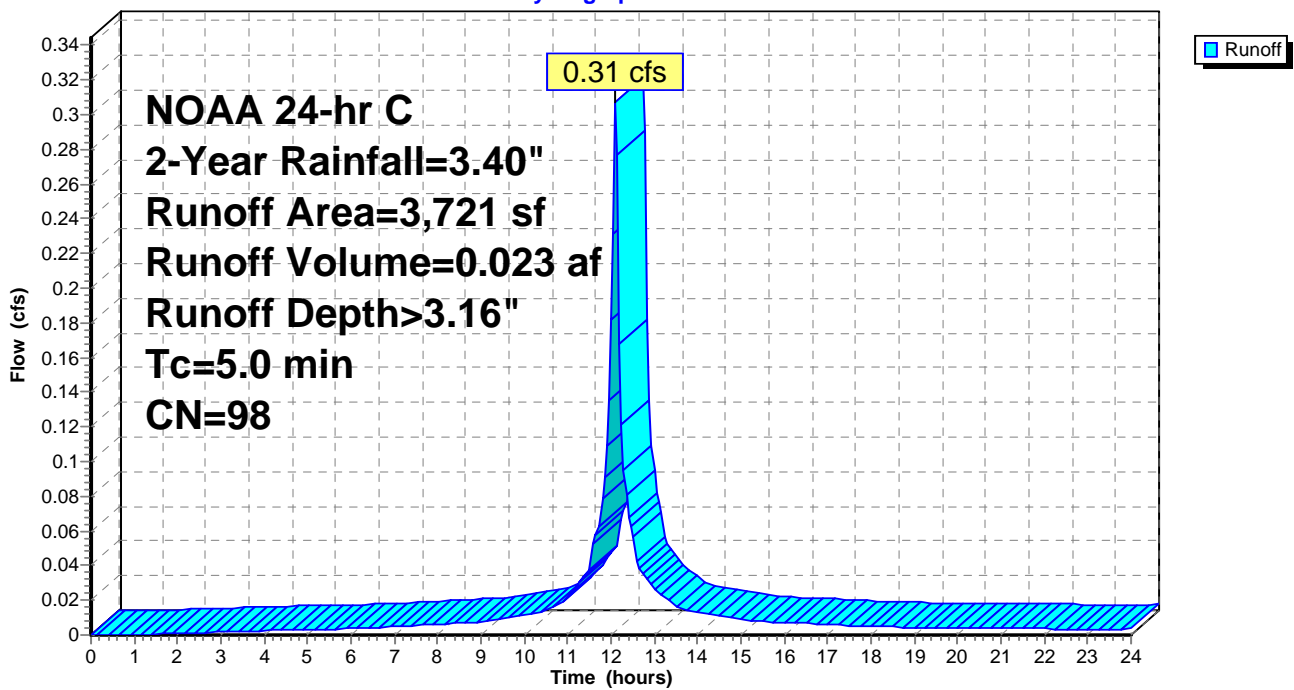

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.09' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 3.16" for 2-Year event
 Inflow = 0.97 cfs @ 12.11 hrs, Volume= 0.072 af
 Outflow = 0.95 cfs @ 12.13 hrs, Volume= 0.072 af, Atten= 2%, Lag= 1.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.81 fps, Min. Travel Time= 0.6 min
 Avg. Velocity = 0.49 fps, Avg. Travel Time= 2.0 min


Peak Storage= 32 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.20'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/' Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/'
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

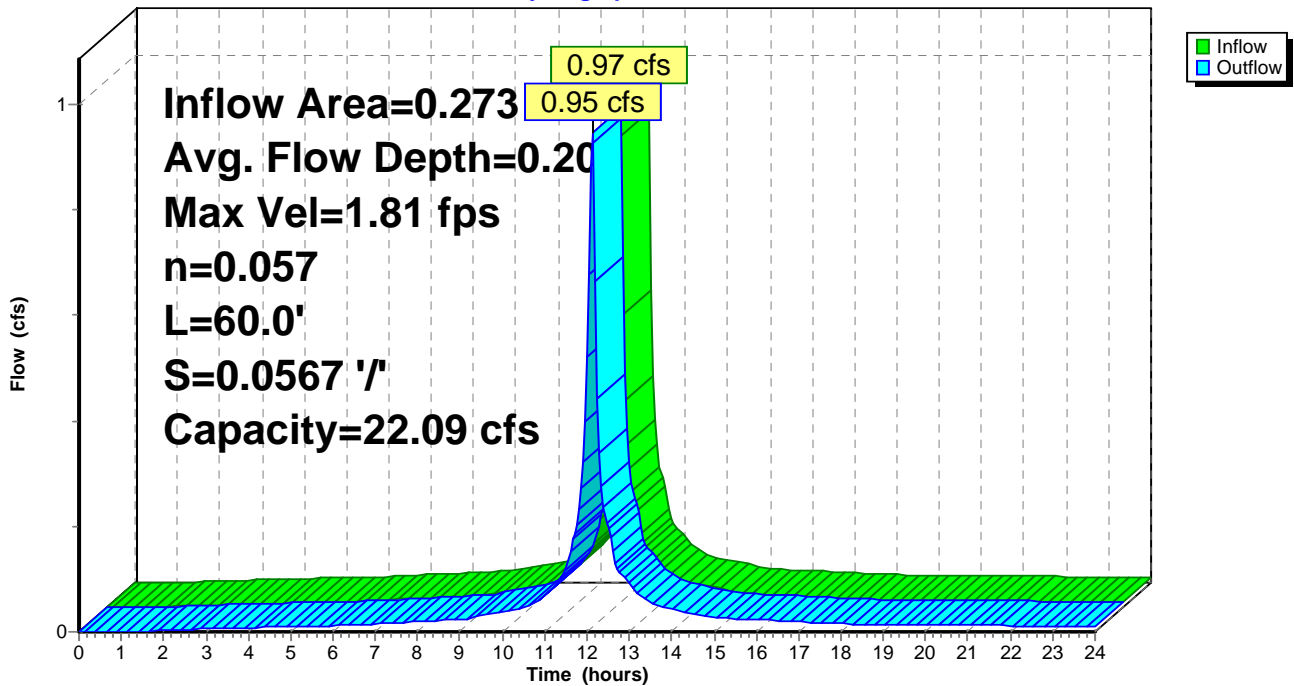

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 3.16" for 2-Year event
 Inflow = 2.26 cfs @ 12.11 hrs, Volume= 0.166 af
 Outflow = 2.10 cfs @ 12.15 hrs, Volume= 0.165 af, Atten= 7%, Lag= 2.4 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.71 fps, Min. Travel Time= 1.5 min
 Avg. Velocity = 0.50 fps, Avg. Travel Time= 5.0 min


Peak Storage= 191 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.40'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

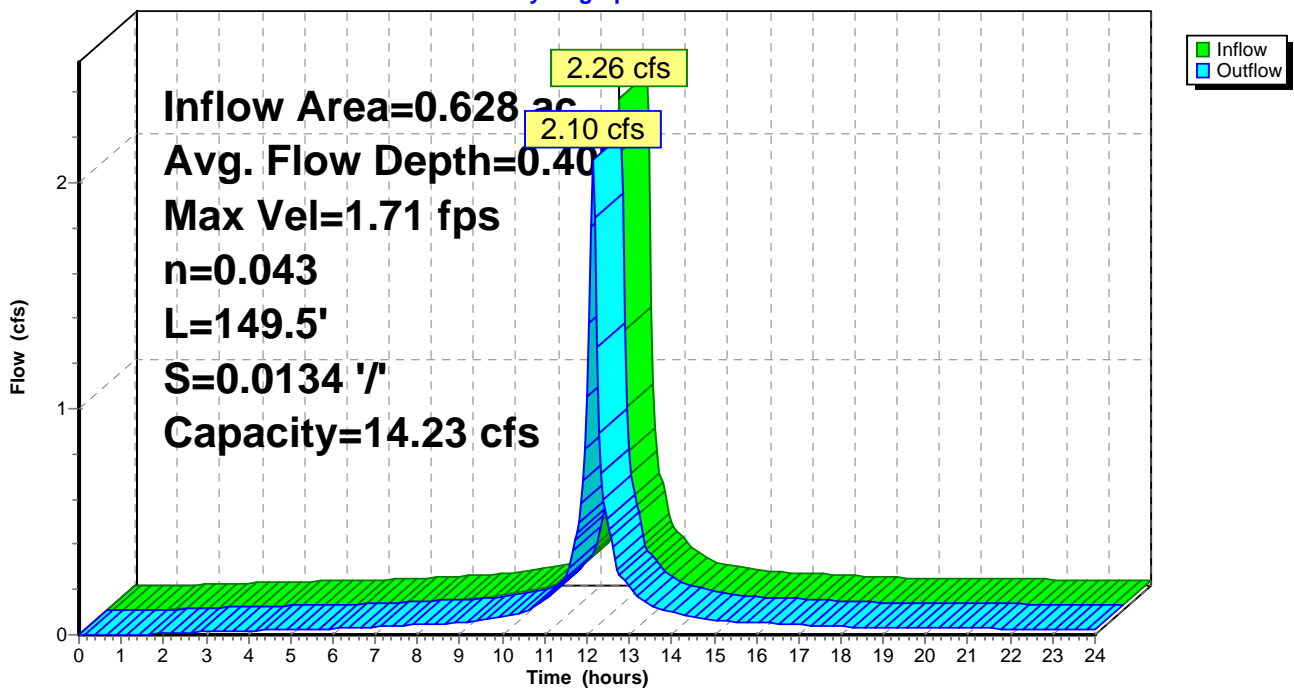

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.19' @ 12.15 hrs


[61] Hint: Exceeded Reach 6R outlet invert by 0.39' @ 12.15 hrs

| | | | |
|---------------|-------------------------------|----------------------|-----------------------------------|
| Inflow Area = | 0.901 ac, 100.00% Impervious, | Inflow Depth > 3.16" | for 2-Year event |
| Inflow = | 3.03 cfs @ 12.14 hrs, | Volume= | 0.237 af |
| Outflow = | 2.99 cfs @ 12.15 hrs, | Volume= | 0.237 af, Atten= 1%, Lag= 0.3 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.20 fps, Min. Travel Time= 0.2 min
 Avg. Velocity= 1.40 fps, Avg. Travel Time= 0.7 min


Peak Storage= 45 cf @ 12.15 hrs
 Average Depth at Peak Storage= 0.64'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/'
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

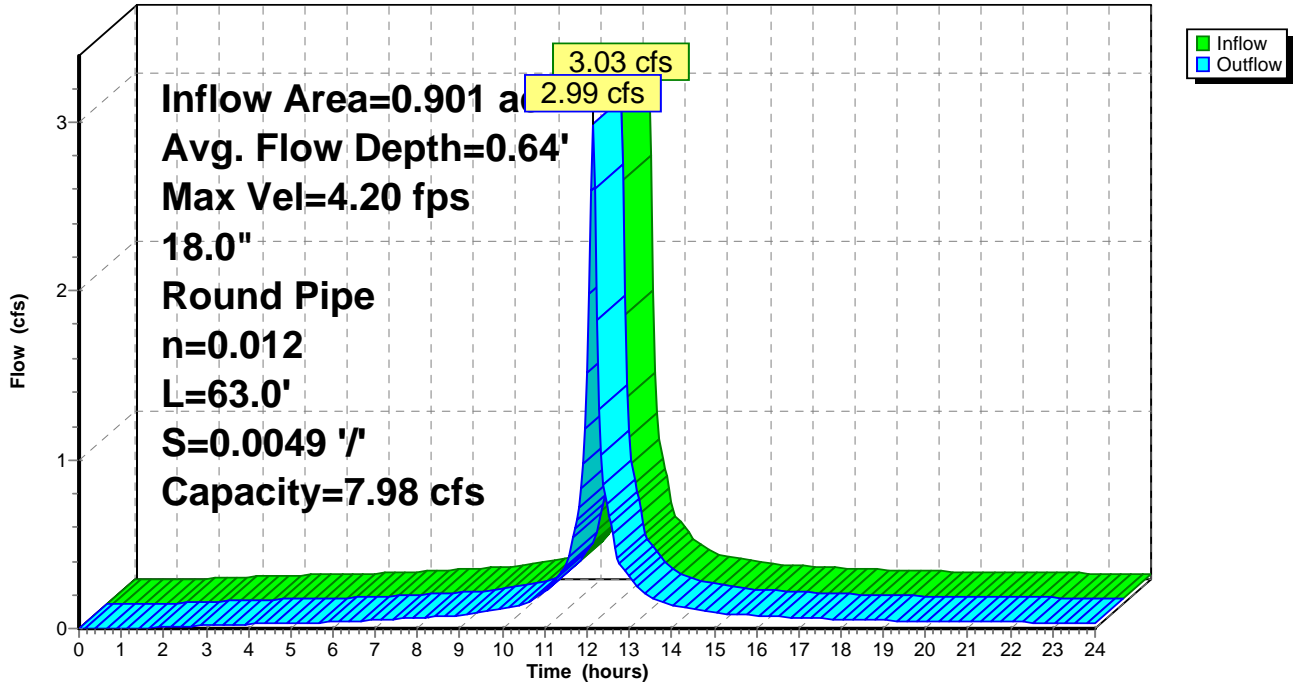

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 3.16" for 2-Year event
 Inflow = 0.31 cfs @ 12.11 hrs, Volume= 0.023 af
 Outflow = 0.30 cfs @ 12.12 hrs, Volume= 0.023 af, Atten= 3%, Lag= 0.7 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.34 fps, Min. Travel Time= 0.3 min
 Avg. Velocity = 0.89 fps, Avg. Travel Time= 1.3 min


Peak Storage= 6 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.11'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'



Reach 14R: U Trench Drain

Hydrograph

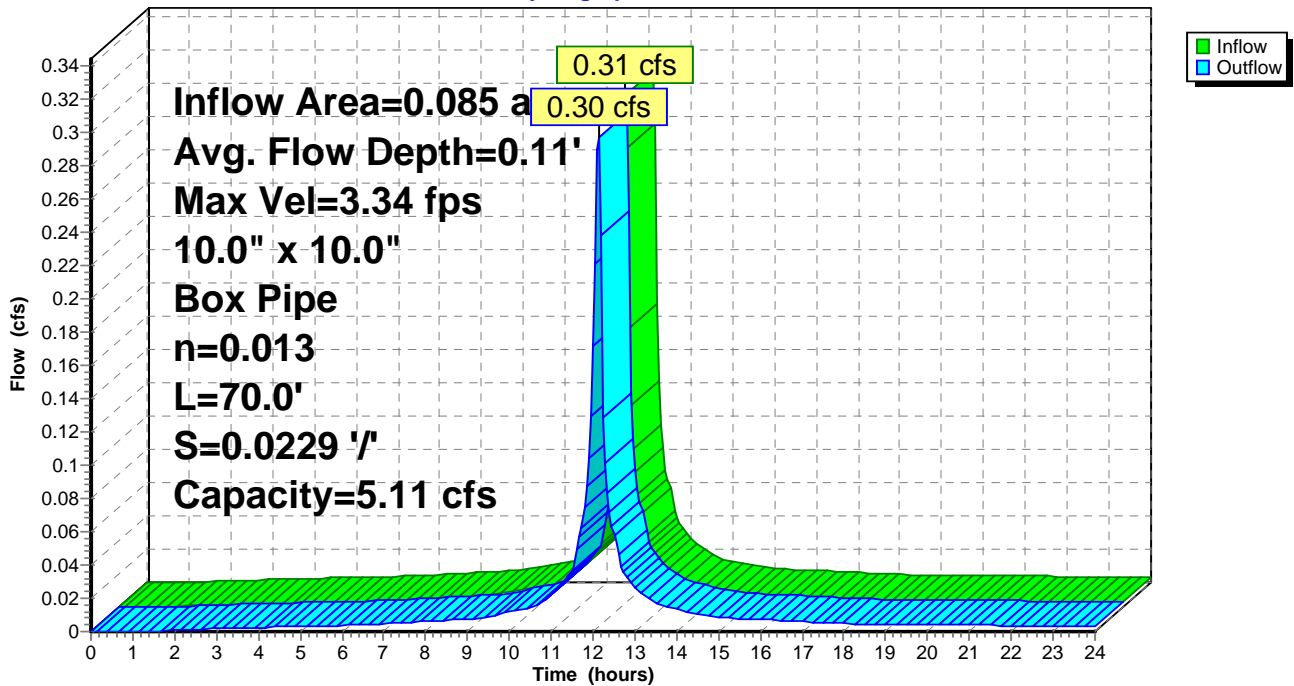

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>4.76"
Tc=5.0 min CN=98 Runoff=1.00 cfs 0.074 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>4.76"
Tc=5.0 min CN=98 Runoff=3.34 cfs 0.249 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>4.76"
Tc=5.0 min CN=98 Runoff=0.45 cfs 0.034 af

Reach 5R: C-3 Avg. Flow Depth=0.25' Max Vel=2.05 fps Inflow=1.44 cfs 0.108 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=1.41 cfs 0.108 af

Reach 6R: C-2 Avg. Flow Depth=0.49' Max Vel=1.91 fps Inflow=3.34 cfs 0.249 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=3.12 cfs 0.249 af

Reach 7R: Culvert 1 Avg. Flow Depth=0.81' Max Vel=4.65 fps Inflow=4.51 cfs 0.357 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=4.46 cfs 0.357 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.14' Max Vel=3.82 fps Inflow=0.45 cfs 0.034 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.44 cfs 0.034 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.357 af Average Runoff Depth = 4.76"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.00 cfs @ 12.11 hrs, Volume= 0.074 af, Depth> 4.76"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

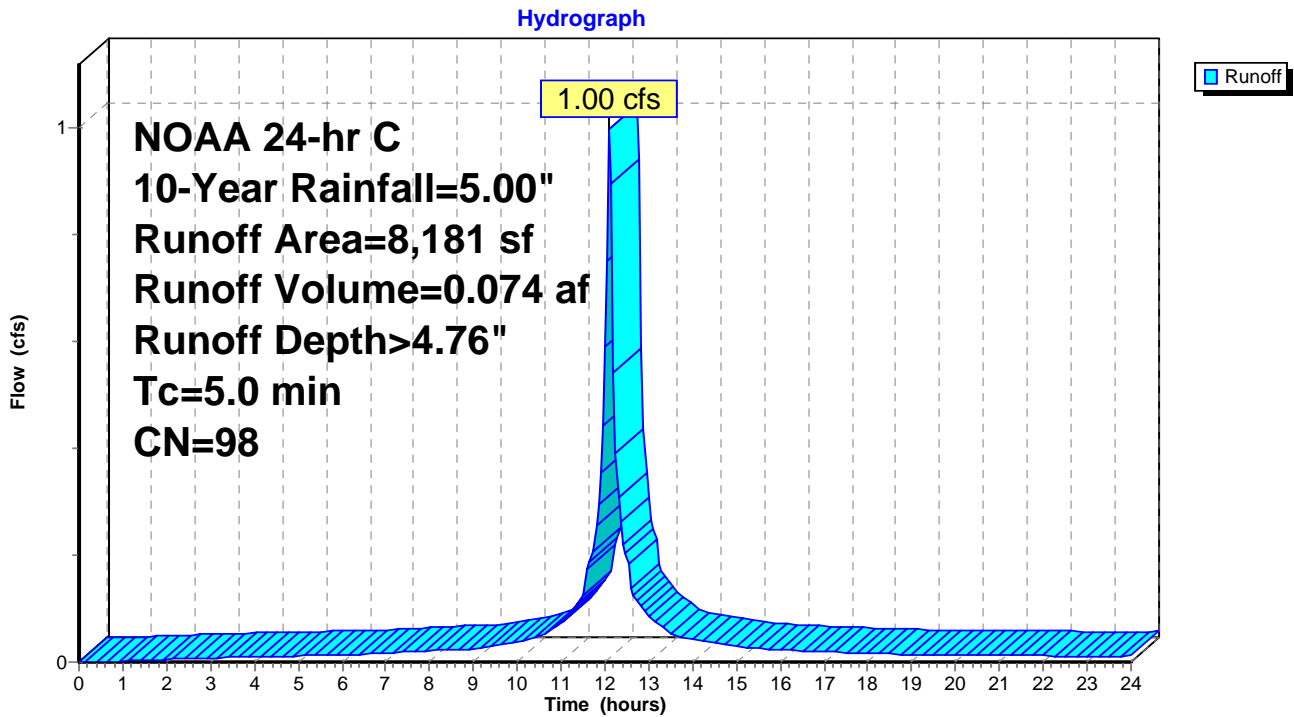

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 3.34 cfs @ 12.11 hrs, Volume= 0.249 af, Depth> 4.76"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

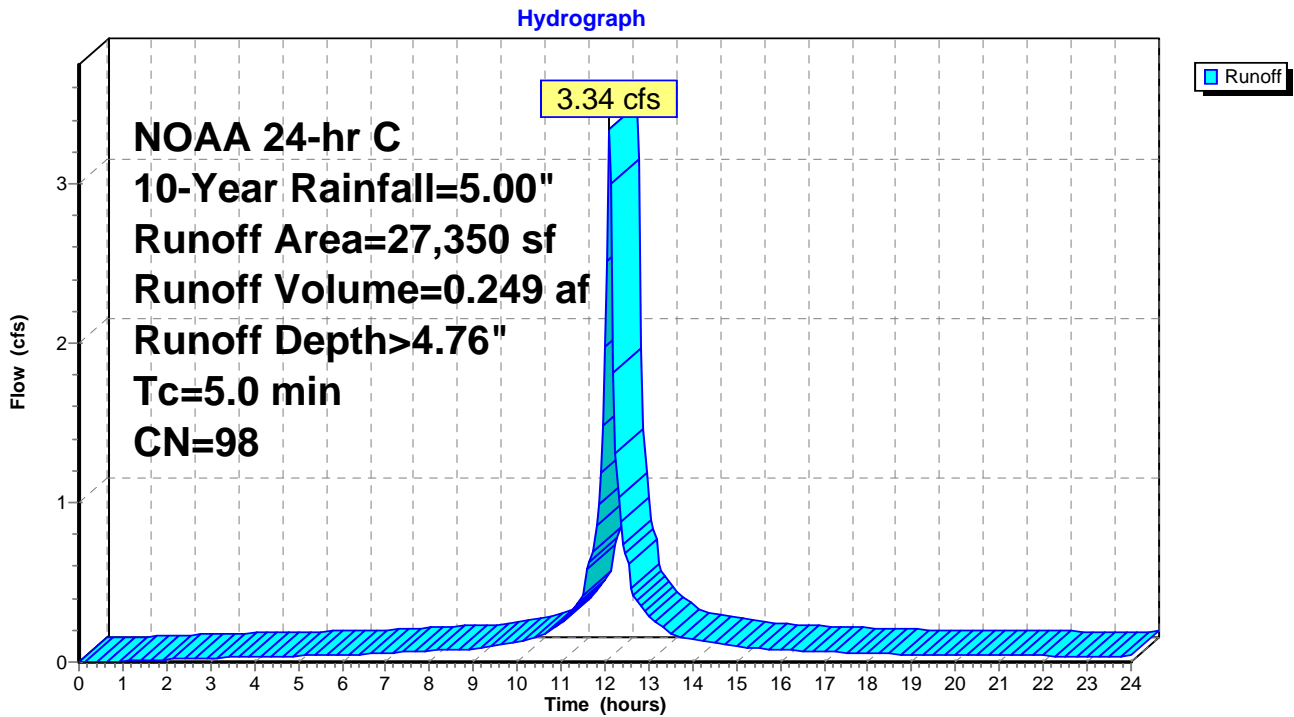

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.45 cfs @ 12.11 hrs, Volume= 0.034 af, Depth> 4.76"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 10-Year Rainfall=5.00"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

Hydrograph

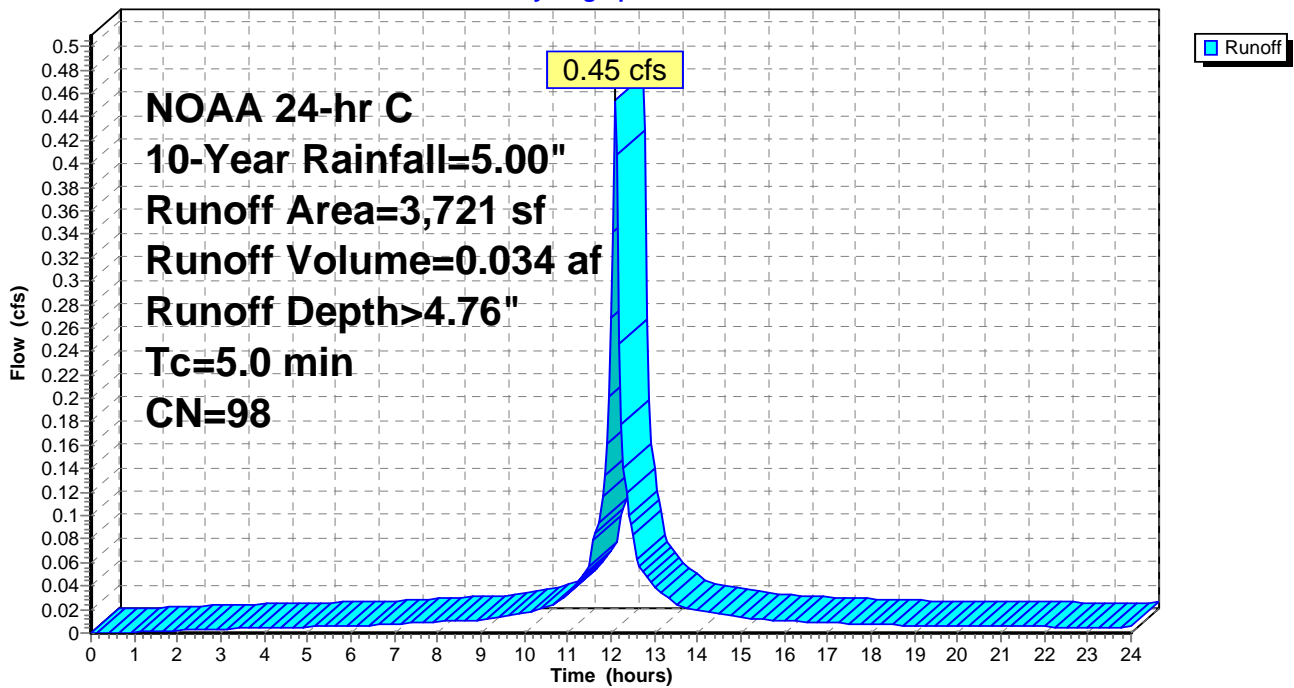

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.11' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 4.76" for 10-Year event
 Inflow = 1.44 cfs @ 12.11 hrs, Volume= 0.108 af
 Outflow = 1.41 cfs @ 12.13 hrs, Volume= 0.108 af, Atten= 2%, Lag= 1.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.05 fps, Min. Travel Time= 0.5 min
 Avg. Velocity = 0.57 fps, Avg. Travel Time= 1.8 min


Peak Storage= 41 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.25'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

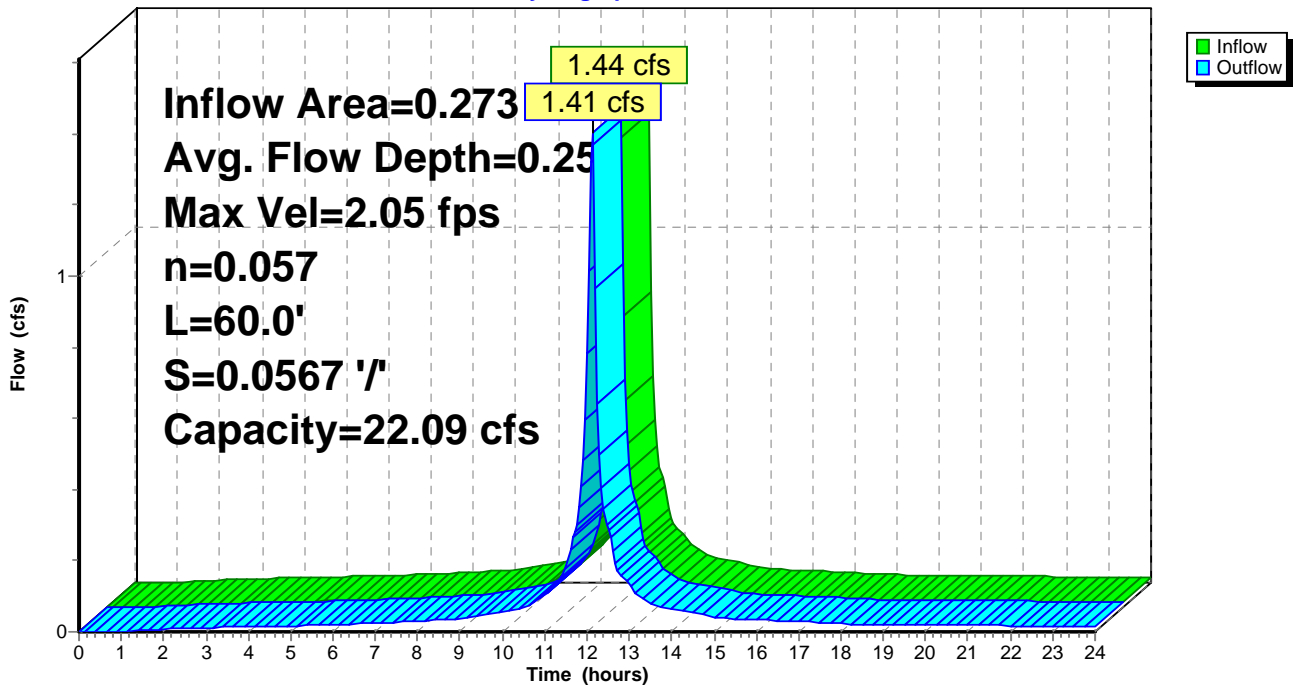

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 4.76" for 10-Year event
 Inflow = 3.34 cfs @ 12.11 hrs, Volume= 0.249 af
 Outflow = 3.12 cfs @ 12.15 hrs, Volume= 0.249 af, Atten= 7%, Lag= 2.2 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 1.91 fps, Min. Travel Time= 1.3 min
 Avg. Velocity = 0.58 fps, Avg. Travel Time= 4.3 min


Peak Storage= 254 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.49'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/' Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/'
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

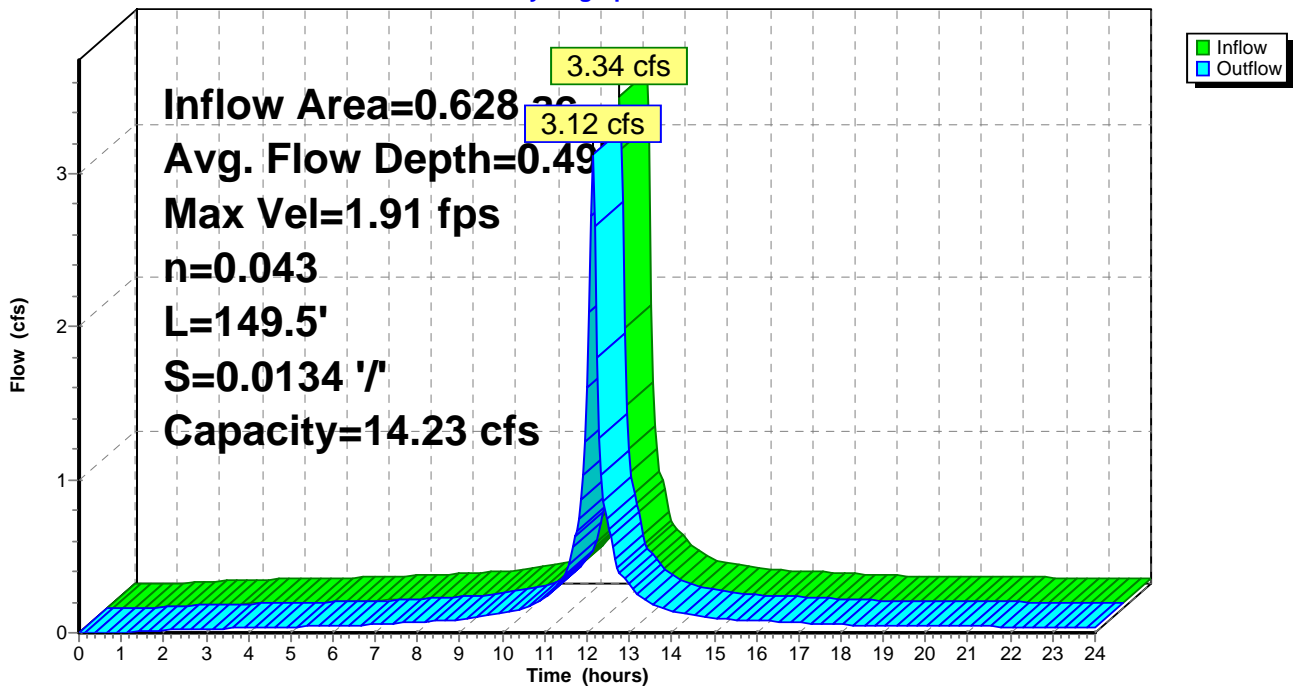

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.31' @ 12.15 hrs


[62] Hint: Exceeded Reach 6R OUTLET depth by 0.07' @ 12.15 hrs

| | | | |
|---------------|-------------------------------|----------------------|-----------------------------------|
| Inflow Area = | 0.901 ac, 100.00% Impervious, | Inflow Depth > 4.75" | for 10-Year event |
| Inflow = | 4.51 cfs @ 12.14 hrs, | Volume= | 0.357 af |
| Outflow = | 4.46 cfs @ 12.15 hrs, | Volume= | 0.357 af, Atten= 1%, Lag= 0.3 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.65 fps, Min. Travel Time= 0.2 min
 Avg. Velocity= 1.58 fps, Avg. Travel Time= 0.7 min


Peak Storage= 61 cf @ 12.14 hrs
 Average Depth at Peak Storage= 0.81'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

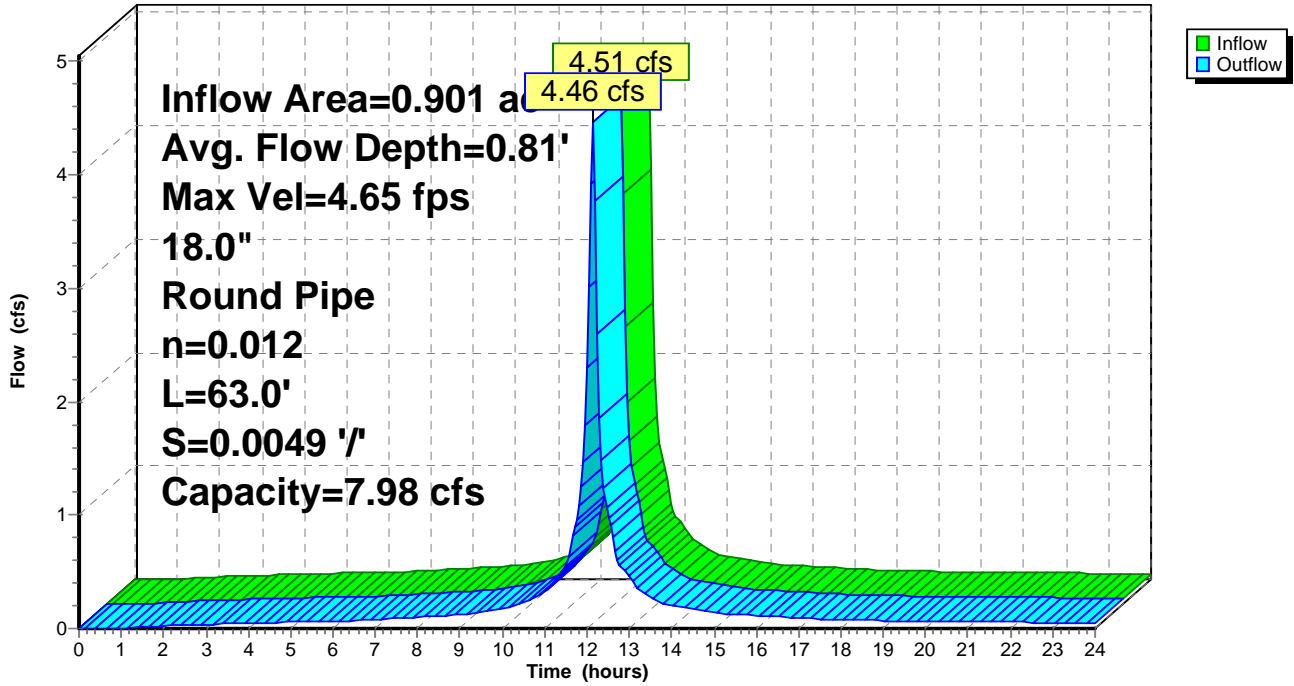

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 4.76" for 10-Year event
 Inflow = 0.45 cfs @ 12.11 hrs, Volume= 0.034 af
 Outflow = 0.44 cfs @ 12.12 hrs, Volume= 0.034 af, Atten= 3%, Lag= 0.6 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 3.82 fps, Min. Travel Time= 0.3 min
 Avg. Velocity = 0.99 fps, Avg. Travel Time= 1.2 min


Peak Storage= 8 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.14'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'



Reach 14R: U Trench Drain

Hydrograph

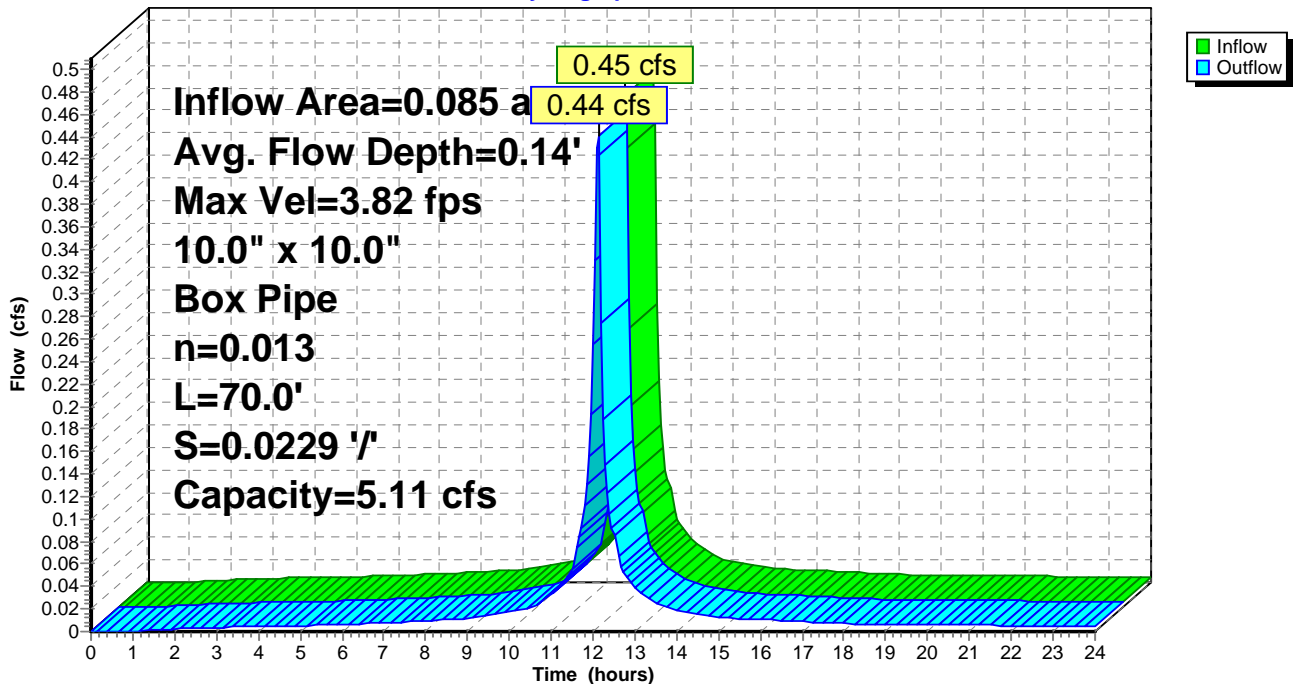

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>5.96"
Tc=5.0 min CN=98 Runoff=1.24 cfs 0.093 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>5.96"
Tc=5.0 min CN=98 Runoff=4.15 cfs 0.312 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>5.96"
Tc=5.0 min CN=98 Runoff=0.56 cfs 0.042 af

Reach 5R: C-3 Avg. Flow Depth=0.28' Max Vel=2.19 fps Inflow=1.79 cfs 0.136 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=1.75 cfs 0.136 af

Reach 6R: C-2 Avg. Flow Depth=0.55' Max Vel=2.03 fps Inflow=4.15 cfs 0.312 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=3.89 cfs 0.311 af

Reach 7R: Culvert 1 Avg. Flow Depth=0.93' Max Vel=4.89 fps Inflow=5.62 cfs 0.447 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=5.56 cfs 0.447 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.16' Max Vel=4.11 fps Inflow=0.56 cfs 0.042 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.55 cfs 0.042 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.447 af Average Runoff Depth = 5.96"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.24 cfs @ 12.11 hrs, Volume= 0.093 af, Depth> 5.96"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

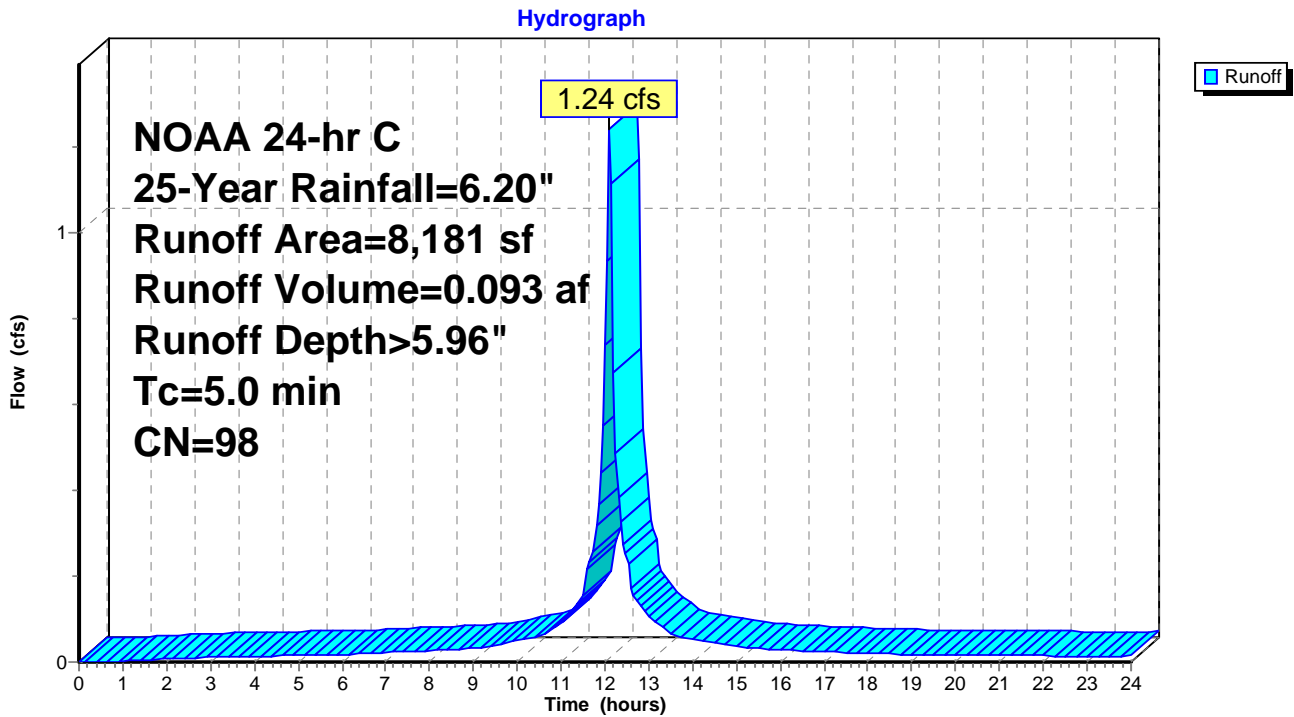

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 4.15 cfs @ 12.11 hrs, Volume= 0.312 af, Depth> 5.96"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

Hydrograph

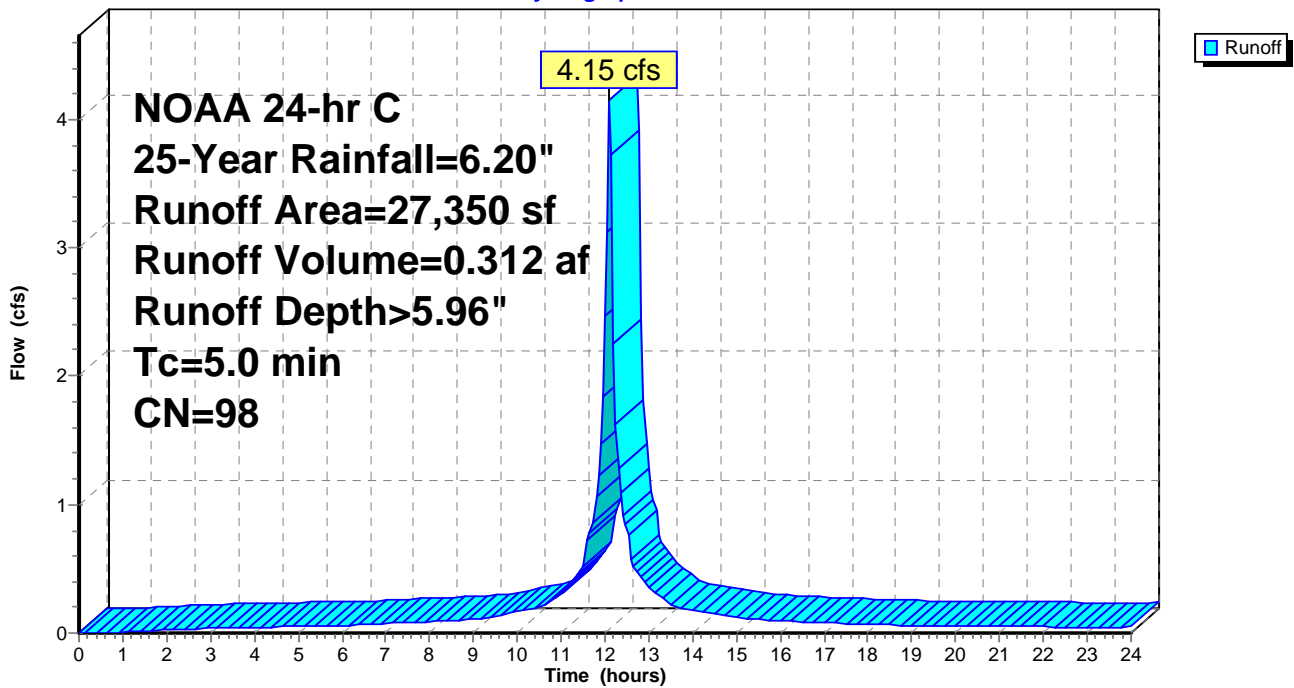

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 0.56 cfs @ 12.11 hrs, Volume= 0.042 af, Depth> 5.96"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 25-Year Rainfall=6.20"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

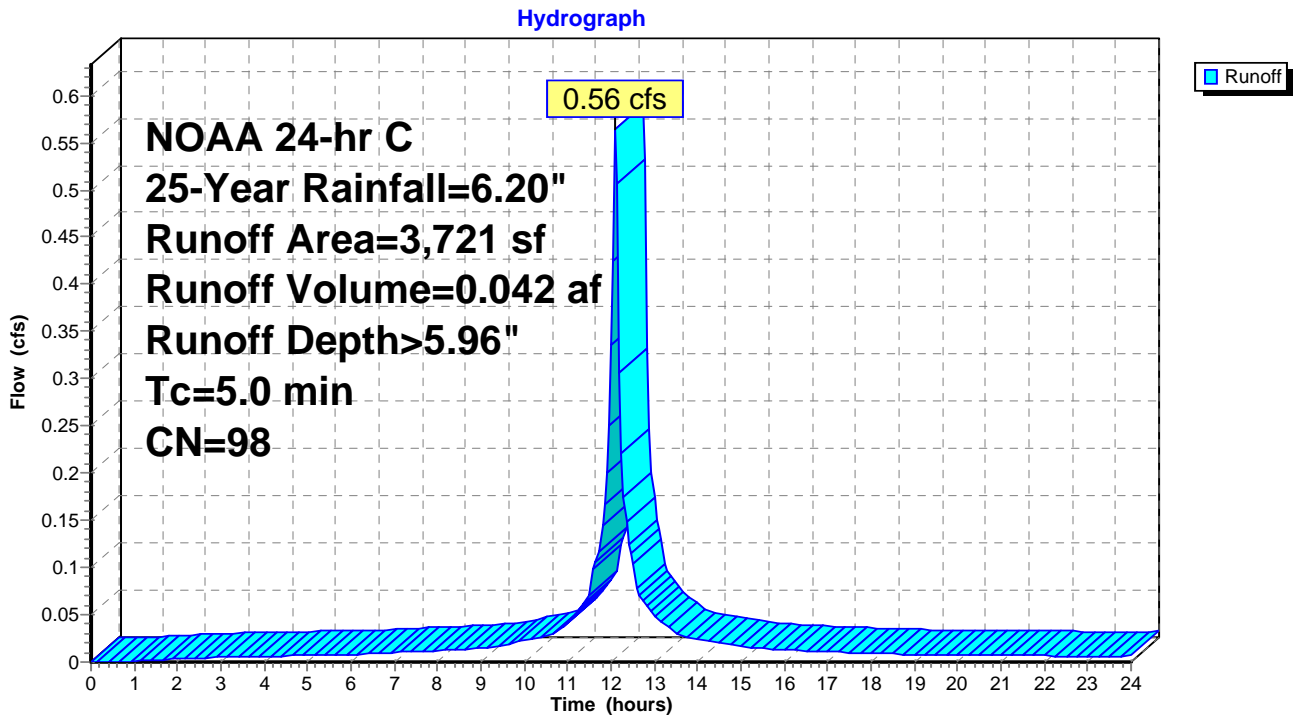

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.12' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 5.96" for 25-Year event
 Inflow = 1.79 cfs @ 12.11 hrs, Volume= 0.136 af
 Outflow = 1.75 cfs @ 12.13 hrs, Volume= 0.136 af, Atten= 2%, Lag= 1.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.19 fps, Min. Travel Time= 0.5 min
 Avg. Velocity = 0.62 fps, Avg. Travel Time= 1.6 min


Peak Storage= 48 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.28'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

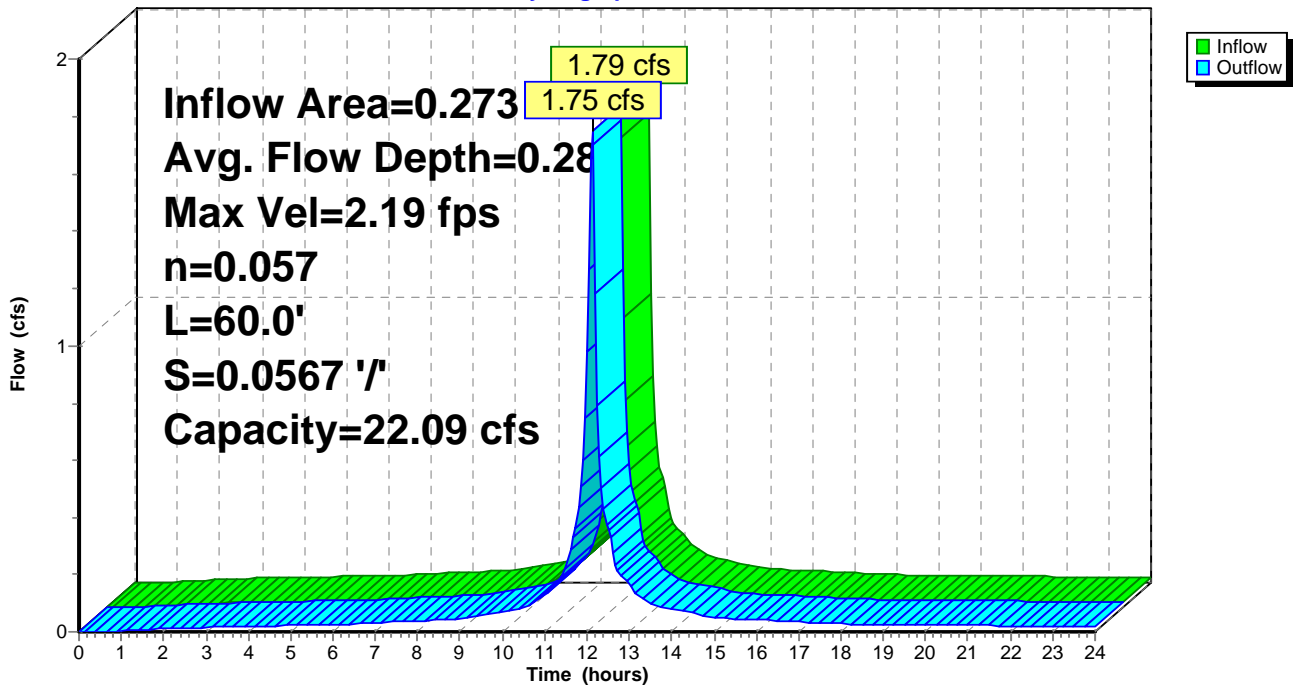

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 5.96" for 25-Year event
 Inflow = 4.15 cfs @ 12.11 hrs, Volume= 0.312 af
 Outflow = 3.89 cfs @ 12.15 hrs, Volume= 0.311 af, Atten= 6%, Lag= 2.1 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.03 fps, Min. Travel Time= 1.2 min
 Avg. Velocity = 0.62 fps, Avg. Travel Time= 4.0 min


Peak Storage= 298 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.55'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/' Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/'
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

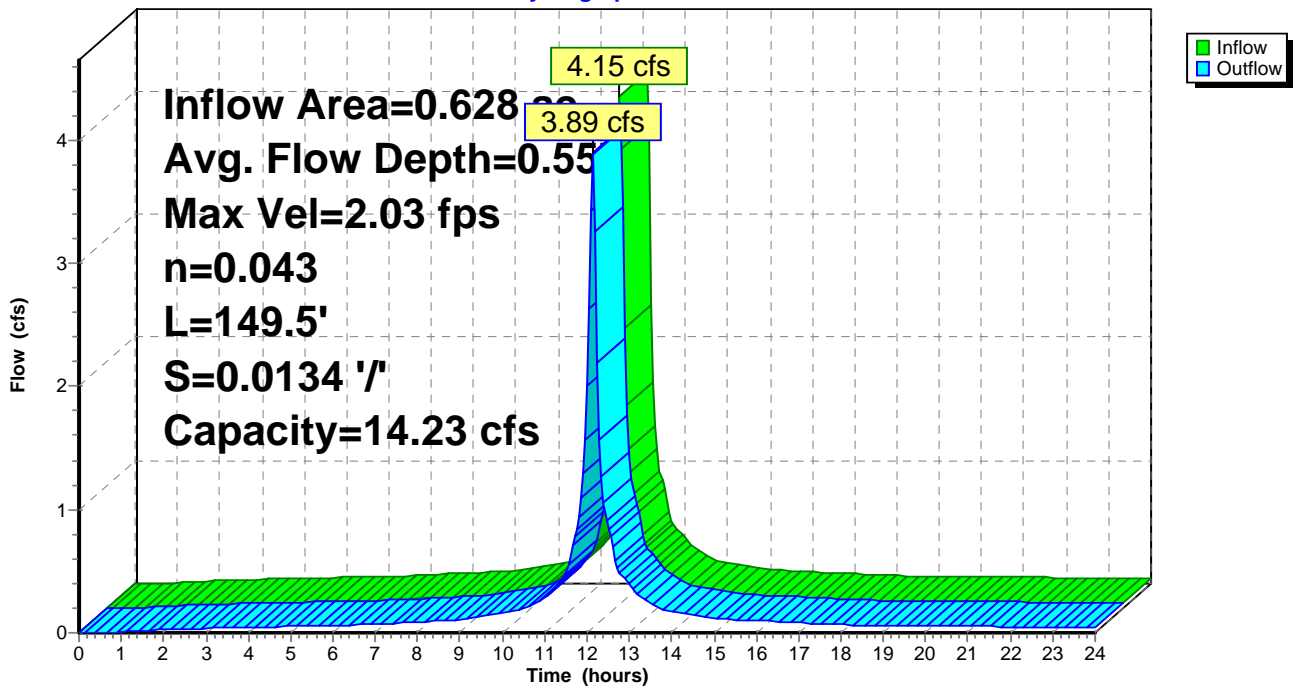

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.40' @ 12.15 hrs


[62] Hint: Exceeded Reach 6R OUTLET depth by 0.14' @ 12.15 hrs

| | | | |
|---------------|-------------------------------|----------------------|-----------------------------------|
| Inflow Area = | 0.901 ac, 100.00% Impervious, | Inflow Depth > 5.95" | for 25-Year event |
| Inflow = | 5.62 cfs @ 12.14 hrs, | Volume= | 0.447 af |
| Outflow = | 5.56 cfs @ 12.15 hrs, | Volume= | 0.447 af, Atten= 1%, Lag= 0.3 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.89 fps, Min. Travel Time= 0.2 min
 Avg. Velocity= 1.69 fps, Avg. Travel Time= 0.6 min


Peak Storage= 72 cf @ 12.14 hrs
 Average Depth at Peak Storage= 0.93'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

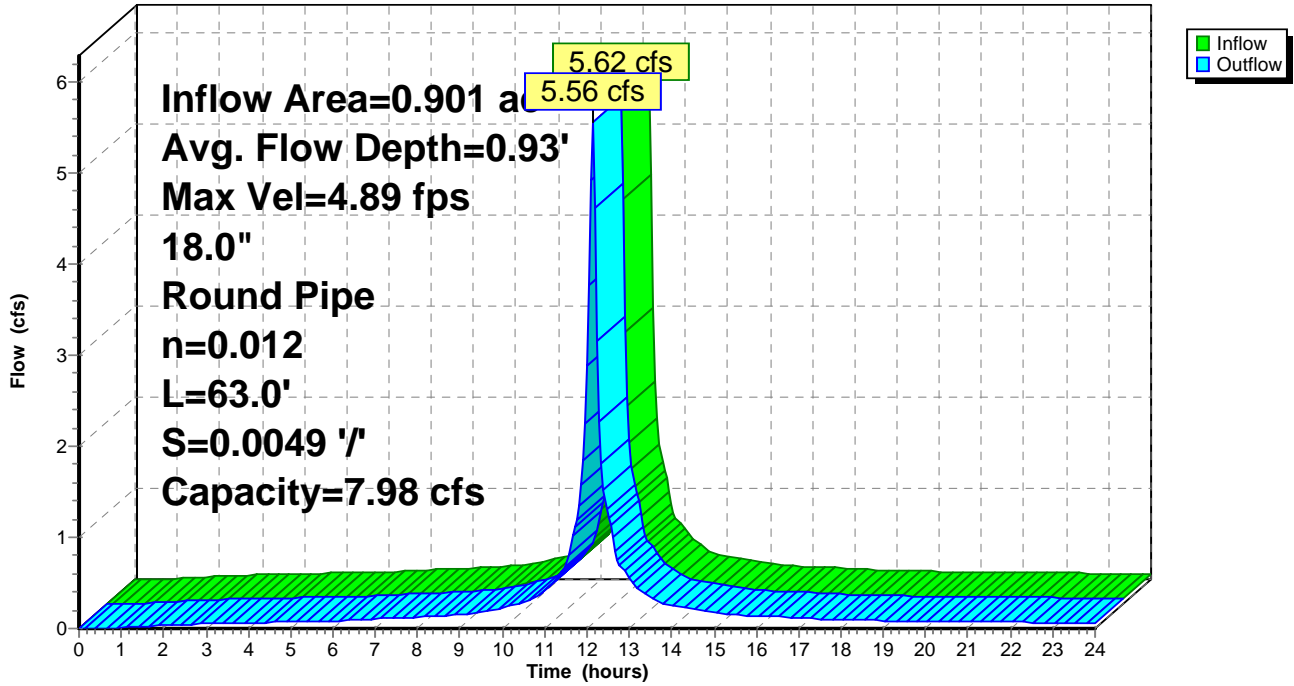

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 5.96" for 25-Year event
 Inflow = 0.56 cfs @ 12.11 hrs, Volume= 0.042 af
 Outflow = 0.55 cfs @ 12.12 hrs, Volume= 0.042 af, Atten= 3%, Lag= 0.6 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.11 fps, Min. Travel Time= 0.3 min
 Avg. Velocity= 1.08 fps, Avg. Travel Time= 1.1 min


Peak Storage= 9 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.16'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/'
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'



Reach 14R: U Trench Drain

Hydrograph

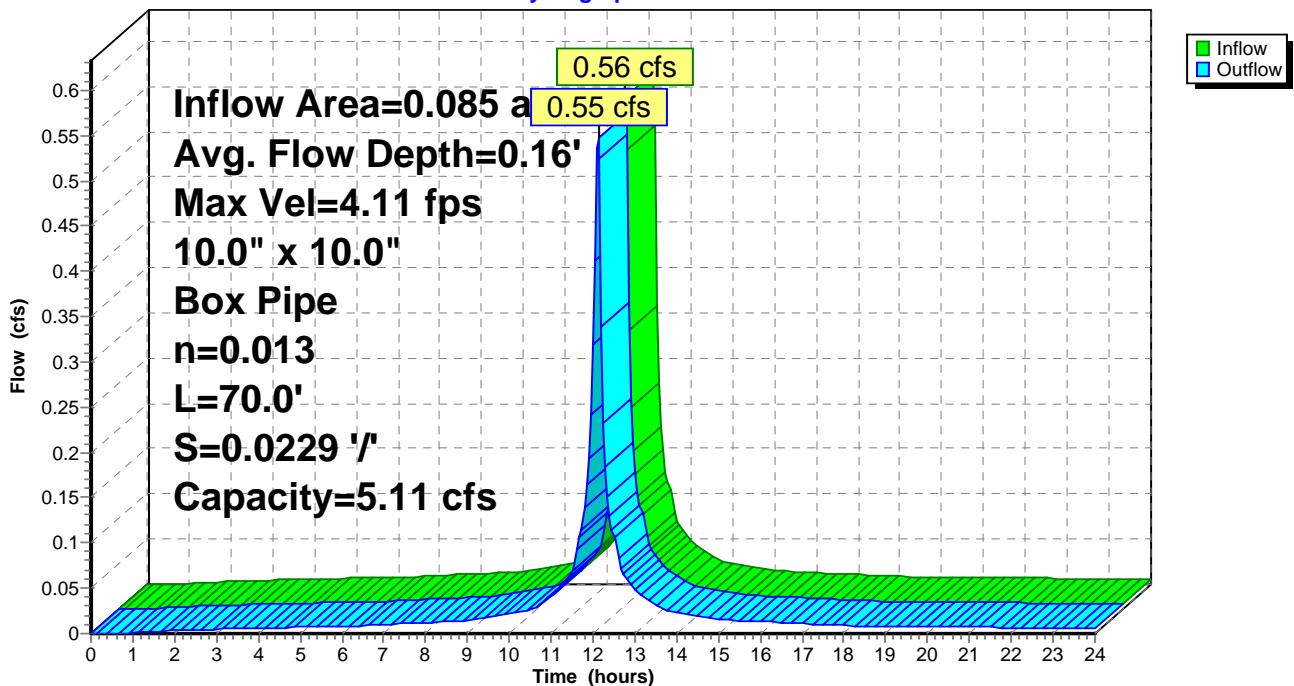

CS515 - channels 2.3

Prepared by Microsoft

HydroCAD® 10.00-26 s/n 09711 © 2020 HydroCAD Software Solutions LLC

NOAA 24-hr C 50-Year Rainfall=7.16"

Printed 2/24/2022

Page 43

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>6.92"
Tc=5.0 min CN=98 Runoff=1.44 cfs 0.108 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>6.92"
Tc=5.0 min CN=98 Runoff=4.80 cfs 0.362 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>6.92"
Tc=5.0 min CN=98 Runoff=0.65 cfs 0.049 af

Reach 5R: C-3 Avg. Flow Depth=0.30' Max Vel=2.28 fps Inflow=2.07 cfs 0.157 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=2.02 cfs 0.157 af

Reach 6R: C-2 Avg. Flow Depth=0.59' Max Vel=2.11 fps Inflow=4.80 cfs 0.362 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=4.51 cfs 0.361 af

Reach 7R: Culvert 1 Avg. Flow Depth=1.03' Max Vel=5.03 fps Inflow=6.51 cfs 0.519 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=6.45 cfs 0.519 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.18' Max Vel=4.30 fps Inflow=0.65 cfs 0.049 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.63 cfs 0.049 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.519 af Average Runoff Depth = 6.92"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.44 cfs @ 12.11 hrs, Volume= 0.108 af, Depth> 6.92"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

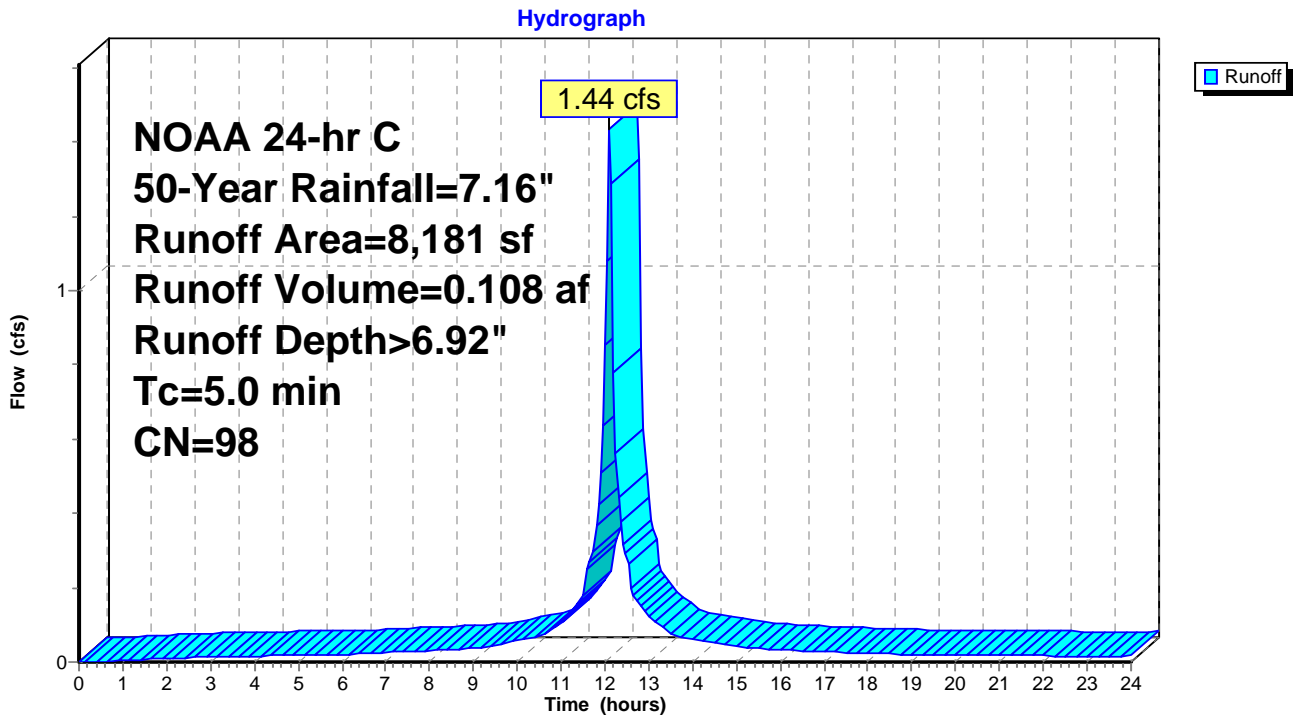

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 4.80 cfs @ 12.11 hrs, Volume= 0.362 af, Depth> 6.92"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

Hydrograph

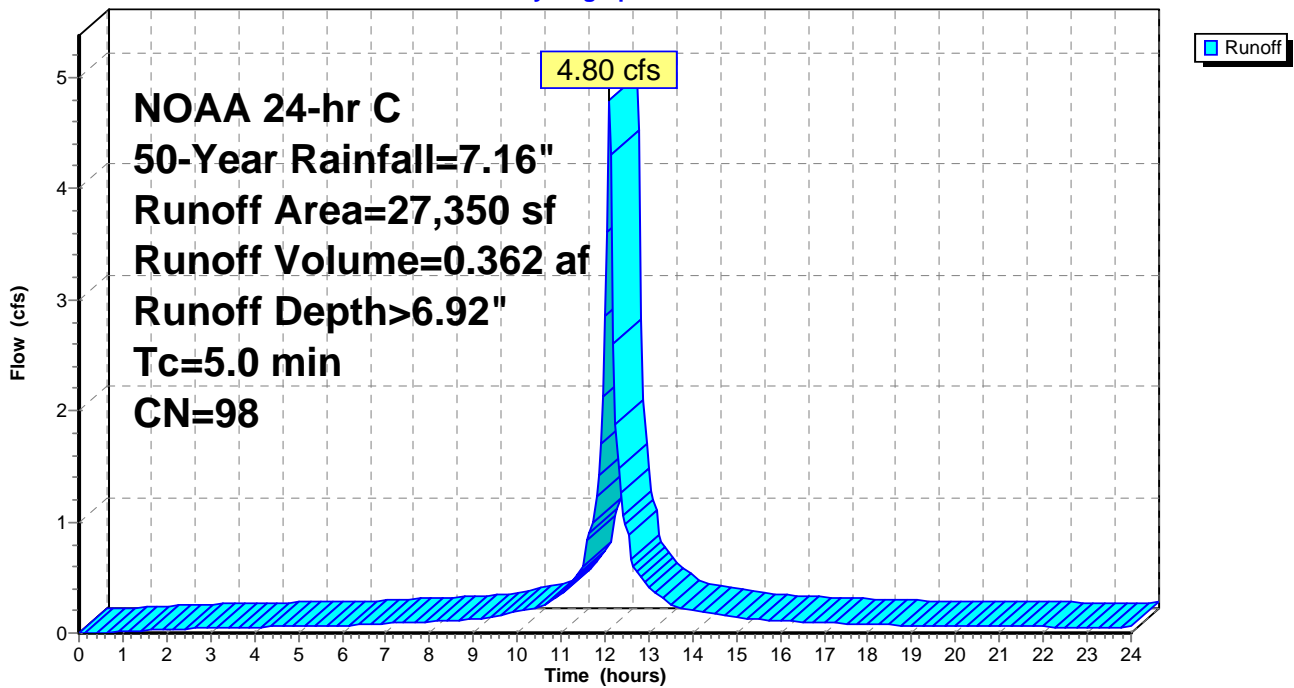

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 0.65 cfs @ 12.11 hrs, Volume= 0.049 af, Depth> 6.92"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, $dt= 0.05$ hrs
 NOAA 24-hr C 50-Year Rainfall=7.16"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

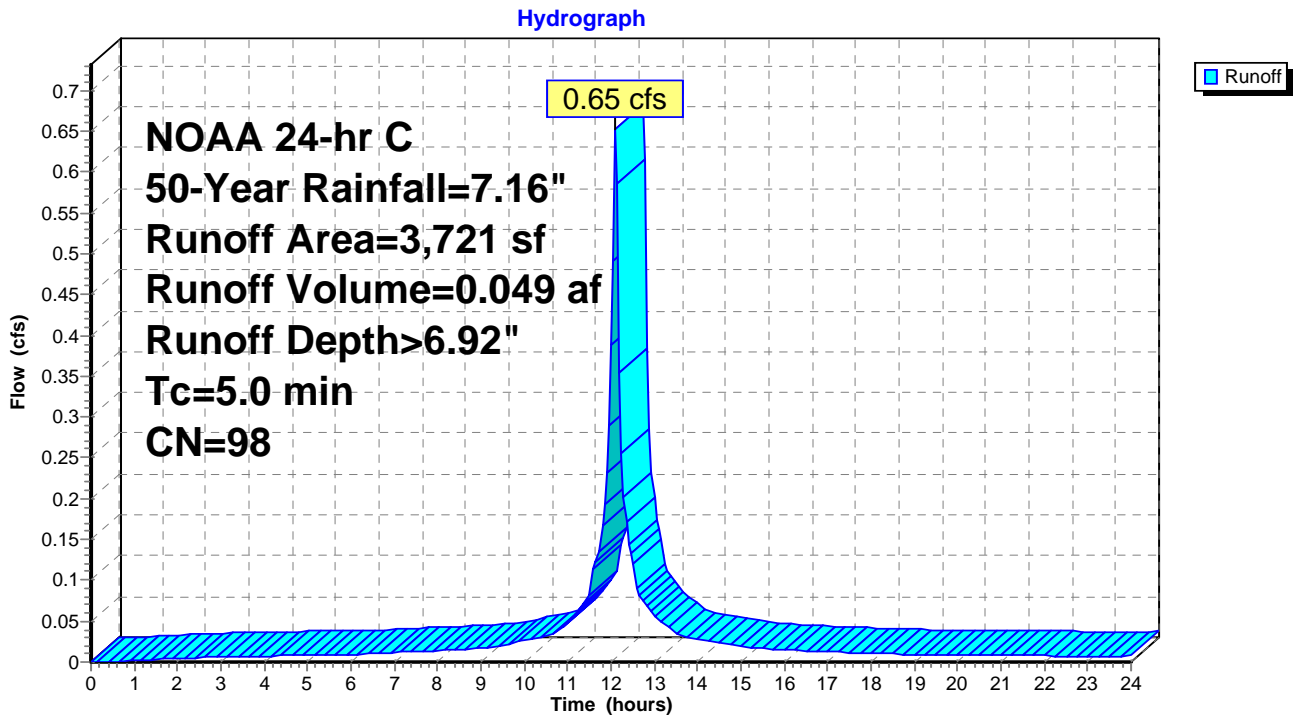

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.13' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 6.92" for 50-Year event
 Inflow = 2.07 cfs @ 12.11 hrs, Volume= 0.157 af
 Outflow = 2.02 cfs @ 12.13 hrs, Volume= 0.157 af, Atten= 2%, Lag= 0.9 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.28 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.65 fps, Avg. Travel Time= 1.5 min


Peak Storage= 53 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.30'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/' Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/'
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

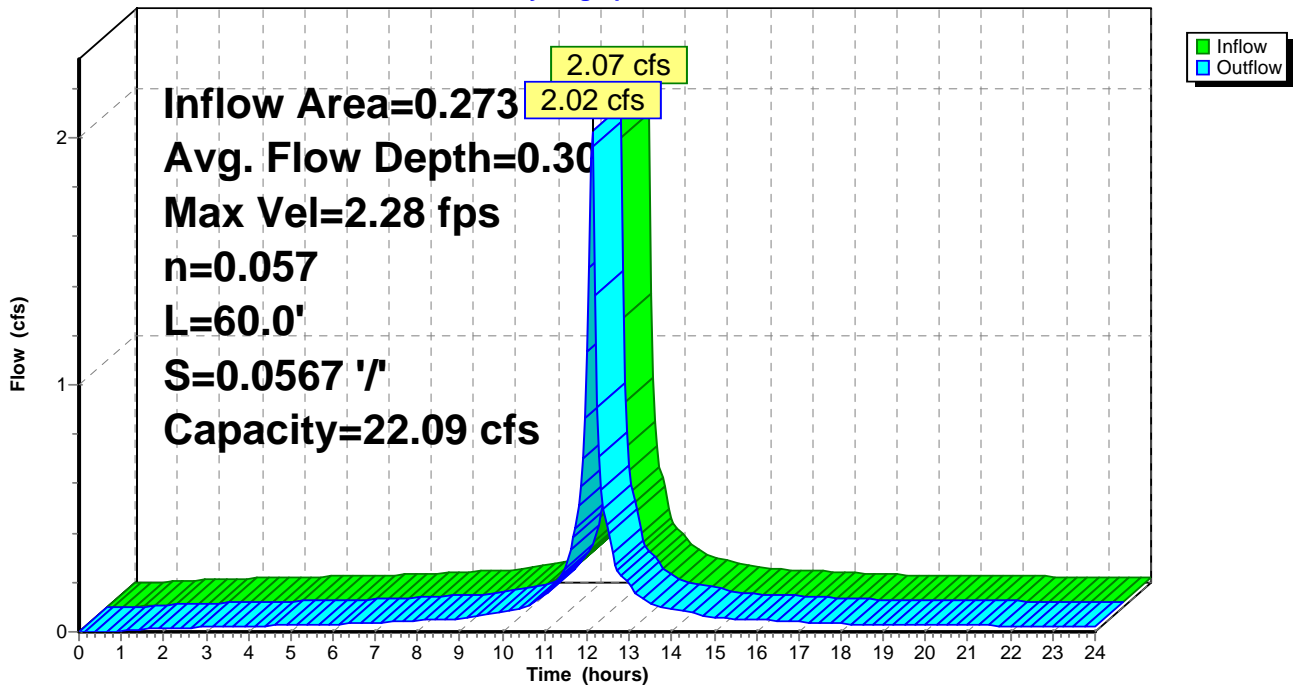

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 6.92" for 50-Year event
 Inflow = 4.80 cfs @ 12.11 hrs, Volume= 0.362 af
 Outflow = 4.51 cfs @ 12.14 hrs, Volume= 0.361 af, Atten= 6%, Lag= 2.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.11 fps, Min. Travel Time= 1.2 min
 Avg. Velocity = 0.66 fps, Avg. Travel Time= 3.8 min


Peak Storage= 331 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.59'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

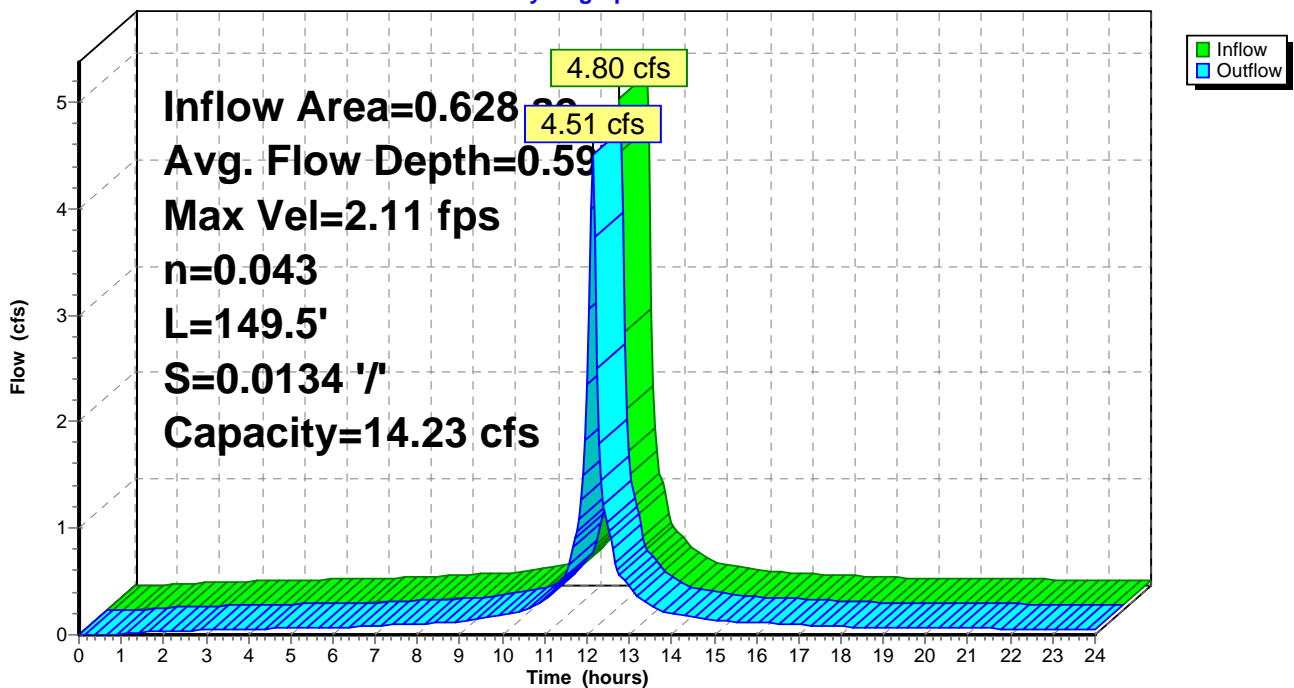

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.48' @ 12.15 hrs


[62] Hint: Exceeded Reach 6R OUTLET depth by 0.20' @ 12.15 hrs

| | | | |
|---------------|-------------------------------|----------------------|-----------------------------------|
| Inflow Area = | 0.901 ac, 100.00% Impervious, | Inflow Depth > 6.91" | for 50-Year event |
| Inflow = | 6.51 cfs @ 12.14 hrs, | Volume= | 0.519 af |
| Outflow = | 6.45 cfs @ 12.14 hrs, | Volume= | 0.519 af, Atten= 1%, Lag= 0.3 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 5.03 fps, Min. Travel Time= 0.2 min
 Avg. Velocity = 1.77 fps, Avg. Travel Time= 0.6 min


Peak Storage= 81 cf @ 12.14 hrs
 Average Depth at Peak Storage= 1.03'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

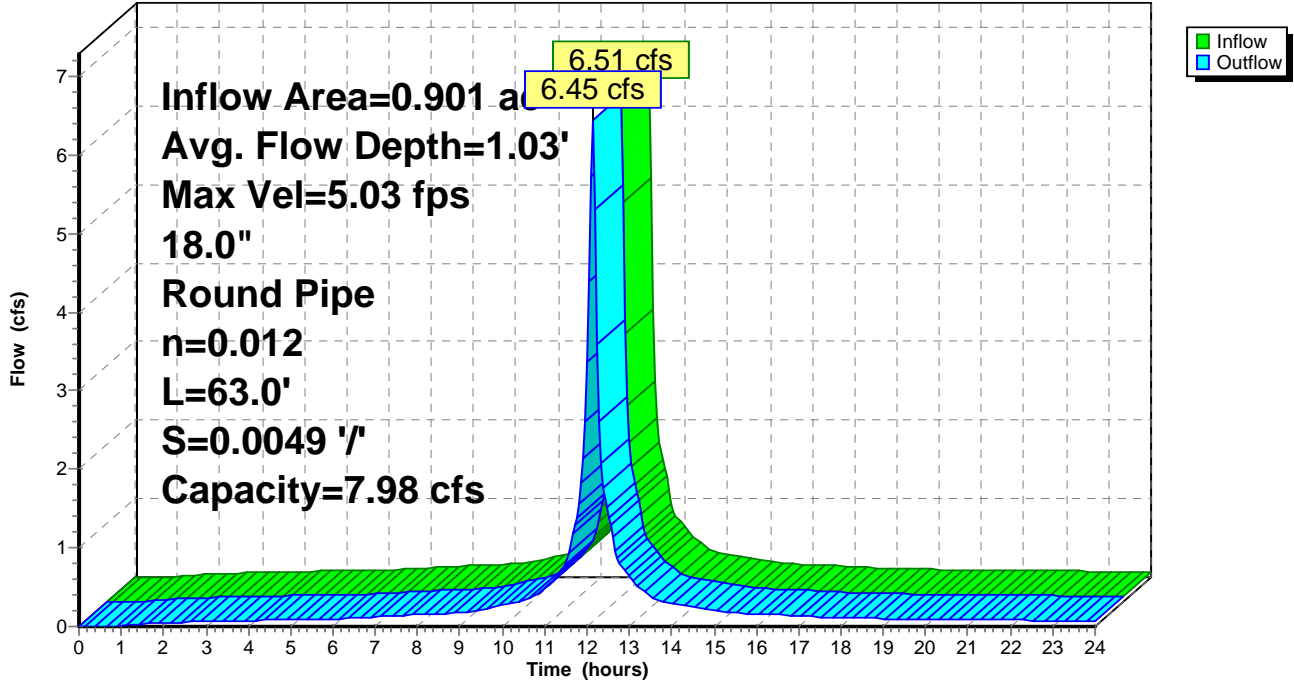

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 6.92" for 50-Year event
 Inflow = 0.65 cfs @ 12.11 hrs, Volume= 0.049 af
 Outflow = 0.63 cfs @ 12.12 hrs, Volume= 0.049 af, Atten= 3%, Lag= 0.6 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.30 fps, Min. Travel Time= 0.3 min
 Avg. Velocity = 1.14 fps, Avg. Travel Time= 1.0 min


Peak Storage= 10 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.18'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'



Reach 14R: U Trench Drain

Hydrograph

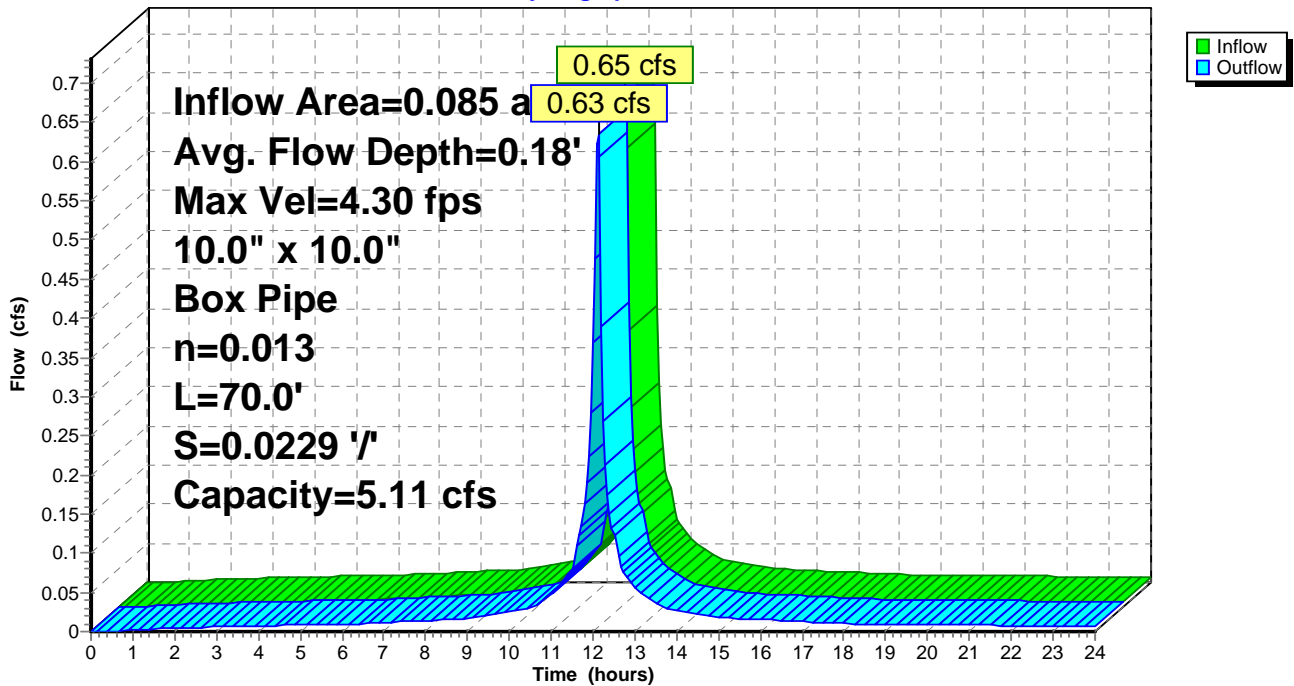

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment 2S: C-3 Runoff Area=8,181 sf 100.00% Impervious Runoff Depth>8.18"
Tc=5.0 min CN=98 Runoff=1.69 cfs 0.128 af

Subcatchment 3S: C-2 Runoff Area=27,350 sf 100.00% Impervious Runoff Depth>8.18"
Tc=5.0 min CN=98 Runoff=5.66 cfs 0.428 af

Subcatchment 15S: U Trench Drain Runoff Area=3,721 sf 100.00% Impervious Runoff Depth>8.18"
Tc=5.0 min CN=98 Runoff=0.77 cfs 0.058 af

Reach 5R: C-3 Avg. Flow Depth=0.33' Max Vel=2.40 fps Inflow=2.44 cfs 0.186 af
n=0.057 L=60.0' S=0.0567 '/ Capacity=22.09 cfs Outflow=2.39 cfs 0.186 af

Reach 6R: C-2 Avg. Flow Depth=0.64' Max Vel=2.20 fps Inflow=5.66 cfs 0.428 af
n=0.043 L=149.5' S=0.0134 '/ Capacity=14.23 cfs Outflow=5.33 cfs 0.428 af

Reach 7R: Culvert 1 Avg. Flow Depth=1.18' Max Vel=5.14 fps Inflow=7.69 cfs 0.614 af
18.0" Round Pipe n=0.012 L=63.0' S=0.0049 '/ Capacity=7.98 cfs Outflow=7.61 cfs 0.614 af

Reach 14R: U Trench Drain Avg. Flow Depth=0.20' Max Vel=4.53 fps Inflow=0.77 cfs 0.058 af
10.0" x 10.0" Box Pipe n=0.013 L=70.0' S=0.0229 '/ Capacity=5.11 cfs Outflow=0.75 cfs 0.058 af

Total Runoff Area = 0.901 ac Runoff Volume = 0.615 af Average Runoff Depth = 8.18"
0.00% Pervious = 0.000 ac 100.00% Impervious = 0.901 ac

Summary for Subcatchment 2S: C-3

[49] Hint: $T_c < 2dt$ may require smaller dt


Runoff = 1.69 cfs @ 12.11 hrs, Volume= 0.128 af, Depth> 8.18"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 8,181 | 98 | Paved parking, HSG D |
| 8,181 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 2S: C-3

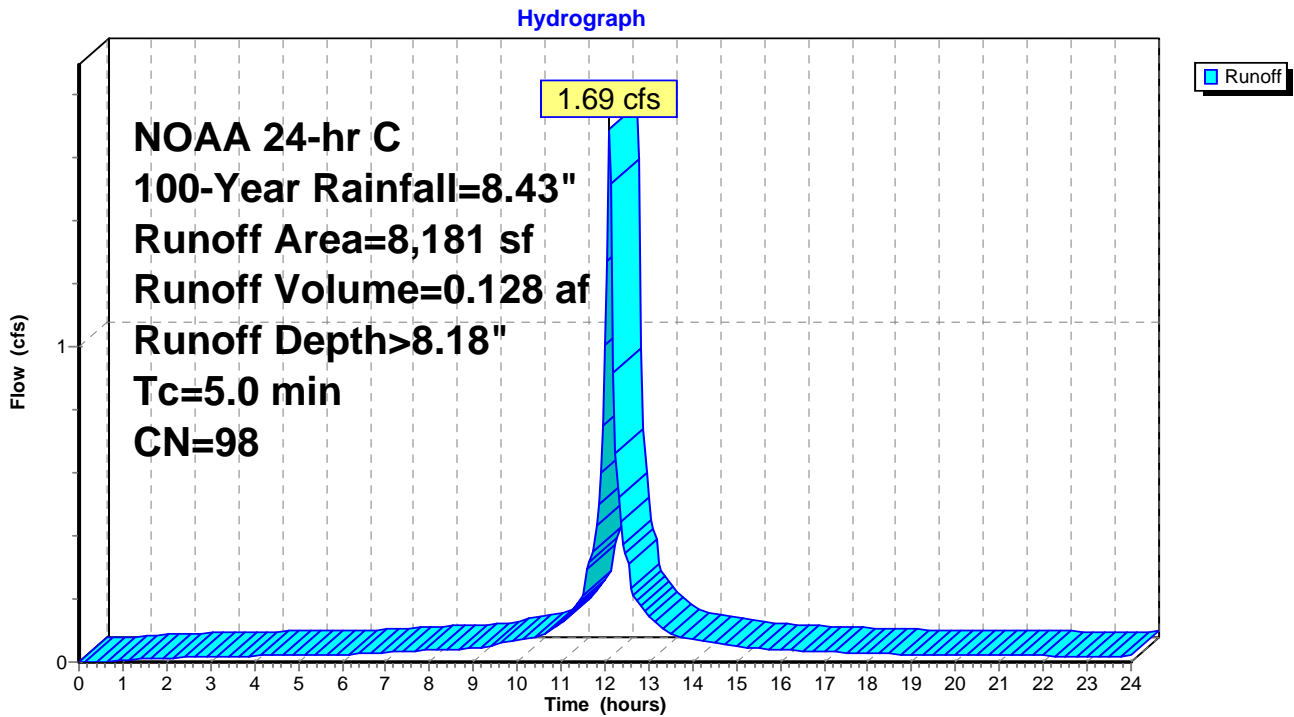

Summary for Subcatchment 3S: C-2

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 5.66 cfs @ 12.11 hrs, Volume= 0.428 af, Depth> 8.18"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 27,350 | 98 | Paved parking, HSG D |
| 27,350 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 3S: C-2

Hydrograph

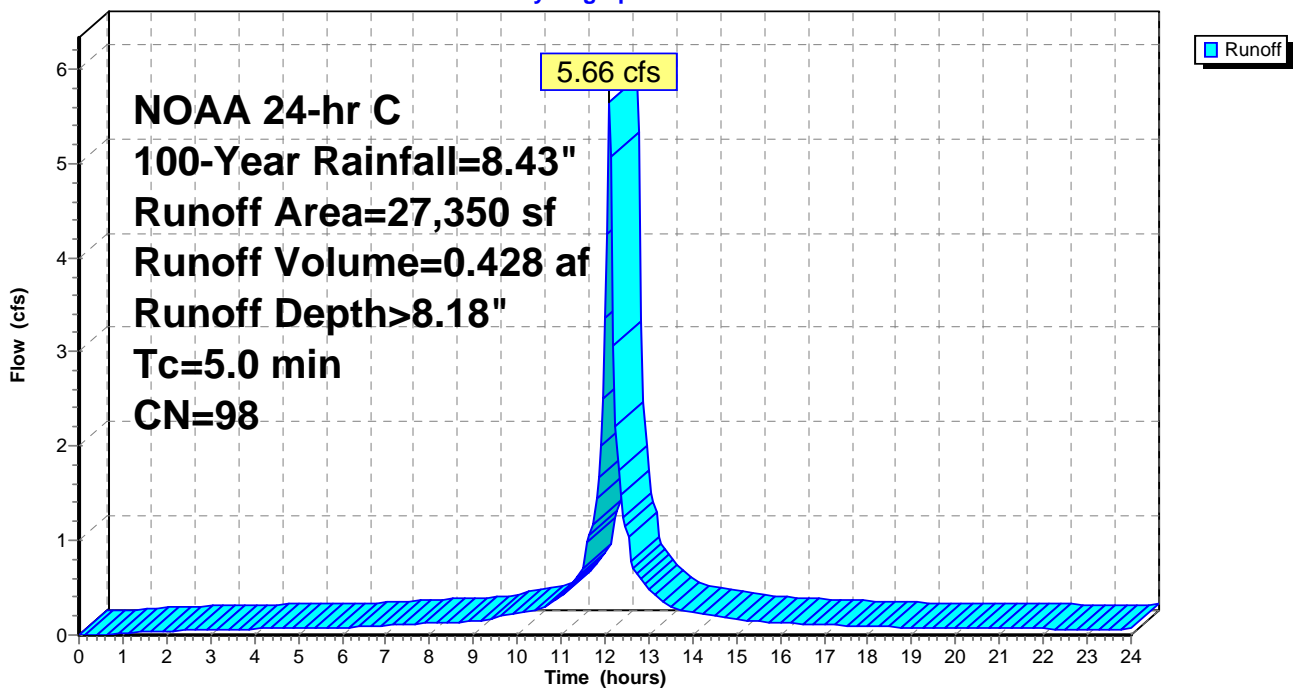

Summary for Subcatchment 15S: U Trench Drain

[49] Hint: $T_c < 2dt$ may require smaller dt

Runoff = 0.77 cfs @ 12.11 hrs, Volume= 0.058 af, Depth> 8.18"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 NOAA 24-hr C 100-Year Rainfall=8.43"

| Area (sf) | CN | Description |
|-----------|----|-------------------------|
| * 3,721 | 98 | Paved parking, HSG D |
| 3,721 | | 100.00% Impervious Area |

| Tc (min) | Length (feet) | Slope (ft/ft) | Velocity (ft/sec) | Capacity (cfs) | Description |
|----------|---------------|---------------|-------------------|----------------|---------------|
| 5.0 | | | | | Direct Entry, |

Subcatchment 15S: U Trench Drain

Hydrograph

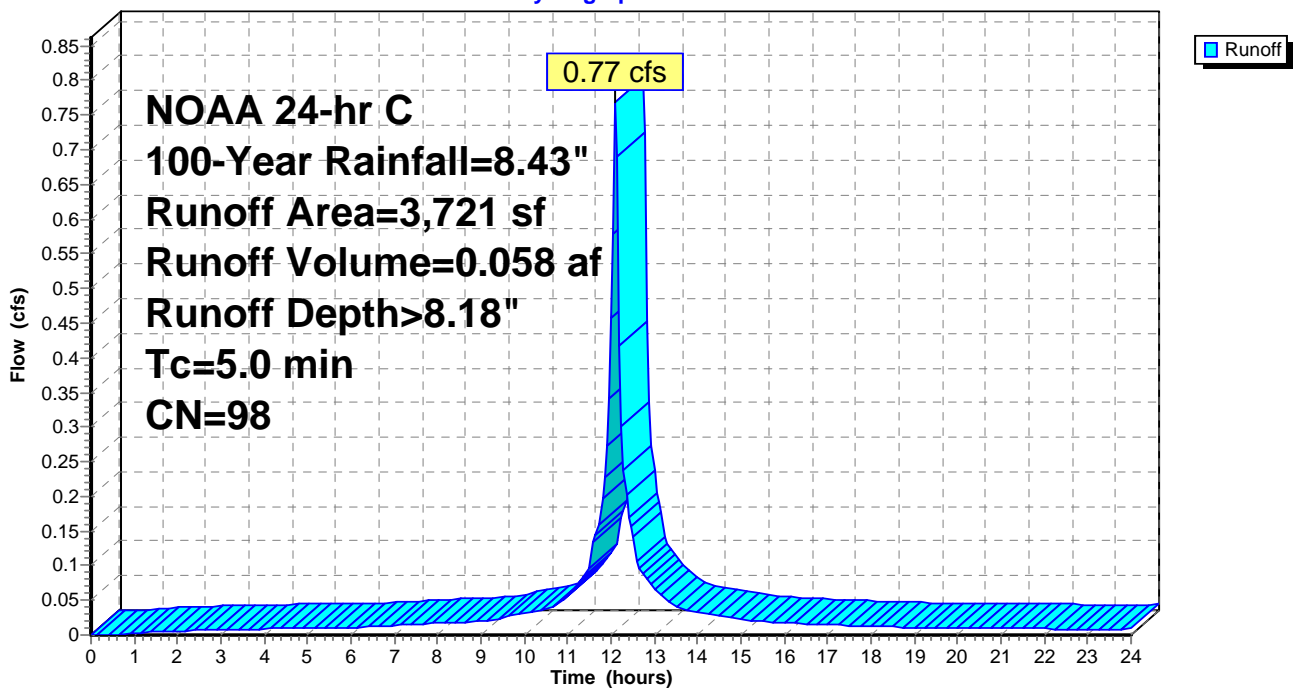

Summary for Reach 5R: C-3

[62] Hint: Exceeded Reach 14R OUTLET depth by 0.13' @ 12.15 hrs

Inflow Area = 0.273 ac, 100.00% Impervious, Inflow Depth > 8.18" for 100-Year event
 Inflow = 2.44 cfs @ 12.11 hrs, Volume= 0.186 af
 Outflow = 2.39 cfs @ 12.13 hrs, Volume= 0.186 af, Atten= 2%, Lag= 0.9 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.40 fps, Min. Travel Time= 0.4 min
 Avg. Velocity = 0.69 fps, Avg. Travel Time= 1.4 min


Peak Storage= 60 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.33'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 22.09 cfs

2.00' x 1.00' deep channel, n= 0.057
 Side Slope Z-value= 3.0 '/' Top Width= 8.00'
 Length= 60.0' Slope= 0.0567 '/'
 Inlet Invert= 1,939.40', Outlet Invert= 1,936.00'



Reach 5R: C-3

Hydrograph

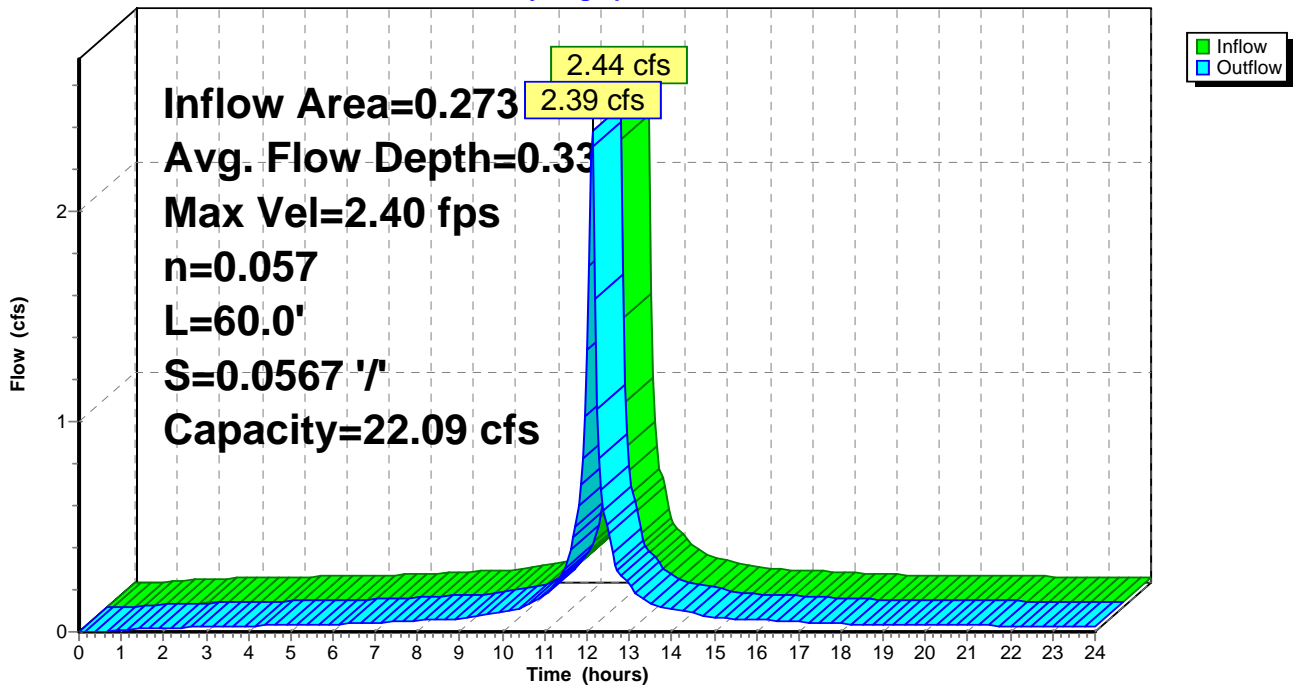

Summary for Reach 6R: C-2

Inflow Area = 0.628 ac, 100.00% Impervious, Inflow Depth > 8.18" for 100-Year event
 Inflow = 5.66 cfs @ 12.11 hrs, Volume= 0.428 af
 Outflow = 5.33 cfs @ 12.14 hrs, Volume= 0.428 af, Atten= 6%, Lag= 2.0 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 2.20 fps, Min. Travel Time= 1.1 min
 Avg. Velocity = 0.70 fps, Avg. Travel Time= 3.6 min


Peak Storage= 373 cf @ 12.13 hrs
 Average Depth at Peak Storage= 0.64'
 Bank-Full Depth= 1.00' Flow Area= 5.0 sf, Capacity= 14.23 cfs

2.00' x 1.00' deep channel, n= 0.043
 Side Slope Z-value= 3.0 '/ Top Width= 8.00'
 Length= 149.5' Slope= 0.0134 '/
 Inlet Invert= 1,938.00', Outlet Invert= 1,936.00'



Reach 6R: C-2

Hydrograph

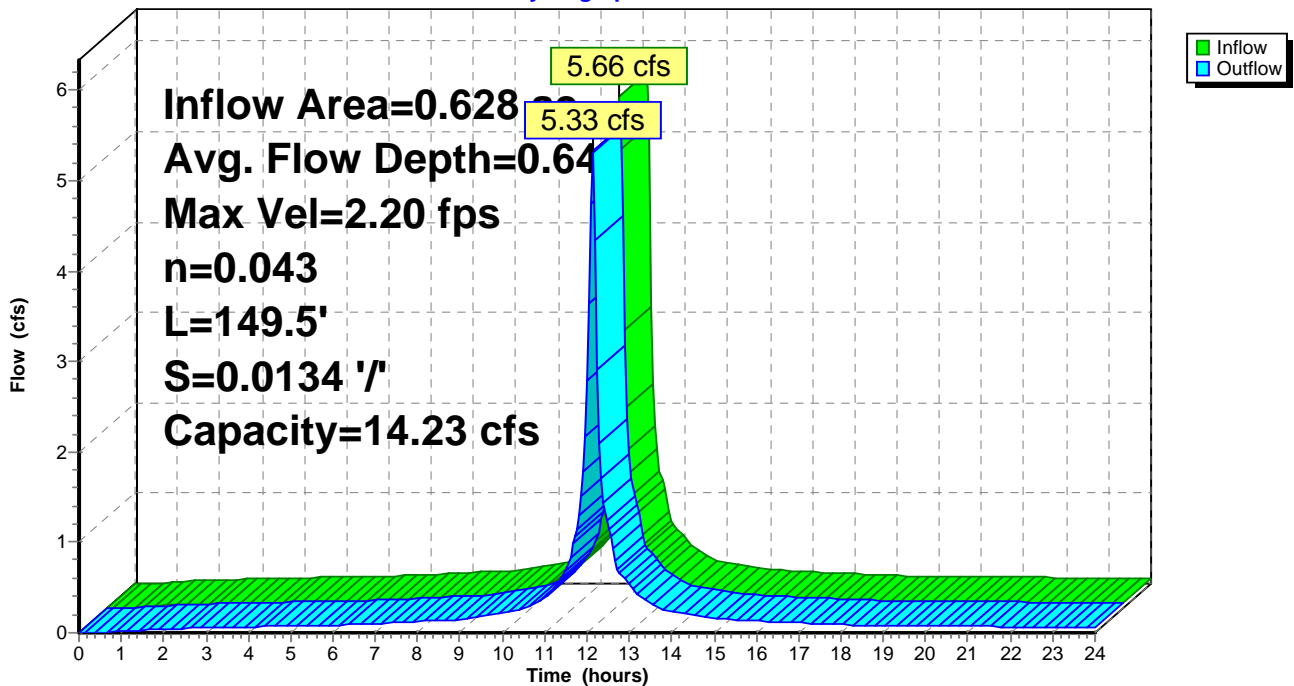

Summary for Reach 7R: Culvert 1

[52] Hint: Inlet/Outlet conditions not evaluated

[62] Hint: Exceeded Reach 5R OUTLET depth by 0.60' @ 12.15 hrs


[62] Hint: Exceeded Reach 6R OUTLET depth by 0.30' @ 12.15 hrs

| | | | |
|---------------|-------------------------------|----------------------|-----------------------------------|
| Inflow Area = | 0.901 ac, 100.00% Impervious, | Inflow Depth > 8.18" | for 100-Year event |
| Inflow = | 7.69 cfs @ 12.14 hrs, | Volume= | 0.614 af |
| Outflow = | 7.61 cfs @ 12.14 hrs, | Volume= | 0.614 af, Atten= 1%, Lag= 0.3 min |

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 5.14 fps, Min. Travel Time= 0.2 min
 Avg. Velocity= 1.87 fps, Avg. Travel Time= 0.6 min


Peak Storage= 94 cf @ 12.14 hrs
 Average Depth at Peak Storage= 1.18'
 Bank-Full Depth= 1.50' Flow Area= 1.8 sf, Capacity= 7.98 cfs

18.0" Round Pipe
 n= 0.012 Concrete pipe, finished
 Length= 63.0' Slope= 0.0049 '/
 Inlet Invert= 1,935.75', Outlet Invert= 1,935.44'



Reach 7R: Culvert 1

Hydrograph

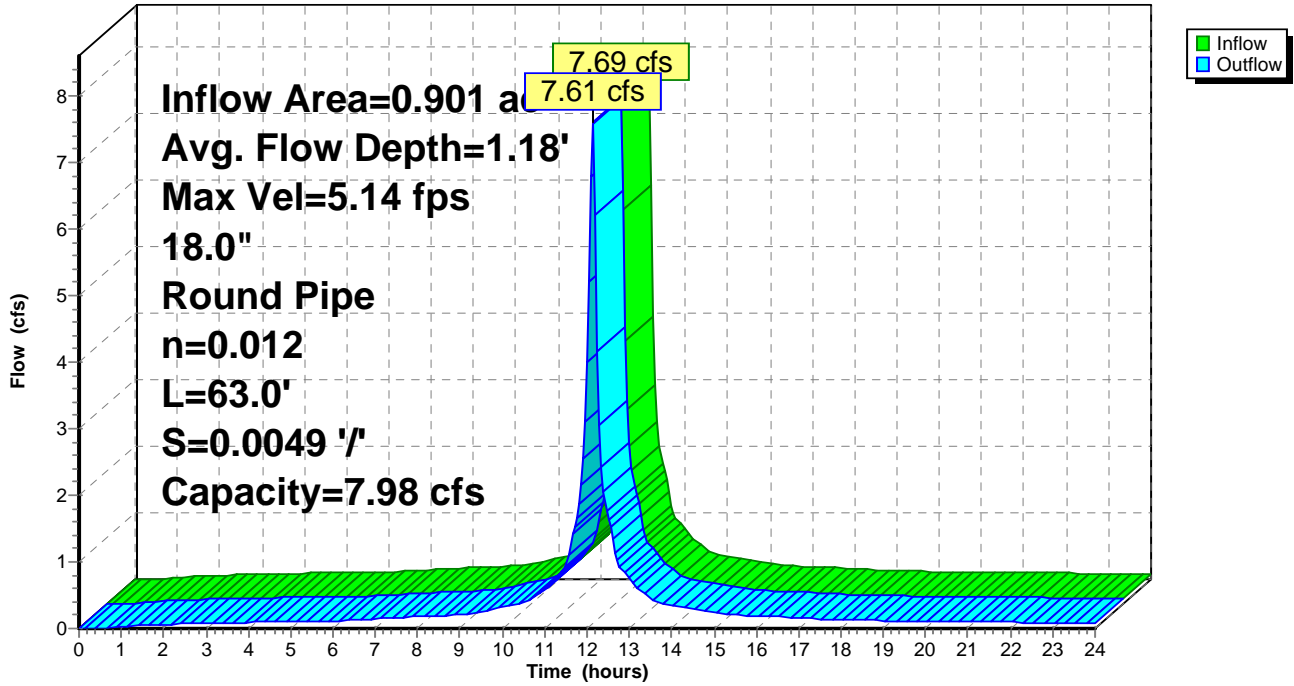

Summary for Reach 14R: U Trench Drain


[52] Hint: Inlet/Outlet conditions not evaluated

Inflow Area = 0.085 ac, 100.00% Impervious, Inflow Depth > 8.18" for 100-Year event
 Inflow = 0.77 cfs @ 12.11 hrs, Volume= 0.058 af
 Outflow = 0.75 cfs @ 12.12 hrs, Volume= 0.058 af, Atten= 3%, Lag= 0.5 min

Routing by Stor-Ind+Trans method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
 Max. Velocity= 4.53 fps, Min. Travel Time= 0.3 min
 Avg. Velocity = 1.21 fps, Avg. Travel Time= 1.0 min


Peak Storage= 12 cf @ 12.12 hrs
 Average Depth at Peak Storage= 0.20'
 Bank-Full Depth= 0.83' Flow Area= 0.7 sf, Capacity= 5.11 cfs

10.0" W x 10.0" H Box Pipe
 n= 0.013 Corrugated PE, smooth interior
 Length= 70.0' Slope= 0.0229 '/
 Inlet Invert= 1,941.00', Outlet Invert= 1,939.40'




Reach 14R: U Trench Drain

Hydrograph

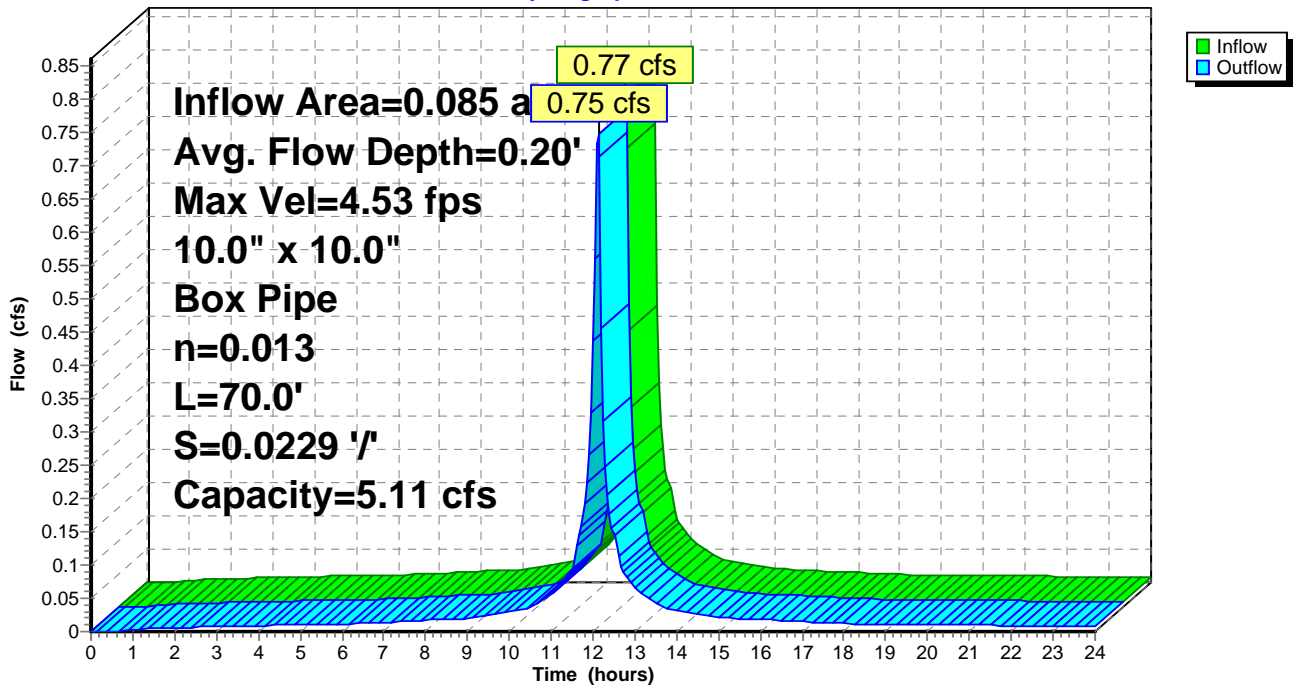

ATTACHMENT 4.6
RIPRAP APRON WORKSHEETS

FIGURE 9.3
Riprap Apron Design, Minimum Tailwater Condition

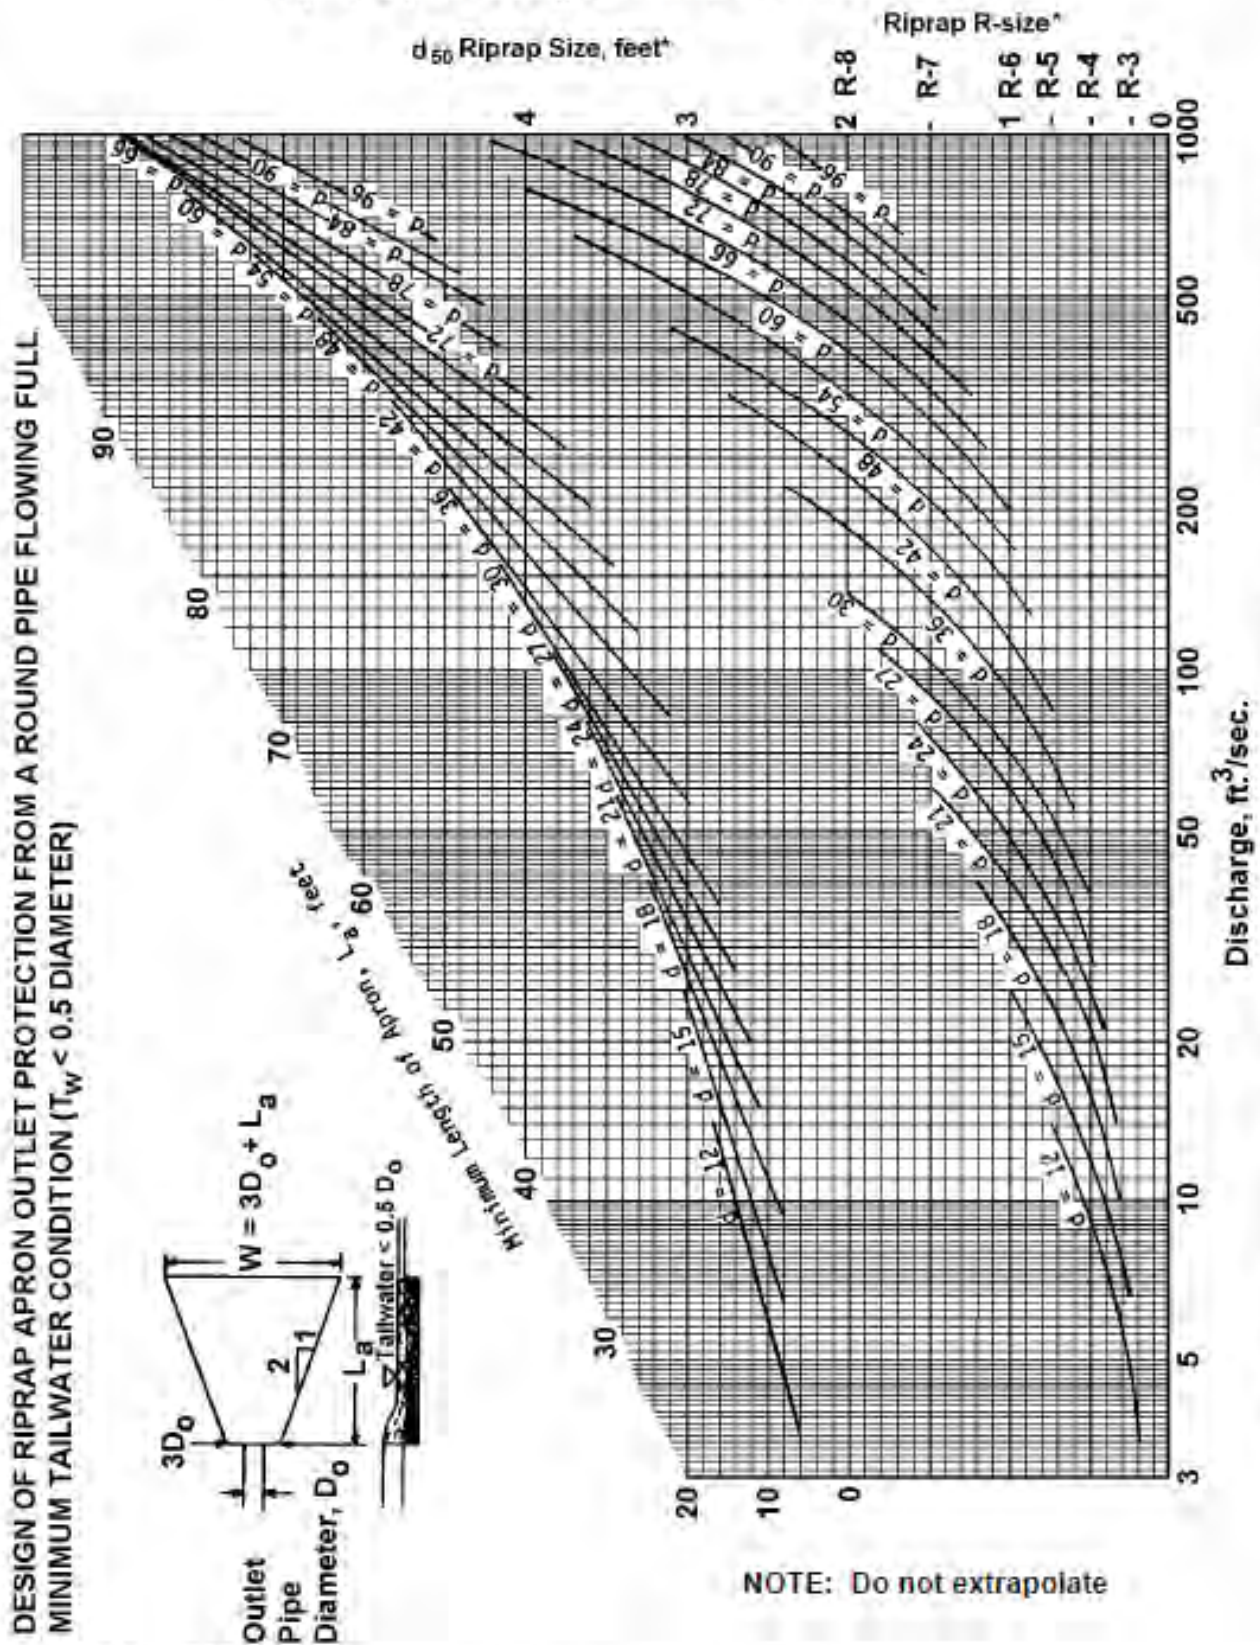

* For discharge velocities exceeding Maximum Allowable for Riprap indicated, increase d_{50} stone size and/or provide velocity reduction device.

Adapted from USDA - NRCS

Not to be used for Box Culverts

ATTACHMENT 4.7
BMP EROSION CONTROL BLANKET REPORTS



North American Green
 5401 St. Wendel-Cynthiana Rd.
 Poseyville, Indiana 47633
 Tel. 800.772.2040
 >Fax 812.867.0247
 www.nagreen.com
 ECMDS v7.0

CHANNEL ANALYSIS

> > CS515: C-1

Name CS515: C-1
 Discharge 5.68
 Channel Slope 0.041
 Channel Bottom Width 4
 Left Side Slope 3
 Right Side Slope 3
 Low Flow Liner
 Retardence Class C 6-12 in
 Vegetation Type Sod Former
 Vegetation Density Good 65-79%
 Soil Type Silt Loam (SM)

SC150BN

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|-------------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| SC150BN Unvegetated | Straight | 5.68 cfs | 2.78 ft/s | 0.39 ft | 0.05 | 2 lbs/ft ² | 1.01 lbs/ft ² | 1.99 | STABLE | D |
| Underlying Substrate | Straight | 5.68 cfs | 2.78 ft/s | 0.39 ft | 0.05 | 1.47 lbs/ft ² | 0.8 lbs/ft ² | 1.82 | STABLE | D |

Unreinforced Vegetation

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|----------------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| Unreinforced Vegetation | Straight | 5.68 cfs | 2.78 ft/s | 0.39 ft | 0.05 | 4 lbs/ft ² | 1.01 lbs/ft ² | 3.97 | STABLE | -- |
| Underlying Substrate | Straight | 5.68 cfs | 2.78 ft/s | 0.39 ft | 0.05 | 4 lbs/ft ² | 0.8 lbs/ft ² | 4.97 | STABLE | -- |



North American Green
 5401 St. Wendel-Cynthiana Rd.
 Poseyville, Indiana 47633
 Tel. 800.772.2040
 >Fax 812.867.0247
 www.nagreen.com
 ECMDS v7.0

CHANNEL ANALYSIS

> > CS515:C-4

Name CS515:C-4
 Discharge 2.37
 Channel Slope 0.017
 Channel Bottom Width 2
 Left Side Slope 3
 Right Side Slope 3
 Low Flow Liner
 Retardence Class C 6-12 in
 Vegetation Type Sod Former
 Vegetation Density Good 65-79%
 Soil Type Silt Loam (SM)

SC150BN

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|-------------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| SC150BN Unvegetated | Straight | 2.37 cfs | 1.72 ft/s | 0.42 ft | 0.05 | 2 lbs/ft ² | 0.45 lbs/ft ² | 4.47 | STABLE | D |
| Underlying Substrate | Straight | 2.37 cfs | 1.72 ft/s | 0.42 ft | 0.05 | 1.47 lbs/ft ² | 0.31 lbs/ft ² | 4.68 | STABLE | D |

Unreinforced Vegetation

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|----------------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| Underlying Substrate | Straight | 2.37 cfs | 1.72 ft/s | 0.42 ft | 0.05 | 4 lbs/ft ² | 0.31 lbs/ft ² | 12.77 | STABLE | -- |
| Unreinforced Vegetation | Straight | 2.37 cfs | 1.72 ft/s | 0.42 ft | 0.05 | 4 lbs/ft ² | 0.45 lbs/ft ² | 8.93 | STABLE | -- |



North American Green
 5401 St. Wendel-Cynthiana Rd.
 Poseyville, Indiana 47633
 Tel. 800.772.2040
 >Fax 812.867.0247
 www.nagreen.com
 ECMDS v7.0

CHANNEL ANALYSIS

> > CS515: C-5

Name CS515: C-5
 Discharge 7.04
 Channel Slope 0.05
 Channel Bottom Width 4
 Left Side Slope 3
 Right Side Slope 3
 Low Flow Liner
 Retardence Class C 6-12 in
 Vegetation Type Sod Former
 Vegetation Density Good 65-79%
 Soil Type Silt Loam (SM)


SC150BN

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|----------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| SC150BN Unvegetated | Straight | 7.04 cfs | 3.18 ft/s | 0.42 ft | 0.05 | 2 lbs/ft ² | 1.31 lbs/ft ² | 1.53 | STABLE | D |
| Underlying Substrate | Straight | 7.04 cfs | 3.18 ft/s | 0.42 ft | 0.05 | 1.47 lbs/ft ² | 1.03 lbs/ft ² | 1.42 | STABLE | D |

Unreinforced Vegetation

| Phase | Reach | Discharge | Velocity | Normal Depth | Mannings N | Permissible Shear Stress | Calculated Shear Stress | Safety Factor | Remarks | Staple Pattern |
|-------------------------|----------|-----------|-----------|--------------|------------|--------------------------|--------------------------|---------------|---------|----------------|
| Unreinforced Vegetation | Straight | 7.04 cfs | 3.18 ft/s | 0.42 ft | 0.05 | 4 lbs/ft ² | 1.31 lbs/ft ² | 3.06 | STABLE | -- |
| Underlying Substrate | Straight | 7.04 cfs | 3.18 ft/s | 0.42 ft | 0.05 | 4 lbs/ft ² | 1.03 lbs/ft ² | 3.87 | STABLE | -- |

ATTACHMENT 5
NON-STRUCTURAL AND STRUCTURAL WATER QUALITY
BMPS MAP

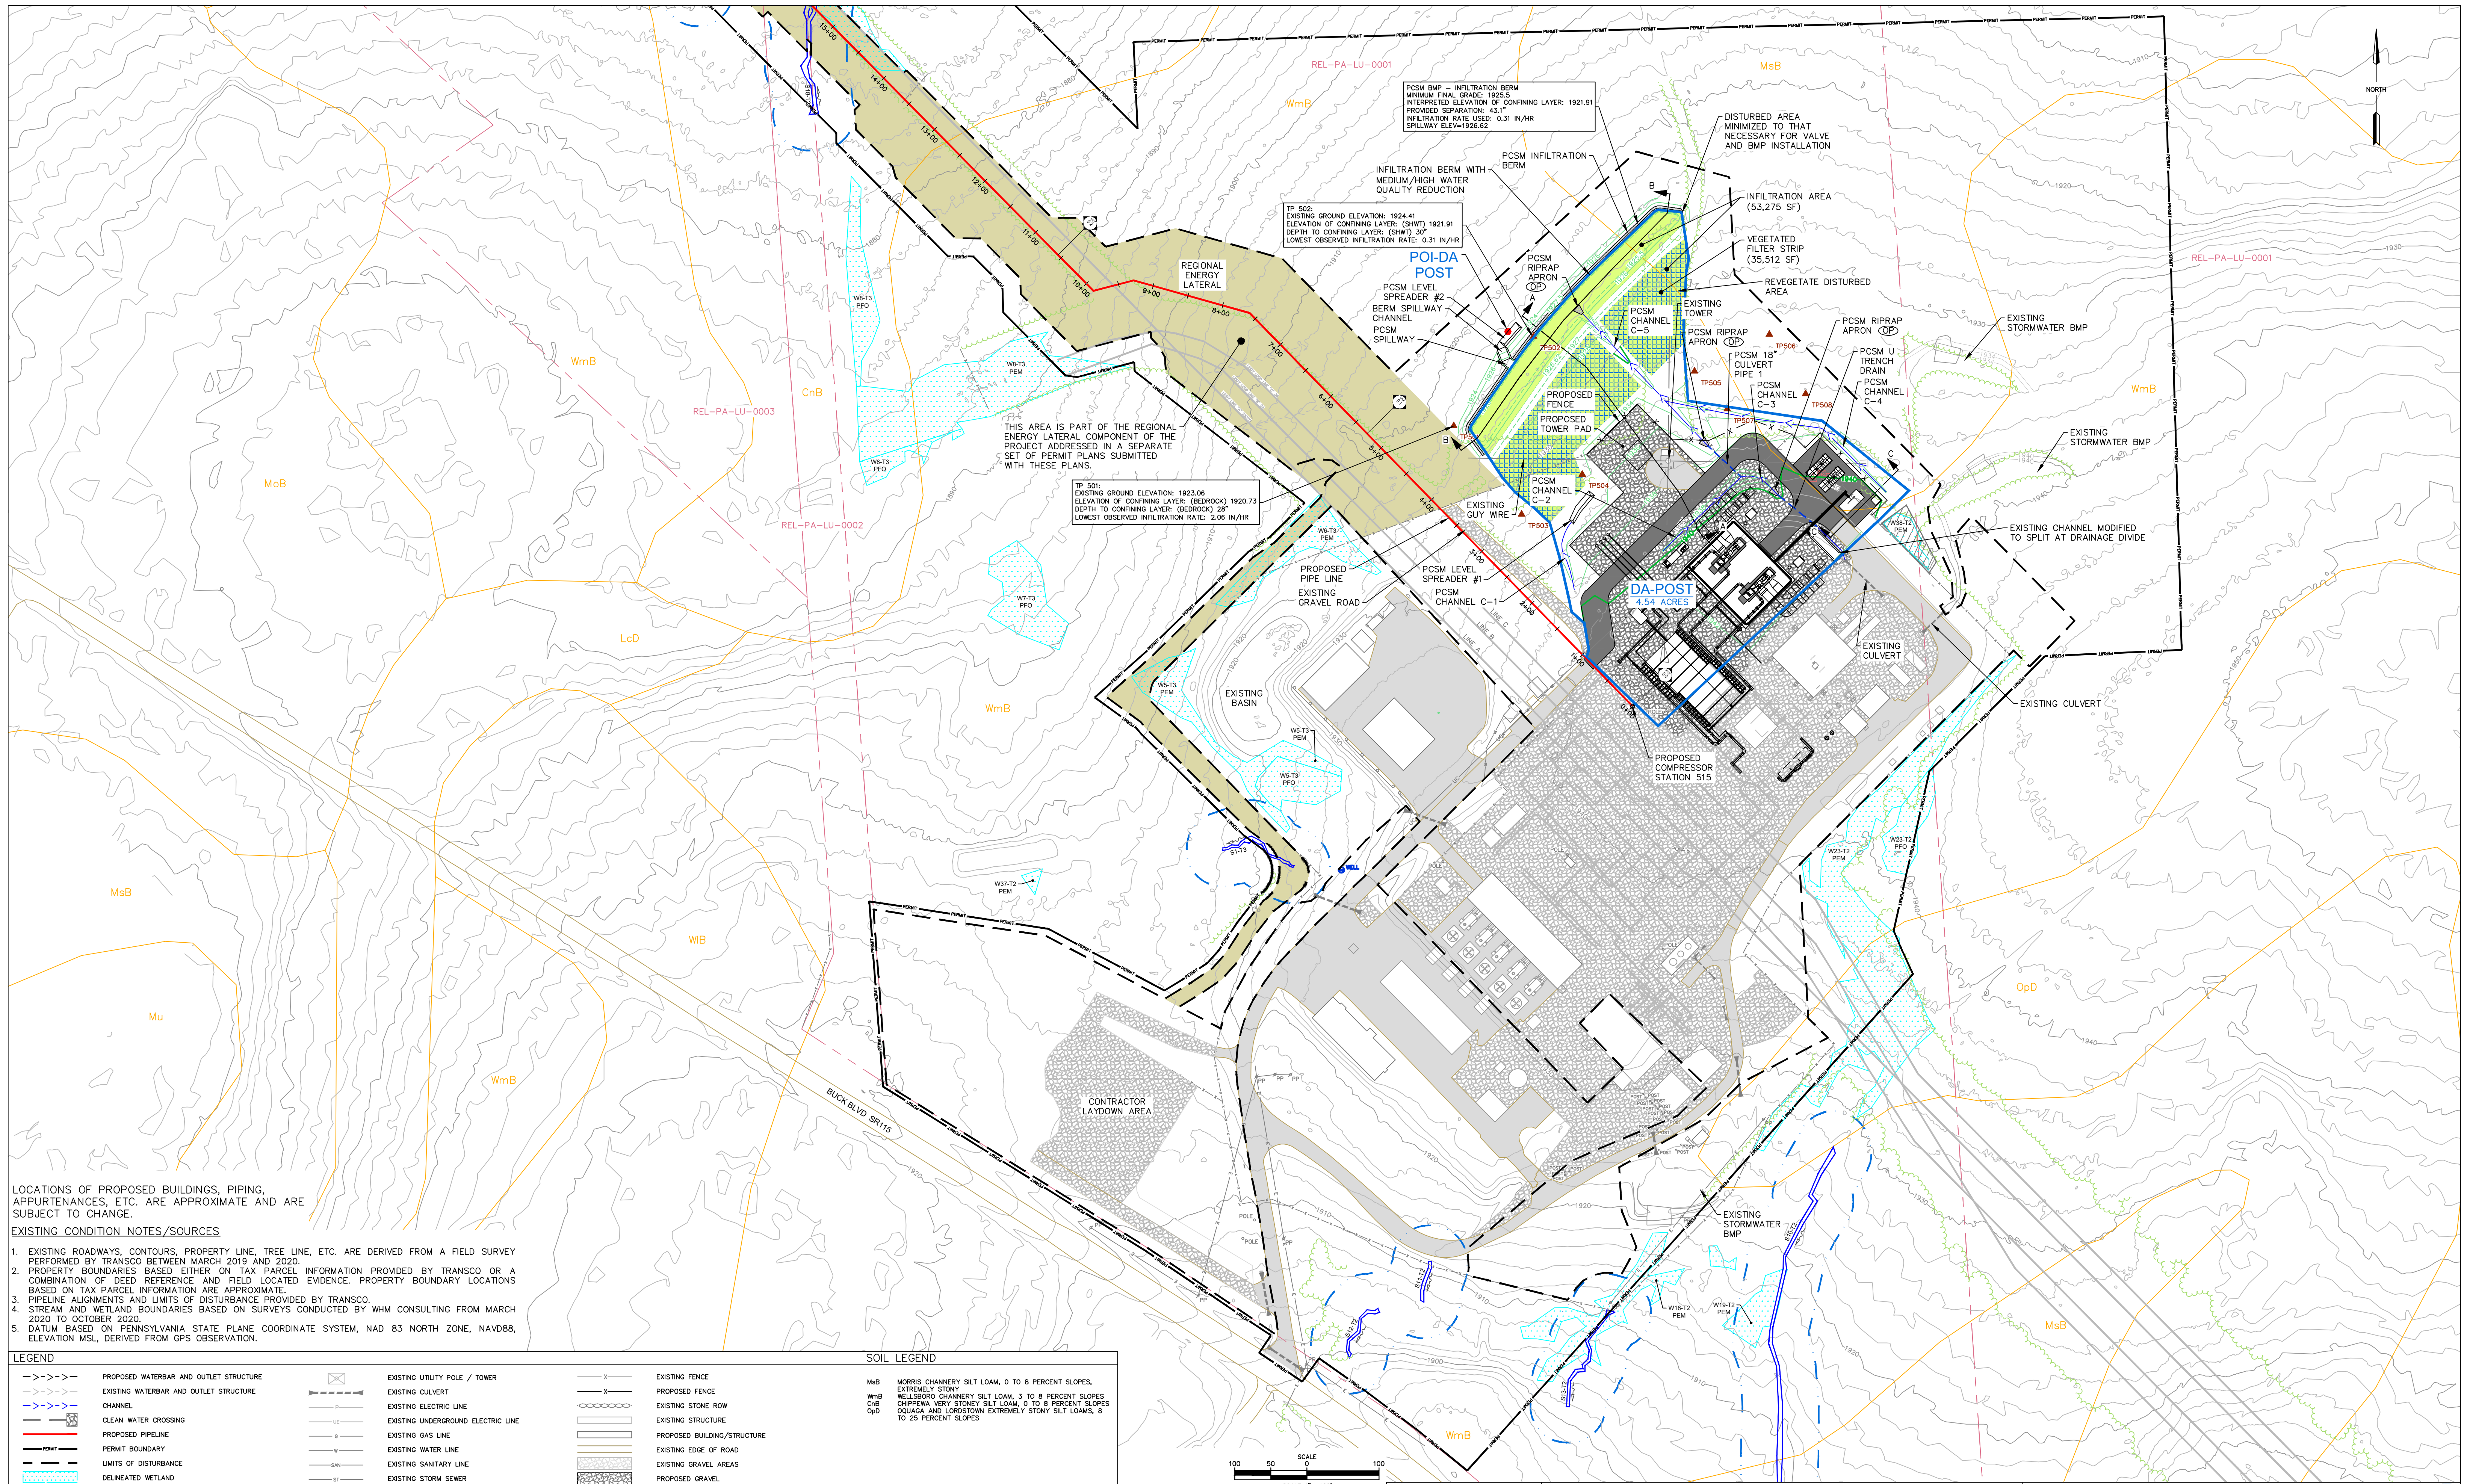


LOCATIONS OF PROPOSED BUILDINGS, PIPING, APPURTENANCES, ETC. ARE APPROXIMATE AND ARE SUBJECT TO CHANGE.

EXISTING CONDITION NOTES/SOURCES

- EXISTING ROADWAYS, CONTOURS, PROPERTY LINE, TREE LINE, ETC. ARE DERIVED FROM A FIELD SURVEY PERFORMED BY TRANSCO BETWEEN MARCH 2019 AND 2020.
- PROPERTY BOUNDARIES BASED EITHER ON TAX PARCEL INFORMATION PROVIDED BY TRANSCO OR A COMBINATION OF DEED REFERENCE AND FIELD LOCATED EVIDENCE. PROPERTY BOUNDARY LOCATIONS BASED ON TAX PARCEL INFORMATION ARE APPROXIMATE.
- PIPELINE ALIGNMENTS AND LIMITS OF DISTURBANCE PROVIDED BY TRANSCO.
- STREAM AND WETLAND BOUNDARIES BASED ON SURVEYS CONDUCTED BY WHM CONSULTING FROM MARCH 2020 TO OCTOBER 2020.
- DATUM BASED ON PENNSYLVANIA STATE PLANE COORDINATE SYSTEM, NAD 83 NORTH ZONE, NAVD88, ELEVATION MSL, DERIVED FROM GPS OBSERVATION.

| LEGEND | | SOIL LEGEND | |
|--------|--|-------------|--|
| | PROPOSED WATERBAR AND OUTLET STRUCTURE | | EXISTING UTILITY POLE / TOWER |
| | EXISTING WATERBAR AND OUTLET STRUCTURE | | EXISTING CULVERT |
| | CHANNEL | | EXISTING ELECTRIC LINE |
| | CLEAN WATER CROSSING | | EXISTING UNDERGROUND ELECTRIC LINE |
| | PROPOSED PIPELINE | | EXISTING GAS LINE |
| | PERMIT BOUNDARY | | EXISTING WATER LINE |
| | LIMITS OF DISTURBANCE | | EXISTING SANITARY LINE |
| | DELINEATED WETLAND | | EXISTING STORM SEWER |
| | DELINEATED WATERWAY / STREAM (TOP OF BANK) | | EXISTING TELEPHONE LINE |
| | STREAM FLOW DIRECTION | | EXISTING FIBER OPTIC LINE |
| | RIPIARIAN BUFFER | | EXISTING UNDERGROUND CABLE LINE |
| | 50' FEMA FLOODWAY | | EXISTING STORM INLET |
| | FEMA 100-YEAR FLOODPLAIN | | EXISTING SANITARY MANHOLE |
| | SOIL BOUNDARY / TYPE | | EXISTING COMMUNICATION/ELECTRIC MANHOLE |
| | EXISTING TREE LINE / TREE/SHRUB | | EXISTING FIRE HYDRANT |
| | PROPERTY LINE | | EXISTING POWER POLE |
| | EXISTING LEIDY / TOPLI PIPELINES | | EXISTING WELL |
| | EXISTING FOREIGN PIPELINES | | EXISTING FENCE |
| | PROPOSED FENCE | | EXISTING STONE ROW |
| | EXISTING STRUCTURE | | PROPOSED BUILDING/STRUCTURE |
| | EXISTING EDGE OF ROAD | | EXISTING GRAVEL AREAS |
| | PROPOSED GRAVEL | | PROPOSED PAVEMENT |
| | PROPOSED PERMANENT ROAD | | PROPOSED GRADE MAJOR CONTOURS (10' C.I.) |
| | EXISTING GRADE MAJOR CONTOURS (10' C.I.) | | PROPOSED GRADE MAJOR CONTOURS (10' C.I.) |
| | EXISTING GRADE MINOR CONTOURS (2' C.I.) | | PROPOSED GRADE MINOR CONTOURS (2' C.I.) |
| | TEST PIT/INFILTRATION TEST LOCATION (2020) | | DELINEATED DRAINAGE AREA |
| | DELINEATED DRAINAGE AREA | | PROPOSED INFILTRATION AREA |
| | PROPOSED VEGETATED FILTER STRIP | | |



| REVISIONS | | | | W.O. NO. | CHK. | APP. |
|-----------|----------|-----|---|----------|------|------|
| NO. | DATE | BY | DESCRIPTION | | | |
| 1 | 06/29/21 | RHM | REVISED PER PADEP COMMENTS. | | | |
| 2 | 03/01/22 | RHM | RESPONSE TO PADEP TECHNICAL DEFICIENCY LETTER | | | |

TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC
 REGIONAL ENERGY ACCESS EXPANSION PROJECT
 COMPRESSOR STATION 515
 POST CONSTRUCTION STORMWATER MANAGEMENT PLAN
 ATTACHMENT 5 WATER QUALITY BMP'S MAP

BUCK TOWNSHIP, LUZERNE COUNTY, PENNSYLVANIA

| | | | |
|-----------------|----------------|---------------------------------|-----------------|
| DRAWN BY: DRV | DATE: 03/31/21 | ISSUED FOR BID: | SCALE: AS NOTED |
| CHECKED BY: RJN | DATE: 03/31/21 | ISSUED FOR CONSTRUCTION: | REVISION: |
| APPROVED BY: PW | DATE: 03/31/21 | DRAWING NUMBER: 26-1000-70-28-D | SHEET 1 OF 1 |

ATTACHMENT 6
OFFSITE DISCHARGE REPORT



Transcontinental Gas Pipe Line Company, LLC

Offsite Discharge Report

Regional Energy Access Expansion Project

Compressor Station 515

April 2021
(Revised March 2022)

1.0 Project Description

Transcontinental Gas Pipe Line Company, LLC (Transco), a subsidiary of The Williams Companies, Inc., is proposing the Regional Energy Access Expansion Project (Project). The existing Compressor Station 515 component of the Project is located at the eastern terminus of the Regional Energy Lateral in Buck Township, Luzerne County. Proposed at this facility is the addition of one gas-fired turbine driven compressor with 31,871 nominal HP at ISO conditions and modification of three existing compressors. Also proposed is the abandonment and replacement of 17,000 HP from five existing gas fired reciprocating driven compressors with one additional gas-fired turbine driven compressor with 20,502 nominal HP at ISO conditions. One Mainline Valve will be installed at this facility (MLV515RA10). Compressor Station 515 will require Erosion and Sediment (E&S) Control and Post Construction Stormwater Management (PCSM) Best Management Practices (BMPs) to manage stormwater runoff during and after construction.

Transco has developed an Offsite Discharge Report for the discharges associated with the proposed BMPs. An Offsite Discharge Report is performed to ensure that no offsite erosion will occur downstream of the proposed activities. The analysis conducted for this project followed the sequence outlined in PaDEP's factsheet for offsite discharges (Document #3930-FS-DEP4124).

2.0 Conveyance Best Management Practices

Erosion and Sediment Control and Post Construction Stormwater Management BMPs are proposed to manage stormwater runoff during and after construction. A series of channels will be installed to direct runoff water from the proposed expansion to a rip rap apron, which will release water into an infiltration berm. At the base of the spillway a level spreader will allow water to flow into the forested area northwest of the Limits of Disturbance. These BMPs will be installed to convey the net increase in volume between the pre- and post-development 2-year storm events and mitigate the increase (pre-post development) in peak runoff for the 2-, 10-, 50-, and 100-year storm events. A level spreader is proposed as the discharge structure at this location.

2.1 Infiltration Berm

The infiltration berm releases water through a spillway and it flows directly into a level spreader where it is discharged towards the forested area located northwest of the Limits of Disturbance. The stormwater is discharged as sheet flow and travels along a vegetative flow path until it reaches delineated wetland, W22-T1 PFO, northwest of the

Limits of Disturbance and ultimately to stream S18-T2. The flow path is depicted on Attachment 1.0. Soil types and the erodibility factors within the flow path are shown on Table 1.

| Table 1 – Soils Mapped within Flow Path | |
|--|--|
| Soil Mapping Unit | Soil Erodibility Factor, K_f |
| WmB | $K_f = N/a$ |
| CnB | $K_f = N/a$ |

The soil erodibility factors are shown in Table 1. Soil erodibility data is not provided for any of the soils in the flow path. Photos were taken along the flow path of the downstream area to show the vegetative cover.



Photo 1: Existing Area at Proposed Level Spreader





Photo 2: Area Downgradient of the Proposed Level Spreader

Photo 1 shows the existing condition where the level spreader is proposed. The area will be graded to facilitate the installation of the level spreader and revegetated. Photo 2 shows the areas downgradient of the proposed level spreader, which is over 90% vegetated. In the E&S and PCSM Narrative, site calculations are provided and show the Pre- and Post-Construction runoff flow rates and volume. These calculations show a reduction in the post-construction discharge rates and volumes. Calculations indicated that the discharge velocity at the proposed level spreader is 2.13 feet per second for the for the 25 year, 24-hour storm event.

3.0 Conclusion

Based on the existing vegetative conditions, low discharge velocities from the BMPs and reduced peak flow rates and volumes from the site, downgradient soil erosion is not anticipate as a result of the proposed development of this site.

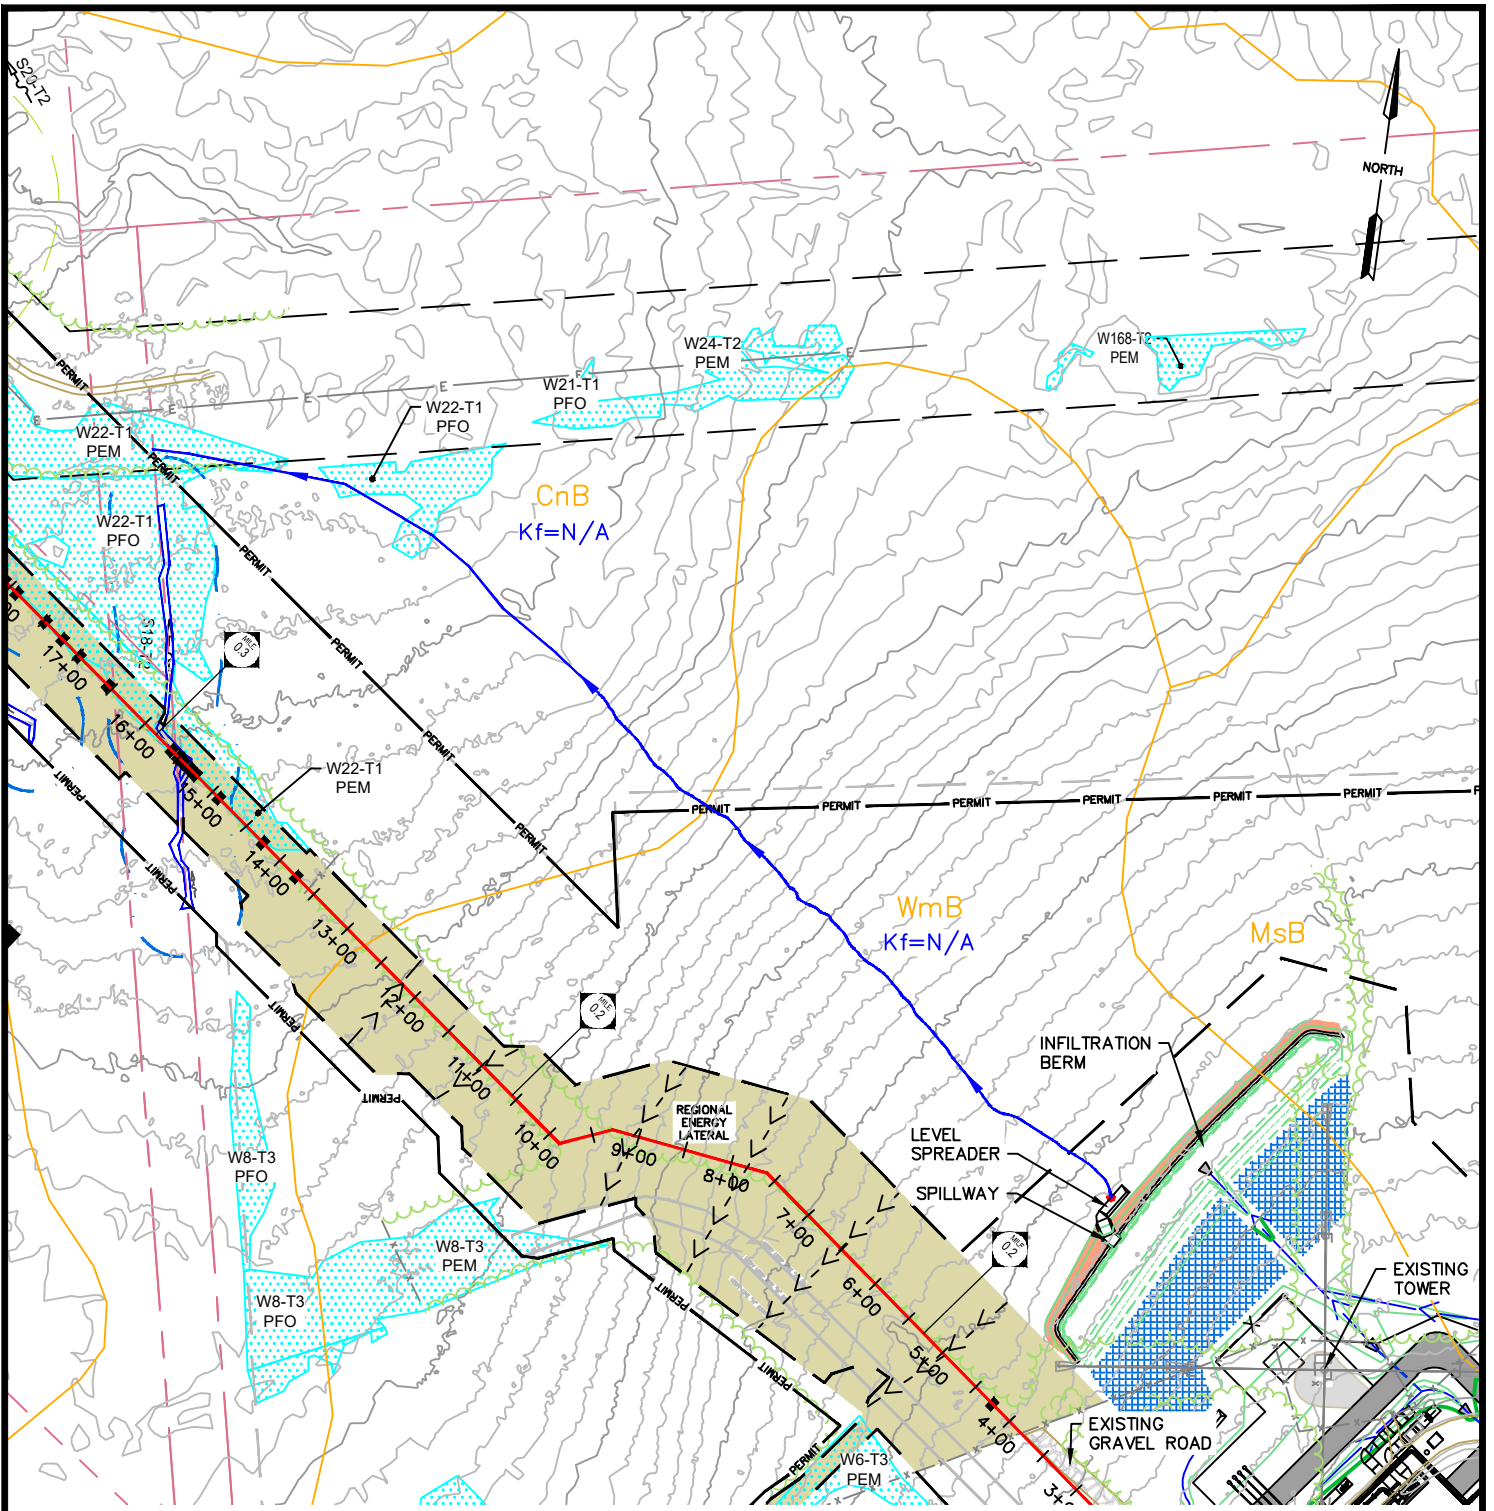

LEGEND

OFFSITE DISCHARGE FLOW PATH



366 WALKER DRIVE, SUITE 300
STATE COLLEGE, PA 16801

TELEPHONE: (814)-689-1650

FAX: (814)-689-1557

TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC
REGIONAL ENERGY ACCESS EXPANSION PROJECT
COMPRESSOR STATION 515
EROSION AND SEDIMENTATION CONTROL PLAN

FLOW PATH

BUCK TOWNSHIP

LUZERNE COUNTY

PENNSYLVANIA

DATE:
02/22/22

DRAWN BY:
RHM

CHECKED:
PW

WHM DRAWING NO:
FLOW PATH

EXHIBIT 1.0

SECTION 3.4.2
DRAWINGS