



**COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
AIR QUALITY PROGRAM**

STATE ONLY NATURAL MINOR OPERATING PERMIT

Issue Date: February 9, 2022

Effective Date: February 9, 2022

Expiration Date: January 31, 2027

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 43-00359

Natural Minor

Federal Tax Id - Plant Code: 83-0598308-1

Owner Information

Name: WABTEC US RAIL INC (DBA GE TRANSPORTATION, A WABTEC CO)

Mailing Address: 660 BARKEYVILLE RD
GROVE CITY, PA 16127-4802

Plant Information

Plant: WABTEC US RAIL GROVE CITY REMANUFACTURING/MERCER

Location: 43 Mercer County 43931 Pine Township

SIC Code: 3519 Manufacturing - Internal Combustion Engines, Nec

Responsible Official

Name: JUSTIN SOKOL

Title: PLANT MANAGER

Phone: (330) 553 - 7438

Email: justin.sokol@wabtec.com

Permit Contact Person

Name: STEPHANIE SAYLOR

Title: EHS MANAGER

Phone: (724) 992 - 9986

Email: stephanie.saylor@wabtec.com

[Signature] _____

ERIC A. GUSTAFSON, NORTHWEST REGION AIR PROGRAM MANAGER



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #016 Reactivation
- #015 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #024 Reporting
- #023 Report Format

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

- E-I: Restrictions



SECTION A. Table of Contents

- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

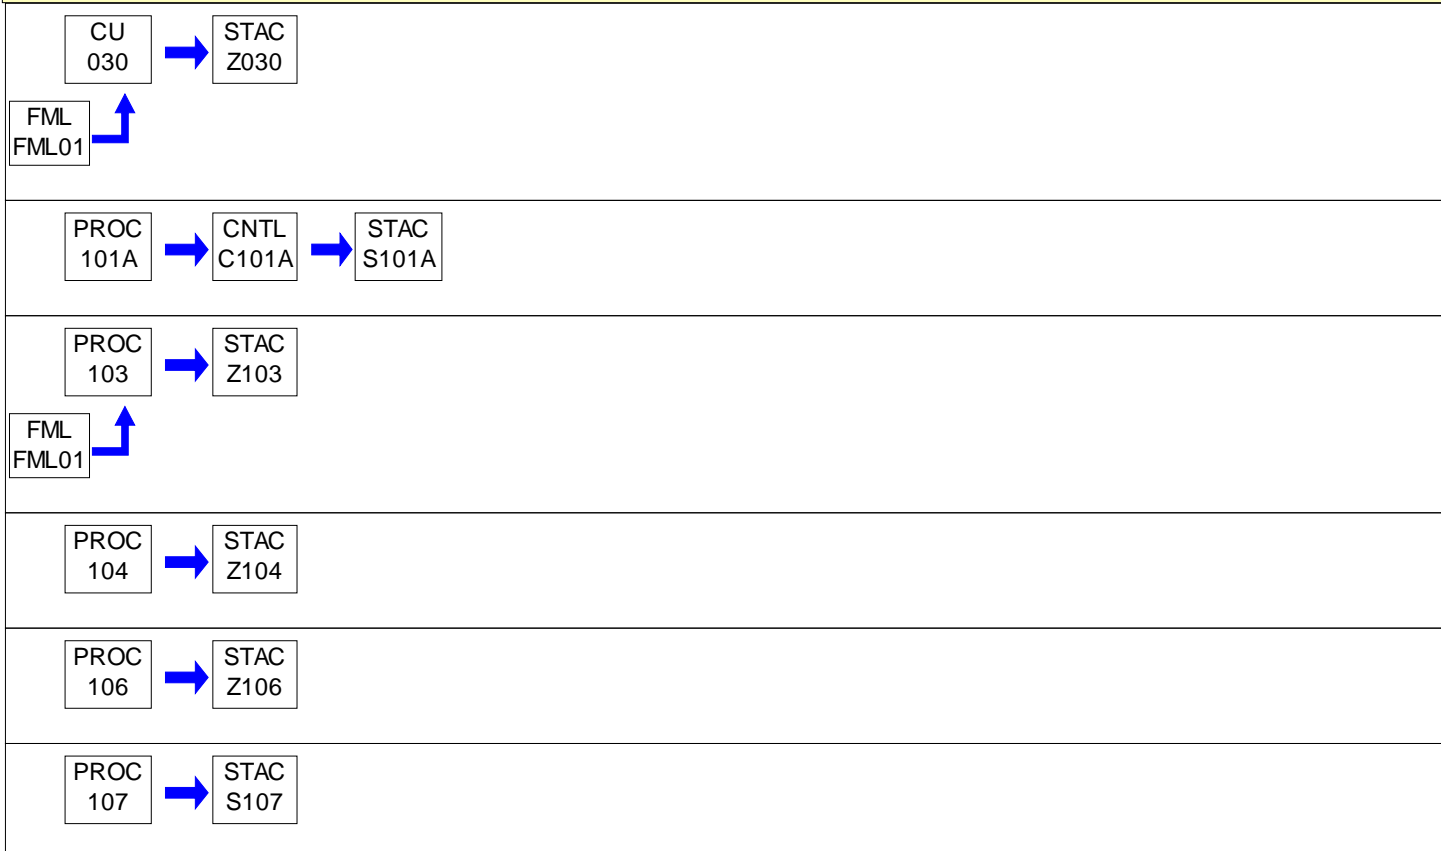
- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous

**SECTION A. Site Inventory List**

Source ID	Source Name	Capacity/Throughput	Fuel/Material
030	NATURAL GAS FUELED COMBUSTION UNITS	8.800 MCF/HR	NATURAL GAS
101A	ROBOTIC PAINTING SYSTEM BOOTH	1.000 Gal/HR	DURASPAR PRIME GREY
103	NATURAL GAS FUELED PROCESS HEATERS & OVENS	3.300 MCF/HR	NATURAL GAS
104	FACILITY PROCESS VOC EMISSIONS	5.000 Lbs/HR	ADHESIVES, SEALANTS
106	PARTS WASHERS	1.000 Lbs/HR	MINERAL SPIRITS 66/3
107	EMERGENCY DIESEL FIRE PUMP ENGINE (121 HP)	1.000 Gal/HR	#2 Oil
C101A	ROBOTIC PAINT BOOTH FILTER		
FML01	NATURAL GAS SERVICE		
S101A	STACK FOR ROBOTIC PAINT BOOTH		
S107	STACK FOR DIESEL ENGINE FIRE PUMP		
Z030	SPACE HEATER FUGITIVE EMISSIONS		
Z103	PROCESS HEATERS & OVENS FUGITIVE EMISSIONS		
Z104	FACILITY PROCESS VOC FUGITIVE EMISSIONS		
Z106	FUGITIVES FROM PARTS WASHERS		

PERMIT MAPS

**SECTION B. General State Only Requirements****#001 [25 Pa. Code § 121.1]****Definitions.**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]**Operating Permit Duration.**

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]**Permit Renewal.**

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]**Operating Permit Fees under Subchapter I.**

- (a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.
- (1) For a synthetic minor facility, a fee equal to:
- (i) Four thousand dollars (\$4,000) for calendar years 2021—2025.
 - (ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.
 - (iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.

**SECTION B. General State Only Requirements**

(2) For a facility that is not a synthetic minor, a fee equal to:

- (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
- (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
- (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.

(b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]**Transfer of Operating Permits.**

(a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.

(b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.

(c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]**Inspection and Entry.**

(a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:

(1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;

(3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;

(4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]**Compliance Requirements.**

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:

**SECTION B. General State Only Requirements**

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]**Need to Halt or Reduce Activity Not a Defense.**

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]**Duty to Provide Information.**

(a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.

(b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]**Revising an Operating Permit for Cause.**

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]**Operating Permit Modifications**

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:

**SECTION B. General State Only Requirements**

(b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.

(c) Minor Operating Permit Modifications. The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.

(d) Significant Operating Permit Modifications. The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.

(e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#012 [25 Pa. Code § 127.441]**Severability Clause.**

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]**De Minimis Emission Increases.**

(a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:

(1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.

(2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

(b) The Department may disapprove or condition de minimis emission increases at any time.

(c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

(1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.

(2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.

(3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:

**SECTION B. General State Only Requirements**

- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
 - (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
 - (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
 - (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]**Operational Flexibility.**

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)

**SECTION B. General State Only Requirements**

(6) Section 127.462 (relating to minor operating permit modifications)

(7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11]**Reactivation**

(a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]**Health Risk-based Emission Standards and Operating Practice Requirements.**

(a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].

(b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]**Circumvention.**

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]**Reporting Requirements.**

(a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.

(b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.

(c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

(d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.

(e) Any records, reports or information submitted to the Department shall be available to the public except for such

**SECTION B. General State Only Requirements**

records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]**Sampling, Testing and Monitoring Procedures.**

(a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.

(b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]**Recordkeeping.**

(a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]**Property Rights.**

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]**Alternative Operating Scenarios.**

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.

**SECTION B. General State Only Requirements****#023 [25 Pa. Code §135.3]****Reporting**

(a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.

(b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#024 [25 Pa. Code §135.4]**Report Format**

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §121.7]****Prohibition of air pollution.**

No person may permit air pollution as that term is defined in the Air Pollution Control Act (35 P. S. § 4001—4015).

002 [25 Pa. Code §123.1]**Prohibition of certain fugitive emissions**

(a) No person may permit the emission into the outdoor atmosphere of fugitive air contaminant from a source other than the following:

(1) Construction or demolition of buildings or structures.

(2) Grading, paving and maintenance of roads and streets.

(3) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.

(4) Clearing of land.

(5) Stockpiling of materials.

(6) Open burning operations.

(7) & (8) [Not applicable.]

(9) Sources and classes of sources other than those identified in paragraphs (1)-(8), for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:

(i) the emissions are of minor significance with respect to causing air pollution; and

(ii) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

(b) [Not applicable]

(c) [See Workpractice Requirements in this section of permit.]

(d) [Not applicable.]

003 [25 Pa. Code §123.2]**Fugitive particulate matter**

A person may not permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in 25 Pa. Code §123.1(a)(1)-(8) [condition #002] if such emissions are visible at the point the emissions pass outside the person's property.

004 [25 Pa. Code §123.31]**Limitations**

A person may not permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

005 [25 Pa. Code §123.41]**Limitations**

A person may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

(1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any 1 hour.

**SECTION C. Site Level Requirements**

(2) Equal to or greater than 60% at any time.

006 [25 Pa. Code §123.42]**Exceptions**

The limitations of 123.41 (relating to limitations) shall not apply to a visible emission in any of the following instances:

- (1) When the presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (2) When the emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (3) When the emission results from sources specified in 25 Pa. Code §123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions) [Condition 002].
- (4) [Not applicable.]

II. TESTING REQUIREMENTS.**# 007 [25 Pa. Code §127.12b]****Plan approval terms and conditions.**

The Department reserves the right to require exhaust stack testing of any source(s) as necessary to verify emissions for purposes including determining the correct emission fee, malfunctions, or determining compliance with applicable requirements.

[From Plan Approval 43-359A, Section C, Condition 006.]

III. MONITORING REQUIREMENTS.**# 008 [25 Pa. Code §123.43]****Measuring techniques**

Visible emissions may be measured using either of the following:

- (1) A device approved by the Department and maintained to provide accurate opacity measurements.
- (2) Observers, trained and qualified to measure plume opacity with the naked eye or with the aid of any devices approved by the Department.

IV. RECORDKEEPING REQUIREMENTS.**# 009 [25 Pa. Code §135.5]****Recordkeeping**

Source owners or operators shall maintain and make available upon request by the Department records including computerized records that may be necessary to comply with 135.21 (relating to reporting; and emission statements). These may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

V. REPORTING REQUIREMENTS.**# 010 [25 Pa. Code §135.21]****Emission statements**

- (a) [Not applicable.]
- (b) The owner or operator of each stationary source emitting oxides of nitrogen or VOC's shall provide the Department with a statement, in a form as the Department may prescribe, for classes or categories of sources, showing the actual

**SECTION C. Site Level Requirements**

emissions of oxides of nitrogen and VOCs from that source for each reporting period, a description of the method used to calculate the emissions and the time period over which the calculation is based. The statement shall contain a certification by a company officer or the plant manager that the information contained in the statement is accurate.

(c) Annual emission statements are due by March 1 for the preceding calendar year beginning with March 1, 1993, for calendar year 1992 and shall provide data consistent with requirements and guidance developed by the EPA. The guidance document is available from: United States Environmental Protection Agency, 401 M. Street, S.W., Washington, D.C. 20460. The Department may require more frequent submittals if the Department determines that one or more of the following applies:

- (1) A more frequent submission is required by the EPA.
- (2) Analysis of the data on a more frequent basis is necessary to implement the requirements of the act.

(d) [Not applicable.]

011 [25 Pa. Code §135.3]**Reporting**

(a) The permittee shall submit by March 1 of each year a source report for the preceding calendar year. The report shall include information for all previously reported sources, new sources which were first operated during the proceeding calendar year and sources modified during the same period which were not previously reported.

(b) [Not applicable.]

(c) A source owner or operator may request an extension of time from the Department for the filing of a source report, and the Department may grant the extension for reasonable cause.

VI. WORK PRACTICE REQUIREMENTS.**# 012 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

(a) - (b) [Paragraphs (a) and (b) are printed under Emission Restrictions in this section of the permit.]

(c) A person responsible for any source specified in Condition #001, above, shall take all reasonable actions to prevent particulate matter from becoming airborne. These actions shall include, but not be limited to, the following:

- (1) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (2) Application of asphalt, oil, water or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.
- (3) Paving and maintenance of roadways.
- (4) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

(d) [Not applicable.]

VII. ADDITIONAL REQUIREMENTS.**# 013 [25 Pa. Code §129.14]****Open burning operations**

(a) [Not applicable.]

(b) Outside of air basins. No person may permit the open burning of material in an area outside of air basins in a manner that:

**SECTION C. Site Level Requirements**

- (1) The emissions are visible, at any time, at the point such emissions pass outside the property of the person on whose land the open burning is being conducted.
 - (2) Malodorous air contaminants from the open burning are detectable outside the property of the person on whose land the open burning is being conducted.
 - (3) The emissions interfere with the reasonable enjoyment of life or property.
 - (4) The emissions cause damage to vegetation or property.
 - (5) The emissions are or may be deleterious to human or animal health.
- (c) Exceptions: The requirements of subsections (a) and (b) do not apply where the open burning operations result from:
- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
 - (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
 - (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
 - (4) [Not applicable.]
 - (5) A fire set for the purpose of burning domestic refuse, when the fire is on the premises of a structure occupied solely as a dwelling by two families or less and when the refuse results from the normal occupancy of such structure.
 - (6) A fire set solely for recreational or ceremonial purposes.
 - (7) A fire set solely for cooking food.
- (d) Clearing and grubbing wastes. The following is applicable to clearing and grubbing wastes:
- (1) As used in this subsection the following terms shall have the following meanings:

Air curtain destructor -- A mechanical device which forcefully projects a curtain of air across a pit in which open burning is being conducted so that combustion efficiency is increased and smoke and other particulate matter are contained.

Clearing and grubbing wastes -- Trees, shrubs, and other native vegetation which are cleared from land during or prior to the process of construction. The term does not include demolition wastes and dirt laden roots.
- (2) [Not applicable.]
 - (3) Subsection (b) notwithstanding clearing and grubbing wastes may be burned outside of an air basin, subject to the following limitations:
 - (i) Upon receipt of a complaint or determination by the Department that an air pollution problem exists, the Department may order that the open burning cease or comply with subsection (b) of this section.
 - (ii) Authorization for open burning under this paragraph does not apply to clearing and grubbing wastes transported from an air basin for disposal outside of an air basin.
 - (4) During an air pollution episode, open burning is limited by Chapter 137 (relating to air pollution episodes) and shall cease as specified in such chapter.

[This permit does not constitute authorization to burn solid waste pursuant to Section 610(3) of the Solid Waste Management Act, 35 P.S. Section 6018.610(3), or any other provision of the Solid Waste Management Act.]

**SECTION C. Site Level Requirements****VIII. COMPLIANCE CERTIFICATION.**

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

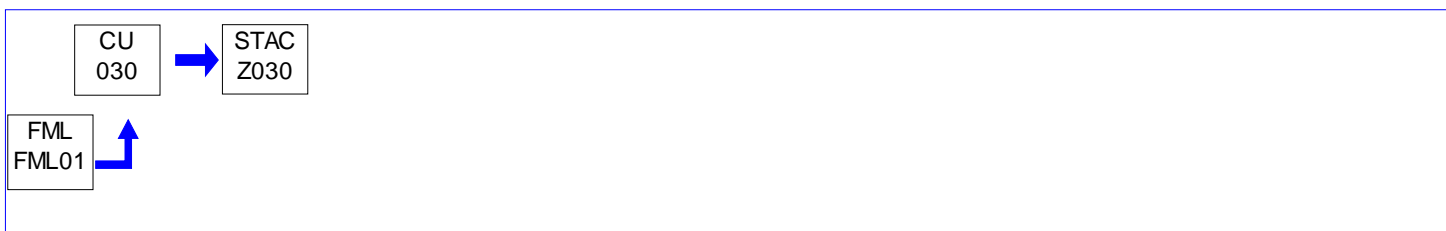
No compliance milestones exist.

**SECTION D. Source Level Requirements**

Source ID: 030

Source Name: NATURAL GAS FUELED COMBUSTION UNITS

Source Capacity/Throughput: 8.800 MCF/HR NATURAL GAS

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §123.22]

Combustion units

No person may permit the emission into the outdoor atmosphere of sulfur oxides, expressed as SO₂, from a combustion unit in excess of the rate of 4 pounds per million Btu of heat input over any 1-hour period.

Fuel Restriction(s).

002 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The permittee shall burn only natural gas to show compliance with 25 Pa. Code §123.22.

[From plan approval 43-359A, Section D, Source 030, Condition 003.]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

This source shall be operated and maintained in accordance with the manufacturer's specifications and in accordance with good air pollution control practices.

[From plan approval 43-359A, Section D, Source 030, Condition 004.]

**SECTION D. Source Level Requirements****VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION D. Source Level Requirements**

Source ID: 101A


Source Name: ROBOTIC PAINTING SYSTEM BOOTH

Source Capacity/Throughput:

1.000 Gal/HR

DURASPAR PRIME GREY PRIME

Conditions for this source occur in the following groups: 1 - 129.52D SURFACE COATING

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §123.13]

Processes

No person may permit the emission into the outdoor atmosphere of particulate matter from any process in a manner that the concentration of particulate matter in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall monitor the pressure differential across the control device.

IV. RECORDKEEPING REQUIREMENTS.

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) The facility shall maintain records of the quantities of coatings and solvents used in this source.

(b) The records shall be maintained on a monthly basis and after the end of each month, the VOC emissions from the source for the previous 12 consecutive months shall be totaled to show that VOC emissions from this source do not meet or exceed the threshold for exemption from plan approval requirements.

(c) The records shall be maintained for a minimum of 5 years and forwarded to the Department upon request.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) The permittee shall maintain a record of all preventative maintenance inspections of the control device.

(b) These records shall contain the following information.

- (1) dates of the inspections,
- (2) any problems or defects,
- (3) the actions taken to correct the problem or defects,
- (4) any routine maintenance performed,
- (5) and the pressure drop across the control device.

(c) The records shall be maintained for at least 5 years.

**SECTION D. Source Level Requirements****V. REPORTING REQUIREMENTS.****# 005 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall notify the Department if VOC emissions for any 12 consecutive month period will be equal to or greater than 2.7 tons per year.

[This operating permit requirement is based upon the December 12, 2017, RFD approval of the robotic paint booth which was approved based upon Exemption # 31 of DEP document # 275-2101-003, sources of uncontrolled VOC emissions less than 2.7 tpy.]

VI. WORK PRACTICE REQUIREMENTS.**# 006 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

(a) The permittee shall operate the control device at all time that this source is in operation.

(b) The permittee shall perform a weekly preventative maintenance inspection of the control device, during the weeks when the source has been operated, in accordance with the manufacturer's recommended schedule or good engineering practice.

(c) The permittee shall operate and maintain this source and the control device in accordance with the manufacturer's specifications and in accordance with good air pollution control practices.

VII. ADDITIONAL REQUIREMENTS.

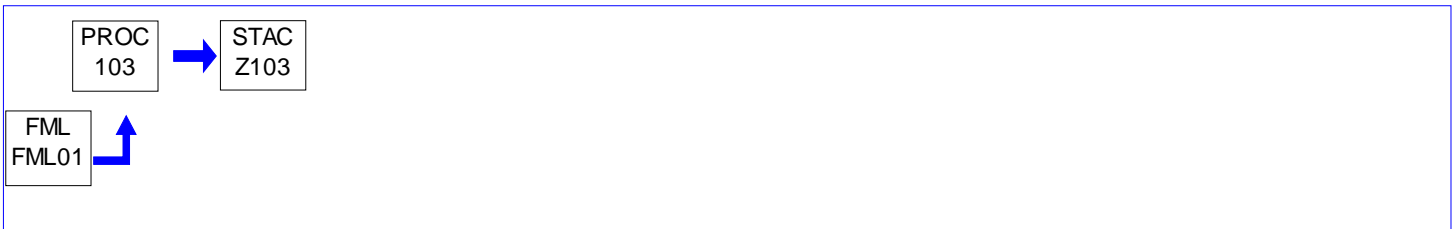
No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 103

Source Name: NATURAL GAS FUELED PROCESS HEATERS & OVENS

Source Capacity/Throughput: 3.300 MCF/HR NATURAL GAS

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §123.13]

Processes

No person may permit the emission into the outdoor atmosphere of particulate matter from a process in a manner that the concentration of particulate matter in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §123.21]

General

No person may permit the emission into the outdoor atmosphere of sulfur oxides from a source in a manner that the concentration of the sulfur oxides, expressed as SO₂, in the effluent gas exceeds 500 parts per million, by volume, dry basis.

Fuel Restriction(s).

003 [25 Pa. Code §127.12b]

Plan approval terms and conditions.

The equipment making up this source shall burn only natural gas to show compliance with the emission restrictions of 25 Pa. Code §§ 123.13 and 123.21.

[From plan approval 43-359A, Section D, Source 103, Condition 003.]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).



SECTION D. Source Level Requirements

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION D. Source Level Requirements**

Source ID: 104

Source Name: FACILITY PROCESS VOC EMISSIONS


Source Capacity/Throughput:

5.000 Lbs/HR

ADHESIVES, SEALANTS

Conditions for this source occur in the following groups: 2 - 129.63A DEGREASING

3 - 129.77 ADHESIVES SEALANTS SOLVENTS

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.12b]****Plan approval terms and conditions.**

(a) The VOC emissions from this source shall not exceed 16.0 tons per year in any 12 consecutive month period.

(b) The emissions shall be calculated based on mass balance accounting for all VOC containing materials.

[From plan approval 43-359A, Section D, Source 104, Condition 001.]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.**# 002 [25 Pa. Code §127.12b]****Plan approval terms and conditions.**

(a) The facility shall keep records of the quantities of VOC containing materials used in this source.

(b) The records shall be maintained on a monthly basis using purchasing or usage file documents and at the end of each month the VOC emissions from the 12 previous months shall be calculated to determine compliance with the VOC emission restriction for this source.

(c) The records shall be kept on-site for a minimum of five (5) years and forwarded to the Department upon request.

[From plan approval 43-359A, Section D, Source 104, Condition 003.]

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements****VI. WORK PRACTICE REQUIREMENTS.****# 003 [25 Pa. Code §127.12b]****Plan approval terms and conditions.**

Good housekeeping and work practices shall be used to minimize spillage.

[From plan approval 43-359A, Section D, Source 104, Condition 004.]

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**


Source ID: 106

Source Name: PARTS WASHERS

Source Capacity/Throughput:

1.000 Lbs/HR

MINERAL SPIRITS 66/3

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

(a) The permittee shall maintain records that clearly demonstrate to the Department that the parts washers are exempt from the VOC control provisions and restrictions and requirements of 25 Pa. Code §129.63, pertaining to Degreasing Operations.

(b) The permittee shall maintain records of annual solvent use in the parts washers.

(c) Records shall also be maintained to demonstrate that VOC emissions from the Parts Washers are less than 2.7 tons per year.

(d) Records demonstrating compliance with this permit shall be maintained for at least 5 years.

[From the July 31, 2013, Request for Determination approval of RFD # 1936.] [Authority for this condition is derived from 25 Pa. Code §129.51, paragraphs (d) and (e).]

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 002 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall install, maintain, and operate the source in accordance with the manufacturer's specifications and good operating practices.

[Authority for this condition is also derived from 25 Pa. Code §§ 129.93 and 129.97.]

**SECTION D. Source Level Requirements****# 003 [25 Pa. Code §129.63]****Degreasing operations**

(a) Cold cleaning machines. Except for those subject to the Federal National emissions standards for hazardous air pollutants (NESHAP) for halogenated solvent cleaners under 40 CFR Part 63 (relating to National emission standards for hazardous air pollutants for source categories), this subsection applies to cold cleaning machines that use 2 gallons or more of solvents containing greater than 5% VOC content by weight for the cleaning of metal parts.

(1) [25 Pa. Code 129.63(a)(1) is not applicable to these parts washers.]

(2) Immersion cold cleaning machines and remote reservoir cold cleaning machines shall:

(i) Have a permanent, conspicuous label summarizing the operating requirements in paragraph (3). In addition, the label shall include the following discretionary good operating practices:

(A) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the cold cleaning machine.

(B) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.

(C) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

(ii) Be equipped with a cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent. For remote reservoir cold cleaning machines which drain directly into the solvent storage reservoir, a perforated drain with a diameter of not more than 6 inches shall constitute an acceptable cover.

(3) Cold cleaning machines shall be operated in accordance with the following procedures:

(i) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.

(ii) Flushing of parts using a flexible hose or other flushing device shall be performed only within the cold cleaning machine. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.

(iii) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in the cold cleaning machine.

(iv) Air agitated solvent baths may not be used.

(v) Spills during solvent transfer and use of the cold cleaning machine shall be cleaned up immediately.

(4) After December 22, 2002, a person may not use, sell or offer for sale for use in a cold cleaning machine any solvent with a vapor pressure of 1.0 millimeter of mercury (mm Hg) or greater and containing greater than 5% VOC by weight, measured at 20°C (68°F) containing VOCs.

(5) On and after December 22, 2002, a person who sells or offers for sale any solvent containing VOCs for use in a cold cleaning machine shall provide, to the purchaser, the following written information:

(i) The name and address of the solvent supplier.

(ii) The type of solvent including the product or vendor identification number.

(iii) The vapor pressure of the solvent measured in mm hg at 20°C (68°F).

**SECTION D. Source Level Requirements**

(6) A person who operates a cold cleaning machine shall maintain for at least 2 years and shall provide to the Department, on request, the information specified in paragraph (5). An invoice, bill of sale, certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this section.

(7) [25 Pa. Code 129.63(a)(7) is not applicable to these parts washers.]

(b) - (e) [25 Pa. Code 129.63(b) - (d) are not applicable to these parts washers.]

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).


**SECTION D. Source Level Requirements**

Source ID: 107

Source Name: EMERGENCY DIESEL FIRE PUMP ENGINE (121 HP)

Source Capacity/Throughput: 1.000 Gal/HR #2 Oil

Conditions for this source occur in the following groups: 4 - EMERGENCY ENGINE

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION E. Source Group Restrictions.**

Group Name: 1 - 129.52D SURFACE COATING
 Group Description: Control of VOC from surface coating
 Sources included in this group

ID	Name
101A	ROBOTIC PAINTING SYSTEM BOOTH

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §129.52d]****Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surf:**

(a) Applicability.

(1) This section applies to the owner and operator of a miscellaneous metal part surface coating process or miscellaneous plastic part surface coating process, or both, if the total actual VOC emissions from all miscellaneous metal part coating units and miscellaneous plastic part coating units, including related cleaning activities, at the facility are equal to or greater than 2.7 tons per 12-month rolling period, before consideration of controls.

(2) [Paragraph (a)(2) does not apply to this facility.]

(3) Compliance with the VOC emission limits and other requirements of this section assures compliance with the VOC emission limits and other requirements of § 129.52 (relating to surface coating processes) for the miscellaneous metal parts and products surface coating processes as specified in § 129.52, Table I, Category 10.

(4) [Paragraph (a)(4) is not applicable to this facility.]

(5) This section does not apply to an owner or operator in the use or application of the following:

- (i) Aerosol coatings that meet the requirements of 40 CFR Part 59, Subpart E (relating to National volatile organic compound emission standards for aerosol coatings).
- (ii) Aerospace coatings.
- (iii) Architectural coatings.
- (iv) Automobile refinishing coatings.
- (v) Auto and light-duty truck assembly coatings.
- (vi) Can, coil or magnet wire coatings.
- (vii) Coating applied to a test panel or coupon, or both, in research and development, quality control or performance testing activities, if records are maintained as required under subsections (e) and (f).
- (viii) Fiberglass boat manufacturing materials.
- (ix) Flat wood paneling coatings.
- (x) Large appliance coatings.
- (xi) Metal furniture coatings.
- (xii) Miscellaneous industrial adhesives.
- (xiii) Paper, film and foil coatings.
- (xiv) Shipbuilding and repair coatings.
- (xv) Wood furniture coatings.

(b) [Refer to ADDITIONAL REQUIREMENTS in this section of permit for the definitions of paragraph (b) of the regulation.]

(c) [Paragraph (c) of the regulation is not applicable to this facility]

(d) Emission limitations. Beginning January 1, 2017, a person subject to subsection (a)(1) may not cause or permit the emission into the outdoor atmosphere of VOCs from a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, unless emissions of VOCs are controlled in accordance with paragraph (1), (2), or (3).

(1) Compliant materials option. The VOC content of each miscellaneous metal part coating or each miscellaneous plastic part coating, as applied, excluding water and exempt compounds, is equal to or less than the VOC content limit for

**SECTION E. Source Group Restrictions.**

the applicable coating category specified in the applicable table of VOC content limits in Tables I - V. [Note: Table I is applicable to sources at this facility and is printed in this permit; Tables II through V are not applicable.]

(2) [Paragraph (d)(2) is not applicable to this facility.]

(3) [Paragraph (d)(3) is not applicable to this facility.]

(4) Least restrictive VOC limit. If more than one VOC content limit or VOC emission rate limit applies to a specific coating, then the least restrictive VOC content limit or VOC emission rate limit applies.

(5) Coatings not listed in Table I, II, VI or VII. For a miscellaneous metal part or miscellaneous plastic part coating that does not meet the coating categories listed in Table I, II, VI or VII, the VOC content limit or VOC emission rate limit shall be determined by classifying the coating as a general one component coating or general multicomponent coating. The corresponding general one component coating or general multicomponent coating limit applies. [Note, only Table I applies to this facility; Tables II, VI, and VII do not apply.]

(6) [Paragraph (d)(6) is not applicable to this facility.]

(e) Compliance and monitoring requirements.

(1) All owners and operators. Regardless of the facility's VOC emissions, the owner or operator of a miscellaneous metal part surface coating process or miscellaneous plastic part surface coating process, or both, subject to subsection (a)(1) or (2), shall comply with this section as specified throughout this section. For an owner or operator subject only to subsection (a)(2), the compliance requirements are the recordkeeping requirements in subsection (f)(2).

(2) [Paragraph (e)(2) is not applicable to this facility.]

(f) [Paragraph (f) is printed under RECORDKEEPING REQUIREMENTS in this section of permit.]

(g) Coating application methods. A person subject to subsection (a)(1) may not cause or permit the emission into the outdoor atmosphere of VOCs from a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, unless the coatings are applied using one or more of the following coating application methods:

(1) Electrostatic coating.

(2) Flow coating.

(3) Dip coating, including electrodeposition.

(4) Roll coating.

(5) High volume-low pressure (HVLP) spray coating.

(6) Airless spray coating.

(7) Air-assisted airless spray coating.

(8) Other coating application method if approved in writing by the Department prior to use.

(i) The coating application method must be capable of achieving a transfer efficiency equivalent to or better than that achieved by HVLP spray coating.

(ii) The owner or operator shall submit the request for approval to the Department in writing.

(h) Exempt coatings and exempt coating unit operations.

(1) The requirements of subsections (d) and (g) do not apply to the application of the following coatings to a metal part:

(i) Stencil coating.

(ii) Safety-indicating coating.

(iii) Solid-film lubricant.

(iv) Electric-insulating and thermal-conducting coating.

(v) Magnetic data storage disk coating.

(vi) Plastic extruded onto metal parts to form a coating.

(vii) Powder coating.

(2) The requirements of subsection (d) do not apply to the application of the following coatings to a plastic part:

**SECTION E. Source Group Restrictions.**

- (i) Touch-up and repair coating.
- (ii) Stencil coating applied on a clear or transparent substrate.
- (iii) Clear or translucent coating.
- (iv) Coating applied at a paint manufacturing facility while conducting performance tests on coating.
- (v) Reflective coating applied to highway cones.
- (vi) Mask coating, if the coating is less than 0.5 millimeter thick (dried) and the area coated is less than 25 square inches.
- (vii) EMI/RFI shielding coating.
- (viii) Heparin-benzalkonium chloride (HBAC)-containing coating applied to a medical device, provided that the total usage of HBAC-containing coatings does not exceed 100 gallons in 1 calendar year at the facility.
- (ix) Powder coating.
- (x) An individual coating category used in an amount less than 50 gallons in 1 calendar year provided that the total usage of all of the coatings, combined, does not exceed 200 gallons per year at the facility. This exception applies only if substitute compliant coatings are not available

(3) [Paragraph (h)(3) is not applicable to this facility.]

(4) The requirements of subsection (g) do not apply to the following activities:

- (i) Application of a touch-up coating, repair coating or textured finish to a metal part.
- (ii) Application of a powder coating to the following:
 - (A) Plastic part.
 - (B) Automotive-transportation plastic part.
 - (C) Business machine plastic part.
- (iii) Airbrush application of coating to a metal part or plastic part using no more than 5 gallons of coating per year.
- (iv) Use of an add-on air pollution control device to comply with subsection (d).
- (v) Application of extreme high-gloss coating in a pleasure craft surface coating operation.

(i) [Paragraph (i) is printed under WORK PRACTICE REQUIREMENTS in this section of permit.]

(j) [Paragraph (j) is printed under WORK PRACTICE REQUIREMENTS in this section of permit.]

(k) [Paragraph (k) is printed under RECORDKEEPING REQUIREMENTS in this section of permit.]

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

002 [25 Pa. Code §129.52d]**Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surf:**

Table I. VOC Content Limits for Metal Parts and Products
Surface Coatings

Weight of VOC per Volume of Coating,
Less Water and Exempt Compounds, as Applied

Coating Category	Air Dried		Baked	
	kg VOC/ liter coating	lb VOC/ gal coating	kg VOC/ liter coating	lb VOC/ gal coating
General One-component	0.34	2.8	0.28	2.3
General Multicomponent	0.34	2.8	0.28	2.3
Camouflage	0.42	3.5	0.42	3.5
Electric-insulating Varnish	0.42	3.5	0.42	3.5
Etching Filler	0.42	3.5	0.42	3.5
Extreme High-gloss	0.42	3.5	0.36	3.0
Extreme Performance	0.42	3.5	0.36	3.0
Heat-resistant	0.42	3.5	0.36	3.0
High-performance Architectural	0.74	6.2	0.74	6.2
High-temperature	0.42	3.5	0.42	3.5
Metallic	0.42	3.5	0.42	3.5

**SECTION E. Source Group Restrictions.**

Military Specification	0.34	2.8	0.28	2.3
Mold-seal	0.42	3.5	0.42	3.5
Pan-backing	0.42	3.5	0.42	3.5
Prefabricated Architectural Multicomponent	0.42	3.5	0.28	2.3
Prefabricated Architectural One-component	0.42	3.5	0.28	2.3
Pretreatment	0.42	3.5	0.42	3.5
Touch-up and Repair	0.42	3.5	0.36	3.0
Silicone-release	0.42	3.5	0.42	3.5
Solar-absorbent	0.42	3.5	0.36	3.0
Vacuum-metalizing	0.42	3.5	0.42	3.5
Drum Coating, New, Exterior	0.34	2.8	0.34	2.8
Drum Coating, New, Interior	0.42	3.5	0.42	3.5
Drum Coating, Reconditioned, Exterior	0.42	3.5	0.42	3.5
Drum Coating, Reconditioned, Interior	0.50	4.2	0.50	4.2

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 003 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Records to show compliance with 25 Pa. Code § 129.52d shall be maintained for at least 5 years.

004 [25 Pa. Code §129.52d]**Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surface coating processes and pleasure craft surface coatings.**

[From § 129.52d(f). Refer to Emission Restrictions in this section of permit for remaining paragraphs of § 129.52d.]

(f) Recordkeeping and reporting requirements.

(1) The owner or operator of a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, subject to subsection (a)(1) shall maintain monthly records sufficient to demonstrate compliance with this section. The records must include the following information:

(i) The following parameters for each coating, thinner, component and cleaning solvent as supplied:

(A) Name and identification number of the coating, thinner, other component or cleaning solvent.

(B) Volume used.

(C) Mix ratio.

(D) Density or specific gravity.

(E) Weight percent of total volatiles, water, solids and exempt solvents.

(F) Volume percent of total volatiles, water and exempt solvents for the applicable table of limits in Tables I—V.

(G) [Paragraph (G) is not applicable to this facility because Tables VI - IX are not applicable to this facility.]

(ii) The VOC content of each coating, thinner, other component and cleaning solvent as supplied.

(iii) The VOC content of each as applied coating or cleaning solvent.

**SECTION E. Source Group Restrictions.**

- (iv) The calculations performed for each applicable requirement under subsections (d) and (e).
- (v) The information required in a plan approval issued under subsection (e)(2).
- (2) [Paragraph (a)(2) of the regulation is not applicable to this facility.]
- (3) [This paragraph of the regulation is streamlined out of the operating permit in favor of the more restriction § 127.441 condition requiring that records be maintained for 5 years.]
- (4) The records shall be submitted to the Department in an acceptable format upon receipt of a written request from the Department.

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

005 [25 Pa. Code §129.52d]**Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surface coating processes and pleasure craft surface coatings.**

[From § 129.52d(k). Refer to Emission Restrictions in this section of permit for remaining paragraphs of § 129.52d.]

(k) Measurements and calculations. To determine the properties of a coating or component used in a miscellaneous metal parts surface coating process or miscellaneous plastic parts surface coating process, measurements and calculations shall be performed according to one or more of the following:

(1) EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, found at 40 CFR Part 60, Subpart D, Appendix A, including updates and revisions.

(2) Manufacturer's formulation data.

(3) Sampling and testing done in accordance with the procedures and test methods specified in Chapter 139.

(4) Other test method demonstrated to provide results that are acceptable for purposes of determining compliance with this section if prior approval is obtained in writing from the Department.

(5) Add-on air pollution control devices shall be equipped with the applicable monitoring equipment according to manufacturers' specifications. The monitoring equipment shall be installed, calibrated, operated and maintained according to manufacturers' specifications at all times the add-on air pollution control device is in use.

(6) EPA calculations information in the following:

(i) A Guideline for Surface Coating Calculations, EPA-340/1-86-016, including updates and revisions.

(ii) Procedures for Certifying Quantity of Volatile Organic Compounds Emitted by Paint, Ink, and Other Coatings, EPA-450/3-84-019, including updates and revisions.

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 006 [25 Pa. Code §129.52d]****Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surface coating processes and pleasure craft surface coatings.**

[From § 129.52d(i) & (j). Refer to Emission Restrictions in this section of permit for remaining paragraphs of § 129.52d.]

(i) Work practice requirements for coating-related activities. The owner or operator of a miscellaneous metal part coating

**SECTION E. Source Group Restrictions.**

unit or miscellaneous plastic part coating unit, or both, subject to subsection (a)(1) shall comply with the following work practices for coating-related activities:

(1) Store all VOC-containing coatings, thinners or coating-related waste materials in closed containers.

(2) Ensure that mixing and storage containers used for VOC-containing coatings, thinners or coating-related waste materials are kept closed at all times, except when depositing or removing these coatings, thinners or waste materials.

(3) Minimize spills of VOC-containing coatings, thinners or coating-related waste materials and clean up spills immediately.

(4) Convey VOC-containing coatings, thinners or coating-related waste materials from one location to another in closed containers or pipes.

(j) Work practice requirements for cleaning materials. The owner or operator of a miscellaneous metal part coating unit or miscellaneous plastic part coating unit subject to subsection (a)(1) shall comply with the following work practices for cleaning materials:

(1) Store all VOC-containing cleaning materials and used shop towels in closed containers.

(2) Ensure that mixing vessels and storage containers used for VOC-containing cleaning materials are kept closed at all times except when depositing or removing these materials.

(3) Minimize spills of VOC-containing cleaning materials and clean up spills immediately.

(4) Convey VOC-containing cleaning materials from one location to another in closed containers or pipes.

(5) Minimize VOC emissions from cleaning of application, storage, mixing or conveying equipment by ensuring that equipment cleaning is performed without atomizing the cleaning solvent and all spent solvent is captured in closed containers.

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

VII. ADDITIONAL REQUIREMENTS.**# 007 [25 Pa. Code §121.1 M - Z]****Definitions.**

[Selected definitions from 25 Pa. Code § 121.1 are printed below. Refer to regulation for remaining definitions.]

Automobiles — Passenger cars capable of seating 12 or fewer passengers and major components of these cars, including, but not limited to, chassis, frames, doors and engines.

Miscellaneous metal parts and products — Items made of ferrous or nonferrous metals, including large farm machinery, small farm machinery, small appliances, commercial and industrial machinery, fabricated metal products and items listed under the Standard Industrial Classification Codes 3300—3999. The term does not include cans, coils, automobiles, light-duty trucks, metal furniture, magnet wire, large appliances, aerospace vehicles or components and automobile refinishing and customized top coating of automobiles and trucks, if production since January 1, 1987, has not exceeded 34 vehicles per day.

Motor vehicle — A self-propelled vehicle designed for transporting persons or property on a street or highway.

Pretreatment coating — An organic coating that contains at least 0.5% acids by weight and is applied directly to metal surfaces of aerospace vehicles and components to provide surface etching, corrosion resistance, adhesion and ease of stripping.

Specialty coating — A coating applied to aerospace vehicles or components that, even though it meets the definition of a primer, topcoat or self-priming topcoat, has additional performance criteria beyond those of primers, topcoats and self-priming topcoats for specific applications. These performance criteria may include, but are not limited to, temperature or fire

**SECTION E. Source Group Restrictions.**

resistance, substrate compatibility, antireflection, temporary protection or marking, sealing, adhesively joining substrates or enhanced corrosion protection.

Specialized function coating — A coating applied to aerospace vehicles or components that fulfills extremely specific engineering requirements that are limited in application and are characterized by low volume usage. This category excludes coatings included in other specialty coating categories.

Transfer efficiency — The ratio of the amount of coating solids deposited onto the surface of a coated part to the amount of coating solids used expressed as a percentage.

008 [25 Pa. Code §129.52d]**Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surface coating processes and pleasure craft surface coatings.**

[Selected definitions from 25 Pa. Code § 129.52d(b) are printed below. Refer to regulation for remaining definitions.]

(b) Definitions. The following words and terms, when used in this section, have the following meanings unless the context clearly indicates otherwise:

Adhesion primer — A coating applied to a polyolefin part to promote the adhesion of a subsequent coating. This type of coating is clearly identified on its accompanying MSDS by this term or as an adhesion promoter.

Air-dried coating — A coating that is cured or dried at a temperature below 90°C (194°F).

Baked coating — A coating cured at a temperature at or above 90°C (194°F).

Cleaning material or cleaning solvent — A material used during cleaning activities or cleaning operations to remove residue or other unwanted materials from equipment.

Clear coating —

- (i) A colorless coating that contains binders, but no pigment, and is formulated to form a transparent film.
- (ii) The term includes a transparent coating that uses the undercoat as a reflectant base or undertone color.

Coating —

- (i) A material applied onto or into a substrate for protective, decorative or functional purposes.
- (ii) The term includes paints, sealants, caulks, primers, inks and maskants.
- (iii) The term does not include protective oils, acids or bases, or combinations of these materials.

Coating unit — A series of one or more coating applicators and associated drying area or oven or both wherein a coating is applied and dried or cured, or both. The unit ends at the point where the coating is dried or cured, or prior to subsequent application of a different coating.

Drum — A cylindrical metal shipping container larger than 12 gallons capacity but not larger than 110 gallons capacity.

EMI/RFI shielding coating — A coating used on electrical or electronic equipment to provide shielding against electromagnetic interference, radio frequency interference or static discharge.

Electric dissipating coating — A coating that rapidly dissipates a high voltage electric charge.

Electric-insulating varnish — A non-convertible-type coating applied to electric motors, components of electric motors or power transformers to provide electrical, mechanical or environmental protection or resistance

Extreme high-gloss coating — A coating that achieves the following:

- (i) For miscellaneous metal part surface coatings or miscellaneous plastic part surface coatings, other than pleasure

**SECTION E. Source Group Restrictions.**

craft surface coatings, a coating when tested by the American Society for Testing Material Test Method D-523-08 shows a reflectance of at least 75% on a 60° meter.

- (ii) [Non-applicable; this facility does not apply coatings to pleasure crafts.]

Extreme-performance coating —

(i) A coating used on a metal or plastic surface where the coated surface is, in its intended use, subject to one or more of the following:

(A) Chronic exposure to corrosive, caustic or acidic agents, chemicals, chemical fumes, chemical mixtures or solutions.

(B) Repeated exposure to temperatures in excess of 250°F.

(C) Repeated heavy abrasion, including mechanical wear and repeated scrubbing with industrial grade solvents, cleansers or scouring agents.

- (ii) The term includes coatings applied to locomotives, railroad cars, farm machinery and heavy duty trucks.

Finish primer/surfacer — A coating applied with a wet film thickness of less than 10 mils prior to the application of a topcoat for purposes of providing corrosion resistance, adhesion of subsequent coatings, a moisture barrier or promotion of a uniform surface necessary for filling in surface imperfections.

Flexible primer — A coating required to comply with engineering specifications for impact resistance, mandrel bend or elongation as defined by the original equipment manufacturer.

Heat-resistant coating — A coating that must withstand a temperature of at least 400°F during normal use.

Heavier vehicle — A self-propelled vehicle designed for transporting persons or property on a street or highway that has a gross vehicle weight rating over 8,500 pounds.

High bake coating — A coating designed to cure only at temperatures of more than 90°C (194°F).

High build primer/surfacer — A coating applied with a wet film thickness of 10 mils or more prior to the application of a topcoat for purposes of providing corrosion resistance, adhesion of subsequent coatings, a moisture barrier or promotion of a uniform surface necessary for filling in surface imperfections.

Mask coating — A thin film coating applied through a template to coat a small portion of a substrate.

Miscellaneous metal parts and miscellaneous plastic parts — Metal or plastic components of parts or products, as well as the parts or products themselves, constructed either entirely or partially from metal or plastic, or both, including the following:

- (i) Fabricated metal products.
- (ii) Molded plastic parts.
- (iii) Farm machinery.
- (iv) Commercial and industrial machinery and equipment.
- (v) Automotive or transportation equipment.
- (vi) Interior or exterior automotive parts.
- (vii) Construction equipment.
- (viii) Motor vehicle accessories.
- (ix) Bicycles and sporting goods.
- (x) Toys.
- (xi) Recreational vehicles.
- (xii) Watercraft.
- (xiii) Extruded aluminum structural components.
- (xiv) Railroad cars.

**SECTION E. Source Group Restrictions.**

- (xv) Heavier vehicles.
- (xvi) Lawn and garden equipment.
- (xvii) Business machines.
- (xviii) Laboratory and medical equipment.
- (xix) Electronic equipment.
- (xx) Steel drums.
- (xxi) Metal pipes.

Multicomponent coating — A coating requiring the addition of a separate reactive resin, commonly known as a catalyst or hardener, before application to the substrate to form an acceptable dry film.

One-component coating — A coating that is ready for application as it comes out of its container to form an acceptable dry film. A thinner may be added to reduce the viscosity, but is not considered a component.

Pretreatment coating — A coating that contains no more than 12% solids by weight and at least 0.5% acid by weight that is used to provide surface etching and that is applied directly to metal surfaces to provide corrosion resistance, adhesion and ease of stripping.

Pretreatment wash primer — A coating that contains no more than 12% solids by weight and at least 0.5% acid by weight that is used to provide surface etching and that is applied directly to fiberglass and metal surfaces to provide corrosion resistance and adhesion of subsequent coatings.

Repair coating — A coating used to recoat portions of a previously coated product that has sustained mechanical damage to the coating following normal coating operations.

Topcoat — A final coating applied in a surface coating process that applies two or more coatings.

[Source: The provisions of this § 129.52d adopted October 21, 2016, effective October 22, 2016, 46 Pa.B. 6758.]

**SECTION E. Source Group Restrictions.**

Group Name: 2 - 129.63A DEGREASING

Group Description: Control of VOC emissions from Industrial Cleaning Solvents

Sources included in this group

ID	Name
104	FACILITY PROCESS VOC EMISSIONS

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §129.63a]****Control of VOC emissions from industrial cleaning solvents.**

(a) Applicability. This section applies to the owner and the operator of a facility at which an industrial cleaning solvent is used or applied in a cleaning activity at a cleaning unit operation, a work production-related work area or a part, product, tool, machinery, equipment, vessel, floor or wall.

(b) [Paragraph (b) of the regulation is printed under Additional Requirements in this section of the permit.]

(c) Exceptions and exemptions.

(1) This section does not apply to all of the following:

(i) An owner or operator of a cleaning unit operation subject to § 129.63 (relating to degreasing operations) or 40 CFR Part 63, Subpart T (relating to National emission standards for halogenated solvent cleaning).

(ii) An owner or operator of a cleaning unit operation associated with a following category:

- (A) Aerospace manufacturing and rework operations.
- (B) Architectural coatings.
- (C) Automobile and light-duty truck assembly coatings.
- (D) Fabric coating.
- (E) Fiberglass boat manufacturing materials.
- (F) Flat wood paneling coatings.
- (G) Flexible packaging printing materials.
- (H) Graphic arts printing and coating operations.
- (I) Large appliance coatings.
- (J) Letterpress printing materials.
- (K) Lithographic printing materials.
- (L) Magnet wire coating operations.
- (M) Marine vessel coating.
- (N) Metal container, closure and coil coating.
- (O) Metal furniture coatings.
- (P) Miscellaneous metal parts coatings.
- (Q) Miscellaneous industrial adhesives.
- (R) Motor vehicle and mobile equipment coating operations.
- (S) Paper, film and foil coating.
- (T) Plastic parts coatings.
- (U) Polyester resin operations.
- (V) Semiconductor wafer fabrication operations.
- (W) Shipbuilding and repair coatings.
- (X) Wood furniture coatings.
- (Y) Wood products coating.
- (Z) Electrical and electronic components.
- (AA) Precision optics.
- (BB) Numismatic dies.
- (CC) Stripping of cured inks, coatings and adhesives.
- (DD) Cleaning of resin, coating, ink or adhesive mixing, molding and application equipment.
- (EE) Resin, coating, ink and adhesive manufacturing.

**SECTION E. Source Group Restrictions.**

- (FF) Performance or quality assurance testing of coatings, inks or adhesives.
- (GG) Flexible and rigid disc manufacturing.
- (HH) Research and development laboratories.
- (II) Medical device manufacturing.
- (JJ) Pharmaceutical manufacturing.
- (KK) Janitorial cleaning.
- (LL) Digital printing.

(2) The VOC emission limitations in subsection (e) do not apply to the use or application of an industrial cleaning solvent by the owner or operator of a cleaning unit operation at a facility subject to subsection (a) under either of the following circumstances:

(i) The use or application of the industrial cleaning solvent is subject to a standard or specification required by the United States Department of Defense, Federal Aviation Administration or other Federal government entity. An owner or operator claiming this exemption shall maintain records in accordance with subsection (h)(2).

(ii) The use or application of the industrial cleaning solvent is associated with the cleaning of screen printing equipment and the industrial cleaning solvent used or applied has an as applied VOC content that does not exceed 4.2 pounds of VOC per gallon (lb VOC/gal) (500 grams of VOC per liter (g VOC/l)) of industrial cleaning solvent. An owner or operator claiming this exemption shall maintain records in accordance with subsection (h)(3).

(3) The VOC emission limitations in subsection (e) and the work practice requirements in subsection (f) do not apply to the owner or operator of a facility subject to subsection (a) if the total combined actual VOC emissions from all subject cleaning unit operations at the facility are less than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls. An owner or operator claiming this exemption shall maintain records in accordance with subsection (h)(4).

(d) [Paragraph (d) of the regulation is not applicable to this facility.]

(e) Emissions limitations. Beginning August 11, 2018, the owner or operator of a facility at which the total combined actual VOC emissions from all subject cleaning unit operations at the facility are equal to or greater than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls, may not cause or permit the emission into the outdoor atmosphere of VOCs from an industrial cleaning solvent used or applied in a cleaning unit operation subject to this section at the facility, unless one of the following limitations is met:

(1) Compliant solvents. The industrial cleaning solvent meets one of the following VOC limits:

(i) A VOC content less than or equal to 0.42 lb VOC/gal (50 g VOC/l) as applied.

(ii) A VOC composite vapor pressure less than or equal to 8 mm mercury at 68°F (20°C) as applied.

(2) [Paragraph (e)(2) of the regulation is not applicable to this facility.]

(f) [Paragraph (f) of the regulation is printed under Work Practice Requirements in this section of the permit.]

(g) - (h) [Paragraphs (g) and (h) of the regulation are printed under Recordkeeping Requirements in this section of the permit.]

(i) - (k) [Paragraphs (i), (j), and (k) of the regulation are printed under Additional Requirements in this section of the permit.]

[Source: The provisions of this § 129.63a adopted August 10, 2018, effective August 11, 2018, 48 Pa.B. 4814.]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.****III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 002 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Records to demonstrate compliance with 25 Pa. Code § 129.63a shall be maintained for at least 5 years.

003 [25 Pa. Code §129.63a]**Control of VOC emissions from industrial cleaning solvents.**

[From 25 Pa. Code § 129.63a(g) and (h):]

(g) Compliance demonstration. The owner or operator of a cleaning unit operation subject to this section shall demonstrate compliance as follows:

(1) The owner or operator of a facility at which the total combined actual VOC emissions from all subject cleaning unit operations at the facility are equal to or greater than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls, shall do either of the following:

(i) Ensure that industrial cleaning solvents used or applied in the subject cleaning unit operations at the facility meet the applicable emissions limitation in subsection (e)(1) and maintain records in accordance with subsection (h)(1)(i).

(ii) [Paragraph (g)(1)(ii) of the regulation does not apply to this source.]

(2) The owner or operator of a cleaning unit operation subject to this section claiming exemption under:

(i) Subsection (c)(2)(i) shall maintain records in accordance with subsection (h)(2).

(ii) Subsection (c)(2)(ii) shall maintain records in accordance with subsection (h)(3).

(iii) Subsection (c)(3) shall maintain records in accordance with subsection (h)(4).

(3) The owner or operator of a cleaning unit operation subject to this section shall determine the VOC content of the industrial cleaning solvent as applied by conducting sampling and testing of the industrial cleaning solvent in accordance with the procedures and test methods specified in subsections (i) and (j) and Chapter 139.

(4) The owner or operator of a cleaning unit operation subject to paragraph (3) may use other test methods or documentation to demonstrate compliance with this section if approved in advance in writing by the Department and the EPA.

(h) Recordkeeping and reporting requirements. The owner or operator of a cleaning unit operation subject to this section shall comply with all of the following applicable recordkeeping and reporting requirements:

(1) The owner or operator of a facility at which the total combined actual VOC emissions from all subject cleaning unit operations at the facility are equal to or greater than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls, shall maintain all of the applicable records:

(i) For an owner or operator that complies with this section by using a complying industrial cleaning solvent under subsection (e)(1), records of all of the following parameters for each cleaning unit operation industrial cleaning solvent:

(A) The name and identification number.

(B) The weight percent of total volatiles, water and exempt solvents, as supplied.

(C) The VOC content or composite vapor pressure, as supplied. The composite vapor pressure as supplied shall be determined in accordance with subsections (i) and (j).

**SECTION E. Source Group Restrictions.**

(D) The VOC content or composite vapor pressure, as applied. The composite vapor pressure as applied shall be determined in accordance with subsections (i) and (j).

(E) The volume used or applied on a monthly basis.

(ii) For an owner or operator that complies with this section through the use of a VOC emissions capture system and an add-on air pollution control device under subsection (e)(2), records sufficient to demonstrate all of the following:

(A) Sampling and testing conducted in accordance with Chapter 139 as required under subsection (e)(2).

(B) Calibration, operation and maintenance of the monitoring equipment installed under subsection (g)(1)(ii) in accordance with manufacturer's specifications.

(2) The owner or operator of a cleaning unit operation claiming exemption under subsection (c)(2)(i) shall maintain records of all of the following information for the exempt industrial cleaning solvent:

(i) A copy of the applicable standard or specification.

(ii) The VOC content or composite vapor pressure, as applied. The composite vapor pressure as applied shall be determined in accordance with subsections (i) and (j).

(iii) The volume used or applied monthly.

(3) The owner or operator of a screen printing equipment cleaning unit operation claiming exemption under subsection (c)(2)(ii) shall maintain records of all of the following information for the screen printing equipment industrial cleaning solvent:

(i) The name and identification number.

(ii) The VOC content or composite vapor pressure, as applied. The composite vapor pressure as applied shall be determined in accordance with subsections (i) and (j).

(iii) The volume used or applied monthly.

(4) The owner or operator of a facility claiming exemption under subsection (c)(3) shall maintain monthly records of the industrial cleaning solvents used or applied at the subject cleaning unit operations sufficient to demonstrate that the total combined actual VOC emissions from all subject cleaning unit operations at the facility are less than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls.

(5) [Paragraph (h)(5) of the regulation is streamlined out of the permit in favor of a 25 Pa. Code § 127.441 condition that records be maintained for 5 years.]

(6) Records shall be submitted to the Department in an acceptable format upon receipt of a written request from the Department.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

004 [25 Pa. Code §129.63a]

Control of VOC emissions from industrial cleaning solvents.

[From 25 Pa. Code § 129.63a(f):]

(f) Work practice requirements for industrial cleaning solvents, used shop towels and waste materials. The owner or operator of a facility subject to subsection (e) shall comply with all of the following work practices for industrial cleaning

**SECTION E. Source Group Restrictions.**

solvents and shop towels used in the cleaning unit operation cleaning activity:

- (1) Store all VOC-containing industrial cleaning solvents, used shop towels and related waste materials in closed containers.
- (2) Ensure that mixing and storage containers used for VOC-containing industrial cleaning solvents and related waste materials are kept closed at all times except when depositing or removing these materials.
- (3) Minimize spills of VOC-containing industrial cleaning solvents and related waste materials and clean up spills immediately.
- (4) Convey VOC-containing industrial cleaning solvents and related waste materials from one location to another in closed containers or pipes.
- (5) Minimize VOC emissions from cleaning of storage, mixing and conveying equipment.
- (6) Minimize air circulation around cleaning unit operations.

VII. ADDITIONAL REQUIREMENTS.**# 005 [25 Pa. Code §129.63a]****Control of VOC emissions from industrial cleaning solvents.**

[From 25 Pa. Code § 129.63a(b)]

(b) Definitions. The following words and terms, when used in this section, have the following meanings unless the context clearly indicates otherwise:

Cleaning activity — The use or application of an industrial cleaning solvent to remove a contaminant, such as an adhesive, ink, paint, dirt, soil, oil or grease, by wiping, flushing, brushing, soaking, dipping, spraying or a similar effort.

Cleaning unit operation —

- (i) An operation at a facility that is a source of VOC emissions from a cleaning activity.
- (ii) The term includes the following cleaning activities:
 - (A) Spray gun cleaning, including the spray gun, attached paint lines and other spray gun equipment used to apply a coating.
 - (B) Spray booth cleaning, including the interior surfaces of the booth and the equipment contained within the booth.
 - (C) Manufactured components cleaning as a step in a manufacturing process, including automobile bodies, furniture, sheet metal, glass windows, engine components, subassemblies, sheet metal panels, molded parts, electrical contacts, steel and copper components, tin-plated or silver-plated terminals, plastic parts, upholstered parts, circuit breaker cases, switch covers, threads and bolts.
 - (D) Parts cleaning, including applicator tips, brushes, machine parts, pumps, circuit boards, truck parts, engine blocks, gauges, cutoff steel, machined parts, tool dies, motors and assemblies, screws, oil guns, welded parts, bearings and filters.
 - (E) Equipment cleaning of a piece of production equipment in place to prevent cross-contamination or for maintenance purposes, including punch presses, electrical contacts on equipment, pump parts, packaging equipment, rollers, ink pans, carts, press frames and table tops.
 - (F) Line cleaning, including a pipe, hose or other line that conveys material like paint or resin, that is cleaned separately from a spray gun, tank or other process equipment.
 - (G) Floor cleaning in a production area of the facility.
 - (H) Tank cleaning, including a tank, mixing pot or process vessel and the attached lines.
- (iii) The term does not include VOC emissions from the use or application of consumer products subject to Chapter 130, Subchapter B (relating to consumer products), including an institutional product or industrial and institutional product as defined in § 130.202 (relating to definitions) for cleaning offices, bathrooms or other areas that are not part of a cleaning unit operation or work production-related work area.

Industrial cleaning solvent — A product formulated with one or more regulated VOCs that is used in a cleaning activity for a cleaning unit operation.

**SECTION E. Source Group Restrictions.**

Regulated VOC — An organic compound which participates in atmospheric photochemical reactions, that is, an organic compound other than those which the Administrator of the EPA designates in 40 CFR 51.100 (relating to definitions) as having negligible photochemical reactivity.

006 [25 Pa. Code §129.63a]**Control of VOC emissions from industrial cleaning solvents.**

[From 25 Pa. Code § 129.63a(i), (j), and (k):]

(i) Composite vapor pressure. The composite vapor pressure of organic compounds in cleaning unit operation industrial cleaning solvents shall be determined by one or more of the following procedures:

(1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using one or more of the following methods:

(i) An appropriate and current ASTM test method with prior written approval from the Department and the EPA.

(ii) Another test method demonstrated to provide results that are acceptable for purposes of determining compliance with this section if prior approval is obtained in writing from the Department and the EPA.

(2) Calculating the composite vapor pressure using the following equation:

[Refer to regulation 25 Pa. Code § 129.63a(i)(2) at this web address for equation:

<http://www.pacodeandbulletin.gov/Display/pacode?file=/secure/pacode/data/025/chapter129/s129.63a.html&d=reduce.>]

Where:

Ppc = VOC composite partial pressure at 20°C, in mm mercury.

Wi = Weight of the "i"th VOC compound, in grams, as determined by ASTM E260.

Ww = Weight of water, in grams, as determined by ASTM D3792.

We = Weight of the "e"th exempt compound, in grams, as determined by ASTM E260.

Mwi = Molecular weight of the "i"th VOC compound, in grams per g-mole, as given in chemical reference literature.

Mww = Molecular weight of water, 18 grams per g-mole.

Mwe = Molecular weight of the "e"th exempt compound, in grams per g-mole, as given in chemical reference literature.

VPI = Vapor pressure of the "i"th VOC compound at 20°C, in mm mercury, as determined by subsection (j).

(3) Providing documentation from the manufacturer of the industrial cleaning solvent that indicates the composite vapor pressure. The documentation may include an MSDS, CPDS or other data certified by the manufacturer.

(j) Vapor pressure of single component compound. The vapor pressure of each single component compound in a cleaning unit operation industrial cleaning solvent shall be determined from one or more of the following:

(1) An appropriate and current ASTM test method with prior written approval from the Department and the EPA.

(2) The most recent edition of one or more of the following sources:

(i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company.

(ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.

(iii) CRC Handbook of Chemistry and Physics, CRC Press.

(iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.

(3) Documentation provided by the manufacturer of the single component compound that indicates the vapor pressure of the single component compound. The documentation may include an MSDS, CPDS or other data certified by the manufacturer.

(k) ASTM method references. References to ASTM methods in this section pertain to test methods developed by ASTM International, 100 Barr Harbor Drive, Post Office Box C700, West Conshohocken, Pennsylvania 19428-2959, www.astm.org.

**SECTION E. Source Group Restrictions.**

Group Name: 3 - 129.77 ADHESIVES SEALANTS SOLVENTS

Group Description: Control of emissions from adhesives, sealants, primers, & solvents

Sources included in this group

ID	Name
104	FACILITY PROCESS VOC EMISSIONS

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §129.77.]****Control of emissions from the use or application of adhesives, sealants, primers and solvents.**

[Regulation 25 Pa. Code § 129.77, including the equations and formulas, is printed in full at this web address:
<http://www.pacodeandbulletin.gov/Display/pacode?file=/secure/pacode/data/025/chapter129/s129.77.html&d=reduce.>]

(a) This section applies to the owner or operator of a facility that uses or applies one or more of the following at the facility on or after January 1, 2012:

- (1) An adhesive, sealant, adhesive primer or sealant primer subject to the VOC content limits in Table V.
- (2) An adhesive or sealant product applied to the listed substrate subject to the VOC content limits in Table VI.
- (3) A surface preparation solvent or cleanup solvent.

(b) On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility an adhesive, sealant, adhesive primer or sealant primer that exceeds the applicable VOC content limit in Table V or VI, except as provided elsewhere in this section.

(c) On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility a surface preparation or cleanup solvent that exceeds the applicable VOC content limit or composite partial vapor pressure requirements of this section, except as provided elsewhere in this section.

(d) The VOC content limits in Table VI for adhesives or sealants applied to particular substrates apply as follows:

- (1) If an owner or operator of a facility uses or applies at the facility an adhesive or sealant subject to a specific VOC content limit in Table V, the specific limit is applicable rather than the adhesive-to-substrate limit in Table VI.
- (2) If an owner or operator of a facility uses or applies at the facility an adhesive to bond dissimilar substrates together, the applicable substrate category with the highest VOC content limit is the limit for this use.

(e) An owner or operator of a facility subject to this section using or applying a surface preparation solvent or cleanup solvent at the facility may not:

- (1) Except as provided in paragraph (2) for single-ply roof membrane, use materials containing VOCs for surface preparation, unless the VOC content of the surface preparation solvent is less than 70 grams per liter of material or 0.6 pound of VOC per gallon of material.
- (2) Use materials containing VOCs for surface preparation or cleanup when applying single-ply roof membrane, unless the composite partial vapor pressure, excluding water and exempt compounds, of the surface preparation solvent or cleanup solvent is less than or equal to 45 mm mercury at 20° C.
- (3) Except as provided in subsection (f), use cleanup solvent materials containing VOCs for the removal of adhesives, sealants, adhesive primers or sealant primers from surfaces, other than from the parts of spray application equipment, unless the composite partial vapor pressure of the solvent is less than or equal to 45 mm mercury at 20° C.

(f) Removal of an adhesive, sealant, adhesive primer or sealant primer from the parts of spray application equipment shall be performed by one or more of the following methods:

**SECTION E. Source Group Restrictions.**

(1) Using an enclosed cleaning system, or an equivalent cleaning system as determined by the test method identified in subsection (z).

(2) Using a solvent with a VOC content less than or equal to 70 grams of VOC per liter of material or 0.6 pound of VOC per gallon of material.

(3) Soaking parts containing dried adhesive in a solvent if the composite partial vapor pressure of the solvent, excluding water and exempt compounds, is less than or equal to 9.5 mm mercury at 20° C and the parts and solvent are in a closed container that remains closed except when adding parts to or removing parts from the container.

(g) An owner or operator of a facility using or applying at the facility an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent subject to the VOC content limits of this section may comply with the requirements of this section through the use of add-on air pollution control equipment if the following requirements are met:

(1) The VOC emissions from the use of all noncomplying as applied adhesives, sealants, adhesive primers, sealant primers, surface preparation solvents and cleanup solvents subject to this section are reduced by an overall efficiency of at least 85%, by weight.

(i) The capture efficiency of the system shall be determined in accordance with subsection (y)(1).

(ii) The control efficiency of the system shall be determined in accordance with subsection (y)(2).

(2) The combustion temperature is continuously monitored and recorded daily if a thermal incinerator is operated.

(3) Inlet and exhaust gas temperatures are continuously monitored and recorded daily if a catalytic incinerator is operated.

(4) Control device efficiency is monitored continuously and recorded daily if a carbon absorber or control device other than a thermal or catalytic incinerator is operated.

(5) Operation records sufficient to demonstrate compliance with the requirements of this section are maintained in accordance with subsections (o), (p) and (q).

(6) The following information is also recorded and maintained:

(i) Daily records of the volume used each day of each noncomplying as applied adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent and cleanup solvent.

(ii) Daily records of the hours of operation of the add-on air pollution control equipment.

(iii) Records of all maintenance performed on the add-on air pollution control equipment, including the date and type of maintenance.

(7) The control equipment is approved, in writing, by the Department in an operating permit.

(8) The owner or operator of a facility that intends to comply with this section using add-on air pollution control equipment may apply to the Department for an extension to the compliance date specified in subsections (a)--(c).

(i) The Department will approve the extension request if the request meets the requirements in subparagraph (ii).

(ii) The extension request must:

(A) Be received, in writing, by January 1, 2012.

(B) Include the date by which a permit application or request for plan approval will be submitted.

(C) Demonstrate to the Department's satisfaction that an extension is necessary.

**SECTION E. Source Group Restrictions.**

- (iii) An extension will be automatically revoked if the recipient fails to comply with its terms by the dates specified in it.
- (h) An owner or operator of a facility subject to this section shall store or dispose of all absorbent materials, including cloth or paper, which are moistened with adhesives, sealants, primers, surface preparation solvents or cleanup solvents subject to this section, in nonabsorbent containers at the facility that are kept closed except when placing materials in or removing materials from the container.
- (i) An owner or operator of a facility subject to this section may not solicit, require or specify the use or application of an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent if the use or application would result in a violation of this section, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g). The prohibition of this subsection applies to all written or oral contracts created on or after January 1, 2012, under which an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent subject to this section is to be used or applied at a facility in this Commonwealth.
- (j) An owner or operator of a facility subject to this section who uses or applies an adhesive, sealant, adhesive primer or sealant primer subject to this section may not add solvent to the adhesive, sealant, adhesive primer or sealant primer in an amount in excess of the manufacturer's recommendation for application, if this addition causes the adhesive, sealant, adhesive primer or sealant primer to exceed the applicable VOC content limit listed in Table V or VI, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g).
- (k) This section does not apply to the use or application of the following compounds or products:
- (1) Adhesives, sealants, adhesive primers or sealant primers being tested or evaluated in a research and development, quality assurance or analytical laboratory, if records are maintained as required in subsections (p) and (q).
 - (2) Adhesives, sealants, adhesive primers or sealant primers that are subject to § 129.73 (relating to aerospace manufacturing and rework) or Chapter 130, Subchapter B or C (relating to consumer products; and architectural and industrial maintenance coatings).
 - (3) Adhesives and sealants that contain less than 20 grams of VOC per liter of adhesive or sealant, less water and less exempt compounds, as applied.
 - (4) Cyanoacrylate adhesives.
 - (5) Adhesives, sealants, adhesive primers or sealant primers that are sold or supplied by the manufacturer or supplier in containers with a net volume of 16 fluid ounces or less, or a net weight of 1 pound or less, except plastic cement welding adhesives and contact adhesives.
 - (6) Contact adhesives that are sold or supplied by the manufacturer or supplier in containers with a net volume of 1 gallon or less.
- (l) This section does not apply to the use of adhesives, sealants, adhesive primers, sealant primers, surface preparation solvents or cleanup solvents in the following operations:
- (1) Tire repair operations, if the label of the adhesive states, "For tire repair only."
 - (2) The assembly, repair and manufacture of aerospace components or undersea-based weapons systems.
 - (3) The manufacture of medical equipment.
 - (4) Plaque laminating operations in which adhesives are used to bond clear, polyester acetate laminate to wood with lamination equipment installed prior to July 1, 1992. An owner or operator claiming an exemption under this paragraph shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o)--(q).
- (m) This section does not apply if the total VOC emissions from all adhesives, sealants, adhesive primers and sealant

**SECTION E. Source Group Restrictions.**

primers used or applied at the facility are less than 200 pounds or an equivalent volume, per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o)--(q).

(n) This section does not apply to the use or application of a noncomplying adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent if the total volume of noncomplying adhesives, sealants, primers, surface preparation and cleanup solvents used or applied facility-wide does not exceed 55 gallons per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o)--(q).

(o) Except as provided in subsection (p), each owner or operator subject to this section shall maintain records demonstrating compliance with this section, including the following information:

(1) A list of each adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent and cleanup solvent product in use and in storage.

(2) A data sheet or material list which provides the product name, manufacturer identification and use or material application for each product included on the list required under paragraph (1).

(3) The VOC content of each product on the list required under paragraph (1), as supplied.

(4) Catalysts, reducers or other components used and the mix ratio.

(5) The VOC content or vapor pressure of each product on the list required by paragraph (1), as applied, if solvent or other VOC is added to the product before application.

(6) The volume purchased or produced of each product on the list required under paragraph (1).

(7) The monthly volume used or applied as part of a manufacturing process at the facility of each product on the list required under paragraph (1).

(p) For an adhesive, sealant, adhesive primer and sealant primer product subject to the laboratory testing exemption of subsection (k)(1), the person conducting the testing shall make and maintain records of all products used, including the following information:

(1) The product name.

(2) The product category of the material or type of application.

(3) The VOC content of the material.

(q) Records made to determine compliance with this section shall be:

(1) Maintained onsite for 5 years from the date the record is created.

(2) Made available to the Department upon receipt of a written request.

(r) Except as otherwise provided in this section, the VOC and solids content of nonaerosol adhesives (including one-part moisture cure urethane adhesives and silicone adhesives), sealants, adhesive primers, sealant primers, surface preparation solvents and cleanup solvents shall be determined using one of the following:

(1) EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.

(2) SCAQMD Method 304, Determination of Volatile Organic Compounds (VOC) in Various Materials, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

**SECTION E. Source Group Restrictions.**

(s) The weight volatile matter content and weight solids content for one-part or multiple part reactive adhesives, except one-part moisture cure urethane adhesives and silicone adhesives, shall be determined using the EPA Reference Method, Determination of Weight Volatile Matter Content and Weight Solids Content of Reactive Adhesives, found at 40 CFR 63, Subpart PPPP, Appendix A, including updates and revisions.

(t) The identity and concentration of exempt organic compounds shall be determined using one of the following:

(1) ASTM D4457, Standard Test Method for Determination of Dichloromethane and 1,1,1-Trichloroethane in Paints and Coatings by Direct Injection into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA including updates and revisions.

(2) SCAQMD Method 303, Determination of Exempt Compounds, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

(u) The VOC content of a plastic cement welding adhesive or primer shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

(v) To determine if a diluent is a reactive diluent, the percentage of the reactive organic compound that becomes an integral part of the finished material shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

(w) The composite partial vapor pressure of organic compounds in cleaning materials shall be determined by the following procedure:

(1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using the following methods:

(i) ASTM E260, Standard Practice for Packed Column Gas Chromatography, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for organic content, including updates and revisions.

(ii) ASTM D3792, Standard Test Method for Water Content of Coatings by Direct Injection Into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for water content, including updates and revisions.

(2) Calculating the composite partial vapor pressure using the following equation:

$$PPc = \frac{\sum_{i=1}^n (Wi) * (VPi) / MWi}{\frac{Ww}{MWw} + \sum_{e=1}^k We / MWe + \sum_{i=1}^n Wi / MWi}$$

Where:

PPc = VOC composite partial vapor pressure at 20° C, in mm mercury.

Wi = Weight of the "i"th VOC compound, in grams, as determined by ASTM E260.

Ww = Weight of water, in grams, as determined by ASTM D3792.

We = Weight of the "e"th exempt compound, in grams, as determined by ASTM E260.

MWi = Molecular weight of the "i"th VOC compound, in grams per g-mole, as given in chemical reference literature.

MWw = Molecular weight of water, in grams per g-mole (18 grams per g-mole).

MWe = Molecular weight of the "e"th exempt compound, in grams per g-mole, as given in chemical reference literature.

VPi = Vapor pressure of the "i"th VOC compound at 20° C, in mm mercury, as determined by subsection (x).

**SECTION E. Source Group Restrictions.**

(x) The vapor pressure of each single component compound shall be determined from one or more of the following:

(1) ASTM D2879, Standard Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isotenoscope, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, including updates and revisions.

(2) The most recent edition of one or more of the following sources:

(i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company, New York.

(ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.

(iii) CRC Handbook of Chemistry and Physics, CRC Press.

(iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.

(v) Additional sources approved by the SCAQMD or other California air districts.

(y) If air pollution control equipment is used to meet the requirements of this section, the owner or operator shall make both of the following determinations:

(1) The measurement of capture efficiency shall be conducted and reported in accordance with the EPA Technical Document "Guidelines for Determining Capture Efficiency," issued January 9, 1995.

(2) The control efficiency shall be determined in accordance with one of the following:

(i) EPA Reference Method 25, Determination of Total Gaseous Nonmethane Organic Emissions as Carbon, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.

(ii) EPA Reference Method 25A, Determination of Total Gaseous Organic Concentration Using a Flame Ionization Analyzer, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.

(iii) EPA Reference Method 25B, Determination of Total Gaseous Organic Concentration Using a Nondispersive Infrared Analyzer, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.

(iv) CARB Method 100, Procedures for Continuous Gaseous Emission Stack Sampling, California Air Resources Board, 1001 "I" Street, Post Office Box 2815, Sacramento, CA 95812 USA, including updates and revisions.

(z) The active and passive solvent losses from the use of an enclosed spray gun cleaning system or equivalent cleaning system, as listed in subsection (f)(1), shall be determined using the SCAQMD method, General Test Method for Determining Solvent Losses from Spray Gun Cleaning Systems, dated October 3, 1989, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

(1) The test solvent for this determination shall be a lacquer thinner with a minimum vapor pressure of 105 mm of mercury at 20° C.

(2) The minimum test temperature shall be 15° C.

(aa) Another test method may be used to determine the VOC or solids content of a product if the request for approval of the test method meets the following requirements:

(1) The request is submitted to the Department in writing.

(2) The request demonstrates that the test method provides results that accurately determine the concentration of VOCs in the product or its emissions.

(3) The Department approves the request in writing.

**SECTION E. Source Group Restrictions.**

(bb) For adhesive, sealant, adhesive primer or sealant primer products that do not contain reactive diluents, grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

$$\text{Grams of VOC per liter of product, as applied} = \frac{Ws - Ww - We}{Vm - Vw - Ve}$$

Where:

- Ws = weight of volatile compounds, in grams.
- Ww = weight of water, in grams.
- We = weight of exempt compounds, in grams.
- Vm = volume of material, in liters.
- Vw = volume of water, in liters.
- Ve = volume of exempt compounds, in liters.

(cc) For adhesive, sealant, adhesive primer or sealant primer products that contain reactive diluents, the VOC content of the product is determined after curing. The grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

$$\text{Grams of VOC per liter of product, as applied} = \frac{Wrs - Wrw - Wre}{Vrm - Vrw - Vre}$$

Where:

- Wrs = weight of volatile compounds not consumed during curing, in grams.
- Wrw = weight of water not consumed during curing, in grams.
- Wre = weight of exempt compounds not consumed during curing, in grams.
- Vrm = volume of material not consumed during curing, in liters.
- Vrw = volume of water not consumed during curing, in liters.
- Vre = volume of exempt compounds not consumed during curing, in liters.

(dd) For low-solids adhesive, sealant, adhesive primer or sealant primer products, grams of VOC per liter of product thinned to the manufacturer's recommendation, including the volume of water and exempt compounds, shall be calculated according to the following equation:

$$\text{Grams of VOC per liter of product, as applied} = \frac{Ws - Ww - We}{Vm}$$

Where:

- Ws = weight of volatile compounds, in grams.
- Ww = weight of water, in grams.
- We = weight of exempt compounds, in grams.
- Vm = volume of material, in liters.

(ee) Percent VOC by weight shall be calculated according to the following equation:

$$\% \text{ VOC by weight} = (Wv/W) \times 100$$

Where:

- Wv = weight of VOCs, in grams.
- W = weight of material, in grams.

(ff) To convert from grams per liter (g/l) to pounds per gallon (lb/gal), multiply the result (VOC content) by 8.345×10^{-3} (lb/gal/g/l).

**SECTION E. Source Group Restrictions.**

Table V. VOC Content Limits for Adhesives, Sealants, Adhesive Primers and Sealant Primers, As Applied

Adhesive, sealant, adhesive primer or sealant primer category	VOC Content Limit (pounds VOC per gallon)*	VOC Content Limit (grams VOC per liter)*
Adhesives		
ABS welding	3.3	400
Ceramic tile installation	1.1	130
Computer diskette jacket manufacturing	7.1	850
Contact bond	2.1	250
Cove base installation	1.3	150
CPVC welding	4.1	490
Indoor floor covering installation	1.3	150
Metal to urethane/rubber molding or casting	7.1	850
Multipurpose construction	1.7	200
Nonmembrane roof installation/repair	2.5	300
Outdoor floor covering installation	2.1	250
Perimeter bonded sheet vinyl flooring installation	5.5	660
Plastic cement welding, other than ABS, CPVC or PVC welding	4.3	510
PVC welding	4.3	510
Sheet rubber installation	7.1	850
Single-ply roof membrane installation/repair	2.1	250
Structural glazing	0.8	100
Thin metal laminating	6.5	780
Tire retread	0.8	100
Waterproof resorcinol glue	1.4	170
Sealants		
Architectural	2.1	250
Marine deck	6.3	760
Nonmembrane roof installation/repair	2.5	300
Roadway	2.1	250
Single-ply roof membrane	3.8	450
Other	3.5	420
Adhesive Primers		
Automotive glass	5.8	700
Plastic cement welding	5.4	650
Single-ply roof membrane	2.1	250
Traffic marking tape	1.3	150
Other	2.1	250
Sealant Primers		
Marine deck	6.3	760
Nonporous architectural	2.1	250
Porous architectural	6.5	775
Other	6.3	750

*The VOC content is determined as the weight of VOC per volume of product, less water and exempt compounds, as specified in subsections (bb) and (cc) or as the weight of VOC per volume of product, as specified in subsection (dd).

Table VI. VOC Content Limits for Adhesive or Sealant Products Applied to Particular Substrates, As Applied

**SECTION E. Source Group Restrictions.**

Adhesive or Sealant Products Applied to the Listed Substrate	VOC content limit (pounds VOC per gallon)*	VOC Content Limit (grams VOC per liter)*
Fiberglass	1.7	200
Flexible vinyl	2.1	250
Metal	0.3	30
Porous material	1.0	120
Rubber	2.1	250
Other substrates	2.1	250

*The VOC content is determined as the weight of VOC per volume of product, less water and exempt compounds, as specified in subsections (bb) and (cc) or as the weight of VOC per volume of product, as specified in subsection (dd).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.**

Group Name: 4 - EMERGENCY ENGINE

Group Description: PM, SOx, & operating hr restriction for plan approval exemption & NESHAP for Emerg. Diesel RIC

Sources included in this group

ID	Name
107	EMERGENCY DIESEL FIRE PUMP ENGINE (121 HP)

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §123.13]****Processes**

No person may permit the emission into the outdoor atmosphere of particulate matter in a manner that the concentration of particulate matter in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §123.21]**General**

No person may permit the emission into the outdoor atmosphere of sulfur oxides from a source in a manner that the concentration of the sulfur oxides, expressed as SO₂, in the effluent gas exceeds 500 parts per million, by volume, dry basis.

Operation Hours Restriction(s).**# 003 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The fire pump diesel engine shall not operate more than 500 hours per year without Department approval.

[Compliance with this operating hour restriction assures that the diesel engine, fueled with #2 fuel oil, will continue to remain below the threshold for a plan approval exemption. Reference 25 Pa. Code §127.14(a)(8) exemption #6 in 33 Pa.B. 3676.]

004 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6640]**Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?**

(a) [Paragraph 63.6640(a) is printed under WORK PRACTICE REQUIREMENTS in this section of permit.]

(b) [Paragraph 63.6640(b) is printed under REPORTING REQUIREMENTS in this section of permit.]

(c) - (d) [Paragraphs 63.6640(c) through (e) are not applicable to this source.]

(f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in nonemergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.

(1) There is no time limit on the use of emergency stationary RICE in emergency situations.

(2) You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).

(i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the

**SECTION E. Source Group Restrictions.**

tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.

(ii)-(iii) [Paragraphs 63.6640(f)(2)(ii)-(iii) were vacated on May 11, 2015.]

(3) [Paragraph 63.6640(f)(3) is not applicable to this source.]

(4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) - (ii) [Paragraphs 63.6640(f)(4)(i)-(ii) are not applicable to this source.]

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

A non-resettable hour-meter shall be installed on the emergency engine.

IV. RECORDKEEPING REQUIREMENTS.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) The permittee shall keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter.

(b) The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation.

007 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6655]

Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines**What records must I keep?**

(a) If you must comply with the emission and operating limitations, you must keep the records described in paragraphs (a)(1) through (a)(5), (b)(1) through (b)(3) and (c) of this section.

(1) A copy of each notification and report that you submitted to comply with this subpart, including all documentation supporting any Initial Notification or Notification of Compliance Status that you submitted, according to the requirement in §63.10(b)(2)(xiv).

(2) Records of the occurrence and duration of each malfunction of operation (i.e., process equipment) or the air pollution control and monitoring equipment.

(3) [Not applicable.]



SECTION E. Source Group Restrictions.

(4) [Not applicable.]

(5) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.6605(b), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation.

(b) - (c) [Paragraphs 63.6655(b) and (c) are not applicable to this source.]

(d) You must keep the records required in Table 6 of this subpart to show continuous compliance with each emission or operating limitation that applies to you.

(e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;

(1) [Not applicable.]

(2) An existing stationary emergency RICE.

(3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.

(f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. [Text from regulation which is not applicable to this engine is omitted from this paragraph.]

(1) [Paragraph 63.6655(f)(1) is not applicable to this source.]

(2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

**# 008 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6660]
Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines**

In what form and how long must I keep my records?

(a) Your records must be in a form suitable and readily available for expeditious review according to §63.10(b)(1).

(b) As specified in §63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to §63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

From 63.10(b)(1):

(b) General recordkeeping requirements. (1) The owner or operator of an affected source subject to the provisions of this part shall maintain files of all information (including all reports and notifications) required by this part recorded in a form suitable and readily available for expeditious inspection and review. The files shall be retained for at least 5 years following

**SECTION E. Source Group Restrictions.**

the date of each occurrence, measurement, maintenance, corrective action, report, or record. At a minimum, the most recent 2 years of data shall be retained on site. The remaining 3 years of data may be retained off site. Such files may be maintained on microfilm, on a computer, on computer floppy disks, on magnetic tape disks, or on microfiche.

[59 FR 12430, Mar. 16, 1994, as amended at 64 FR 7468, Feb. 12, 1999; 67 FR 16604, Apr. 5, 2002; 68 FR 32601, May 30, 2003; 69 FR 21752, Apr. 22, 2004; 71 FR 20455, Apr. 20, 2006]

V. REPORTING REQUIREMENTS.**# 009 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6640]****Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?**

(a) [Paragraph 63.6640(a) is printed under WORK PRACTICE REQUIREMENTS in this section of permit.]

(b) You must report each instance in which you did not meet each emission limitation or operating limitation in Table 2d to this subpart that apply to you. These instances are deviations from the emission and operating limitations in this subpart. These deviations must be reported according to the requirements in §63.6650. [Reference to Tables 1a and 1b, Tables 2a and 2b, Table 2c and references to performance testing in the regulation, which are not applicable to this source, are omitted from this paragraph.]

(c) – (e) [Paragraphs 63.6640(c) through (e) are not applicable to this source.]

(f) [Paragraph 63.6640(f) is printed under RESTRICTIONS in this section of permit.]

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

VI. WORK PRACTICE REQUIREMENTS.**# 010 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63 Subpart ZZZZ Table 2d]****Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****Requirements for Existing Stationary RICE Located at Area Sources of HAP Emissions**

As stated in §§63.6603 and 63.6640, you must comply with the following requirements for existing stationary RICE located at area sources of HAP emissions:

[Category 4 applies. Non-applicable items are omitted.]

4. For each Emergency stationary CI [Compression Ignition engine] RICE (See note 2.),

you must meet the following requirement, except during periods of startup . . .

- a. Change oil and filter every 500 hours of operation or annually, whichever comes first; (see note 1)
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary;

and

- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

Notes:

1 Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.

2 If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the

**SECTION E. Source Group Restrictions.**

management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[75 FR page 9688, Mar. 3, 2010; 75 FR page 51595, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

011 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63 Subpart ZZZZ Table 6]**Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****Table 6 to Subpart ZZZZ of Part 63.-- Continuous Compliance With Emission Limitations and Operating Limitations**

As stated in §63.6640, you must continuously comply with the emissions and operating limitations and work or management practices as required by the following:

[Category 9 of Table 6 to Part 63 Subpart ZZZZ applies. Applicable requirements from Table 6 are included here. Non-applicable text from Table 6 is omitted.]

For each existing emergency stationary RICE located at an area source of HAP, complying with the Work or Management practices requirement, you must demonstrate continuous compliance by . . .

- i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or
- ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

[76 FR 12870, Mar. 9, 2011; 78 FR 6700, Jan. 30, 2013]

012 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6603]**Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?**

[References in regulation to §63.6620 and Table 4 in introductory text of §63.6603 is not applicable to this source and is omitted from this paragraph.]

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, you must comply with the requirements in Table 2d to this subpart that apply to you. [The reference in regulation to Table 2b in 63.6603(a) which is not applicable to this source is omitted from this paragraph.]

(b) - (f) [Paragraphs 63.6603 (b) through (f) are not applicable to this source.]

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013]

013 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6605]**Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****What are my general requirements for complying with this subpart?**

(a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance

**SECTION E. Source Group Restrictions.**

procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

014 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6625]

Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

What are my monitoring, installation, operation, and maintenance requirements?

(a) - (d) Not applicable.

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) - (2) Not applicable;

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) - (10) Not applicable.

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) Not applicable.

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply. [Tables 1a, 2a, 2c do not apply to the emergency engines of this source; Category 4 of Table 2d applies.]

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in item 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Table 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine. [Non-applicable text is omitted from this paragraph.]

(j) [Not applicable.]

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6700, Jan. 30, 2013]

015 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6640]

Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

**SECTION E. Source Group Restrictions.****How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?**

(a) You must demonstrate continuous compliance with each requirement in Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart. [Text in the regulation 63.6640(a) which is not applicable to this source is omitted from this paragraph.] [Table 6 is printed in this section of permit.]

(b) - (d) [Paragraphs 63.6640(b) through (d) are not applicable to this source.]

(e) [Paragraph 63.6640(e) is printed under REPORTING REQUIREMENTS in this section of permit.]

(f) [Paragraph 63.6640(f) is printed under RESTRICTIONS in this section of permit.]

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

VII. ADDITIONAL REQUIREMENTS.**# 016 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6675]****Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****What definitions apply to this subpart?**

[Selected definitions from §63.6675 are printed below. Refer to regulation for remaining definitions applicable to 40 CFR Part 63 Subpart ZZZZ.]

Emergency stationary RICE means any stationary reciprocating internal combustion engine that meets all of the criteria in paragraphs (1) through (3) of this definition. All emergency stationary RICE must comply with the requirements specified in § 63.6640(f) in order to be considered emergency stationary RICE. If the engine does not comply with the requirements specified in § 63.6640(f), then it is not considered to be an emergency stationary RICE under this subpart.

(1) The stationary RICE is operated to provide electrical power or mechanical work during an emergency situation. Examples include stationary RICE used to produce power for critical networks or equipment (including power supplied to portions of a facility) when electric power from the local utility (or the normal power source, if the facility runs on its own power production) is interrupted, or stationary RICE used to pump water in the case of fire or flood, etc.

(2) The stationary RICE is operated under limited circumstances for situations not included in paragraph (1) of this definition, as specified in § 63.6640(f).

(3) The stationary RICE operates as part of a financial arrangement with another entity in situations not included in paragraph (1) of this definition only as allowed in § 63.6640(f)(2)(ii) or (iii) and § 63.6640(f)(4)(i) or (ii).

Subpart means 40 CFR part 63, subpart ZZZZ.

[Source: 69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3607, Jan. 18, 2008; 75 FR 9679, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 76 FR 12867, Mar. 9, 2011; 78 FR 6700, Jan. 30, 2013]

**SECTION F. Alternative Operation Requirements.**

No Alternative Operations exist for this State Only facility.

**SECTION G. Emission Restriction Summary.**

Source Id	Source Description			
030	NATURAL GAS FUELED COMBUSTION UNITS			
Emission Limit				Pollutant
4.000	Lbs/MMBTU	of heat input. [25 Pa Code 123.22]		SOX
101A	ROBOTIC PAINTING SYSTEM BOOTH			
Emission Limit				Pollutant
0.040	gr/DRY FT3	25 Pa Code 123.13		TSP
103	NATURAL GAS FUELED PROCESS HEATERS & OVENS			
Emission Limit				Pollutant
0.040	gr/DRY FT3	25 Pa Code 123.13		PM10
500.000	PPMV	dry basis. [25 Pa Code 123.21]		SOX
104	FACILITY PROCESS VOC EMISSIONS			
Emission Limit				Pollutant
16.000	Tons/Yr	From plan approval 43-359A		VOC
107	EMERGENCY DIESEL FIRE PUMP ENGINE (121 HP)			
Emission Limit				Pollutant
500.000	PPMV	dry basis [25 Pa Code 123.21]		SOX
0.040	gr/DRY FT3	25 Pa Code 123.13		TSP

Site Emission Restriction Summary

Emission Limit	Pollutant
----------------	-----------

**SECTION H. Miscellaneous.**

(a) This facility is located at 660 Barkeyville Road, Grove City, PA 16127.

This facility is a NATURAL MINOR with respect to Potential Emissions of regulated air pollutants.

The following eFACTS ID's are assigned to this facility for this permit issuance:

Permit number: 43-00359

Records Management System (RMS) Facility Name: GE Transp Sys Grove City UX Fac

RMS ID: 46888

APS ID: 1031212

Master Auth ID: 1070463

Client ID: 347856

Site ID: 615333

Primary Facility (PF) ID: 752939

(b) The Capacity/Throughput numbers listed in Section A, the Site Inventory List, and provided in Section D of this permit for individual sources are for informational purposes only and are not to be considered enforceable limits. The actual enforceable emission and operating limits for each source, with the correct number of significant digits, are listed in Sections C, D, and E of this permit. The Emission Restriction Summary in Section G of this permit is for information purposes only and is not to be used to establish enforceable limits.

(c) Abbreviations used in this permit:

Schematics:

FML: Fuel material location

CU: Combustion Unit

PROC: Process

CNTL: Control device

STAC: Stack. The stack can represent either the emission point or fugitive emissions in a permit map.

Pollutants:

CO: Carbon Monoxide

NOx: Nitrogen Oxides

SOx: Sulfur Oxides

TSP: Total Suspended Particulate (includes both filterable and condensable)

PM10: Particulate Matter less than 10 microns

PM2.5: Particulate Matter less than 2.5 microns

VOC: Volatile Organic Compounds

HAP: Hazardous Air Pollutant

Source ID: Department assigned ID number for the source

Source Name: Department assigned name for the source

Capacity/Throughput: The maximum rated capacity or throughput for the source. The maximum rated capacity or throughput is not considered an enforceable limit. Enforceable limits are contained within the conditions of the permit.

Fuel/Material: The fuel/material assigned to SCC for the source

AIMS: Air Information Management System -- the DEP electronic database for permitting and emission reports

CFR: Code of Federal Regulations

CI: Combustion Ignition

CMS: Continuous Monitoring System

Department: Pennsylvania Department of Environmental Protection (the DEP)

eFacts: Environmental Facility Application Compliance Tracking System -- the DEP electronic database for inspection reports

ICE: Internal Combustion Engine

ICI: Industrial, Commercial, and Institutional

NESHAP: National Emission Standards for Hazardous Air Pollutants (40 CFR Part 63)

NSPS: New Source Performance Standards (40 CFR Part 60)

NWRO: Northwest Regional Office of PADEP

RFD: Request for Determination of Changes of Minor Significance & Exemption from plan approval.

RICE: Reciprocating Internal Combustion Engine

SCC: Source Classification Code as defined by EPA

SI: Spark Ignition

**SECTION H. Miscellaneous.**

Source: An air contamination source (25 Pa. Code § 121.1).

(d) All reports, submittals, and other communications required by this permit shall be submitted to the following office. Web addresses for electronic submittals to this office are below.

Bureau of Air Quality
Department of Environmental Protection
230 Chestnut Street
Meadville, PA 16335
814-332-6940 (phone)
814-332-6121 (fax)
Office Hours 8 a.m. - 4 p.m.
800-541-2050 (after hours)

Spills and other emergencies should be reported immediately to DEP by telephone at 800-541-2050.

Submittals of Asbestos Abatement and Demolition/Renovation Notification Forms should be made via the Online Asbestos Notification System. Information and links are located at this web address:

<https://www.dep.pa.gov/Business/Air/BAQ/BusinessTopics/Pages/Asbestos.aspx>

Submittals of Annual emissions inventory, if required, must be made via the DEP's AES*Online secure website. Information and links are located at this web address:

<https://www.dep.pa.gov/Business/Air/BAQ/BusinessTopics/Emission/Pages/default.aspx>

Submittals pertaining to emissions testing (protocols, test results, etc.) must be made through PSIMS*Online at

<https://www.depgreenport.state.pa.us/ecommm/Login.jsp>

The 15-day advance notifications of emissions testing dates shall be submitted directly to both:

(1) the Protocol Reviewer at Central Office Division of Source Testing at the email address provided by the protocol reviewer; and

(2) to the Northwest Regional Office Air Quality Inspector. Telephone the Northwest Regional Office at 814-332-6940 to obtain the email address of the Air Quality Inspector.

Submittals of RFD's shall be made via the DEP's Greenport website at <https://greenport.pa.gov>

All other submittals to this office should be made via the DEP's OnBase electronic upload website at this web address:

<https://www.dep.pa.gov/DataandTools/Pages/Application-Form-Upload.aspx>

(e) The following sources/activities have been determined to be of minor significance with respect to emissions of regulated air pollutants and have no applicable emission, testing, monitoring, recordkeeping, or reporting requirements.

(1) Welding (TIG/ARC/Laser/MIG) and Brazing;

(2) Machining/drilling/forming stations;

(3) Shot blasts;

(4) a hydroblasting unit used to clean metal parts through water-assisted abrasion. Solid mead is applied through a high-pressure water delivery system to remove foreign material and rust from metal parts. Installation of this unit was RFD approved on December 8, 2021, for a De minimis increase.

(5) The "Trivial Activities" list as published in the July 26, 2003 in PA Bulletin Vol. 33, No. 30; as amended August 10, 2013; and as amended in any subsequent PA Bulletin notices in the future. This "Trivial Activities" list is available in the Department of Environmental Protection Air Quality Guidance Document number 275-2101-003.

(f) For the purpose of this permit, Source 103 (Natural Gas Fueled Process Heaters & Ovens) consists of the following sources located throughout the facility firing natural gas. The units of this source are exempt from the requirements of a plan approval as described in the 25 Pa. Code §127.14(a) exemption list.

- Furnaces
- Ovens
- Pressure Washers
- Water Heaters
- Space Heaters
- Thermal Parts Cleaners

**SECTION H. Miscellaneous.**

The equipment of Source 103 includes, but is not limited to, the following:

- (1) Pump Oven previously known as Shake/Bake Oven #3 (0.3 MMBtu/hr)
- (2) Frame Washer (1.0 MMBtu/hr)
- (3) Mexico Mart Washer previously known as Liner Washer (0.55 MMBtu/hr)
- (4) Skirt Finish Washer previously known as Strongback Washer (0.5 MMBtu/hr)
- (5) Car Wash previously known as Tear Down Steam Booth (0.3 MMBtu/hr)
- (6) Wastewater evaporator, installed in 2018, equipped with 2 burners with a combined rated heat input capacity of 2.1 million Btu/hr.
- (7) Air makeup unit serving the Robotic Paint Booth

(g) Source 104 (Facility Process VOC Emissions) consists of the use of adhesives, aerosol paints, alcohols, cleaners, inspection chemicals, inks, lubricants, markers, paints, rust preventers, sealants and other similar products for manufacturing purposes throughout the facility.

(h) Source 106 (Parts Washers) consists of the parts washers which are in use.

- Three System One 500 series remote reservoir cold cleaning machines in the Bolt ReQual department are used for the degreasing of small metal parts. Each unit holds 20 gallons of mineral spirits.
- A Grays Mills parts washer in the Small Parts department is also empty and unplugged and tagged-out.

(i) This new operating permit, effective August 16, 2016, is issued on August 16, 2016.

(j) This permit was amended on May 23, 2019, to incorporate the change of ownership to Wabtec US Rail Inc.

(k) This operating permit renewal, effective February 9, 2022, is issued on February 9, 2022.



***** End of Report *****
