



COMMONWEALTH OF PENNSYLVANIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
AIR QUALITY PROGRAM

STATE ONLY SYNTHETIC MINOR OPERATING PERMIT

Issue Date: April 28, 2026

Effective Date: August 1, 2026

Expiration Date: July 31, 2031

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 06-05068

Synthetic Minor

Federal Tax Id - Plant Code: 25-1878574-8

Owner Information

Name: READING TERM DE LLC
Mailing Address: 900 S EISENHOWER BLVD
MIDDLETOWN, PA 17057-5503

Plant Information

Plant: READING TERM DE LLC/SINKING SPRING E & W TERM
Location: 06 Berks County 06959 Sinking Spring Borough
SIC Code: 5171 Wholesale Trade - Petroleum Bulk Stations And Terminals

Responsible Official

Name: PAUL SILER
Title: VP ESOH
Phone: (720) 425 - 9641 Email: psiler@LHTterminals.com

Permit Contact Person

Name: PAUL SILER
Title: VP ESOH
Phone: (720) 425 - 9641 Email: psiler@LHTterminals.com

[Signature] _____
WILLIAM R. WEAVER, SOUTH CENTRAL REGION AIR PROGRAM MANAGER



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter F.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation of Sources
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #023 Prohibition of Air Pollution
- #024 Reporting
- #025 Report Format

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions



SECTION A. Table of Contents

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

Section G. Emission Restriction Summary



Section H. Miscellaneous

**SECTION A. Site Inventory List**

Source ID	Source Name	Capacity/Throughput		Fuel/Material
102	LOADING RACK 1 (EAST)	390.000	Th Gal/HR	DISTILLATES
		390.000	Th Gal/HR	GASOLINE
		390.000	Th Gal/HR	PETROLEUM LIQUIDS
103	LOADING RACK 2 (WEST)	144.000	Th Gal/HR	DISTILLATES
		144.000	Th Gal/HR	GASOLINE
		144.000	Th Gal/HR	PETROLEUM LIQUIDS
201	TANK 201 IF:GAS/DIST OIL/ETHANOL 0.49 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
202	TANK 202 IF:GAS/DIST OIL 0.47 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
203	TANK 203 IF:GAS/DIST OIL/ETHANOL 0.33 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	ETHANOL
211	TANK 211 IF:GAS/DIST OIL 0.49 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
212	TANK 212 FIX:DISTILLATES 0.82 MM GAL	195.000	Th Gal/HR	DISTILLATE OILS (STAND
		195.000	Th Gal/HR	DISTILLATES
214	TANK 214 FIX:DISTILLATES 0.36 MM GAL	195.000	Th Gal/HR	DISTILLATE OILS (STAND
		195.000	Th Gal/HR	DISTILLATES
220	TANK 220 FIX:DISTILLATES 0.82 MM GAL	195.000	Th Gal/HR	DISTILLATE OILS (STAND
		195.000	Th Gal/HR	DISTILLATES
221	TANK 221 IF:GAS/DIST OIL 0.77 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
222	TANK 222 IF:GAS/DIST OIL 4.06 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
223	TANK 223 IF:GAS/DIST OIL 5.25 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
224	TANK 224 IF:GAS/DIST OIL 3.57 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
225	TANK 225 IF:GAS/DIST OIL 4.57 MM GAL	195.000	Th Gal/HR	GASOLINE
		195.000	Th Gal/HR	OTHER LIQUIDS
301	TANK101 IF:GAS/DIST OIL 1.76 MM GAL	144.000	Th Gal/HR	GASOLINE
		144.000	Th Gal/HR	OTHER LIQUIDS
302	TANK 102 IF:GAS/DIST OIL 0.85 MM GAL	144.000	Th Gal/HR	GASOLINE
		144.000	Th Gal/HR	OTHER LIQUIDS
303	TANK 103 FIX:DIST OIL 0.85 MM GAL	144.000	Th Gal/HR	DISTILLATE OILS (STAND
		144.000	Th Gal/HR	DISTILLATES
304	TANK 104 IF:GAS/DIST OIL 0.84 MM GAL	144.000	Th Gal/HR	GASOLINE
		144.000	Th Gal/HR	OTHER LIQUIDS
305	TANK 105 FIX:DIST OIL 4.06 MM GAL	144.000	Th Gal/HR	DISTILLATE OILS (STAND
		144.000	Th Gal/HR	DISTILLATES
306	TANK 106 IF:GAS/DIST OIL/ETHANOL 0.45 MM GAL	144.000	Th Gal/HR	GASOLINE
		144.000	Th Gal/HR	OTHER LIQUIDS

**SECTION A. Site Inventory List**

Source ID	Source Name	Capacity/Throughput	Fuel/Material
307	TANK 107 IF:GAS/DIST OIL 3.89 MM GAL	144.000 Th Gal/HR	GASOLINE
		144.000 Th Gal/HR	OTHER LIQUIDS
308	TANK 108 IF:GAS/DIST OIL 3.89 MM GAL	144.000 Th Gal/HR	GASOLINE
		144.000 Th Gal/HR	OTHER LIQUIDS
309	TANK 109 IF:GAS/DIST OIL 4.06 MM GAL	144.000 Th Gal/HR	GASOLINE
		144.000 Th Gal/HR	OTHER LIQUIDS
401	EMERGENCY GENERATOR	29.000 Gal/HR	Diesel Fuel
C02	ZINK CARBON ADSORPTION UNIT (EAST)		
C03	ZINK CARBON ADSORPTION UNIT (WEST)		
FML001	DIESEL FUEL TANKS		
S02	STACK ON ZINK (EAST)		
S03	STACK ON ZINK UNIT (WEST)		
S401	STACK FROM EMERGENCY GEN		
Z201	VENTS ON TANK 201		
Z202	VENTS ON TANK 202		
Z203	VENTS ON TANK 203		
Z211	VENTS ON TANK 211		
Z212	VENTS ON TANK 212		
Z214	VENTS ON TANK 214		
Z220	VENTS ON TANK 220		
Z221	VENTS ON TANK 221		
Z222	VENTS ON TANK 222		
Z223	VENTS ON TANK 223		
Z224	VENTS ON TANK 224		
Z225	VENTS ON TANK 225		
Z301	VENTS ON TANK 101		
Z302	VENTS ON TANK 102		
Z303	VENTS ON TANK 103		
Z304	VENTS FOR TANK 104		
Z305	VENTS FOR TANK 105		
Z306	VENTS FOR TANK 106		
Z307	VENTS FOR TANK 107		
Z308	VENTS FOR TANK 108		
Z309	VENT: TANK 109		

PERMIT MAPS

**PERMIT MAPS**

PROC
201 → STAC
Z201

PROC
202 → STAC
Z202

PROC
203 → STAC
Z203

PROC
211 → STAC
Z211

PROC
212 → STAC
Z212

PROC
214 → STAC
Z214

PROC
220 → STAC
Z220

PROC
221 → STAC
Z221

PROC
222 → STAC
Z222

PROC
223 → STAC
Z223

PROC
224 → STAC
Z224

PROC
225 → STAC
Z225

PROC
301 → STAC
Z301

PROC
302 → STAC
Z302

PROC
303 → STAC
Z303



PERMIT MAPS

PROC 304 → STAC Z304

PROC 305 → STAC Z305

PROC 306 → STAC Z306

PROC 307 → STAC Z307

PROC 308 → STAC Z308

PROC 309 → STAC Z309

PROC 401 → STAC S401

FML
FML001 ↗

**SECTION B. General State Only Requirements****#001 [25 Pa. Code § 121.1]****Definitions.**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]**Operating Permit Duration.**

(a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.

(b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]**Permit Renewal.**

(a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.

(b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.

(c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.

(d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.

(e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).

(f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]**Operating Permit Fees under Subchapter F.**

(a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.

(1) For a synthetic minor facility, a fee equal to:

(i) Four thousand dollars (\$4,000) for calendar years 2021—2025.

(ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.

(iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.

(2) For a facility that is not a synthetic minor, a fee equal to:

**SECTION B. General State Only Requirements**

- (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
- (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
- (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.

(b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]**Transfer of Operating Permits.**

(a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.

(b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.

(c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]**Inspection and Entry.**

(a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:

(1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;

(3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;

(4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]**Compliance Requirements.**

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:

- (1) Enforcement action

**SECTION B. General State Only Requirements**

(2) Permit termination, revocation and reissuance or modification

(3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]**Need to Halt or Reduce Activity Not a Defense.**

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]**Duty to Provide Information.**

(a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.

(b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]**Revising an Operating Permit for Cause.**

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

(1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.

(2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.

(3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.

(4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]**Operating Permit Modifications**

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:

(b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless

**SECTION B. General State Only Requirements**

precluded by the Clean Air Act or its regulations.

(c) **Minor Operating Permit Modifications.** The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.

(d) **Significant Operating Permit Modifications.** The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.

(e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#012 [25 Pa. Code § 127.441]**Severability Clause.**

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]**De Minimis Emission Increases.**

(a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:

(1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.

(2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

(b) The Department may disapprove or condition de minimis emission increases at any time.

(c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

(1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.

(2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.

(3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:

(1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.

**SECTION B. General State Only Requirements**

- (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
- (4) Space heaters which heat by direct heat transfer.
- (5) Laboratory equipment used exclusively for chemical or physical analysis.
- (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
- (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
- (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]**Operational Flexibility.**

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)
- (6) Section 127.462 (relating to minor operating permit modifications)
- (7) Subchapter H (relating to general plan approvals and general operating permits)

**SECTION B. General State Only Requirements****#015 [25 Pa. Code § 127.11a]****Reactivation of Sources**

- (a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).
- (b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]**Health Risk-based Emission Standards and Operating Practice Requirements.**

- (a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].
- (b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]**Circumvention.**

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]**Reporting Requirements.**

- (a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.
- (b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.
- (c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:
- Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)
- (d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.
- (e) Any records, reports or information submitted to the Department shall be available to the public except for such records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

**SECTION B. General State Only Requirements****#019 [25 Pa. Code §§ 127.441(c) & 135.5]****Sampling, Testing and Monitoring Procedures.**

(a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.

(b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]**Recordkeeping.**

(a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]**Property Rights.**

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]**Alternative Operating Scenarios.**

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.

#023 [25 Pa. Code § 121.7]**Prohibition of Air Pollution**

No person may permit air pollution as that term is defined in the Air Pollution Control Act (35 P.S. §§ 4001-4015).

**SECTION B. General State Only Requirements****#024 [25 Pa. Code §135.3]****Reporting**

(a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.

(b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#025 [25 Pa. Code §135.4]**Report Format**

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

No person shall permit the emission into the outdoor atmosphere of any fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of buildings or structures.
- (b) Grading, paving and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of materials.
- (f) Open burning operations.
- (g) Sources and classes of sources other than those identified above, for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
 - (1) the emissions are of minor significance with respect to causing air pollution;
 - (2) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air standard.

002 [25 Pa. Code §123.2]**Fugitive particulate matter**

No person shall permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in Section C, Condition # 001, if the emissions are visible at the point the emissions pass outside the persons property.

003 [25 Pa. Code §123.31]**Limitations**

No person shall permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

004 [25 Pa. Code §123.41]**Limitations**

No person shall emit visible air contaminants into the outdoor atmosphere in such a manner that the opacity of the emission is either of the following unless otherwise stated in this permit:

- (1) Equal to or greater than 20 percent for a period or periods aggregating more than three minutes in any one hour.
- (2) Equal to or greater than 60 percent at any time.

005 [25 Pa. Code §123.42]**Exceptions**

The emission limitations of 123.41 (relating to limitations) do not apply to a visible emission in any of the following instances:

- (a) The presence of uncombined water is the only reason for failure of the emission to meet the limitation.
- (b) The emission results from sources specified in Section C, Condition #001 (relating to prohibition of certain fugitive emissions).

**SECTION C. Site Level Requirements****# 006 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall limit the facility's annual emission to less than the following thresholds during any consecutive 12-month period:

- (a) 100 tons per year (TPY) of nitrogen oxides (NO_x)
- (b) 100 TPY of carbon monoxide (CO)
- (c) 100 TPY of sulfur oxides (SO_x)
- (d) 100 TPY of PM-10 (particulate matter having an effective aerodynamic diameter less than or equal to a nominal 10 micron body)
- (e) 100 TPY of PM-2.5 (particulate matter having an effective aerodynamic diameter less than or equal to a nominal 2.5 micron body)
- (f) 50 TPY of volatile organic compounds (VOC)
- (g) 25 TPY of aggregate HAPs
- (h) 10 TPY of any individual hazardous air pollutant (HAP)

Compliance verification requires emissions to be calculated and recorded for each month and each consecutive 12-month period.

II. TESTING REQUIREMENTS.**# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The Department reserves the right to require exhaust stack testing of the source(s) as necessary during the permit term to verify emissions for purposes including emission fees, malfunctions or permit condition violations.

008 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

For any testing the permittee shall do the following:

- (a) Pursuant to 25 Pa. Code § 139.3 at least 90 calendar days prior to commencing an emissions testing program, unless otherwise approved in writing by DEP, a test protocol shall be submitted to the Department for review and approval. Unless otherwise approved in writing by DEP, the permittee shall not conduct the test that is the subject of the protocol, until the protocol has been approved by DEP.
- (b) Pursuant to 25 Pa. Code § 139.3 at least 15 calendar days prior to commencing an emission testing program, notification as to the date and time of testing shall be given to the appropriate Regional Office. Notification shall also be sent to the Division of Source Testing and Monitoring. Notification shall not be made without prior receipt of a protocol acceptance letter from the Department.
- (c) Pursuant to 25 Pa. Code Section 139.53(a)(3) within 15 calendar days after completion of the on-site testing portion of an emission test program, if a complete test report has not yet been submitted, an electronic mail notification shall be sent to the Department's Division of Source Testing and Monitoring and the appropriate Regional Office indicating the completion date of the on-site testing.
- (d) Pursuant to 40 CFR Part 60.8(a), 40 CFR Part 61.13(f) and 40 CFR Part 63.7(g) a complete test report shall be submitted to the Department no later than 60 calendar days after completion of the on-site testing portion of an emission test program. For those tests being conducted pursuant to 40 CFR Part 61, a complete test report shall be submitted within 31 days after completion of the test.
- (e) Pursuant to 25 Pa. Code Section 139.53(b) a complete test report shall include a summary of the emission results on the first page of the report indicating if each pollutant measured is within permitted limits and a statement of compliance or non-compliance with all applicable permit conditions. The summary results will include, at a minimum, the following information:

1. A statement that the owner or operator has reviewed the report from the emissions testing body and agrees with the

**SECTION C. Site Level Requirements**

findings.

2. Permit number(s) and condition(s) which are the basis for the evaluation.
3. Summary of results with respect to each applicable permit condition.
4. Statement of compliance or non-compliance with each applicable permit condition.

(f) Pursuant to 25 Pa. Code § 139.3 to all submittals shall meet all applicable requirements specified in the most current version of the Department's Source Testing Manual.

(g) All testing shall be performed in accordance with the provisions of Chapter 139 of the Rules and Regulations of the Department of Environmental Protection.

(h) Pursuant to 25 Pa. Code Section 139.53(a)(1) and 139.53(a)(3) all submittals, besides notifications, shall be accomplished through PSIMS*Online available through <https://www.depgreenport.state.pa.us/ecomm/Login.jsp> when it becomes available. If internet submittal cannot be accomplished, one digital copy of each submittal shall be made to each of the following:

Regional Office:
Digital copy: RA-epscstacktesting@pa.gov

Bureau of Air Quality:
Digital copy: RA-epstacktesting@pa.gov

Unless otherwise approved in writing by DEP, a complete paper copy of each submittal shall be made to PA DEP, Bureau of Air Quality, Division of Source Testing and Monitoring, 400 Market Street, 12th Floor Rachael Carson State Office Building, Harrisburg, PA 17105-8468

(i) The permittee shall ensure all federal reporting requirements contained in the applicable subpart of 40 CFR are followed, including timelines more stringent than those contained herein. In the event of an inconsistency or any conflicting requirements between state and the federal, the most stringent provision, term, condition, method or rule shall be used by default.

009 [25 Pa. Code §139.1]**Sampling facilities.**

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such source. The Department will set forth, in the request, the time period in which the facilities shall be provided as well as the specifications for such facilities.

III. MONITORING REQUIREMENTS.**# 010 [25 Pa. Code §123.43]****Measuring techniques**

Visible air contaminants may be measured using either of the following:

- (a) A device approved by the Department and maintained to provide accurate opacity measurements.
- (b) Observers, trained and certified, to measure plume opacity with the naked eye, as per EPA Method 9, or with the aid of any devices approved by the Department.

011 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall conduct a weekly inspection during regular business workdays around the plant periphery during the daylight hours when the plant is in production to detect visible emissions, fugitive emissions and odorous emissions as follows:

- (a) Visible emissions in excess of the limits stated in Section C, Condition #004. Visible emissions may be measured

**SECTION C. Site Level Requirements**

according to the methods specified in Section C, Condition #010. As an alternative, plant personnel who observe such visible emissions shall report each incident to the Department within four hours of the occurrence and arrange for a certified observer to read the visible emissions.

(b) Presence of fugitive emissions beyond the plant property boundaries, as stated in Section C, Condition #002.

(c) Presence of odor beyond the plant property boundaries that have the potential to be malodorous as stated in Section C, Condition #003.

IV. RECORDKEEPING REQUIREMENTS.**# 012 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain records of the weekly inspections referenced in Section C, Condition #011. The records shall include, at minimum, the following information:

- (a) The name of the company representative monitoring each instance,
- (b) A description of the emissions and/or malodors observed and actions taken to mitigate them,
- (c) The date and time of the observation,
- (d) The wind direction and speed during each observation.

The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

013 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Unless otherwise noted, all records required by this and subsequent operating permits shall be maintained for the most recent five-year period and shall be readily available to the Department upon request. The most recent two years of records must be retained at the facility. The remaining three years of records may be retained off site. The records may be retained on paper, microfilm, microfiche or computer disks. If the records are retained on computer disks, the records must be in commonly available software. Commonly available software is usually compatible with a Microsoft application such as Word or Excel. For records retained off site, readily available is defined as available in one business day.

V. REPORTING REQUIREMENTS.**# 014 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall report malfunctions to the Department. A malfunction is any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner that affects the facility's ability to comply with a permit term. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:

(a) Malfunctions which pose an imminent danger to public health, safety, welfare and the environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two hours after discovery of the incident. Telephone reports can be made to the Reading District Office at (610) 916-0100 during normal business hours, or to the Department's Emergency Hotline at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at <https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx>. The permittee shall submit a written report of instances of such malfunctions to the Department within three (3) days of the telephone report.

(b) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirement of subsection (a) above, shall be reported to the Department, in writing, within five (5) days of malfunction discovery.

(c) Unless otherwise approved by DEP, all malfunctions shall be reported through the Department's Greenport PUP system available through: <https://greenport.pa.gov/ePermitPublicAccess/PublicSubmission/Home>

**SECTION C. Site Level Requirements****VI. WORK PRACTICE REQUIREMENTS.****# 015 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

The permittee shall take all reasonable actions to prevent particulate matter from the sources identified in Condition #001, Section C becoming airborne. These actions shall include, but not be limited to, the following:

- (a) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (b) Application of asphalt, oil, water or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.
- (c) Paving and maintenance of roadways.
- (d) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

VII. ADDITIONAL REQUIREMENTS.**# 016 [25 Pa. Code §129.14]****Open burning operations**

(a) No person may permit the open burning of material in the air basin except where the open burning operations result from the following:

- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (2) Any fire set for the propose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set in conjunction with the production of agricultural commodities in their unmanufactured state on the premises of the farm operation.
- (5) A fire set solely for recreational or ceremonial purposes.
- (6) A fire set solely for cooking food.

(b) This permit does not constitute authorization to burn solid waste pursuant to Section 610(3) of the Solid Waste Management Act, 35 P. S. Section 6018.610(3), or any other provision of the Solid Waste Management Act.

017 [25 Pa. Code §129.62]**General standards for bulk gasoline terminals/plants, and small gasoline storage tanks**

(a) Gasoline may not be spilled or discarded in sewers or stored in open containers or handled in a manner that would result in uncontrolled evaporation to the atmosphere.

(b) An owner or operator of a bulk gasoline plant, bulk gasoline terminal, tank truck or trailer or stationary storage tank to which § 129.59, § 129.60(b) or (c) or § 129.61 (relating to bulk gasoline terminals; bulk gasoline plants; and small gasoline storage tank control (Stage I control)) apply may not permit the transfer of gasoline between the tank truck or trailer and a stationary storage tank unless the following conditions are met:

- (1) The vapor balance system is in good working order and is designed and operated in a manner that prevents:
 - (i) Gauge pressure from exceeding 18 inches of H₂O (4500 pascals) and vacuum from exceeding 6 inches of water (1500 pascals) in the gasoline tank truck.
 - (ii) A reading equal to or greater than 100% of the lower explosive limit—LEL, measured as propane—at 1 inch from

**SECTION C. Site Level Requirements**

points on the perimeter of a potential leak source when measured by the method referenced in § 139.14 (relating to emissions of VOCs) during loading or unloading operations at small gasoline storage tanks, bulk plants and bulk terminals.

(iii) Avoidable liquid leaks during loading or unloading operations at small gasoline storage tanks, bulk plants and bulk terminals.

(2) A truck, vapor balance system or vapor disposal system, if applicable, that exceeds the limits in paragraph (1) is repaired and retested within 15 days.

(3) There are no visually- or audibly-detectable leaks in the tank truck's or trailer's pressure/vacuum relief valves and hatch covers, the truck tanks or storage tanks, or associated vapor and liquid lines during loading or unloading.

(4) The pressure and vacuum relief valves on storage vessels and tank trucks or trailers are set to release at no less than .7 psig (4.8 kilopascals) of pressure or .3 psig (2.1 kilopascals) of vacuum or the highest allowable pressure and vacuum as specified in State or local fire codes, the National Fire Prevention Association guidelines or other National consensus standards acceptable to the Department. Upon demonstration by the owner or operator of an underground small gasoline storage tank that the vapor balance system specified in paragraph (1) will achieve a 90% vapor recovery efficiency without a pressure and vacuum relief valve and that an interlock system, sufficient to ensure connection of the vapor recovery line prior to delivery of the gasoline, will be used—no pressure and vacuum relief valve is required. The vacuum setting on the pressure and vacuum relief valve on an underground storage tank may be set at the lowest vacuum setting which is sufficient to keep the vent closed at zero pressure and vacuum.

(c) A person may not allow a gasoline tank truck subject to § 129.59, § 129.60 or § 129.61 to be filled or emptied in a geographic area specified in § 129.61(a) unless the gasoline tank truck:

(1) Has been tested by the owner or operator within the immediately preceding 12 months in accordance with § 139.14.

(2) Sustains a pressure change of no more than 750 pascals (3 inches of H₂O) in 5 minutes when pressurized to a gauge pressure of 18 inches of H₂O (4,500 pascals) or evacuated to a gauge pressure of 6 inches of H₂O (1,500 pascals) during the testing required in paragraph (1).

(3) Is repaired by the owner or operator and retested within 15 days of testing if it does not meet the criteria in paragraph (2).

(4) Displays a clear marking near the Department of Transportation Certification plate required by 49 CFR 178.340-10b (relating to certification), which shows the most recent date upon which the gasoline tank truck passed the test required in this subsection.

(d) Reporting and recordkeeping shall be as follows:

(1) The owner or operator of a source of VOCs subject to subsection (c) shall maintain records of certification testing and repairs. The records shall identify the gasoline tank truck, vapor collection system or vapor control system; the date of the test or repair; and, if applicable, the type of repair and the date of retest. The records shall be maintained in a legible, readily-available condition for 1 year after the date the testing or repair was completed.

(2) The records of certification tests required by paragraph (1) shall contain:

(i) The gasoline tank truck tank serial number.

(ii) The initial test pressure and the time of the reading.

(iii) The final test pressure and the time of the reading.

(iv) The initial test vacuum and the time of the reading.

**SECTION C. Site Level Requirements**

- (v) The final test vacuum and the time of the reading.
 - (vi) At the top of each report page, the company name and the date and location of the tests on that page.
 - (vii) The name and title of the person conducting the test.
- (3) Copies of records and reports under this subsection shall be made available to the Department upon verbal or written request at any reasonable time. A copy of the test results for each gasoline tank shall be kept with the truck.
- (e) Gasoline tank trucks with a rated capacity of less than 4,800 gallons are exempt from subsections (c) and (d).

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.


**SECTION D. Source Level Requirements**

Source ID: 102

Source Name: LOADING RACK 1 (EAST)

Source Capacity/Throughput:	390.000 Th Gal/HR	DISTILLATES
	390.000 Th Gal/HR	GASOLINE
	390.000 Th Gal/HR	PETROLEUM LIQUIDS

Conditions for this source occur in the following groups: SG01
SG06
SG07

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 103

Source Name: LOADING RACK 2 (WEST)

Source Capacity/Throughput:	144.000 Th Gal/HR	DISTILLATES
	144.000 Th Gal/HR	GASOLINE
	144.000 Th Gal/HR	PETROLEUM LIQUIDS

Conditions for this source occur in the following groups: SG01
SG06
SG07

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 201

Source Name: TANK 201 IF:GAS/DIST OIL/ETHANOL 0.49 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 203

Source Name: TANK 203 IF:GAS/DIST OIL/ETHANOL 0.33 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	ETHANOL

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 211 Source Name: TANK 211 IF:GAS/DIST OIL 0.49 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 214

Source Name: TANK 214 FIX:DISTILLATES 0.36 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	DISTILLATE OILS (STANDING LC
	195.000 Th Gal/HR	DISTILLATES

Conditions for this source occur in the following groups: SG04

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 220

Source Name: TANK 220 FIX:DISTILLATES 0.82 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	DISTILLATE OILS (STANDING LC
	195.000 Th Gal/HR	DISTILLATES

Conditions for this source occur in the following groups: SG04

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 221 Source Name: TANK 221 IF:GAS/DIST OIL 0.77 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 223 Source Name: TANK 223 IF:GAS/DIST OIL 5.25 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG03
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 225 Source Name: TANK 225 IF:GAS/DIST OIL 4.57 MM GAL

Source Capacity/Throughput:	195.000 Th Gal/HR	GASOLINE
	195.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG03
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 301 Source Name: TANK101 IF:GAS/DIST OIL 1.76 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	GASOLINE
	144.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 302 Source Name: TANK 102 IF:GAS/DIST OIL 0.85 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	GASOLINE
	144.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


**SECTION D. Source Level Requirements**

Source ID: 303

Source Name: TANK 103 FIX:DIST OIL 0.85 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	DISTILLATE OILS (STANDING LC
	144.000 Th Gal/HR	DISTILLATES

Conditions for this source occur in the following groups: SG04

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).




SECTION D. Source Level Requirements

Source ID: 305

Source Name: TANK 105 FIX:DIST OIL 4.06 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	DISTILLATE OILS (STANDING LC
	144.000 Th Gal/HR	DISTILLATES

Conditions for this source occur in the following groups: SG04



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 306 Source Name: TANK 106 IF:GAS/DIST OIL/ETHANOL 0.45 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	GASOLINE
	144.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG03
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 307 Source Name: TANK 107 IF:GAS/DIST OIL 3.89 MM GAL

Source Capacity/Throughput:	144.000 Th Gal/HR	GASOLINE
	144.000 Th Gal/HR	OTHER LIQUIDS

Conditions for this source occur in the following groups: SG02
SG03
SG06

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 401

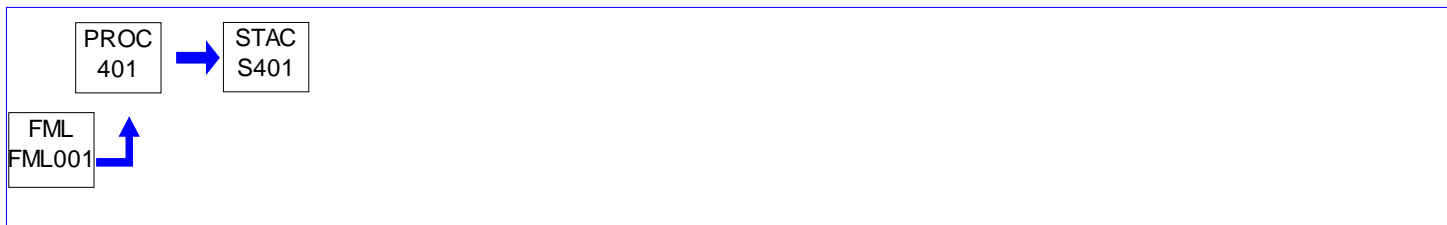
Source Name: EMERGENCY GENERATOR

Source Capacity/Throughput:

29.000 Gal/HR

Diesel Fuel

Conditions for this source occur in the following groups: SG08

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §123.13]

Processes

The permittee shall limit the emissions of particulate matter to the outdoor atmosphere from the source in a manner that the concentration of particulate matter in the effluent gas does not exceed 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §123.21]

General

No person may permit the emission into the outdoor atmosphere of sulfur oxides from a source in a manner that the concentration of the sulfur oxides, expressed as SO₂, in the effluent gas exceeds 500 parts per million, by volume, dry basis.

Operation Hours Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall limit the operation of the generator to 500 hours or less during any consecutive 12-month period.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall maintain the following records:

- (a) Hours of operation per month
- (b) Hours of operation per consecutive 12-months
- (c) Emissions per month
- (d) Emissions per consecutive 12-months



SECTION D. Source Level Requirements

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION E. Source Group Restrictions.**

Group Name: SG01

Group Description: Loading Racks

Sources included in this group

ID	Name
102	LOADING RACK 1 (EAST)
103	LOADING RACK 2 (WEST)

I. RESTRICTIONS.**Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall limit the total organic compound emissions from the vapor recovery unit controlling the loading rack #2 (west) to 8 milligrams per liter (0.069 pounds per thousand gallons) of product loaded.

[Compliance with this requirement assures compliance with 40 CFR 60.502(b)]

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall limit the total organic compound emissions from the vapor recovery units controlling the loading rack #1 (east) to 10 milligrams per liter (0.086 pounds per thousand gallons) of product loaded.

[Compliance with this requirement assures compliance with 40 CFR 60.502(c)]

003 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall limit total actual VOC emissions (stack and fugitive) to 32 tons during any consecutive 12-month period from both loading racks.

Throughput Restriction(s).**# 004 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall limit the loading rack product throughputs during any consecutive 12-month period to the following:

(a) Loading Rack #1 (east)

- (1) 767 million gallons of gasoline
- (2) 1,019 million gallons of total product

(b) Loading Rack #2 (west)

- (1) 803 million gallons of gasoline
- (2) 1,055 million gallons of total product

II. TESTING REQUIREMENTS.**# 005 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Once each quarter using a portable analyzer the permittee shall test the source to show compliance with the total organic compound emission limits in this permit.

III. MONITORING REQUIREMENTS.**# 006 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall conduct daily (week days only) visual inspections of the loading rack, collection system and vapor recovery units. A periodic preventative maintenance inspection shall be performed.

**SECTION E. Source Group Restrictions.****# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall conduct periodic tank truck inspections for visible or audible leaks.

IV. RECORDKEEPING REQUIREMENTS.**# 008 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall keep records of the following:

- (a) The quarterly total organic compound emissions tests using a portable analyzer.
- (b) The results of the baseline emission tests performed.
- (c) The daily visual inspection of the loading racks, vapor collection systems and vapor recovery units.
- (d) The periodic tank truck inspections for visible and audible leaks.
- (e) The preventive maintenance inspections.

009 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall record the following:

- (a) Monthly and 12-month rolling total throughput of gasoline at each loading rack.
- (b) Monthly and 12-month rolling total throughput of total product at each loading rack.
- (c) Monthly and 12-month rolling total emission of VOC and HAP for both loading racks combined.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 010 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The vapor collection and disposal system shall be operated at all times during the loading of gasoline and when gasoline vapors are present in the tank truck at the commencement of distillate loading.

011 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall operate and maintain the vapor recovery units as per the manufacturer's specifications and good air pollution practices.

VII. ADDITIONAL REQUIREMENTS.**# 012 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

(a) The loading rack #1 (east) shall consist of the following:

- (1) Four (4) gasoline and distillate oil loading stations each equipped with bottom loading arms and equipped with vapor recovery lines,
- (2) One (1) distillate oil only loading station with top-submerged fill loading arms, that extend to within six inches of the bottom of the receiving vehicular tank,
- (3) A vapor recovery system with a carbon adsorption/absorption unit (Zink or equivalent).

(b) The loading rack #2 (west) shall consist of the following:

- (1) Four (4) gasoline and distillate oil loading stations each equipped with six bottom loading arms and a vapor recovery

**SECTION E. Source Group Restrictions.**

line,

- (2) One (1) distillate oil only loading station with top-submerged fill loading arms, that extend to within six inches of the bottom of the receiving vehicular tank,
- (3) A vapor recovery system with a carbon adsorption/absorption unit (Zink or equivalent).

013 [25 Pa. Code §129.59]**Bulk gasoline terminals**

- (a) A person may not cause or permit the loading of gasoline into a vehicular tank from a bulk gasoline terminal unless the gasoline loading racks are equipped with a vapor collection and disposal system capable of processing volatile organic vapors and gases so that no more than 0.0668 pounds (30.3 grams) of gasoline (measured as propane) are emitted to the atmosphere for every 100 gallons (380 liters) of gasoline loaded.
- (b) A person may not cause or permit the loading of gasoline into a vehicular tank from a bulk gasoline terminal unless the gasoline loading racks are equipped with a loading arm with a vapor collection adaptor and pneumatic, hydraulic or other mechanical means to force a vapor-tight seal between the adaptor and the hatch of the tank. A means shall be provided to prevent gasoline drainage from the loading device when it is not connected to the hatch, and to accomplish complete drainage before the removal. When loading is effected through means other than hatches, loading and vapor lines shall be equipped with fittings which make vapor-tight connections and which will be closed upon disconnection.
- (c) An owner or operator of a bulk gasoline plant shall maintain records of daily throughput. These records shall be retained for at least 2 years and shall be made available to the Department on request.

**SECTION E. Source Group Restrictions.**

Group Name: SG02

Group Description: 25 Pa §129.56 Storage Tank(s) (> 40,000 gal)

Sources included in this group

ID	Name
201	TANK 201 IF:GAS/DIST OIL/ETHANOL 0.49 MM GAL
202	TANK 202 IF:GAS/DIST OIL 0.47 MM GAL
203	TANK 203 IF:GAS/DIST OIL/ETHANOL 0.33 MM GAL
211	TANK 211 IF:GAS/DIST OIL 0.49 MM GAL
221	TANK 221 IF:GAS/DIST OIL 0.77 MM GAL
222	TANK 222 IF:GAS/DIST OIL 4.06 MM GAL
223	TANK 223 IF:GAS/DIST OIL 5.25 MM GAL
224	TANK 224 IF:GAS/DIST OIL 3.57 MM GAL
225	TANK 225 IF:GAS/DIST OIL 4.57 MM GAL
301	TANK101 IF:GAS/DIST OIL 1.76 MM GAL
302	TANK 102 IF:GAS/DIST OIL 0.85 MM GAL
304	TANK 104 IF:GAS/DIST OIL 0.84 MM GAL
306	TANK 106 IF:GAS/DIST OIL/ETHANOL 0.45 MM GAL
307	TANK 107 IF:GAS/DIST OIL 3.89 MM GAL
308	TANK 108 IF:GAS/DIST OIL 3.89 MM GAL
309	TANK 109 IF:GAS/DIST OIL 4.06 MM GAL

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain the following records for each storage tank:

- (a) Type of Tank
- (b) Diameter (feet)
- (c) Volume (gallons)
- (d) Type of Roof
- (e) Internal Shell Condition
- (f) Shell Color and Condition
- (g) Roof Color and Condition
- (h) Type of Primary Seal
- (i) Type of Secondary Seal (if any)
- (j) Deck Fittings/Status
- (k) Date of Installation

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall record the following for each storage tank:

**SECTION E. Source Group Restrictions.**

- (a) Monthly amount of each liquid stored,
 (b) Monthly emissions of VOC and HAPs,

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 003 [25 Pa. Code §129.56]****Storage tanks greater than 40,000 gallons capacity containing VOCs**

(a) No person may permit the placing, storing or holding in a stationary tank, reservoir or other container with a capacity greater than 40,000 gallons of volatile organic compounds with a vapor pressure greater than 1.5 psia (10.5 kilopascals) under actual storage conditions unless the tank, reservoir or other container is a pressure tank capable of maintaining working pressures sufficient at all times to prevent vapor or gas loss to the atmosphere or is designed and equipped with one of the following vapor loss control devices:

(1) An external or an internal floating roof. This control equipment may not be permitted if the volatile organic compounds have a vapor pressure of 11 psia (76 kilopascals) or greater under actual storage conditions.

(2) Vapor recovery system. A vapor recovery system, consisting of a vapor gathering system capable of collecting the volatile organic compound vapors and gases discharged and a vapor disposal system capable of processing such volatile organic vapors and gases so as to prevent their emission to the atmosphere. Tank gauging and sampling devices shall be gas-tight except when gauging or sampling is taking place. The vapor recovery system shall be maintained in good working order and recover at least 80% of the vapors emitted by such tank.

(b) An external floating roof shall be fitted with a primary seal and a continuous secondary seal extending from the floating roof to the tank wall (rim-mounted secondary seal). The external floating roof shall meet the following equipment requirements:

(1) Seal closure devices shall meet the following requirements:

(i) There are no visible holes, tears or other openings in the seals or seal fabric.

(ii) The seals are intact and uniformly in place around the circumference of the floating roof between the floating roof and the tank wall.

(iii) For tanks with vapor-mounted primary seals, the accumulated area of gaps exceeding 1/8 inch in width between the secondary seal and the tank wall shall not exceed 1 square inch per foot of tank diameter. Compliance with this subsection shall be determined by physically measuring the length and width of gaps around the entire circumference of the secondary seal in each place where a 1/8 inch uniform diameter probe passes freely (without forcing or binding against the seal) between the seal and tank wall and by summing the area of the individual gaps.

(2) Openings in the external floating roof, except for automatic bleeder vents, rim space vents and leg sleeves, are as follows:

(i) Equipped with covers, seals or lids in the closed position except when the openings are in actual use.

(ii) Equipped with projections into the tank which remain below the liquid surface at all times.

**SECTION E. Source Group Restrictions.**

- (3) Automatic bleeder vents are closed at all times except when the roof is floated off or landed on the roof leg supports.
- (4) Rim vents are set to open when the roof is being floated off the leg supports or at the recommended setting of the manufacturer.
- (5) Emergency roof drains are provided with slotted membrane fabric covers or equivalent covers which cover at least 90% of the area of the opening.
- (c) An internal floating roof shall be fitted with a primary seal and shall comply with the following equipment requirements:
- (1) A closure seal or seals, to close the space between the roof edge and tank wall is used.
 - (2) There are no holes, tears or other openings in the seal or a seal fabric or materials.
 - (3) Openings except stub drains are equipped with covers, lids or seals such that:
 - (i) The cover, lid or seal is in the closed position at all times except when in actual use.
 - (ii) Automatic bleeder vents are closed at all times except when the roof is floated off or landed on the roof leg supports.
 - (iii) Rim vents, if provided are set to open when the roof is being floated off the roof leg supports or at the recommended setting of the manufacturer.
- (d) This section does not apply to petroleum liquid storage vessels which:
- (1) Are used to store waxy, heavy pour crude oil.
 - (2) Have capacities less than 420,000 gallons and are used to store produced crude oil and condensate prior to lease custody transfer.
- (e) For the purposes of this section, the petroleum liquid storage vessels listed in this subsection comply with the equipment requirements of this section. These tanks shall comply with the maintenance, inspection and reporting requirements of this section. These petroleum liquid storage vessels are those:
- (1) Which contain a petroleum liquid with a true vapor pressure less than 4 psia (27.6 kilopascals) and which are of welded construction and which presently possess a metallic-type shoe seal, a liquid-mounted foam seal, a liquid-mounted liquid filled type seal or other closure device of demonstrated equivalence approved by the Department.
 - (2) Which are of welded construction, equipped with a metallic-type shoe primary seal and has a secondary seal from the top of the shoe seal to the tank wall (shoe-mounted secondary seal).
- (f) The owner or operator of a petroleum liquid storage vessel with a floating roof subject to this regulation shall:
- (1) Perform routine inspections annually in order to insure compliance with subsection (b) or (c). The inspection shall include a visual inspection of the secondary seal gap when inspecting external floating roof tanks.
 - (2) For external floating roof tanks, measure the secondary seal gap annually in accordance with subsection (b)(1)(iii) when the floating roof is equipped with a vapor-mounted primary seal.
 - (3) Maintain records of the types of volatile petroleum liquids stored, the maximum true vapor pressure of the liquid as stored, and the results of the inspections performed in subsection (f)(1) and (2). Copies of the records shall be retained by the owner or operator for a period of 2 years after the date on which the record was made and shall be made available to the Department upon written or verbal request at a reasonable time.
- (g) For volatile organic compounds whose storage temperature is governed by ambient weather conditions, the vapor pressure under actual storage conditions shall be determined using a temperature which is representative of the average storage temperature for the hottest month of the year in which the storage takes place.

**SECTION E. Source Group Restrictions.**

(h) If a failure is detected during inspections required in this section, the owner or operator, or both, shall repair the items or empty and remove the storage vessel from service within 45 days. If this failure cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Department. A request for an extension shall document that alternate storage capacity is unavailable and specify a schedule of actions the owner or operator will take that will assure that the equipment will be repaired or the vessel will be emptied as soon as possible but within the additional 30-day time requested.

**SECTION E. Source Group Restrictions.**

Group Name: SG03

Group Description: 40 CFR 60, Subpart Kb Storage Tank(s)

Sources included in this group

ID	Name
222	TANK 222 IF:GAS/DIST OIL 4.06 MM GAL
223	TANK 223 IF:GAS/DIST OIL 5.25 MM GAL
224	TANK 224 IF:GAS/DIST OIL 3.57 MM GAL
225	TANK 225 IF:GAS/DIST OIL 4.57 MM GAL
306	TANK 106 IF:GAS/DIST OIL/ETHANOL 0.45 MM GAL
307	TANK 107 IF:GAS/DIST OIL 3.89 MM GAL
308	TANK 108 IF:GAS/DIST OIL 3.89 MM GAL
309	TANK 109 IF:GAS/DIST OIL 4.06 MM GAL

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 60 Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced After July 23, 1984 shall comply with all applicable requirements of the Subpart. 40 CFR 60.4(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Associate Director
 United States Environmental Protection Agency
 Region III, Enforcement & Compliance Assurance Division
 Air, RCRA and Toxics Branch (3ED21)

**SECTION E. Source Group Restrictions.**

Four Penn Center
1600 John F. Kennedy Boulevard
Philadelphia, Pennsylvania 19103-2852

Unless otherwise approved by DEP, the DEP copies shall be reported through the Department's Greenport PUP system available through:

<https://greenport.pa.gov/ePermitPublicAccess/PublicSubmission/Home>

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.110b]

Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984

Applicability and designation of affected facility.

§ 60.110b - Applicability and designation of affected facility.

(a) Except as provided in paragraph (b) of this section, the affected facility to which this subpart applies is each storage vessel with a capacity greater than or equal to 75 cubic meters (m³) that is used to store volatile organic liquids (VOL) for which construction, reconstruction, or modification is commenced after July 23, 1984, and on or before October 4, 2023.

(b) This subpart does not apply to storage vessels with a capacity greater than or equal to 151 m³ storing a liquid with a maximum true vapor pressure less than 3.5 kilopascals (kPa) or with a capacity greater than or equal to 75 m³ but less than 151 m³ storing a liquid with a maximum true vapor pressure less than 15.0 kPa.

(c) [Reserved]

(d) This subpart does not apply to the following:

- (1) Vessels at coke oven by-product plants.
- (2) Pressure vessels designed to operate in excess of 204.9 kPa and without emissions to the atmosphere.
- (3) Vessels permanently attached to mobile vehicles such as trucks, railcars, barges, or ships.
- (4) Vessels with a design capacity less than or equal to 1,589.874 m³ used for petroleum or condensate stored, processed, or treated prior to custody transfer.
- (5) Vessels located at bulk gasoline plants.
- (6) Storage vessels located at gasoline service stations.
- (7) Vessels used to store beverage alcohol.
- (8) Vessels subject to subpart GGGG of 40 CFR part 63.

(e) Alternative means of compliance -

(1) Option to comply with part 65. Owners or operators may choose to comply with 40 CFR part 65, subpart C, to satisfy the requirements of §§ 60.112b through 60.117b for storage vessels that are subject to this subpart that meet the specifications in paragraphs (e)(1)(i) and (ii) of this section. When choosing to comply with 40 CFR part 65, subpart C, the monitoring requirements of § 60.116b(c), (e), (f)(1), and (g) still apply. Other provisions applying to owners or operators who choose to comply with 40 CFR part 65 are provided in 40 CFR 65.1.

(i) A storage vessel with a design capacity greater than or equal to 151 m³ containing a VOL that, as stored, has a

**SECTION E. Source Group Restrictions.**

maximum true vapor pressure equal to or greater than 5.2 kPa; or

(ii) A storage vessel with a design capacity greater than 75 m³ but less than 151 m³ containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 27.6 kPa.

(2) Part 60, subpart A. Owners or operators who choose to comply with 40 CFR part 65, subpart C, must also comply with §§ 60.1, 60.2, 60.5, 60.6, 60.7(a)(1) and (4), 60.14, 60.15, and 60.16 for those storage vessels. All sections and paragraphs of subpart A of this part that are not mentioned in this paragraph (e)(2) do not apply to owners or operators of storage vessels complying with 40 CFR part 65, subpart C, except that provisions required to be met prior to implementing 40 CFR part 65 still apply. Owners and operators who choose to comply with 40 CFR part 65, subpart C, must comply with 40 CFR part 65, subpart A.

(3) Internal floating roof report. If an owner or operator installs an internal floating roof and, at initial startup, chooses to comply with 40 CFR part 65, subpart C, a report shall be furnished to the Administrator stating that the control equipment meets the specifications of 40 CFR 65.43. This report shall be an attachment to the notification required by 40 CFR 65.5(b).

(4) [NO EXTERNAL FLOATING ROOF]

(5) Option to comply with part 63, subpart WW, of this chapter. Except as specified in paragraphs (e)(5)(i) through (iv) of this section, owners or operators may choose to comply with 40 CFR part 63, subpart WW, to satisfy the requirements of §§ 60.112b through 60.117b for storage vessels either with a design capacity greater than or equal to 151 m³ containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 5.2 kPa but less than 76.6 kPa, or with a design capacity greater than or equal to 75 m³ but less than 151 m³ containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 27.6 kPa but less than 76.6 kPa.

(i) The general provisions in subpart A of this part apply instead of the general provisions in subpart A of part 63 of this chapter.

(ii) Where terms are defined in both this subpart and 40 CFR part 63, subpart WW, the definitions in this subpart apply.

(iii) Owners or operators who choose to comply with 40 CFR part 63, subpart WW, also must comply with the monitoring requirements of § 60.116b(a), (c), (e), and (f)(1), except as specified in paragraphs (e)(5)(iii)(A) through (C) of this section.

(A) The reference to all records applies only to the records required by § 60.116b(c);

(B) The reference to § 60.116b(b) does not apply; and

(C) The reference to § 60.116b(g) does not apply.

(iv) Owners or operators who choose to comply with 40 CFR part 63, subpart WW, must also keep records and furnish reports as specified in paragraphs (e)(5)(iv)(A) through (F) of this section.

(A) For each affected facility, the owner or operator must notify the Administrator at least 30 days before the first inspection is conducted under 40 CFR part 63, subpart WW. After this notification is submitted to the Administrator, the owner or operator must continue to comply with the alternative standard described in this paragraph (e)(5) until the owner or operator submits another notification to the Administrator indicating the affected facility is using the requirements of §§ 60.112b through 60.117b instead of the alternative standard described in this paragraph (e)(5). The compliance schedule for events does not reset upon switching between compliance with this subpart and 40 CFR part 63, subpart WW.

(B) Keep a record of each affected facility using the alternative standard described in this paragraph (e)(5) when conducting an inspection required by § 63.1063(c)(1) of this chapter.

(C) Keep a record of each affected facility using the alternative standard described in this paragraph (e)(5) when conducting an inspection required by § 63.1063(c)(2) of this chapter.

(D) Copies of all records and reports kept pursuant to § 60.115b(a) and (b) that have not met the 2-year record retention required by the introductory text of § 60.115b must be kept for an additional 2 years after the date of submittal of the

**SECTION E. Source Group Restrictions.**

inspection notification specified in paragraph (e)(5)(iv)(A) of this section, indicating the affected facility is using the requirements of 40 CFR part 63, subpart WW.

(E) Copies of all records and reports kept pursuant to § 63.1065 of this chapter that have not met the 5-year record retention required by the introductory text of § 63.1065 must be kept for an additional 5 years after the date of submittal of the notification specified in paragraph (e)(5)(iv)(A) of this section, indicating the affected facility is using the requirements of §§ 60.112b through 60.117b.

(F) The following exceptions to the reporting requirements of § 63.1066 of this chapter apply:

(1) The notification of initial startup required under § 63.1066(a)(1) and (2) of this chapter must be submitted as an attachment to the notification required by §§ 60.7(a)(3) and 60.115b(a)(1);

(2) The reference in § 63.1066(b)(2) of this chapter to periodic reports “when inspection failures occur” means to submit inspections results within 60 days of the initial gap measurements required by § 63.1063(c)(2)(i) of this chapter and within 30 days of all other inspections required by § 63.1063(c)(1) and (2) of this chapter.

[52 FR 11429, Apr. 8, 1987, as amended at 54 FR 32973, Aug. 11, 1989; 65 FR 78275, Dec. 14, 2000; 68 FR 59332, Oct. 15, 2003; 86 FR 5019, Jan. 19, 2021; 89 FR 83317, Oct. 15, 2024]

AUTHORITY: 42 U.S.C. 7401

SOURCE: 36 FR 24877, Dec. 23, 1971, unless otherwise noted.

CITE AS: 40 CFR 60.110b

**# 003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.112b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Standard for volatile organic compounds (VOC).**

60.112b(a) The owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m³ containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 5.2 kPa but less than 76.6 kPa or with a design capacity greater than or equal to 75 m³ but less than 151 m³ containing a VOL that, as stored, has a maximum true vapor pressure equal to or greater than 27.6 kPa but less than 76.6 kPa, shall equip each storage vessel with one of the following:

60.112b(a)(1) A fixed roof in combination with an internal floating roof meeting the following specifications:

60.112b(a)(1)(i) The internal floating roof shall rest or float on the liquid surface (but not necessarily in complete contact with it) inside a storage vessel that has a fixed roof. The internal floating roof shall be floating on the liquid surface at all times, except during initial fill and during those intervals when the storage vessel is completely emptied or subsequently emptied and refilled. When the roof is resting on the leg supports, the process of filling, emptying, or refilling shall be continuous and shall be accomplished as rapidly as possible.

60.112b(a)(1)(ii) Each internal floating roof shall be equipped with one of the following closure devices between the wall of the storage vessel and the edge of the internal floating roof:

60.112b(a)(1)(ii)(A) A foam- or liquid-filled seal mounted in contact with the liquid (liquid-mounted seal). A liquid-mounted seal means a foam- or liquid-filled seal mounted in contact with the liquid between the wall of the storage vessel and the floating roof continuously around the circumference of the tank.

60.112b(a)(1)(ii)(B) Two seals mounted one above the other so that each forms a continuous closure that completely covers the space between the wall of the storage vessel and the edge of the internal floating roof. The lower seal may be vapor-mounted, but both must be continuous.

60.112b(a)(1)(ii)(C) A mechanical shoe seal. A mechanical shoe seal is a metal sheet held vertically against the wall of the storage vessel by springs or weighted levers and is connected by braces to the floating roof. A flexible coated fabric

**SECTION E. Source Group Restrictions.**

(envelope) spans the annular space between the metal sheet and the floating roof.

60.112b(a)(1)(iii) Each opening in a noncontact internal floating roof except for automatic bleeder vents (vacuum breaker vents) and the rim space vents is to provide a projection below the liquid surface.

60.112b(a)(1)(iv) Each opening in the internal floating roof except for leg sleeves, automatic bleeder vents, rim space vents, column wells, ladder wells, sample wells, and stub drains is to be equipped with a cover or lid which is to be maintained in a closed position at all times (i.e., no visible gap) except when the device is in actual use. The cover or lid shall be equipped with a gasket. Covers on each access hatch and automatic gauge float well shall be bolted except when they are in use.

60.112b(a)(1)(v) Automatic bleeder vents shall be equipped with a gasket and are to be closed at all times when the roof is floating except when the roof is being floated off or is being landed on the roof leg supports.

60.112b(a)(1)(vi) Rim space vents shall be equipped with a gasket and are to be set to open only when the internal floating roof is not floating or at the manufacturer's recommended setting.

60.112b(a)(1)(vii) Each penetration of the internal floating roof for the purpose of sampling shall be a sample well. The sample well shall have a slit fabric cover that covers at least 90 percent of the opening.

60.112b(a)(1)(viii) Each penetration of the internal floating roof that allows for passage of a column supporting the fixed roof shall have a flexible fabric sleeve seal or a gasketed sliding cover.

60.112b(a)(1)(ix) Each penetration of the internal floating roof that allows for passage of a ladder shall have a gasketed sliding cover.

60.112b(a)(2) [NA - NO EXTERNAL FLOATING ROOF]

60.112b(a)(3) [NA - NO CLOSED VENT SYSTEM AND CONTROL DEVICE]

60.112b(a)(4) A system equivalent to those described in paragraphs (a)(1), (a)(2), or (a)(3) of this section as provided in § 60.114b of this subpart.

60.112b(b) [NA - NO VOL STORED WITH VAPOR PRESSURE \geq 76.6 kPa]

60.112b(c) [NA - ONLY APPLIES TO MERCK & CO'S STONEWALL PLANT]

[52 FR 11429, Apr. 8, 1987, as amended at 62 FR 52641, Oct. 8, 1997]

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.113b]

Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984 Testing and procedures.

The owner or operator of each storage vessel as specified in § 60.112b(a) shall meet the requirements of paragraph (a), (b), or (c) of this section. The applicable paragraph for a particular storage vessel depends on the control equipment installed to meet the requirements of § 60.112b.

60.113b(a) After installing the control equipment required to meet § 60.112b(a)(1) (permanently affixed roof and internal floating roof), each owner or operator shall:

60.113b(a)(1) Visually inspect the internal floating roof, the primary seal, and the secondary seal (if one is in service), prior to filling the storage vessel with VOL. If there are holes, tears, or other openings in the primary seal, the secondary seal, or the seal fabric or defects in the internal floating roof, or both, the owner or operator shall repair the items before filling the storage vessel.

60.113b(a)(2) For Vessels equipped with a liquid-mounted or mechanical shoe primary seal, visually inspect the internal floating roof and the primary seal or the secondary seal (if one is in service) through manholes and roof hatches on the fixed

**SECTION E. Source Group Restrictions.**

roof at least once every 12 months after initial fill. If the internal floating roof is not resting on the surface of the VOL inside the storage vessel, or there is liquid accumulated on the roof, or the seal is detached, or there are holes or tears in the seal fabric, the owner or operator shall repair the items or empty and remove the storage vessel from service within 45 days. If a failure that is detected during inspections required in this paragraph cannot be repaired within 45 days and if the vessel cannot be emptied within 45 days, a 30-day extension may be requested from the Administrator in the inspection report required in § 60.115b(a)(3). Such a request for an extension must document that alternate storage capacity is unavailable and specify a schedule of actions the company will take that will assure that the control equipment will be repaired or the vessel will be emptied as soon as possible.

60.113b(a)(3) For vessels equipped with a double-seal system as specified in § 60.112b(a)(1)(ii)(B):

60.113b(a)(3)(i) Visually inspect the vessel as specified in paragraph (a)(4) of this section at least every 5 years; or

60.113b(a)(3)(ii) Visually inspect the vessel as specified in paragraph (a)(2) of this section.

60.113b(a)(4) Visually inspect the internal floating roof, the primary seal, the secondary seal (if one is in service), gaskets, slotted membranes and sleeve seals (if any) each time the storage vessel is emptied and degassed. If the internal floating roof has defects, the primary seal has holes, tears, or other openings in the seal or the seal fabric, or the secondary seal has holes, tears, or other openings in the seal or the seal fabric, or the gaskets no longer close off the liquid surfaces from the atmosphere, or the slotted membrane has more than 10 percent open area, the owner or operator shall repair the items as necessary so that none of the conditions specified in this paragraph exist before refilling the storage vessel with VOL. In no event shall inspections conducted in accordance with this provision occur at intervals greater than 10 years in the case of vessels conducting the annual visual inspection as specified in paragraphs (a)(2) and (a)(3)(ii) of this section and at intervals no greater than 5 years in the case of vessels specified in paragraph (a)(3)(i) of this section.

60.113b(a)(5) Notify the Administrator in writing at least 30 days prior to the filling or refilling of each storage vessel for which an inspection is required by paragraphs (a)(1) and (a)(4) of this section to afford the Administrator the opportunity to have an observer present. If the inspection required by paragraph (a)(4) of this section is not planned and the owner or operator could not have known about the inspection 30 days in advance or refilling the tank, the owner or operator shall notify the Administrator at least 7 days prior to the refilling of the storage vessel. Notification shall be made by telephone immediately followed by written documentation demonstrating why the inspection was unplanned. Alternatively, this notification including the written documentation may be made in writing and sent by express mail so that it is received by the Administrator at least 7 days prior to the refilling.

60.113b(b) [NA - NO EXTERNAL FLOATING ROOFS]

60.113b(c) [NA - NOT SUBJECT TO § 60.112b (a)(3) OR (b)(2)]

60.113b(d) [NA - NO CLOSED VENT AND FLARE]

[52 FR 11429, Apr. 8, 1987, as amended at 54 FR 32973, Aug. 11, 1989]

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.114b]

Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Alternative means of emission limitation.

60.114b(a) If, in the Administrator's judgment, an alternative means of emission limitation will achieve a reduction in emissions at least equivalent to the reduction in emissions achieved by any requirement in § 60.112b, the Administrator will publish in the Federal Register a notice permitting the use of the alternative means for purposes of compliance with that requirement.

60.114b(b) Any notice under paragraph (a) of this section will be published only after notice and an opportunity for a hearing.

60.114b(c) Any person seeking permission under this section shall submit to the Administrator a written application including:

**SECTION E. Source Group Restrictions.**

60.114b(c)(1) An actual emissions test that uses a full-sized or scale-model storage vessel that accurately collects and measures all VOC emissions from a given control device and that accurately simulates wind and accounts for other emission variables such as temperature and barometric pressure.

60.114b(c)(2) An engineering evaluation that the Administrator determines is an accurate method of determining equivalence.

60.114b(d) The Administrator may condition the permission on requirements that may be necessary to ensure operation and maintenance to achieve the same emissions reduction as specified in § 60.112b.

**# 006 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.115b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Reporting and recordkeeping requirements.**

The owner or operator of each storage vessel as specified in § 60.112b(a) shall keep records and furnish reports as required by paragraphs (a), (b), or (c) of this section depending upon the control equipment installed to meet the requirements of § 60.112b. The owner or operator shall keep copies of all reports and records required by this section, except for the record required by (c)(1), for at least 2 years. The record required by (c)(1) will be kept for the life of the control equipment.

60.115b(a) After installing control equipment in accordance with § 60.112b(a)(1) (fixed roof and internal floating roof), the owner or operator shall meet the following requirements.

60.115b(a)(1) Furnish the Administrator with a report that describes the control equipment and certifies that the control equipment meets the specifications of § 60.112b(a)(1) and § 60.113b(a)(1). Prior to October 15, 2024, this report shall be an attachment to the notification required by § 60.7(a)(3). Beginning October 15, 2024, the owner or operator must submit all subsequent reports in PDF format following the procedures specified in paragraph (e) of this section.

60.115b(a)(2) Keep a record of each inspection performed as required by § 60.113b(a)(1), (a)(2), (a)(3), and (a)(4). Each record shall identify the storage vessel on which the inspection was performed and shall contain the date the vessel was inspected and the observed condition of each component of the control equipment (seals, internal floating roof, and fittings).

60.115b(a)(3) If any of the conditions described in § 60.113b(a)(2) are detected during the annual visual inspection required by § 60.113b(a)(2), a report shall be furnished to the Administrator within 30 days of the inspection. Each report shall identify the storage vessel, the nature of the defects, and the date the storage vessel was emptied or the nature of and date the repair was made. Beginning October 15, 2024, all subsequent reports must be submitted in PDF format following the procedures in paragraph (e) of this section.

60.115b(a)(4) After each inspection required by § 60.113b(a)(3) that finds holes or tears in the seal or seal fabric, or defects in the internal floating roof, or other control equipment defects listed in § 60.113b(a)(3)(ii), a report shall be furnished to the Administrator within 30 days of the inspection. The report shall identify the storage vessel and the reason it did not meet the specifications of § 60.112b(a)(1) or § 60.113b(a)(3) and list each repair made. Beginning October 15, 2024, all subsequent reports must be submitted in PDF format following the procedures in paragraph (e) of this section.

60.115b(b) [NA - NOT EXTERNAL FLOATING ROOFS]

60.115b(c) [NA - NOT SUBJECT TO § 60.112b (a)(3) OR (b)(1)]

60.115b(d) [NA - NO CLOSED VENT SYSTEM AND FLARE]

60.115b(e) An owner or operator required to submit notifications or reports following the procedures specified in this paragraph (e) must submit notifications or reports to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI), which can be accessed through the EPA's Central Data Exchange (CDX) (<https://cdx.epa.gov>). The EPA will make all the information submitted through CEDRI available to the public without further notice to the owner or operator. Do not use CEDRI to submit information the owner or operator claims as CBI. Although the EPA does not expect persons to assert a claim of CBI, if an owner or operator wishes to assert a CBI claim for some of the information in the report or notification, the owner or operator must submit a complete file in the format specified in this subpart, including information claimed to

**SECTION E. Source Group Restrictions.**

be CBI, to the EPA following the procedures in paragraphs (e)(1) and (2) of this section. Clearly mark the part or all of the information claimed to be CBI. Information not marked as CBI may be authorized for public release without prior notice. Information marked as CBI will not be disclosed except in accordance with procedures set forth in 40 CFR part 2. All CBI claims must be asserted at the time of submission. Anything submitted using CEDRI cannot later be claimed CBI. Furthermore, under CAA section 114(c), emissions data is not entitled to confidential treatment, and the EPA is required to make emissions data available to the public. Thus, emissions data will not be protected as CBI and will be made publicly available. The owner or operator must submit the same file submitted to the CBI office with the CBI omitted to the EPA via the EPA's CDX as described earlier in this paragraph (e).

60.115b(e)(1) The preferred method to receive CBI is for it to be transmitted electronically using email attachments, File Transfer Protocol, or other online file sharing services. Electronic submissions must be transmitted directly to the OAQPS CBI Office at the email address oaqpscbi@epa.gov, and as described above, should include clear CBI markings, and be flagged to the attention of the NSPS Kb Lead. Owners and operators who do not have their own file sharing service and who require assistance with submitting large electronic files that exceed the file size limit for email attachments should email oaqpscbi@epa.gov to request a file transfer link.

60.115b(e)(2) If an owner or operator cannot transmit the file electronically, the owner or operator may send CBI information through the postal service to the following address: U.S. EPA, Attn: OAQPS Document Control Officer and NSPS Kb Lead, Mail Drop: C404-02, 109 T.W. Alexander, P.O. Box 12055, RTP, NC 27711. The mailed CBI material should be double wrapped and clearly marked. Any CBI markings should not show through the outer envelope.

60.115b(f) Owners and operators required to electronically submit notifications or reports through CEDRI in the EPA's CDX may assert a claim of EPA system outage for failure to timely comply with the electronic submittal requirement. To assert a claim of EPA system outage, owners and operators must meet the requirements outlined in paragraphs (f)(1) through (7) of this section.

60.115b(f)(1) The owner or operator must have been or will be precluded from accessing CEDRI and submitting a required report within the time prescribed due to an outage of either the EPA's CEDRI or CDX systems.

60.115b(f)(2) The outage must have occurred within the period of time beginning 5 business days prior to the date that the submission is due.

60.115b(f)(3) The outage may be planned or unplanned.

60.115b(f)(4) The owner or operator must submit notification to the Administrator in writing as soon as possible following the date the owner or operator first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

60.115b(f)(5) The owner or operator must provide to the Administrator a written description identifying:

60.115b(f)(5)(i) The date(s) and time(s) when CDX or CEDRI was accessed and the system was unavailable;

60.115b(f)(5)(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to EPA system outage;

60.115b(f)(5)(iii) A description of measures taken or to be taken to minimize the delay in reporting; and

60.115b(f)(5)(iv) The date by which the owner or operator proposes to report, or if the owner or operator has already met the reporting requirement at the time of the notification, the date the report was submitted.

60.115b(f)(6) The decision to accept the claim of EPA system outage and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

60.115b(f)(7) In any circumstance, the report must be submitted electronically as soon as possible after the outage is resolved.

60.115b(g) Owners and operators required to electronically submit notifications or reports through CEDRI in the EPA's CDX may assert a claim of force majeure for failure to timely comply with the electronic submittal requirement. To assert a claim

**SECTION E. Source Group Restrictions.**

of force majeure, you must meet the requirements outlined in paragraphs (g)(1) through (5) of this section.

60.115b(g)(1) An owner or operator may submit a claim if a force majeure event is about to occur, occurs, or has occurred or there are lingering effects from such an event within the period of time beginning 5 business days prior to the date the submission is due. For the purposes of this section, a force majeure event is defined as an event that will be or has been caused by circumstances beyond the control of the affected facility, its contractors, or any entity controlled by the affected facility that prevents the owner or operator from complying with the requirement to submit a report electronically within the time period prescribed. Examples of such events are acts of nature (e.g., hurricanes, earthquakes, or floods), acts of war or terrorism, or equipment failure or safety hazard beyond the control of the affected facility (e.g., large scale power outage).

60.115b(g)(2) The owner or operator must submit notification to the Administrator in writing as soon as possible following the date the owner or operator first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

60.115b(g)(3) The owner or operator must provide to the Administrator:

60.115b(g)(3)(i) A written description of the force majeure event;

60.115b(g)(3)(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to the force majeure event;

60.115b(g)(3)(iii) A description of measures taken or to be taken to minimize the delay in reporting; and

60.115b(g)(3)(iv) The date by which the owner or operator proposes to report, or if the owner or operator has already met the reporting requirement at the time of the notification, the date the report was submitted.

60.115b(g)(4) The decision to accept the claim of force majeure and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

60.115b(g)(5) In any circumstance, the reporting must occur as soon as possible after the force majeure event occurs.

[52 FR 11429, Apr. 8, 1987, as amended at 86 FR 5019, Jan. 19, 2021; 89 FR 83317, Oct. 15, 2024]

**# 007 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.116b]
Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984
Monitoring of operations.**

60.116b(a) The owner or operator shall keep copies of all records required by this section, except for the record required by paragraph (b) of this section, for at least 2 years. The record required by paragraph (b) of this section will be kept for the life of the source.

60.116b(b) The owner or operator of each storage vessel as specified in § 60.110b(a) shall keep readily accessible records showing the dimension of the storage vessel and an analysis showing the capacity of the storage vessel.

60.116b(c) Except as provided in paragraphs (f) and (g) of this section, the owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m³ storing a liquid with a maximum true vapor pressure greater than or equal to 3.5 kPa or with a design capacity greater than or equal to 75 m³ but less than 151 m³ storing a liquid with a maximum true vapor pressure greater than or equal to 15.0 kPa shall maintain a record of the VOL stored, the period of storage, and the maximum true vapor pressure of that VOL during the respective storage period.

60.116b(d) Except as provided in paragraph (g) of this section, the owner or operator of each storage vessel either with a design capacity greater than or equal to 151 m³ storing a liquid with a maximum true vapor pressure that is normally less than 5.2 kPa or with a design capacity greater than or equal to 75 m³ but less than 151 m³ storing a liquid with a maximum true vapor pressure that is normally less than 27.6 kPa shall notify the Administrator within 30 days when the maximum true vapor pressure of the liquid exceeds the respective maximum true vapor pressure values for each volume range. Beginning October 15, 2024, all subsequent notifications must be submitted in PDF format following the procedures specified in § 60.115b(e).

**SECTION E. Source Group Restrictions.**

60.116b(e) Available data on the storage temperature may be used to determine the maximum true vapor pressure as determined below.

60.116b(e)(1) For vessels operated above or below ambient temperatures, the maximum true vapor pressure is calculated based upon the highest expected calendar-month average of the storage temperature. For vessels operated at ambient temperatures, the maximum true vapor pressure is calculated based upon the maximum local monthly average ambient temperature as reported by the National Weather Service.

60.116b(e)(2) For crude oil or refined petroleum products the vapor pressure may be obtained by the following:

60.116b(e)(2)(i) Available data on the Reid vapor pressure and the maximum expected storage temperature based on the highest expected calendar-month average temperature of the stored product may be used to determine the maximum true vapor pressure from nomographs contained in API Bulletin 2517 (incorporated by reference—see § 60.17), unless the Administrator specifically requests that the liquid be sampled, the actual storage temperature determined, and the Reid vapor pressure determined from the sample(s).

60.116b(e)(2)(ii) The true vapor pressure of each type of crude oil with a Reid vapor pressure less than 13.8 kPa or with physical properties that preclude determination by the recommended method is to be determined from available data and recorded if the estimated maximum true vapor pressure is greater than 3.5 kPa.

60.116b(e)(3) For other liquids, the vapor pressure:

60.116b(e)(3)(i) May be obtained from standard reference texts, or

60.116b(e)(3)(ii) Determined by ASTM D2879–83, 96, or 97 (incorporated by reference—see § 60.17); or

60.116b(e)(3)(iii) Measured by an appropriate method approved by the Administrator; or

60.116b(e)(3)(iv) Calculated by an appropriate method approved by the Administrator.

60.116b(f) The owner or operator of each vessel storing a waste mixture of indeterminate or variable composition shall be subject to the following requirements.

60.116b(f)(1) Prior to the initial filling of the vessel, the highest maximum true vapor pressure for the range of anticipated liquid compositions to be stored will be determined using the methods described in paragraph (e) of this section.

60.116b(f)(2) For vessels in which the vapor pressure of the anticipated liquid composition is above the cutoff for monitoring but below the cutoff for controls as defined in § 60.112b(a), an initial physical test of the vapor pressure is required; and a physical test at least once every 6 months thereafter is required as determined by the following methods:

60.116b(f)(2)(i) ASTM D2879–83, 96, or 97 (incorporated by reference—see § 60.17); or

60.116b(f)(2)(ii) ASTM D323–82 or 94 (incorporated by reference—see § 60.17); or

60.116b(f)(2)(iii) As measured by an appropriate method as approved by the Administrator.

60.116b(g) The owner or operator of each vessel equipped with a closed vent system and control device meeting the specification of § 60.112b or with emissions reductions equipment as specified in 40 CFR 65.42(b)(4), (b)(5), (b)(6), or (c) is exempt from the requirements of paragraphs (c) and (d) of this section.

[52 FR 11429, Apr. 8, 1987, as amended at 65 FR 61756, Oct. 17, 2000; 65 FR 78276, Dec. 14, 2000; 68 FR 59333, Oct. 15, 2003; 89 FR 83319, Oct. 15, 2024]

008 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.117b]

Subpart Kb - Standards of Performance for Volatile Organic Liquid Storage Vessels (Including Petroleum Liquid Storage Vessels) for Which Construction, Reconstruction, or Modification Commenced after July 23, 1984

Delegation of authority.

**SECTION E. Source Group Restrictions.**

60.117b(a) In delegating implementation and enforcement authority to a State under section 111(c) of the Act, the authorities contained in paragraph (b) of this section shall be retained by the Administrator and not transferred to a State.

60.117b(b) Authorities which will not be delegated to States: §§ 60.111b(f)(4), 60.114b, 60.116b(e)(3)(iii), 60.116b(e)(3)(iv), and 60.116b(f)(2)(iii), and approval of an alternative to any electronic reporting to the EPA required by this subpart.

[52 FR 11429, Apr. 8, 1987, as amended at 52 FR 22780, June 16, 1987; 89 FR 83319, Oct. 15, 2024]

**SECTION E. Source Group Restrictions.**

Group Name: SG04

Group Description: Large Storage Tanks (Distillate Oils)

Sources included in this group

ID	Name
212	TANK 212 FIX:DISTILLATES 0.82 MM GAL
214	TANK 214 FIX:DISTILLATES 0.36 MM GAL
220	TANK 220 FIX:DISTILLATES 0.82 MM GAL
303	TANK 103 FIX:DIST OIL 0.85 MM GAL
305	TANK 105 FIX:DIST OIL 4.06 MM GAL

I. RESTRICTIONS.**Throughput Restriction(s).**

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall not store a petroleum liquid in these tanks which, as stored, has a true vapor pressure equal to or greater than 1.5 psia (10.3 kilopascals).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall maintain the following records for each storage tank:

- (a) Type of Tank
- (b) Diameter (feet)
- (c) Volume (gallons)
- (d) Type of Roof
- (e) Internal Shell Condition
- (f) Shell Color and Condition
- (g) Roof Color and Condition
- (h) Date of Installation

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall record the following for each storage tank:

- (a) Monthly amount of each liquid stored,
- (b) Monthly emissions of VOC and HAPs,

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall record the type of material stored in each tank and its true vapor pressure on a monthly basis, retained at the site, and made available to the Department upon request.

**SECTION E. Source Group Restrictions.****V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 005 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

For liquids whose storage temperature is governed by ambient weather conditions, the vapor pressure under actual storage conditions shall be determined using a temperature which is representative of the average temperature for the location and for the hottest month of the year in which the storage takes place.

**SECTION E. Source Group Restrictions.**

Group Name: SG06

Group Description: 40 CFR 63, Subpart BBBBBB Source(s)

Sources included in this group

ID	Name
102	LOADING RACK 1 (EAST)
103	LOADING RACK 2 (WEST)
201	TANK 201 IF:GAS/DIST OIL/ETHANOL 0.49 MM GAL
202	TANK 202 IF:GAS/DIST OIL 0.47 MM GAL
203	TANK 203 IF:GAS/DIST OIL/ETHANOL 0.33 MM GAL
211	TANK 211 IF:GAS/DIST OIL 0.49 MM GAL
221	TANK 221 IF:GAS/DIST OIL 0.77 MM GAL
222	TANK 222 IF:GAS/DIST OIL 4.06 MM GAL
223	TANK 223 IF:GAS/DIST OIL 5.25 MM GAL
224	TANK 224 IF:GAS/DIST OIL 3.57 MM GAL
225	TANK 225 IF:GAS/DIST OIL 4.57 MM GAL
301	TANK101 IF:GAS/DIST OIL 1.76 MM GAL
302	TANK 102 IF:GAS/DIST OIL 0.85 MM GAL
304	TANK 104 IF:GAS/DIST OIL 0.84 MM GAL
306	TANK 106 IF:GAS/DIST OIL/ETHANOL 0.45 MM GAL
307	TANK 107 IF:GAS/DIST OIL 3.89 MM GAL
308	TANK 108 IF:GAS/DIST OIL 3.89 MM GAL
309	TANK 109 IF:GAS/DIST OIL 4.06 MM GAL

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.****VII. ADDITIONAL REQUIREMENTS.****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 63, Subpart BBBBBB—National Emission Standards for Hazardous Air Pollutants for Source Category: Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Associate Director
United States Environmental Protection Agency
Region III, Enforcement & Compliance Assurance Division
Air, RCRA and Toxics Branch (3ED21)
Four Penn Center
1600 John F. Kennedy Boulevard
Philadelphia, Pennsylvania 19103-2852

Unless otherwise approved by DEP, the DEP copies shall be reported through the Department's Greenport PUP system available through:

<https://greenport.pa.gov/ePermitPublicAccess/PublicSubmission/Home>

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

002 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11081]**Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities****Am I subject to the requirements in this subpart?**

§63.11081 Am I subject to the requirements in this subpart?

(a) The affected source to which this subpart applies is each area source bulk gasoline terminal, pipeline breakout station, pipeline pumping station, and bulk gasoline plant identified in paragraphs (a)(1) through (4) of this section. You are subject to the requirements in this subpart if you own or operate one or more of the affected area sources identified in paragraphs (a)(1) through (4) of this section.

(1) [NA - NOT A BULK GASOLINE TERMINAL]

(2) A pipeline breakout station that is not subject to the control requirements of 40 CFR part 63, subpart R (§§63.423 and 63.424).

(3) [NA - NOT A PIPELINE PUMPING STATION]

(4) [NA - NOT A BULK GASOLINE PLANT]

(b) If you are an owner or operator of affected sources, as defined in (a)(1) through (4) of this section, you are not required to meet the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71 as a result of being subject to this subpart. However, you are still subject to the requirement to apply for and obtain a permit under 40 CFR part 70 or 40 CFR part 71 if you meet one or more of the applicability criteria found in 40 CFR 70.3(a) and (b) or 40 CFR part 71.3(a) and (b).

(c) [NA - NOT A GASOLINE DISPENSING FACILITY]

(d) [NA - NOT AVIATION GASOLINE TANK AT AIRPORT]

(e) [NA - NO GASOLINE LOADING INTO MARINE TANK VESSELS]

**SECTION E. Source Group Restrictions.**

- (f) [NA - NOT A BULK GASOLINE TERMINAL]
- (g) [NA - NOT A BULK GASOLINE PLANT OR BULK GASOLINE TERMINAL]
- (h) [NA - NO CARGO TANKS]
- (i) [NA - NOT SUBJECT TO OTHER FEDERAL SUBPART]
- (j) For new or reconstructed affected sources, as specified in § 63.11082(b) and (c), recordkeeping to document applicable throughput must begin upon startup of the affected source. For existing sources, as specified in § 63.11082(d), recordkeeping to document applicable throughput must begin on January 10, 2008. Records required under this paragraph shall be kept for a period of 5 years.

[73 FR 1933, Jan. 10, 2008, as amended at 76 FR 4176, Jan. 24, 2011; 89 FR 39373, May 8, 2024]

003 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11082]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What parts of my affected source does this subpart cover?

§63.11082 What parts of my affected source does this subpart cover?

- (a) The emission sources to which this subpart applies are gasoline storage tanks, gasoline loading racks, vapor collection-equipped gasoline cargo tanks, and equipment components in vapor or liquid gasoline service that meet the criteria specified in tables 1 through 4 to this subpart.
- (b) [NA - AFFECTED SOURCE IS EXISTING]
- (c) [NA - AFFECTED SOURCE IS EXISTING]
- (d) An affected source is an existing affected source if it is not new or reconstructed.

[73 FR 1933, Jan. 10, 2008, as amended at 89 FR 39373, May 8, 2024]

004 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11083]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

When do I have to comply with this subpart?

§63.11083 When do I have to comply with this subpart?

- (a) [NA - AFFECTED SOURCE IS EXISTING]
- (b) Except as specified in paragraphs (d) and (e) of this section, if you have an existing affected source, you must comply with the standards in this subpart no later than January 10, 2011.
- (c) If you have an existing affected source that becomes subject to the control requirements in this subpart because of an increase in the daily throughput, as specified in § 63.11086(a) or in option 1 of table 2 to this subpart, you must comply with the standards in this subpart no later than 3 years after the affected source becomes subject to the control requirements in this subpart.
- (d) All affected sources that commenced construction or reconstruction on or before June 10, 2022, must comply with the requirements in paragraphs (d)(1) through (5) of this section upon startup or on May 8, 2027, whichever is later. All affected sources that commenced construction or reconstruction after June 10, 2022, must comply with the requirements in paragraphs (d)(1) through (5) of this section upon startup, or on July 8, 2024, whichever is later.

(1) [NA - NOT A BULK GASOLINE PLANT]

(2) [NA - NOT A BULK GASOLINE TERMINAL]

**SECTION E. Source Group Restrictions.**

(3) [NA - NOT A BULK GASOLINE TERMINAL]

(4) For equipment leak inspections at bulk gasoline terminals, bulk gasoline plants, pipeline breakout stations, or pipeline pumping stations, the requirements in § 63.11089(c).

(5) [NA - NO CARGO TANKS]

(e) All affected sources that commenced construction or reconstruction on or before June 10, 2022, must comply with the requirements specified in items 2(d) and 2(e) in table 1 to this subpart upon startup or the next time the storage vessel is completely emptied and degassed, or by May 8, 2034, whichever occurs first. All affected sources that commenced construction or reconstruction after June 10, 2022, must comply with the requirements specified in items 2(d) and 2(e) in table 1 to this subpart upon startup, or on July 8, 2024, whichever is later.

[89 FR 39373, May 8, 2024]

005 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11085]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What are my general duties to minimize emissions?

EMISSION LIMITATIONS AND MANAGEMENT PRACTICES

§63.11085 What are my general duties to minimize emissions?

Each owner or operator of an affected source under this subpart must comply with the requirements of paragraphs (a) through (c) of this section.

(a) You must, at all times, operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require the owner or operator to make any further efforts to reduce emissions if levels required by the applicable standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator, which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

(b) You must not allow gasoline to be handled in a manner that would result in vapor releases to the atmosphere for extended periods of time. Measures to be taken include, but are not limited to, the following:

(1) Minimize gasoline spills;

(2) Clean up spills as expeditiously as practicable;

(3) Cover all open gasoline containers and all gasoline storage tank fill-pipes with a gasketed seal when not in use; and

(4) Minimize gasoline sent to open waste collection systems that collect and transport gasoline to reclamation and recycling devices, such as oil/water separators.

(c) You must keep applicable records and submit reports as specified in §§ 63.11094(g) and 63.11095(d) or § 63.11095(e).

[89 FR 39373, May 8, 2024]

006 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11086]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What requirements must I meet if my facility is a bulk gasoline plant?

[NA - NOT A BULK GASOLINE PLANT]

007 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11087]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals,

**SECTION E. Source Group Restrictions.****Bulk Plants, and Pipeline Facilities****What requirements must I meet for gasoline storage tanks if my facility is a bulk gasoline terminal, pipeline breakout station, or pipeline pumping station?**

§63.11087 What requirements must I meet for gasoline storage tanks if my facility is a bulk gasoline terminal, pipeline breakout station, or pipeline pumping station?

(a) You must meet each emission limit and management practice in Table 1 to this subpart that applies to your gasoline storage tank.

TABLE 1 REQUIREMENTS: Applicability Criteria, Emission Limits, and Management Practices for Storage Tanks

If you own or operate:

1. [NA - OPTION 2(b) OR 2(d) APPLIES]

2. A gasoline storage tank with a capacity of greater than or equal to 75 m³ and not meeting any of the criteria specified in item 1 of this Table, then you must do the following:

(a) [NA - OPTION 2(b) OR 2(d) APPLIES]; or

(b) Equip each internal floating roof gasoline storage tank according to the requirements in §60.112b(a)(1) of this chapter, except for the secondary seal requirements under §60.112b(a)(1)(ii)(B) and the requirements in §60.112b(a)(1)(iv) through (ix) of this chapter; and

(c) [NA - NO EXTERNAL FLOATING ROOF TANKS]; or

(d) Equip and operate each internal and external floating roof gasoline storage tank according to the applicable requirements in §63.1063(a)(1) and (b), except for the secondary seal requirements under §63.1063(a)(1)(i)(C) and (D), and equip each external floating roof gasoline storage tank according to the requirements of §63.1063(a)(2) if such storage tank does not currently meet the requirements of §63.1063(a)(1).

3. A surge control tank, then you must equip each tank with a fixed roof that is mounted to the tank in a stationary manner and with a pressure/vacuum vent with a positive cracking pressure of no less than 0.50 inches of water. Maintain all openings in a closed position at all times when not in use.

[76 FR 4179, Jan. 24, 2011]

END OF TABLE 1 REQUIREMENTS

(b) You must comply with the requirements of this subpart by the applicable dates specified in § 63.11083, except that storage vessels equipped with floating roofs and not meeting the requirements of paragraph (a) of this section must be in compliance at the first degassing and cleaning activity after January 10, 2011 or by January 10, 2018, whichever is first.

(c) You must comply with the applicable testing and monitoring requirements specified in §63.11092(f).

(d) You must submit the applicable notifications as required under §63.11093.

(e) You must keep records and submit reports as specified in §§63.11094 and 63.11095.

(f) If your gasoline storage tank is subject to, and complies with, the control requirements of 40 CFR part 60, subpart Kb of this chapter, your storage tank will be deemed in compliance with this section. You must report this determination in the Notification of Compliance Status report under §63.11093(b). [SOURCE IDs 120, 121, 122, 126 AND 127 COMPLY WITH SUBPART Kb]

(g) No later than the dates specified in § 63.11083, if your gasoline storage tank is subject to, and complies with, the control requirements of § 60.112b(a)(2), (3), or (4) of this chapter, your storage tank will be deemed in compliance with this section. If your gasoline storage tank is subject to the control requirements of § 60.112b(a)(1) of this chapter, you must conduct

**SECTION E. Source Group Restrictions.**

lower explosive limit (LEL) monitoring as specified in § 63.11092(f)(1)(ii) to demonstrate compliance with this section. You must report this determination in the Notification of Compliance Status report under § 63.11093(b). The requirements in paragraph (f) of this section do not apply when demonstrating compliance with this paragraph (g).

[73 FR 1933, Jan. 10, 2008, as amended at 89 FR 39374, May 8, 2024]

008 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11088]**Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities****What requirements must I meet for gasoline loading racks if my facility is a bulk gasoline terminal, pipeline breakout station, or pipeline pumping station?**

63.11088(a) You must meet each emission limit and management practice in Table 2 to this subpart that applies to you.

TABLE 2 REQUIREMENTS

If you own or operate . . .

ITEM 1. A bulk gasoline terminal loading rack(s) with a gasoline throughput (total of all racks) of 250,000 gallons per day, or greater. Gallons per day is calculated by summing the current day's throughput, plus the throughput for the previous 364 days, and then dividing that sum by 365

Then you must:

(a) Equip your loading rack(s) with a vapor collection system designed to collect the TOC vapors displaced from cargo tanks during product loading; and

(b) Reduce emissions of TOC to less than or equal to 80 mg/l of gasoline loaded into gasoline cargo tanks at the loading rack; and

(c) Design and operate the vapor collection system to prevent any TOC vapors collected at one loading rack or lane from passing through another loading rack or lane to the atmosphere; and

(d) Limit the loading of gasoline into gasoline cargo tanks that are vapor tight using the procedures specified in § 60.502(e) through (j) of this chapter. For the purposes of this section, the term "tank truck" as used in § 60.502(e) through (j) of this chapter means "cargo tank" as defined in § 63.11100.

END OF TABLE 2 REQUIREMENTS

63.11088(b) As an alternative for railcar cargo tanks to the requirements specified in Table 2 to this subpart, you may comply with the requirements specified in § 63.422(e).

63.11088(c) You must comply with the requirements of this subpart by the applicable dates specified in § 63.11083.

63.11088(d) You must comply with the applicable testing and monitoring requirements specified in § 63.11092.

63.11088(e) You must submit the applicable notifications as required under § 63.11093.

63.11088(f) You must keep records and submit reports as specified in §§ 63.11094 and 63.11095.

009 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11089]**Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities****What requirements must I meet for equipment leak inspections if my facility is a bulk gasoline terminal, bulk plant, pipeline breakout station, or pipeline pumping station?**

§63.11089 What requirements must I meet for equipment leak inspections if my facility is a bulk gasoline terminal, bulk plant, pipeline breakout station, or pipeline pumping station?

(a) Each owner or operator of a bulk gasoline terminal, bulk gasoline plant, pipeline breakout station, or pipeline pumping station subject to the provisions of this subpart shall implement a leak detection and repair program for all equipment in gasoline service according to the requirements in paragraph (b) or (c) of this section, as applicable based on the

**SECTION E. Source Group Restrictions.**

compliance dates specified in § 63.11083.

(b) Perform a monthly leak inspection of all equipment in gasoline service, as defined in § 63.11100. For this inspection, detection methods incorporating sight, sound, and smell are acceptable.

(1) A logbook shall be used and shall be signed by the owner or operator at the completion of each inspection. A section of the logbook shall contain a list, summary description, or diagram(s) showing the location of all equipment in gasoline service at the facility.

(2) Each detection of a liquid or vapor leak shall be recorded in the logbook. When a leak is detected, an initial attempt at repair shall be made as soon as practicable, but no later than 5 calendar days after the leak is detected. Repair or replacement of leaking equipment shall be completed within 15 calendar days after detection of each leak, except as provided in paragraph (b)(3) of this section.

(3) Delay of repair of leaking equipment will be allowed if the repair is not feasible within 15 days. The owner or operator shall provide in the semiannual report specified in § 63.11095(c), the reason(s) why the repair was not feasible and the date each repair was completed.

(c) No later than the dates specified in § 63.11083, comply with the requirements in § 60.502a(j) of this chapter except as provided in paragraphs (c)(1) through (4) of this section. The requirements in paragraph (b) of this section do not apply when demonstrating compliance with this paragraph (c).

(1) The frequency for optical gas imaging (OGI) monitoring shall be annually rather than quarterly as specified in § 60.502a(j)(1)(i) of this chapter.

(2) The frequency for Method 21 monitoring of pumps and valves shall be annually rather than quarterly as specified in § 60.502a(j)(1)(ii)(A) and (B) of this chapter.

(3) The frequency of monitoring of pressure relief devices shall be annually and within 5 calendar days after each pressure release rather than quarterly and within 5 calendar days after each pressure release as specified in § 60.502a(j)(4)(i) of this chapter.

(4) Any pressure relief device that is located at a bulk gasoline plant or pipeline pumping station that is monitored only by non-plant personnel may be monitored after a pressure release the next time the monitoring personnel are onsite, but in no case more than 30 calendar days after a pressure release.

(d) You must comply with the requirements of this subpart by the applicable dates specified in § 63.11083.

(e) You must submit the applicable notifications as required under § 63.11093.

(f) You must keep records and submit reports as specified in §§ 63.11094 and 63.11095.

[89 FR 39375, May 8, 2024]

010 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11092]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What testing and monitoring requirements must I meet?

§63.11092 What testing and monitoring requirements must I meet?

(a) [NA - NOT A BULK GASOLINE TERMINAL]

(b) [NA - NOT A BULK GASOLINE TERMINAL]

(c) [NA - NOT A BULK GASOLINE TERMINAL]

(d) [NA - NOT A BULK GASOLINE TERMINAL]

**SECTION E. Source Group Restrictions.**

(e) [NA - NOT A BULK GASOLINE TERMINAL NO LOADING RACKS]

(f) Each owner or operator subject to the emission standard in § 63.11087 for gasoline storage tanks shall comply with the requirements in paragraphs (f)(1) through (3) of this section.

(1) If your gasoline storage tank is equipped with an internal floating roof,

(i) You must perform inspections of the floating roof system according to the requirements of § 60.113b(a) of this chapter if you are complying with option 2(b) in table 1 to this subpart, or according to the requirements of § 63.1063(c)(1) if you are complying with option 2(e) in table 1 to this subpart.

(ii) No later than the dates specified in § 63.11083, you must conduct LEL monitoring according to the provisions in § 63.425(j). A deviation of the LEL level is considered an inspection failure under § 60.113b(a)(2) of this chapter or § 63.1063(d)(2) and must be remedied as such. Any repairs must be confirmed effective through re-monitoring of the LEL and meeting the levels in options 2(c) and 2(f) in table 1 to this subpart within the timeframes specified in § 60.113b(a)(2) or § 63.1063(e), as applicable.

(2) [NA - NO EXTERNAL FLOATING ROOF TANKS]

(3) [N/A – A CLOSED VENT SYSTEM AND CONTROL DEVICE ARE NOT UTILIZED]

(g) [NA - NO CARGO TANKS]

(h) As an alternative to the pressure monitoring requirements in § 60.504a(d) of this chapter, you may comply with the pressure monitoring requirements in § 60.503(d) of this chapter during any performance test or performance evaluation conducted under § 63.11092(e) to demonstrate compliance with the provisions in § 60.502a(h) of this chapter.

(i) [NA - NO PERFORMANCE TESTS]

[73 FR 1933, Jan. 10, 2008, as amended at 73 FR 12276, Mar. 7, 2008; 76 FR 4177, Jan. 24, 2011; 89 FR 39375, May 8, 2024]

011 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11093]

Subpart BBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What notifications must I submit and when?

NOTIFICATIONS, RECORDS, AND REPORTS

§63.11093 What notifications must I submit and when?

(a) & (b) [NA - INITIAL NOTIFICATION/NOTIFICATION OF COMPLIANCE STATUS RECEIVED 2/16/21]

(c) [NA - NO PERFORMANCE TESTS]

(d) Each owner or operator of any affected source under this subpart must submit additional notifications specified in §63.9, as applicable.

(e) The owner or operator must submit all Notification of Compliance Status reports in PDF format to the EPA following the procedure specified in § 63.9(k), except any medium submitted through mail must be sent to the attention of the Gasoline Distribution Sector Lead.

[73 FR 1933, Jan. 10, 2008, as amended at 89 FR 39377, May 8, 2024]

012 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11094]

Subpart BBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What are my recordkeeping requirements?

§63.11094 What are my recordkeeping requirements?

**SECTION E. Source Group Restrictions.**

(a) Each owner or operator of a bulk gasoline terminal or pipeline breakout station whose storage vessels are subject to the provisions of this subpart shall keep records as specified in paragraphs (a)(1) and (2) of this section.

(1) If you are complying with options 2(a), 2(b), or 2(d) in table 1 to this subpart, keep records as specified in § 60.115b of this chapter except records shall be kept for at least 5 years. If you are complying with the requirements of option 2(e) in table 1 to this subpart, you shall keep records as specified in § 63.1065.

(2) [NA - OPTION 2(b) OR 2(d) APPLIES]

(b) [NA - NOT A BULK GASOLINE TERMINAL]

(c) Each owner or operator subject to the equipment leak provisions of § 63.11089 shall prepare and maintain a record describing the types, identification numbers, and locations of all equipment in gasoline service. For facilities electing to implement an instrument program under § 63.11089(b), the record shall contain a full description of the program.

(d) Each owner or operator of an affected source subject to equipment leak inspections under § 63.11089(b) shall record in the logbook for each leak that is detected the information specified in paragraphs (d)(1) through (7) of this section.

(1) The equipment type and identification number.

(2) The nature of the leak (i.e., vapor or liquid) and the method of detection (i.e., sight, sound, or smell).

(3) The date the leak was detected and the date of each attempt to repair the leak.

(4) Repair methods applied in each attempt to repair the leak.

(5) "Repair delayed" and the reason for the delay if the leak is not repaired within 15 calendar days after discovery of the leak.

(6) The expected date of successful repair of the leak if the leak is not repaired within 15 days.

(7) The date of successful repair of the leak.

(e) Each owner or operator of an affected source subject to § 63.11089(c) or § 60.503a(a)(2) of this chapter shall maintain records of each leak inspection and leak identified under § 63.11089(c) or § 60.503a(a)(2) as specified in paragraphs (e)(1) through (5) of this section for at least 5 years.

(1) An indication if the leak inspection was conducted under § 63.11089(c) or § 60.503a(a)(2) of this chapter.

(2) Leak determination method used for the leak inspection.

(3) For leak inspections conducted with Method 21 of appendix A-7 to part 60 of this chapter, keep the following additional records:

(i) Date of inspection.

(ii) Inspector name.

(iii) Monitoring instrument identification.

(iv) Identification of all equipment surveyed and the instrument reading for each piece of equipment.

(v) Date and time of instrument calibration and initials of operator performing the calibration.

(vi) Calibration gas cylinder identification, certification date, and certified concentration.

(vii) Instrument scale used.

**SECTION E. Source Group Restrictions.**

(viii) Results of the daily calibration drift assessment.

(4) For leak inspections conducted with OGI, keep the records specified in section 12 of appendix K to part 60 of this chapter.

(5) For each leak detected during a leak inspection or by audio/visual/olfactory methods during normal duties, record the following information:

(i) The equipment type and identification number.

(ii) The date the leak was detected, the name of the person who found the leak, the nature of the leak (i.e., vapor or liquid), and the method of detection (i.e., audio/visual/olfactory, Method 21, or OGI).

(iii) The date of each attempt to repair the leak and the repair methods applied in each attempt to repair the leak.

(iv) The date of successful repair of the leak, the method of monitoring used to confirm the repair, and if Method 21 of appendix A-7 to part 60 of this chapter is used to confirm the repair, the maximum instrument reading measured by Method 21 of appendix A-7. If OGI is used to confirm the repair, keep video footage of the repair confirmation.

(v) For each repair delayed beyond 15 calendar days after discovery of the leak, record "Repair delayed", the reason for the delay, and the expected date of successful repair. The owner or operator (or designate) whose decision it was that repair could not be carried out in the 15- calendar day timeframe must sign the record.

(vi) For each leak that is not repairable, the maximum instrument reading measured by Method 21 of appendix A-7 to part 60 of this chapter at the time the leak is determined to be not repairable, a video captured by the OGI camera showing that emissions are still visible, or a signed record that the leak is still detectable via audio/visual/olfactory methods.

(f) [NA - NOT A BULK GASOLINE TERMINAL]

(g) [NA - NOT A BULK GASOLINE TERMINAL NO LOADING RACKS]

(h) [NA - NOT A BULK GASOLINE TERMINAL]

(i) [NA - NO CARGO TANKS]

(j) [NA - NO CARGO TANKS]

(k) Each owner or operator of an affected source under this subpart shall keep the following records for each deviation of an emissions limitation (including operating limit), work practice standard, or operation and maintenance requirement in this subpart.

(1) Date, start time, and duration of each deviation.

(2) List of the affected sources or equipment for each deviation, an estimate of the quantity of each regulated pollutant emitted over any emission limit and a description of the method used to estimate the emissions.

(3) Actions taken to minimize emissions in accordance with § 63.11085(a).

(l) [NA - NOT A BULK GASOLINE TERMINAL]

(m) Keep written procedures required under § 63.8(d)(2) on record for the life of the affected source or until the affected source is no longer subject to the provisions of this part, to be made available for inspection, upon request, by the Administrator. If the performance evaluation plan is revised, you shall keep previous (i.e., superseded) versions of the performance evaluation plan on record to be made available for inspection, upon request, by the Administrator, for a period of 5 years after each revision to the plan. The program of corrective action shall be included in the plan as required under § 63.8(d)(2).

**SECTION E. Source Group Restrictions.**

(n) [NA - NO PERFORMANCE TESTS]

(o) Any records required to be maintained by this subpart that are submitted electronically via the EPA's Compliance and Emissions Reporting Interface (CEDRI) may be maintained in electronic format. This ability to maintain electronic copies does not affect the requirement for facilities to make records, data, and reports available upon request to a delegated authority or the EPA as part of an on-site compliance evaluation.

[89 FR 39377, May 7, 2024]

013 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11095]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What are my reporting requirements?

§63.11095 What are my reporting requirements?

(a) Reporting requirements for performance tests. Prior to November 4, 2024, each owner or operator of an affected source under this subpart shall submit performance test reports to the Administrator according to the requirements in § 63.13. Beginning on November 4, 2024, within 60 days after the date of completing each performance test required by this subpart, you must submit the results of the performance test following the procedures specified in § 63.9(k). As required by § 63.7(g)(2)(iv), you must include the value for the combustion zone temperature operating parameter limit set based on your performance test in the performance test report. If the monitoring alternative in § 63.11092(h) is used, indicate that this monitoring alternative is being used, identify each loading rack that loads gasoline cargo tanks at the bulk gasoline terminal subject to the provisions of this subpart, and report the highest instantaneous pressure monitored during the performance test or performance evaluation for each identified loading rack. Data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT website (<https://www.epa.gov/electronic-reporting-air-emissions/electronic-reporting-tool-ert>) at the time of the test must be submitted in a file format generated using the EPA's ERT. Alternatively, you may submit an electronic file consistent with the extensible markup language (XML) schema listed on the EPA's ERT website. Data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the test must be included as an attachment in the ERT or an alternate electronic file.

(b) Reporting requirements for performance evaluations. Prior to November 4, 2024, each owner or operator of an affected source under this subpart shall submit performance evaluations to the Administrator according to the requirements in § 63.13. Beginning on November 4, 2024, within 60 days after the date of completing each CEMS performance evaluation, you must submit the results of the performance evaluation following the procedures specified in § 63.9(k). If the monitoring alternative in § 63.11092(h) is used, indicate that this monitoring alternative is being used, identify each loading rack that loads gasoline cargo tanks at the bulk gasoline terminal subject to the provisions of this subpart, and report the highest instantaneous pressure monitored during the performance test or performance evaluation for each identified loading rack. The results of performance evaluations of CEMS measuring relative accuracy test audit (RATA) pollutants that are supported by the EPA's ERT as listed on the EPA's ERT website at the time of the evaluation must be submitted in a file format generated using the EPA's ERT. Alternatively, you may submit an electronic file consistent with the XML schema listed on the EPA's ERT website. The results of performance evaluations of CEMS measuring RATA pollutants that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the evaluation must be included as an attachment in the ERT or an alternate electronic file.

(c) Reporting requirements prior to May 8, 2027. Prior to May 8, 2027, each owner or operator of a source subject to the requirements of this subpart shall submit reports as specified in paragraphs (c)(1) through (3) of this section, as applicable.

(1) Each owner or operator of a bulk terminal or a pipeline breakout station subject to the control requirements of this subpart shall include in a semiannual compliance report to the Administrator the following information, as applicable:

(i) For storage vessels, if you are complying with options 2(a), 2(b), or 2(d) in table 1 to this subpart, the information specified in § 60.115b(a), (b), or (c) of this chapter, depending upon the control equipment installed, or, if you are complying with option 2(e) in table 1 to this subpart, the information specified in § 63.1066.

(ii) [NA - NO CARGO TANKS NO LOADING RACKS]

(iii) For equipment leak inspections, the number of equipment leaks not repaired within 15 days after detection.

**SECTION E. Source Group Restrictions.**

(iv) For storage vessels complying with § 63.11087(b) after January 10, 2011, the storage vessel's Notice of Compliance Status information can be included in the next semi-annual compliance report in lieu of filing a separate Notification of Compliance Status report under § 63.11093.

(2) Each owner or operator of an affected source subject to the control requirements of this subpart shall submit an excess emissions report to the Administrator at the time the semiannual compliance report is submitted. Excess emissions events under this subpart, and the information to be included in the excess emissions report, are specified in paragraphs (c)(2)(i) through (v) of this section.

(i) [NA – NO CARGO TANKS]

(ii) [NA – NO CARGO TANKS]

(iii) Each exceedance or failure to maintain, as appropriate, the monitored operating parameter value determined under § 63.11092(b). The report shall include the monitoring data for the days on which exceedances or failures to maintain have occurred, and a description and timing of the steps taken to repair or perform maintenance on the vapor collection and processing systems or the CMS.

(iv) [RESERVED]

(v) For each occurrence of an equipment leak for which no repair attempt was made within 5 days or for which repair was not completed within 15 days after detection:

(A) The date on which the leak was detected;

(B) The date of each attempt to repair the leak;

(C) The reasons for the delay of repair; and

(D) The date of successful repair.

(3) Each owner or operator of a bulk gasoline plant or a pipeline pumping station shall submit a semiannual excess emissions report, including the information specified in paragraphs (c)(1)(iii) and (c)(2)(v) of this section, only for a 6-month period during which an excess emission event has occurred. If no excess emission events have occurred during the previous 6-month period, no report is required.

(d) Reporting requirements for semiannual reports on or after May 8, 2027. On or after May 8, 2027, you must submit to the Administrator semiannual reports with the applicable information in paragraphs (d)(1) through (9) of this section following the procedure specified in paragraph (e) of this section.

(1) Report the following general facility information:

(i) Facility name.

(ii) Facility physical address, including city, county, and State.

(iii) Latitude and longitude of facility's physical location. Coordinates must be in decimal degrees with at least five decimal places.

(iv) The following information for the contact person:

(A) Name.

(B) Mailing address.

(C) Telephone number.

**SECTION E. Source Group Restrictions.**

(D) Email address.

(v) [NA - NOT A BULK GASOLINE TERMINAL]

(vi) Date of report and beginning and ending dates of the reporting period. You are no longer required to provide the date of report when the report is submitted via CEDRI.

(vii) Statement by a responsible official, with that official's name, title, and signature, certifying the truth, accuracy, and completeness of the content of the report. If your report is submitted via CEDRI, the certifier's electronic signature during the submission process replaces the requirement in this paragraph (d)(1)(vii).

(2) [NA – NO THERMAL OXIDATION SYSTEM IN USE]

(3) [NA – NO THERMAL OXIDATION SYSTEM IN USE]

(4) [NA – NO CARGO TANKS]

(5) [NA – NO CARGO TANKS]

(6) [NA – NO CARGO TANKS]

(7) Report the following information for each leak inspection and each leak identified under § 63.11089(c) and § 60.503a(a)(2) of this chapter.

(i) For each leak detected during a leak inspection required under § 63.11089(c) and § 60.503a(a)(2) of this chapter, report:

(A) The date of the inspection.

(B) The leak determination method (OGI or Method 21).

(C) The total number and type of equipment for which leaks were detected.

(D) The total number and type of equipment for which leaks were repaired within 15 calendar days.

(E) The total number and type of equipment for which no repair attempt was made within 5 calendar days of the leaks being identified.

(F) The total number and types of equipment placed on the delay of repair, as specified in § 60.502a(j)(8) of this chapter.

(ii) For leaks identified under § 63.11089(c) by audio/visual/olfactory methods during normal duties report:

(A) The total number and type of equipment for which leaks were identified.

(B) The total number and type of equipment for which leaks were repaired within 15 calendar days.

(C) The total number and type of equipment for which no repair attempt was made within 5 calendar days of the leaks being identified.

(D) The total number and type of equipment placed on the delay of repair, as specified in § 60.502a(j)(8) of this chapter.

(iii) The total number of leaks on the delay of repair list at the start of the reporting period.

(iv) The total number of leaks on the delay of repair list at the end of the reporting period.

(v) For each leak that was on the delay of repair list at any time during the reporting period, report:

(A) Unique equipment identification number.

**SECTION E. Source Group Restrictions.**

(B) Type of equipment.

(C) Leak determination method (OGI, Method 21, or audio/visual/olfactory).

(D) The reason(s) why the repair was not feasible within 15 calendar days.

(E) If applicable, the date repair was completed.

(8) For each gasoline storage tank subject to requirements in item 2 of table 1 to this subpart, report:

(i) If you are complying with options 2(a), 2(b), or 2(d) in table 1 to this subpart, the information specified in § 60.115b(a) or (b) of this chapter or deviations in measured parameter values from the plan specified in § 60.115b(c) of this chapter, depending upon the control equipment installed, or, if you are complying with option 2(e) in table 1 to this subpart, the information specified in § 63.1066(b).

(ii) [NA – FACILITY COMPLIES WITH 2(b) & 2(d)]

(9) If there were no deviations from the emission limitations, operating parameters, or work practice standards, then provide a statement that there were no deviations from the emission limitations, operating parameters, or work practice standards during the reporting period. If there were no periods during which a continuous monitoring system (including a CEMS or CPMS) was inoperable or out-of-control, then provide a statement that there were no periods during which a continuous monitoring system was inoperable or out-of-control during the reporting period.

(e) Requirements for semiannual report submissions. Each owner or operator of an affected source under this subpart shall submit semiannual compliance reports with the information specified in paragraph (c) or (d) of this section to the Administrator according to the requirements in § 63.13. Beginning on May 8, 2027, or once the report template for this subpart has been available on the CEDRI website (<https://www.epa.gov/electronic-reporting-air-emissions/cedri>) for one year, whichever date is later, you must submit all subsequent semiannual compliance reports using the appropriate electronic report template on the CEDRI website for this subpart and following the procedure specified in § 63.9(k), except any medium submitted through mail must be sent to the attention of the Gasoline Distribution Sector Lead. The date report templates become available will be listed on the CEDRI website. Unless the Administrator or delegated State agency or other authority has approved a different schedule for submission of reports, the report must be submitted by the deadline specified in this subpart, regardless of the method in which the report is submitted.

[89 FR 39380, May 8, 2024]

014 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11098]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

What parts of the General Provisions apply to me?

§63.11098 What parts of the General Provisions apply to me?

Table 4 to this subpart shows which parts of the General Provisions apply to you.

[89 FR 39383, May 8, 2024]

015 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11099]

Subpart BBBBBB - National Emission Standards for Hazardous Air Pollutants for Gasoline Distribution Bulk Terminals, Bulk Plants, and Pipeline Facilities

Who implements and enforces this subpart?

§ 63.11099 Who implements and enforces this subpart?

(a) This subpart can be implemented and enforced by the U.S. EPA or a delegated authority such as the applicable State, local, or tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. Contact the applicable U.S. EPA Regional Office to find out if implementation and enforcement of this subpart is delegated to a State, local, or tribal agency.

**SECTION E. Source Group Restrictions.**

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or tribal agency under subpart E of this part, the authorities specified in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or tribal agency.

(c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (5) of this section.

(1) Approval of alternatives to the requirements in §§ 63.11086 through 63.11088 and § 63.11092. Any owner or operator requesting to use an alternative means of emission limitation for storage vessels in Table 1 to this subpart must follow either the provisions in § 60.114b of this chapter if you are complying with options 2(a), 2(b), or 2(c) in Table 1 to this subpart, or the provisions in § 63.1064 if you are complying with option 2(d) in Table 1 to this subpart.

(2) Approval of major alternatives to test methods under § 63.7(e)(2)(ii) and (f), as defined in § 63.90, and as required in this subpart.

(3) Approval of major alternatives to monitoring under § 63.8(f), as defined in § 63.90, and as required in this subpart.

(4) Approval of major alternatives to recordkeeping and reporting under § 63.10(f), as defined in § 63.90, and as required in this subpart.

(5) Approval of an alternative to any electronic reporting to the EPA required by this subpart.

[73 FR 1933, Jan. 10, 2008, as amended at 89 FR 39383, May 8, 2024]

**SECTION E. Source Group Restrictions.**

Group Name: SG07

Group Description: 40 CFR 60. Subpart XX Source(s)

Sources included in this group

ID	Name
102	LOADING RACK 1 (EAST)
103	LOADING RACK 2 (WEST)

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 63, Subpart XX—Standards of Performance for Bulk Gasoline Terminals shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Associate Director
 United States Environmental Protection Agency
 Region III, Enforcement & Compliance Assurance Division
 Air, RCRA and Toxics Branch (3ED21)
 Four Penn Center
 1600 John F. Kennedy Boulevard
 Philadelphia, Pennsylvania 19103-2852

Unless otherwise approved by DEP, the DEP copies shall be reported through the Department's Greenport PUP system available through:

<https://greenport.pa.gov/ePermitPublicAccess/PublicSubmission/Home>

**SECTION E. Source Group Restrictions.**

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.500]**Subpart XX - Standards of Performance for Bulk Gasoline Terminals****Applicability and designation of affected facility.**

§ 60.500 Applicability and designation of affected facility.

(a) The affected facility to which the provisions of this subpart apply is the total of all the loading racks at a bulk gasoline terminal which deliver liquid product into gasoline tank trucks.

(b) Each facility under paragraph (a) of this section, the construction or modification of which is commenced after December 17, 1980, and on or before June 10, 2022, is subject to the provisions of this subpart.

(c) For purposes of this subpart, any replacement of components of an existing facility, described in paragraph (a) of this section, commenced before August 18, 1983 in order to comply with any emission standard adopted by a State or political subdivision thereof will not be considered a reconstruction under the provisions of 40 CFR 60.15.

Note:

The intent of these standards is to minimize the emissions of VOC through the application of best demonstrated technologies (BDT). The numerical emission limits in this standard are expressed in terms of total organic compounds. This emission limit reflects the performance of BDT.

[48 FR 37590, Aug. 18, 1983, as amended at 89 FR 39344, May 8, 2024]

003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.502]**Subpart XX - Standards of Performance for Bulk Gasoline Terminals****Standard for Volatile Organic Compound (VOC) emissions from bulk gasoline terminals.**

On and after the date on which § 60.8(a) requires a performance test to be completed, the owner or operator of each bulk gasoline terminal containing an affected facility shall comply with the requirements of this section.

60.502(a) Each affected facility shall be equipped with a vapor collection system designed to collect the total organic compounds vapors displaced from tank trucks during product loading.

60.502(b) The emissions to the atmosphere from the vapor collection system due to the loading of liquid product into gasoline tank trucks are not to exceed 35 milligrams of total organic compounds per liter of gasoline loaded, except as noted in paragraph (c) of this section.

60.502(c) For each affected facility equipped with an existing vapor processing system, the emissions to the atmosphere from the vapor collection system due to the loading of liquid product into gasoline tank trucks are not to exceed 80 milligrams of total organic compounds per liter of gasoline loaded.

60.502(d) Each vapor collection system shall be designed to prevent any total organic compounds vapors collected at one loading rack from passing to another loading rack.

60.502(e) Loadings of liquid product into gasoline tank trucks shall be limited to vapor-tight gasoline tank trucks using the following procedures:

60.502(e)(1) The owner or operator shall obtain the vapor tightness documentation described in § 60.505(b) for each gasoline tank truck which is to be loaded at the affected facility.

60.502(e)(2) The owner or operator shall require the tank identification number to be recorded as each gasoline tank truck is loaded at the affected facility.

60.502(e)(3)

**SECTION E. Source Group Restrictions.**

60.502(e)(3)(i) The owner or operator shall cross-check each tank identification number obtained in paragraph (e)(2) of this section with the file of tank vapor tightness documentation within 2 weeks after the corresponding tank is loaded, unless either of the following conditions is maintained:

60.502(e)(3)(i)(A) If less than an average of one gasoline tank truck per month over the last 26 weeks is loaded without vapor tightness documentation then the documentation cross-check shall be performed each quarter; or

60.502(e)(3)(i)(B) If less than an average of one gasoline tank truck per month over the last 52 weeks is loaded without vapor tightness documentation then the documentation cross-check shall be performed semiannually.

60.502(e)(3)(ii) If either the quarterly or semiannual cross-check provided in paragraphs (e)(3)(i) (A) through (B) of this section reveals that these conditions were not maintained, the source must return to biweekly monitoring until such time as these conditions are again met.

60.502(e)(4) The terminal owner or operator shall notify the owner or operator of each non-vapor-tight gasoline tank truck loaded at the affected facility within 1 week of the documentation cross-check in paragraph (e)(3) of this section.

60.502(e)(5) The terminal owner or operator shall take steps assuring that the nonvapor-tight gasoline tank truck will not be reloaded at the affected facility until vapor tightness documentation for that tank is obtained.

60.502(e)(6) Alternate procedures to those described in paragraphs (e)(1) through (5) of this section for limiting gasoline tank truck loadings may be used upon application to, and approval by, the Administrator.

60.502(f) The owner or operator shall act to assure that loadings of gasoline tank trucks at the affected facility are made only into tanks equipped with vapor collection equipment that is compatible with the terminal's vapor collection system.

60.502(g) The owner or operator shall act to assure that the terminal's and the tank truck's vapor collection systems are connected during each loading of a gasoline tank truck at the affected facility. Examples of actions to accomplish this include training drivers in the hookup procedures and posting visible reminder signs at the affected loading racks.

60.502(h) The vapor collection and liquid loading equipment shall be designed and operated to prevent gauge pressure in the delivery tank from exceeding 4,500 pascals (450 mm of water) during product loading. This level is not to be exceeded when measured by the procedures specified in § 60.503(d).

60.502(i) No pressure-vacuum vent in the bulk gasoline terminal's vapor collection system shall begin to open at a system pressure less than 4,500 pascals (450 mm of water).

60.502(j) Each calendar month, the vapor collection system, the vapor processing system, and each loading rack handling gasoline shall be inspected during the loading of gasoline tank trucks for total organic compounds liquid or vapor leaks. For purposes of this paragraph, detection methods incorporating sight, sound, or smell are acceptable. Each detection of a leak shall be recorded and the source of the leak repaired within 15 calendar days after it is detected.

[48 FR 37590, Aug. 18, 1983; 48 FR 56580, Dec. 22, 1983, as amended at 54 FR 6678, Feb. 14, 1989; 64 FR 7466, Feb. 12, 1999]

004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.503]**Subpart XX - Standards of Performance for Bulk Gasoline Terminals****Test methods and procedures.**

60.503(a) In conducting the performance tests required in § 60.8, the owner or operator shall use as reference methods and procedures the test methods in appendix A of this part or other methods and procedures as specified in this section, except as provided in § 60.8(b). The three-run requirement of § 60.8(f) does not apply to this subpart.

60.503(b) Immediately before the performance test required to determine compliance with § 60.502 (b), (c), and (h), the owner or operator shall use Method 21 to monitor for leakage of vapor all potential sources in the terminal's vapor collection system equipment while a gasoline tank truck is being loaded. The owner or operator shall repair all leaks with readings of 10,000 ppm (as methane) or greater before conducting the performance test.

**SECTION E. Source Group Restrictions.**

60.503(c) The owner or operator shall determine compliance with the standards in § 60.502 (b) and (c) as follows:

60.503(c)(1) The performance test shall be 6 hours long during which at least 300,000 liters of gasoline is loaded. If this is not possible, the test may be continued the same day until 300,000 liters of gasoline is loaded or the test may be resumed the next day with another complete 6-hour period. In the latter case, the 300,000-liter criterion need not be met. However, as much as possible, testing should be conducted during the 6-hour period in which the highest throughput normally occurs.

60.503(c)(2) If the vapor processing system is intermittent in operation, the performance test shall begin at a reference vapor holder level and shall end at the same reference point. The test shall include at least two startups and shutdowns of the vapor processor. If this does not occur under automatically controlled operations, the system shall be manually controlled.

60.503(c)(3) The emission rate (E) of total organic compounds shall be computed using the following equation:

REFER TO REGULATION FOR EQUATION

where:

E=emission rate of total organic compounds, mg/liter of gasoline loaded.

Vesi=volume of air-vapor mixture exhausted at each interval "i", scm.

Cei=concentration of total organic compounds at each interval "i", ppm.

L=total volume of gasoline loaded, liters.

n=number of testing intervals.

i=emission testing interval of 5 minutes.

K=density of calibration gas, 1.83×10^{-6} for propane and 2.41×10^{-6} for butane, mg/scm.

60.503(c)(4) The performance test shall be conducted in intervals of 5 minutes. For each interval "i", readings from each measurement shall be recorded, and the volume exhausted (Vesi) and the corresponding average total organic compounds concentration (Cei) shall be determined. The sampling system response time shall be considered in determining the average total organic compounds concentration corresponding to the volume exhausted.

60.503(c)(5) The following methods shall be used to determine the volume (Vesi) air-vapor mixture exhausted at each interval:

60.503(c)(5)(i) Method 2B shall be used for combustion vapor processing systems.

60.503(c)(5)(ii) Method 2A shall be used for all other vapor processing systems.

60.503(c)(6) Method 25A or 25B shall be used for determining the total organic compounds concentration (Cei) at each interval. The calibration gas shall be either propane or butane. The owner or operator may exclude the methane and ethane content in the exhaust vent by any method (e.g., Method 18) approved by the Administrator.

60.503(c)(7) To determine the volume (L) of gasoline dispensed during the performance test period at all loading racks whose vapor emissions are controlled by the processing system being tested, terminal records or readings from gasoline dispensing meters at each loading rack shall be used.

60.503(d) The owner or operator shall determine compliance with the standard in § 60.502(h) as follows:

60.503(d)(1) A pressure measurement device (liquid manometer, magnehelic gauge, or equivalent instrument), capable of measuring up to 500 mm of water gauge pressure with ± 2.5 mm of water precision, shall be calibrated and installed on the terminal's vapor collection system at a pressure tap located as close as possible to the connection with the gasoline tank truck.

60.503(d)(2) During the performance test, the pressure shall be recorded every 5 minutes while a gasoline truck is being loaded; the highest instantaneous pressure that occurs during each loading shall also be recorded. Every loading position must be tested at least once during the performance test.

**SECTION E. Source Group Restrictions.**

60.503(e) [NA - NO FLARES]

60.503(f) [NA - NO FLARES]

[54 FR 6678, Feb. 14, 1989; 54 FR 21344, Feb. 14, 1989, as amended at 68 FR 70965, Dec. 19, 2003]

005 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.505]

**Subpart XX - Standards of Performance for Bulk Gasoline Terminals
Reporting and recordkeeping.**

60.505(a) The tank truck vapor tightness documentation required under § 60.502(e)(1) shall be kept on file at the terminal in a permanent form available for inspection.

60.505(b) The documentation file for each gasoline tank truck shall be updated at least once per year to reflect current test results as determined by Method 27. This documentation shall include, as a minimum, the following information:

60.505(b)(1) Test title: Gasoline Delivery Tank Pressure Test—EPA Reference Method 27.

60.505(b)(2) Tank owner and address.

60.505(b)(3) Tank identification number.

60.505(b)(4) Testing location.

60.505(b)(5) Date of test.

60.505(b)(6) Tester name and signature.

60.505(b)(7) Witnessing inspector, if any: Name, signature, and affiliation.

60.505(b)(8) Test results: Actual pressure change in 5 minutes, mm of water (average for 2 runs).

60.505(c) A record of each monthly leak inspection required under § 60.502(j) shall be kept on file at the terminal for at least 2 years. Inspection records shall include, as a minimum, the following information:

60.505(c)(1) Date of inspection.

60.505(c)(2) Findings (may indicate no leaks discovered; or location, nature, and severity of each leak).

60.505(c)(3) Leak determination method.

60.505(c)(4) Corrective action (date each leak repaired; reasons for any repair interval in excess of 15 days).

60.505(c)(5) Inspector name and signature.

60.505(d) The terminal owner or operator shall keep documentation of all notifications required under § 60.502(e)(4) on file at the terminal for at least 2 years.

60.505(e) As an alternative to keeping records at the terminal of each gasoline cargo tank test result as required in paragraphs (a), (c), and (d) of this section, an owner or operator may comply with the requirements in either paragraph (e)(1) or (2) of this section.

60.505(e)(1) An electronic copy of each record is instantly available at the terminal.

60.505(e)(1)(i) The copy of each record in paragraph (e)(1) of this section is an exact duplicate image of the original paper record with certifying signatures.

60.505(e)(1)(ii) The permitting authority is notified in writing that each terminal using this alternative is in compliance

**SECTION E. Source Group Restrictions.**

with paragraph (e)(1) of this section.

60.505(e)(2) For facilities that utilize a terminal automation system to prevent gasoline cargo tanks that do not have valid cargo tank vapor tightness documentation from loading (e.g., via a card lock-out system), a copy of the documentation is made available (e.g., via facsimile) for inspection by permitting authority representatives during the course of a site visit, or within a mutually agreeable time frame.

60.505(e)(2)(i) The copy of each record in paragraph (e)(2) of this section is an exact duplicate image of the original paper record with certifying signatures.

60.505(e)(2)(ii) The permitting authority is notified in writing that each terminal using this alternative is in compliance with paragraph (e)(2) of this section.

60.505(f) The owner or operator of an affected facility shall keep records of all replacements or additions of components performed on an existing vapor processing system for at least 3 years.

[48 FR 37590, Aug. 18, 1983; 48 FR 56580, Dec. 22, 1983, as amended at 68 FR 70965, Dec. 19, 2003]

006 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.506]**Subpart XX - Standards of Performance for Bulk Gasoline Terminals Reconstruction.**

For purposes of this subpart:

60.506(a) The cost of the following frequently replaced components of the affected facility shall not be considered in calculating either the "fixed capital cost of the new components" or the "fixed capital costs that would be required to construct a comparable entirely new facility" under § 60.15: pump seals, loading arm gaskets and swivels, coupler gaskets, overfill sensor couplers and cables, flexible vapor hoses, and grounding cables and connectors.

60.506(b) Under § 60.15, the "fixed capital cost of the new components" includes the fixed capital cost of all depreciable components (except components specified in § 60.506(a)) which are or will be replaced pursuant to all continuous programs of component replacement which are commenced within any 2-year period following December 17, 1980. For purposes of this paragraph, "commenced" means that an owner or operator has undertaken a continuous program of component replacement or that an owner or operator has entered into a contractual obligation to undertake and complete, within a reasonable time, a continuous program of component replacement.

**SECTION E. Source Group Restrictions.**

Group Name: SG08

Group Description: 40 CFR 63, Subpart ZZZZ Engine(s)

Sources included in this group

ID	Name
401	EMERGENCY GENERATOR

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6585]****Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines****Am I subject to this subpart?**

§ 63.6585 Am I subject to this subpart?

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

(a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.

(b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.

(c) An area source of HAP emissions is a source that is not a major source.

(d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or

**SECTION E. Source Group Restrictions.**

other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

(e) [N/A – NOT USED FOR NATIONAL SECURITY PURPOSES]

(f) [N/A – RICE NOT RESIDENTIAL, COMMERCIAL OR INSTITUTIONAL]

[69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

§ 63.6590 What parts of my plant does this subpart cover?

This subpart applies to each affected source.

(a) Affected source. An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.

(1) Existing stationary RICE.

(i) [N/A – NOT A MAJOR HAP SOURCE]

(ii) [N/A – NOT A MAJOR HAP SOURCE]

(iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

(iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

(2) New stationary RICE.

(i) [N/A – NOT A MAJOR HAP SOURCE]

(ii) [N/A – NOT A MAJOR HAP SOURCE]

(iii) [N/A – NOT A NEW SOURCE]

(3) [N/A – NOT A RECONSTRUCTED SOURCE]

(b) Stationary RICE subject to limited requirements. (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of § 63.6645(f).

(i) [N/A – NOT A MAJOR HAP SOURCE]

(ii) [N/A – NOT A MAJOR HAP SOURCE]

(2) [N/A – NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]

(3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:

(i) [N/A – NOT A MAJOR HAP SOURCE]

(ii) [N/A – NOT A MAJOR HAP SOURCE]

**SECTION E. Source Group Restrictions.**

(iii) [N/A – NOT A MAJOR HAP SOURCE]

(iv) [N/A – NOT A MAJOR HAP SOURCE]

(v) [N/A – NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]

(c) [N/A – NOT SUBJECT TO SUBPARTS IIII OR JJJJ]

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

§ 63.6595 When do I have to comply with this subpart?

(a) Affected sources. (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. IF YOU HAVE an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or AN EXISTING STATIONARY CI RICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS, OPERATING LIMITATIONS, AND OTHER REQUIREMENTS NO LATER THAN MAY 3, 2013.

IF YOU HAVE an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of hap emissions, or AN EXISTING STATIONARY SI RICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS, OPERATING LIMITATIONS, AND OTHER REQUIREMENTS NO LATER THAN OCTOBER 19, 2013.

(2) [N/A – NOT A MAJOR HAP SOURCE]

(3) [N/A – NOT A MAJOR HAP SOURCE]

(4) [N/A – NOT A MAJOR HAP SOURCE]

(5) [N/A – NOT A MAJOR HAP SOURCE]

(6) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(7) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(b) Area sources that become major sources. If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.

(1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.

(2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.

(c) If you own or operate an affected source, you must meet the applicable notification requirements in § 63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

Emission and Operating Limitations

**SECTION E. Source Group Restrictions.**

§ 63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

[N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?

[N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?

[N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, YOU MUST COMPLY WITH THE REQUIREMENTS IN TABLE 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

TABLE 2d REQUIREMENTS:

4. For each EMERGENCY STATIONARY CI RICE and black start stationary CI RICE**, you must meet the following requirement, except during periods of startup:

- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

5. For each EMERGENCY STATIONARY SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year**, you must meet the following requirement, except during periods of startup:

- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.

*Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.

**If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has

**SECTION E. Source Group Restrictions.**

ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[END OF TABLE 2d REQUIREMENTS]

(b) [N/A – EMERGENCY ENGINE(S)]

(c) [N/A – EMERGENCY ENGINE(S)]

(d) [N/A – EMERGENCY ENGINE(S)]

(e) [N/A – EMERGENCY ENGINE(S)]

(f) [N/A – EMERGENCY ENGINE(S)]

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013; 89 FR 70515, Aug. 30, 2024]

§ 63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?

(a) [N/A – EMERGENCY ENGINE(S)]

(b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates for the purpose specified in § 63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR 1090.305 for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.

(c) [N/A – NOT A MAJOR SOURCE]

(d) [N/A – NOT IN SPECIFIED GEOGRAPHIC LOCATIONS]

[78 FR 6702, Jan. 30, 2013, as amended at 85 FR 78463, Dec. 4, 2020; 87 FR 48607, Aug. 10, 2022]

General Compliance Requirements

§ 63.6605 What are my general requirements for complying with this subpart?

(a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.

(b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

Testing and Initial Compliance Requirements

§ 63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

**SECTION E. Source Group Restrictions.**

[N/A – NOT A MAJOR HAP SOURCE]

§ 63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

[N/A – NOT A MAJOR HAP SOURCE]

§ 63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

[N/A – NO PERFORMANCE TESTING REQUIRED]

§ 63.6615 When must I conduct subsequent performance tests?

[N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6620 What performance tests and other procedures must I use?

[N/A – NO PERFORMANCE TESTING REQUIRED]

§ 63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

(a) [N/A – CEMS NOT REQUIRED]

(b) [N/A – CPMS NOT REQUIRED]

(c) [N/A – LFG NOT USED]

(d) [N/A – NOT A MAJOR HAP SOURCE]

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) [N/A – NOT A MAJOR HAP SOURCE]

(2) [N/A – NOT A MAJOR HAP SOURCE]

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) [N/A – EMERGENCY ENGINE(S)]

(5) [N/A – EMERGENCY ENGINE(S)]

(6) [N/A – EMERGENCY ENGINE(S)]

(7) [N/A – EMERGENCY ENGINE(S)]

(8) [N/A – EMERGENCY ENGINE(S)]

(9) [N/A – EMERGENCY ENGINE(S)]

(10) [N/A – EMERGENCY ENGINE(S)]

**SECTION E. Source Group Restrictions.**

(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) [NA – EMERGENCY ENGINE(S)]

(h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.

(i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of table 2c to this subpart or in items 1 or 4 of table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil and filter change requirement in tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil and filter in table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil and filter. If any of the limits are exceeded, the engine owner or operator must change the oil and filter within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil and filter within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil and filter changes for the engine. The analysis program must be part of the maintenance plan for the engine.

(j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of table 2c to this subpart or in items 5, 6, 7, 8, 10, 11, or 13 of table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil and filter change requirement in tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil and filter in table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil and filter. If any of the limits are exceeded, the engine owner or operator must change the oil and filter within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil and filter within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil and filter changes for the engine. The analysis program must be part of the maintenance plan for the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013; 89 FR 70516, Aug. 30, 2024]

§ 63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart. [NA – NONE OF THE CATEGORIES IN TABLE 5 APPLY TO EMERGENCY ENGINES]

(b) [N/A – PERFORMANCE TESTING NOT REQUIRED]

(c) [N/A – NOCS NOT REQUIRED FOR EXISTING EMERGENCY RICE]

(d) [N/A – EMERGENCY ENGINE(S)]

**SECTION E. Source Group Restrictions.**

(e) [N/A – EMERGENCY ENGINE(S)]

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

Continuous Compliance Requirements

§ 63.6635 How do I monitor and collect data to demonstrate continuous compliance?

[N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

TABLE 6 REQUIREMENTS

9. FOR EACH existing emergency and black start stationary RICE ≤ 500 HP located at a major source of HAP, existing non-emergency stationary RICE < 100 HP located at a major source of HAP, EXISTING EMERGENCY and black start STATIONARY RICE LOCATED AT AN AREA SOURCE OF HAP, existing non-emergency stationary CI RICE ≤ 300 HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE ≤ 500 HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE > 500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE > 500 HP located at an area source of HAP that are remote stationary RICE, complying with the requirement to "Work or Management practices", you must demonstrate continuous compliance by:

i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or

ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

[END OF TABLE 6 REQUIREMENTS]

(b) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(c) [N/A – ANNUAL COMPLIANCE DEMONSTRATION NOT REQUIRED]

(d) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or

**SECTION E. Source Group Restrictions.**

reconstructed limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

(f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4), the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.

(1) There is no time limit on the use of emergency stationary RICE in emergency situations.

(2) You may operate your emergency stationary RICE for the purpose specified in paragraph (f)(2)(i) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).

(i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.

(ii)-(iii) [RESERVED]

(3) [N/A – NOT A MAJOR HAP SOURCE]

(4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.

(i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.

(ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

(A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.

(B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.

(C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.

(D) The power is provided only to the facility itself or to support the local transmission and distribution system.

(E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

**SECTION E. Source Group Restrictions.**

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022]

Notifications, Reports, and Records

§ 63.6645 What notifications must I submit and when?

(a) You must submit all of the notifications in §§ 63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;

(1) [N/A – NOT A MAJOR HAP SOURCE]

(2) [N/A PER (5) BELOW]

(3) [N/A – NOT A MAJOR HAP SOURCE]

(4) [N/A – NOT A MAJOR HAP SOURCE]

(5) THIS REQUIREMENT DOES NOT APPLY IF YOU OWN OR OPERATE an existing stationary RICE less than 100 HP, AN EXISTING STATIONARY EMERGENCY RICE, OR AN EXISTING STATIONARY RICE THAT IS NOT SUBJECT TO ANY NUMERICAL EMISSION STANDARDS.

(b) [N/A – NOT A MAJOR HAP SOURCE]

(c) [N/A – NOT A MAJOR HAP SOURCE]

(d) [N/A – NOT A MAJOR HAP SOURCE]

(e) [N/A – NOT A MAJOR HAP SOURCE]

(f) [N/A – 63.6590(b) DOES NOT APPLY]

(g) [N/A – PERFORMANCE TEST NOT REQUIRED]

(h) [N/A – PERFORMANCE TEST NOT REQUIRED]

(i) [N/A – EMERGENCY ENGINE(S)]

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6705, Jan. 30, 2013; 85 FR 73912, Nov. 19, 2020; 89 FR 70516, Aug. 30, 2024]

§ 63.6650 What reports must I submit and when?

(a) You must submit each report in Table 7 of this subpart that applies to you.

TABLE 7 REQUIREMENTS

4. For each emergency stationary RICE that operate for the purposes specified in § 63.6640(f)(4)(ii), you must submit a Report. The report must contain the information in § 63.6650(h)(1). You must submit the report annually according to the requirements in § 63.6650(h)(2)-(3).

[END OF TABLE 7 REQUIREMENTS]

(b) Unless the Administrator has approved a different schedule for submission of reports under § 63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

**SECTION E. Source Group Restrictions.**

- (1) [N/A – ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (2) [N/A – ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (3) [N/A – ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (4) [N/A – ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (5) [N/A – ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in § 63.6595 and ending on December 31.
- (7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in § 63.6595.
- (8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.
- (9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.
- (c) [N/A – “COMPLIANCE REPORT” NOT REQUIRED]
- (d) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (f) [N/A – NOT SUBJECT TO TITLE V PERMITTING]
- (g) [N/A – LFG NOT USED]
- (h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates for the purpose specified in § 63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.
 - (1) The report must contain the following information:
 - (i) Company name and address where the engine is located.
 - (ii) Date of the report and beginning and ending dates of the reporting period.
 - (iii) Engine site rating in brake HP, year construction of the engine commenced (as defined in § 63.2, where the exact year is not known, provide the best estimate), and type of engine (CI, SI 2SLB, SI 4SLB, or SI 4SRB).
 - (iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.
 - (v) –(vi) [RESERVED]
 - (vii) Hours spent for operation for the purpose specified in § 63.6640(f)(4)(ii), including the date, start time, and end time for engine operation for the purposes specified in § 63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.
 - (viii) If there were no deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.
 - (ix) If there were deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), information on the

**SECTION E. Source Group Restrictions.**

number, duration (in hours), and cause of deviations, and the corrective action taken.

(2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.

(3) Before February 26, 2025, the annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (<https://cdx.epa.gov/>). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 63.13. Beginning on February 26, 2025, the annual report must be submitted according to paragraph (i) of this section.

(i) Beginning on February 26, 2025 for the annual report specified in § 63.6650(h) and February 26, 2025 or one year after the report becomes available in CEDRI, whichever is later for all other semiannual or annual reports, submit all semiannual and annual subsequent compliance reports using the appropriate electronic report template on the CEDRI website (<https://www.epa.gov/electronic-reporting-air-emissions/cedri>) for this subpart and following the procedure specified in § 63.9(k), except any CBI must be submitted according to the procedures in § 63.6645(h). The date report templates become available will be listed on the CEDRI website. Unless the Administrator or delegated state agency or other authority has approved a different schedule for submission of reports, the report must be submitted by the deadline specified in this subpart, regardless of the method in which the report is submitted.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013; 87 FR 48607, Aug. 10, 2022; 89 FR 70517, Aug. 30, 2024]

§ 63.6655 What records must I keep?

(a) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(b) [N/A – NO CEMS OR CPMS]

(c) [N/A – LFG NOT USED]

(d) [N/A – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

(e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;

(1) [N/A – NOT A MAJOR HAP SOURCE]

(2) An existing stationary emergency RICE.

(3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.

(f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purpose specified in § 63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.

(1) [NA – NOT A MAJOR HAP SOURCE]

(2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30,

**SECTION E. Source Group Restrictions.**

2013; 87 FR 48607, Aug. 10, 2022; 89 FR 70518 preview citation details, Aug. 30, 2024]

§ 63.6660 In what form and how long must I keep my records?

(a) Your records must be in a form suitable and readily available for expeditious review according to § 63.10(b)(1).

(b) As specified in § 63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.

(c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to § 63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

Other Requirements and Information

§ 63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

[75 FR 9678, Mar. 3, 2010]

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart ZZZZ -National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Associate Director
United States Environmental Protection Agency
Region III, Enforcement & Compliance Assurance Division
Air, RCRA and Toxics Branch (3ED21)
Four Penn Center
1600 John F. Kennedy Boulevard
Philadelphia, Pennsylvania 19103-2852

Unless otherwise approved by DEP, the DEP copies shall be reported through the Department's Greenport PUP system available through:

<https://greenport.pa.gov/ePermitPublicAccess/PublicSubmission/Home>

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions



SECTION E. Source Group Restrictions.

of the revised subpart.



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

**SECTION H. Miscellaneous.**

#001

This permit includes the sources previously operated under Air Quality Permit 06-05068 issued July 6, 2021, and supercedes that permit.

#002

NOTE: All of the capacity/throughput values listed in Sections A and D are for informational purposes only and are not operating limits unless stated so in conditions in Section D or Section E.

#003

The following sources have been found to be of minor significance:

- (1) Terminal Building Furnace.
- (2) Main office Furnace.
- (3) Shop Furnace.
- (4) Shop Water Heater.
- (5) Biodiesel Storage tanks with vents.
- (6) Ethanol & Biodiesel Rail Car Off-loading System.
- (7) Waste oil (T-184), 1,000 gallons
- (8) Heating oil tank, 275 gallons
- (9) Heating oil tank, 275 gallons
- (10) Slop tank, 250 gallons

#004

Additive storage tanks less than 40,000 gallons and vapor pressure less than 1.5 psia:

ID	Source
232	Tank T-815
233	Tank T-816
234	Tank T-3
235	Tank T-2
236	Tank T-5
237	Tank T-4
238	Tank T-6
239	Tank T-7
240	Tank T-1
241	Tank T-01
331	Tank T-09
332	Tank T-10
333	Tank T-11
334	Tank T-12
335	Tank T-13
336	Tank T-14
337	Tank T-15
338	Tank T-16
339	Out of Service Tank

#005

Sources 212, 214, 220, 303 (ID 103) and 305 (ID 305) are tanks listed in SG04 because they do not have floating roofs and can only store distillates.

#006

Three RFDs were approved during the previous permit.

RFD #6535 added butane blending to gasoline storage tanks.

RFD #7231 installed two new 8000 gallon additive storage tanks.

RFD #8163 approved gasoline railcar offloading operations to transport gasoline from railcars to storage tanks.



***** End of Report *****
