



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents
Site Inventory List

Section B. General Title V Requirements

- #001 Definitions
- #002 Prohibition of Air Pollution
- #003 Property Rights
- #004 Permit Expiration
- #005 Permit Renewal
- #006 Transfer of Ownership or Operational Control
- #007 Inspection and Entry
- #008 Compliance Requirements
- #009 Need to Halt or Reduce Activity Not a Defense
- #010 Duty to Provide Information
- #011 Reopening and Revising the Title V Permit for Cause
- #012 Reopening a Title V Permit for Cause by EPA
- #013 Operating Permit Application Review by the EPA
- #014 Significant Operating Permit Modifications
- #015 Minor Operating Permit Modifications
- #016 Administrative Operating Permit Amendments
- #017 Severability Clause
- #018 Fee Payment
- #019 Authorization for De Minimis Emission Increases
- #020 Reactivation of Sources
- #021 Circumvention
- #022 Submissions
- #023 Sampling, Testing and Monitoring Procedures
- #024 Compliance Certification
- #025 Recordkeeping Requirements
- #026 Reporting Requirements
- #027 Operational Flexibility
- #028 Risk Management
- #029 Approved Economic Incentives and Emission Trading Programs
- #030 Permit Shield
- #031 Reporting
- #032 Report Format

Section C. Site Level Title V Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level Title V Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements



SECTION A. Table of Contents

- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

- E-I: Restrictions
- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

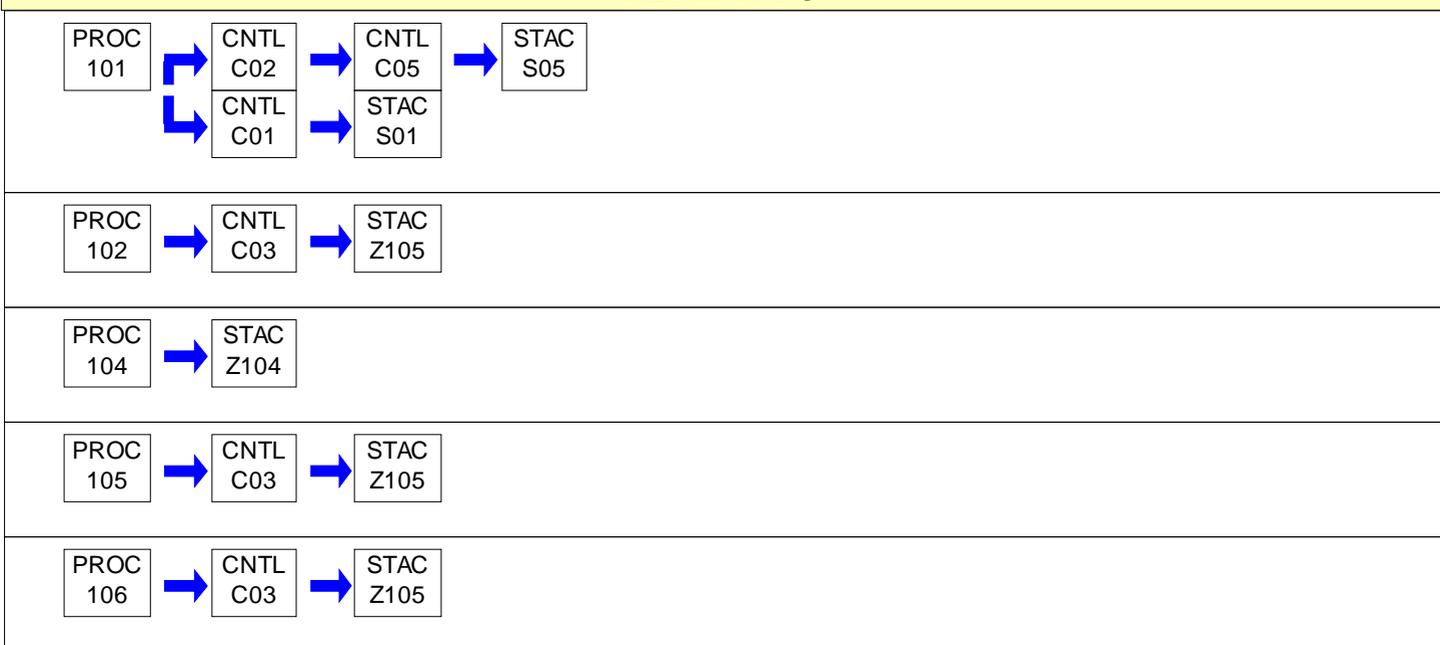
- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous

**SECTION A. Site Inventory List**

| Source ID | Source Name | Capacity/Throughput | Fuel/Material |
|-----------|--|---------------------|---------------|
| 101 | LANDFILL GAS COLLECTION AND CONTROL | | |
| 102 | PAVED & UNPAVED ROADS | | |
| 104 | LEACHATE STORAGE TANKS | | |
| 105 | LANDFILL CONSTRUCTION/OPERATION | | |
| 106 | SOIL PROCESSING | | |
| 107 | OVERBURDEN BLASTING | | |
| 111 | ROCK CRUSHING | | |
| 112 | 2,128 BHP CUMMINS C1540 N6CB ENGINE | | |
| 115 | COMPRESSED NATURAL GAS FUELING STATION | | |
| C01 | ZINK FLARE | | |
| C02 | TREATMENT PLANT | | |
| C03 | PRESSURIZED WATER TRUCK | | |
| C05 | THERMAL OXIDIZER | | |
| C112A | CUMMINS ENGINE OXIDATION CATALYST | | |
| C112B | CUMMINS ENGINE SCR | | |
| S01 | LFG FLARE #1 STACK | | |
| S05 | THERMAL OXIDIZER STACK | | |
| S112 | CUMMINS ENGINE STACK | | |
| Z104 | FUGITIVE EMISSION | | |
| Z105 | FUGITIVE EMISSION | | |
| Z107 | OVERBURDEN BLASTING FUGITIVES | | |
| Z111 | ROCK CRUSHING FUGITIVES | | |
| Z115 | EXHAUST | | |

PERMIT MAPS

**PERMIT MAPS**

PROC
107 → STAC
Z107

PROC
111 → STAC
Z111

PROC
112 → CNTL
C112A → CNTL
C112B → STAC
S112

PROC
115 → STAC
Z115

**SECTION B. General Title V Requirements****#001 [25 Pa. Code § 121.1]****Definitions**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 121.7]**Prohibition of Air Pollution**

No person may permit air pollution as that term is defined in the Air Pollution Control Act (35 P.S. §§ 4001-4015).

#003 [25 Pa. Code § 127.512(c)(4)]**Property Rights**

This permit does not convey property rights of any sort, or any exclusive privileges.

#004 [25 Pa. Code § 127.446(a) and (c)]**Permit Expiration**

This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit. The terms and conditions of the expired permit shall automatically continue pending issuance of a new Title V permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.

#005 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446(e), 127.503 & 127.704(b)]**Permit Renewal**

(a) An application for the renewal of the Title V permit shall be submitted to the Department at least six (6) months, and not more than 18 months, before the expiration date of this permit. The renewal application is timely if a complete application is submitted to the Department's Regional Air Manager within the timeframe specified in this permit condition.

(b) The application for permit renewal shall include the current permit number, the appropriate permit renewal fee, a description of any permit revisions and off-permit changes that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.

(c) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413. The application for renewal of the Title V permit shall also include submission of compliance review forms which have been used by the permittee to update information submitted in accordance with either 25 Pa. Code § 127.412(b) or § 127.412(j).

(d) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information during the permit renewal process. The permittee shall also promptly provide additional information as necessary to address any requirements that become applicable to the source after the date a complete renewal application was submitted but prior to release of a draft permit.

#006 [25 Pa. Code §§ 127.450(a)(4) & 127.464(a)]**Transfer of Ownership or Operational Control**

(a) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership or operational control of the source shall be treated as an administrative amendment if:

(1) The Department determines that no other change in the permit is necessary;

(2) A written agreement has been submitted to the Department identifying the specific date of the transfer of permit

**SECTION B. General Title V Requirements**

responsibility, coverage and liability between the current and the new permittee; and,

(3) A compliance review form has been submitted to the Department and the permit transfer has been approved by the Department.

(b) In accordance with 25 Pa. Code § 127.464(a), this permit may not be transferred to another person except in cases of transfer-of-ownership which are documented and approved to the satisfaction of the Department.

#007 [25 Pa. Code § 127.513, 35 P.S. § 4008 and § 114 of the CAA]**Inspection and Entry**

(a) Upon presentation of credentials and other documents as may be required by law for inspection and entry purposes, the permittee shall allow the Department of Environmental Protection or authorized representatives of the Department to perform the following:

- (1) Enter at reasonable times upon the permittee's premises where a Title V source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
- (2) Have access to and copy or remove, at reasonable times, records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#008 [25 Pa. Code §§ 127.25, 127.444, & 127.512(c)(1)]**Compliance Requirements**

(a) The permittee shall comply with the conditions of this permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one (1) or more of the following:

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source, which is subject to 25 Pa. Code Article III, unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued to the source are operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this Title V permit.

**SECTION B. General Title V Requirements****#009 [25 Pa. Code § 127.512(c)(2)]****Need to Halt or Reduce Activity Not a Defense**

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#010 [25 Pa. Code §§ 127.411(d) & 127.512(c)(5)]**Duty to Provide Information**

(a) The permittee shall furnish to the Department, within a reasonable time, information that the Department may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or to determine compliance with the permit.

(b) Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to keep by this permit, or for information claimed to be confidential, the permittee may furnish such records directly to the Administrator of EPA along with a claim of confidentiality.

#011 [25 Pa. Code §§ 127.463, 127.512(c)(3) & 127.542]**Reopening and Revising the Title V Permit for Cause**

(a) This Title V permit may be modified, revoked, reopened and reissued or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay a permit condition.

(b) This permit may be reopened, revised and reissued prior to expiration of the permit under one or more of the following circumstances:

(1) Additional applicable requirements under the Clean Air Act or the Air Pollution Control Act become applicable to a Title V facility with a remaining permit term of three (3) or more years prior to the expiration date of this permit. The Department will revise the permit as expeditiously as practicable but not later than 18 months after promulgation of the applicable standards or regulations. No such revision is required if the effective date of the requirement is later than the expiration date of this permit, unless the original permit or its terms and conditions has been extended.

(2) Additional requirements, including excess emissions requirements, become applicable to an affected source under the acid rain program. Upon approval by the Administrator of EPA, excess emissions offset plans for an affected source shall be incorporated into the permit.

(3) The Department or the EPA determines that this permit contains a material mistake or inaccurate statements were made in establishing the emissions standards or other terms or conditions of this permit.

(4) The Department or the Administrator of EPA determines that the permit must be revised or revoked to assure compliance with the applicable requirements.

(c) Proceedings to revise this permit shall follow the same procedures which apply to initial permit issuance and shall affect only those parts of this permit for which cause to revise exists. The revision shall be made as expeditiously as practicable.

(d) Regardless of whether a revision is made in accordance with (b)(1) above, the permittee shall meet the applicable standards or regulations promulgated under the Clean Air Act within the time frame required by standards or regulations.

#012 [25 Pa. Code § 127.543]**Reopening a Title V Permit for Cause by EPA**

As required by the Clean Air Act and regulations adopted thereunder, this permit may be modified, reopened and reissued, revoked or terminated for cause by EPA in accordance with procedures specified in 25 Pa. Code § 127.543.

**SECTION B. General Title V Requirements****#013 [25 Pa. Code § 127.522(a)]****Operating Permit Application Review by the EPA**

The applicant may be required by the Department to provide a copy of the permit application, including the compliance plan, directly to the Administrator of the EPA. Copies of title V permit applications to EPA, pursuant to 25 PA Code §127.522(a), shall be submitted, if required, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#014 [25 Pa. Code § 127.541]**Significant Operating Permit Modifications**

When permit modifications during the term of this permit do not qualify as minor permit modifications or administrative amendments, the permittee shall submit an application for significant Title V permit modifications in accordance with 25 Pa. Code § 127.541. Notifications to EPA, pursuant to 25 PA Code §127.522(a), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#015 [25 Pa. Code §§ 121.1 & 127.462]**Minor Operating Permit Modifications**

The permittee may make minor operating permit modifications (as defined in 25 Pa. Code §121.1), on an expedited basis, in accordance with 25 Pa. Code §127.462 (relating to minor operating permit modifications). Notifications to EPA, pursuant to 25 PA Code §127.462(c), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#016 [25 Pa. Code § 127.450]**Administrative Operating Permit Amendments**

(a) The permittee may request administrative operating permit amendments, as defined in 25 Pa. Code §127.450(a). Copies of request for administrative permit amendment to EPA, pursuant to 25 PA Code §127.450(c)(1), if required, shall be submitted to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

(b) Upon final action by the Department granting a request for an administrative operating permit amendment covered under §127.450(a)(5), the permit shield provisions in 25 Pa. Code § 127.516 (relating to permit shield) shall apply to administrative permit amendments incorporated in this Title V Permit in accordance with §127.450(c), unless precluded by the Clean Air Act or the regulations thereunder.

#017 [25 Pa. Code § 127.512(b)]**Severability Clause**

The provisions of this permit are severable, and if any provision of this permit is determined by the Environmental Hearing Board or a court of competent jurisdiction, or US EPA to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

**SECTION B. General Title V Requirements****#018 [25 Pa. Code §§ 127.704, 127.705 & 127.707]****Fee Payment**

- (a) The permittee shall pay fees to the Department in accordance with the applicable fee schedules in 25 Pa. Code Chapter 127, Subchapter I (relating to plan approval and operating permit fees). The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.
- (b) Emission Fees. The permittee shall, on or before September 1st of each year, pay applicable annual Title V emission fees for emissions occurring in the previous calendar year as specified in 25 Pa. Code § 127.705. The permittee is not required to pay an emission fee for emissions of more than 4,000 tons of each regulated pollutant emitted from the facility.
- (c) As used in this permit condition, the term "regulated pollutant" is defined as a VOC, each pollutant regulated under Sections 111 and 112 of the Clean Air Act and each pollutant for which a National Ambient Air Quality Standard has been promulgated, except that carbon monoxide is excluded.
- (d) Late Payment. Late payment of emission fees will subject the permittee to the penalties prescribed in 25 Pa. Code § 127.707 and may result in the suspension or termination of the Title V permit. The permittee shall pay a penalty of fifty percent (50%) of the fee amount, plus interest on the fee amount computed in accordance with 26 U.S.C.A. § 6621(a)(2) from the date the emission fee should have been paid in accordance with the time frame specified in 25 Pa. Code § 127.705(c).
- (e) The permittee shall pay an annual operating permit maintenance fee according to the following fee schedule established in 25 Pa. Code § 127.704(d) on or before December 31 of each year for the next calendar year.
- (1) Eight thousand dollars (\$8,000) for calendar years 2021—2025.
 - (2) Ten thousand dollars (\$10,000) for calendar years 2026—2030.
 - (3) Twelve thousand five hundred dollars (\$12,500) for the calendar years beginning with 2031.

#019 [25 Pa. Code §§ 127.14(b) & 127.449]**Authorization for De Minimis Emission Increases**

(a) This permit authorizes de minimis emission increases from a new or existing source in accordance with 25 Pa. Code §§ 127.14 and 127.449 without the need for a plan approval or prior issuance of a permit modification. The permittee shall provide the Department with seven (7) days prior written notice before commencing any de minimis emissions increase that would result from either: (1) a physical change of minor significance under § 127.14(c)(1); or (2) the construction, installation, modification or reactivation of an air contamination source. The written notice shall:

- (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

The Department may disapprove or condition de minimis emission increases at any time.

(b) Except as provided below in (c) and (d) of this permit condition, the permittee is authorized during the term of this permit to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NO_x from a single source during the term of the permit and 5 tons of NO_x at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of

**SECTION B. General Title V Requirements**

oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM₁₀ from a single source during the term of the permit and 3.0 tons of PM₁₀ at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.

(c) In accordance with § 127.14, the permittee may install the following minor sources without the need for a plan approval:

(1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.

(2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.

(3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility, liquefied petroleum gas or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code § 123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.

(4) Space heaters which heat by direct heat transfer.

(5) Laboratory equipment used exclusively for chemical or physical analysis.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:

(1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (b)(4) and (5) of this permit condition.

(2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.

(3) Violate any applicable requirement of the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.

(4) Changes which are modifications under any provision of Title I of the Clean Air Act and emission increases which would exceed the allowable emissions level (expressed as a rate of emissions or in terms of total emissions) under the Title V permit.

(e) Unless precluded by the Clean Air Act or the regulations thereunder, the permit shield described in 25 Pa. Code § 127.516 (relating to permit shield) shall extend to the changes made under 25 Pa. Code § 127.449 (relating to de minimis emission increases).

(f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.

(g) Except for de minimis emission increases allowed under this permit, 25 Pa. Code § 127.449, or sources and physical changes meeting the requirements of 25 Pa. Code § 127.14, the permittee is prohibited from making physical changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.

**SECTION B. General Title V Requirements**

(h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#020 [25 Pa. Code §§ 127.11a & 127.215]**Reactivation of Sources**

(a) The permittee may reactivate a source at the facility that has been out of operation or production for at least one year, but less than or equal to five (5) years, if the source is reactivated in accordance with the requirements of 25 Pa. Code §§ 127.11a and 127.215. The reactivated source will not be considered a new source.

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#021 [25 Pa. Code §§ 121.9 & 127.216]**Circumvention**

(a) The owner of this Title V facility, or any other person, may not circumvent the new source review requirements of 25 Pa. Code Chapter 127, Subchapter E by causing or allowing a pattern of ownership or development, including the phasing, staging, delaying or engaging in incremental construction, over a geographic area of a facility which, except for the pattern of ownership or development, would otherwise require a permit or submission of a plan approval application.

(b) No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of this permit, the Air Pollution Control Act or the regulations promulgated thereunder, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#022 [25 Pa. Code §§ 127.402(d) & 127.513(1)]**Submissions**

(a) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given on the permit transmittal letter, or otherwise notified)

(b) Any report or notification for the EPA Administrator or EPA Region III should be addressed to:

Enforcement & Compliance Assurance Division
Air, RCRA and Toxics Branch (3ED21)
Four Penn Center
1600 John F. Kennedy Boulevard
Philadelphia, PA 19103-2852

The Title V compliance certification shall be emailed to EPA at R3_APD_Permits@epa.gov.

(c) An application, form, report or compliance certification submitted pursuant to this permit condition shall contain certification by a responsible official as to truth, accuracy, and completeness as required under 25 Pa. Code § 127.402(d). Unless otherwise required by the Clean Air Act or regulations adopted thereunder, this certification and any other certification required pursuant to this permit shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.

#023 [25 Pa. Code §§ 127.441(c) & 127.463(e); Chapter 139; & 114(a)(3), 504(b) of the CAA]**Sampling, Testing and Monitoring Procedures**

(a) The permittee shall perform the emissions monitoring and analysis procedures or test methods for applicable requirements of this Title V permit. In addition to the sampling, testing and monitoring procedures specified in this

**SECTION B. General Title V Requirements**

permit, the Permittee shall comply with any additional applicable requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.

(b) The sampling, testing and monitoring required under the applicable requirements of this permit, shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139 unless alternative methodology is required by the Clean Air Act (including §§ 114(a)(3) and 504(b)) and regulations adopted thereunder.

#024 [25 Pa. Code § 127.513]**Compliance Certification**

(a) One year after the date of issuance of the Title V permit, and each year thereafter, unless specified elsewhere in the permit, the permittee shall submit to the Department and EPA Region III a certificate of compliance with the terms and conditions in this permit, for the previous year, including the emission limitations, standards or work practices.

This certification shall include:

- (1) The identification of each term or condition of the permit that is the basis of the certification.
- (2) The compliance status.
- (3) The methods used for determining the compliance status of the source, currently and over the reporting period.
- (4) Whether compliance was continuous or intermittent.

(b) The compliance certification shall be postmarked or hand-delivered no later than thirty days after each anniversary of the date of issuance of this Title V Operating Permit, or on the submittal date specified elsewhere in the permit, to the Department in accordance with the submission requirements specified in Section B, Condition #022 of this permit. The Title V compliance certification shall be emailed to EPA at R3_APD_Permits@epa.gov.

#025 [25 Pa. Code §§ 127.511 & Chapter 135]**Recordkeeping Requirements**

(a) The permittee shall maintain and make available, upon request by the Department, records of required monitoring information that include the following:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of the required monitoring data and supporting information for at least five (5) years from the date of the monitoring sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

**SECTION B. General Title V Requirements****#026 [25 Pa. Code §§ 127.411(d), 127.442, 127.463(e) & 127.511(c)]****Reporting Requirements**

- (a) The permittee shall comply with the reporting requirements for the applicable requirements specified in this Title V permit. In addition to the reporting requirements specified herein, the permittee shall comply with any additional applicable reporting requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.
- (b) Pursuant to 25 Pa. Code § 127.511(c), the permittee shall submit reports of required monitoring at least every six (6) months unless otherwise specified in this permit. Instances of deviations (as defined in 25 Pa. Code § 121.1) from permit requirements shall be clearly identified in the reports. The reporting of deviations shall include the probable cause of the deviations and corrective actions or preventative measures taken, except that sources with continuous emission monitoring systems shall report according to the protocol established and approved by the Department for the source. The required reports shall be certified by a responsible official.
- (c) Every report submitted to the Department under this permit condition shall comply with the submission procedures specified in Section B, Condition #022(c) of this permit.
- (d) Any records, reports or information obtained by the Department or referred to in a public hearing shall be made available to the public by the Department except for such records, reports or information for which the permittee has shown cause that the documents should be considered confidential and protected from disclosure to the public under Section 4013.2 of the Air Pollution Control Act and consistent with Sections 112(d) and 114(c) of the Clean Air Act and 25 Pa. Code § 127.411(d). The permittee may not request a claim of confidentiality for any emissions data generated for the Title V facility.

#027 [25 Pa. Code § 127.3]**Operational Flexibility**

The permittee is authorized to make changes within the Title V facility in accordance with the following provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements of Section 502(b)(10) of the Clean Air Act and Section 6.1(i) of the Air Pollution Control Act:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)
- (6) Section 127.462 (relating to minor operating permit amendments)
- (7) Subchapter H (relating to general plan approvals and operating permits)

#028 [25 Pa. Code §§ 127.441(d), 127.512(i) and 40 CFR Part 68]**Risk Management**

- (a) If required by Section 112(r) of the Clean Air Act, the permittee shall develop and implement an accidental release program consistent with requirements of the Clean Air Act, 40 CFR Part 68 (relating to chemical accident prevention provisions) and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act (P.L. 106-40).
- (b) The permittee shall prepare and implement a Risk Management Plan (RMP) which meets the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68 and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act when a regulated substance listed in 40 CFR § 68.130 is present in a process in more than the listed threshold quantity at the Title V facility. The permittee shall submit the RMP to the federal Environmental Protection Agency according to the following schedule and requirements:
- (1) The permittee shall submit the first RMP to a central point specified by EPA no later than the latest of the following:

**SECTION B. General Title V Requirements**

- (i) Three years after the date on which a regulated substance is first listed under § 68.130; or,
 - (ii) The date on which a regulated substance is first present above a threshold quantity in a process.
- (2) The permittee shall submit any additional relevant information requested by the Department or EPA concerning the RMP and shall make subsequent submissions of RMPs in accordance with 40 CFR § 68.190.
- (3) The permittee shall certify that the RMP is accurate and complete in accordance with the requirements of 40 CFR Part 68, including a checklist addressing the required elements of a complete RMP.
- (c) As used in this permit condition, the term "process" shall be as defined in 40 CFR § 68.3. The term "process" means any activity involving a regulated substance including any use, storage, manufacturing, handling, or on-site movement of such substances or any combination of these activities. For purposes of this definition, any group of vessels that are interconnected, or separate vessels that are located such that a regulated substance could be involved in a potential release, shall be considered a single process.
- (d) If the Title V facility is subject to 40 CFR Part 68, as part of the certification required under this permit, the permittee shall:
- (1) Submit a compliance schedule for satisfying the requirements of 40 CFR Part 68 by the date specified in 40 CFR § 68.10(a); or,
 - (2) Certify that the Title V facility is in compliance with all requirements of 40 CFR Part 68 including the registration and submission of the RMP.
- (e) If the Title V facility is subject to 40 CFR Part 68, the permittee shall maintain records supporting the implementation of an accidental release program for five (5) years in accordance with 40 CFR § 68.200.
- (f) When the Title V facility is subject to the accidental release program requirements of Section 112(r) of the Clean Air Act and 40 CFR Part 68, appropriate enforcement action will be taken by the Department if:
- (1) The permittee fails to register and submit the RMP or a revised plan pursuant to 40 CFR Part 68.
 - (2) The permittee fails to submit a compliance schedule or include a statement in the compliance certification required under Section B, Condition #026 of this permit that the Title V facility is in compliance with the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68, and 25 Pa. Code § 127.512(i).

#029 [25 Pa. Code § 127.512(e)]**Approved Economic Incentives and Emission Trading Programs**

No permit revision shall be required under approved economic incentives, marketable permits, emissions trading and other similar programs or processes for changes that are provided for in this Title V permit.

#030 [25 Pa. Code §§ 127.516, 127.450(d), 127.449(f) & 127.462(g)]**Permit Shield**

(a) The permittee's compliance with the conditions of this permit shall be deemed in compliance with applicable requirements (as defined in 25 Pa. Code § 121.1) as of the date of permit issuance if either of the following applies:

- (1) The applicable requirements are included and are specifically identified in this permit.
- (2) The Department specifically identifies in the permit other requirements that are not applicable to the permitted facility or source.

(b) Nothing in 25 Pa. Code § 127.516 or the Title V permit shall alter or affect the following:

- (1) The provisions of Section 303 of the Clean Air Act, including the authority of the Administrator of the EPA provided thereunder.
- (2) The liability of the permittee for a violation of an applicable requirement prior to the time of permit issuance.

**SECTION B. General Title V Requirements**

(3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act.

(4) The ability of the EPA to obtain information from the permittee under Section 114 of the Clean Air Act.

(c) Unless precluded by the Clean Air Act or regulations thereunder, final action by the Department incorporating a significant permit modification in this Title V Permit shall be covered by the permit shield at the time that the permit containing the significant modification is issued.

#031 [25 Pa. Code §135.3]**Reporting**

(a) The permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.

(b) A source owner or operator may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#032 [25 Pa. Code §135.4]**Report Format**

Emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §121.7]****Prohibition of air pollution.**

No person may permit air pollution as that term is defined in the act.

002 [25 Pa. Code §123.1]**Prohibition of certain fugitive emissions**

(a) No person may permit the emission into the outdoor atmosphere of fugitive air contaminant from a source other than the following:

(1) Construction or demolition of buildings or structures.

(2) Grading, paving and maintenance of roads and streets.

(3) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.

(4) Clearing of land.

(5) Stockpiling of materials.

(6) Open burning operations.

(7) [Not applicable]

(8) [Not applicable]

(9) Sources and classes of sources other than those identified in paragraphs (1)-(8), for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:

(i) the emissions are of minor significance with respect to causing air pollution; and

(ii) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

(b) An application form for requesting a determination under either subsection (a)(9) or 129.15(c) is available from the Department. In reviewing these applications, the Department may require the applicant to supply information including, but not limited to, a description of proposed control measures, characteristics of emissions, quantity of emissions, and ambient air quality data and analysis showing the impact of the source on ambient air quality. The applicant shall be required to demonstrate that the requirements of subsections (a)(9) and (c) and 123.2 (relating to fugitive particulate matter) or of the requirements of 129.15(c) have been satisfied. Upon such demonstration, the Department will issue a determination, in writing, either as an operating permit condition, for those sources subject to permit requirements under the act, or as an order containing appropriate conditions and limitations.

(c) [Paragraph (c) of the regulation is printed under WORK PRACTICE REQUIREMENTS in this section of permit.]

(d) [Paragraph (d) of the regulation is not applicable to this facility.]

003 [25 Pa. Code §123.2]**Fugitive particulate matter**

A person may not permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in 25 Pa. Code § 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions) [Condition #001 above] if such emissions are visible at the point the emissions pass outside the person's property.

**SECTION C. Site Level Requirements****# 004 [25 Pa. Code §123.31]****Limitations**

A person may not permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

005 [25 Pa. Code §123.41]**Limitations**

A person may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any 1 hour.
- (2) Equal to or greater than 60% at any time.

006 [25 Pa. Code §123.42]**Exceptions**

The limitations of 25 Pa. Code § 123.41 (relating to limitations) shall not apply to a visible emission in any of the following instances:

- (1) When the presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (2) When the emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (3) When the emission results from sources specified in 25 Pa. Code § 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions). [123.1(a)(1) -- (9) are printed under Emission Restrictions of Condition #001 in this section of permit.]
- (4) [Not applicable]

007 [25 Pa. Code §127.402]**General provisions.**

(a) A person may not operate a stationary air contamination source unless the Department has issued to the person a permit to operate the source under this article in response to a written application for a permit submitted on forms and containing the information the Department may prescribe.

(b) The Department will provide public notice and the right to comment on each permit prior to issuance or denial and may hold public hearings concerning a permit.

(c) A permit may be issued to an applicant for a stationary air contamination source requiring construction, assembly, installation, reactivation or modification when the requirements of this article related to operating requirements have been met and there has been performed upon the source a test or evaluation which satisfies the Department that the air contamination source will not discharge into the outdoor atmosphere an air contaminant at a rate in excess of that permitted by applicable regulations under this article, or in violation of a performance or emission standard or other requirements established by the EPA or the Department for the source, and will not cause air pollution.

(d) An application, form, report or compliance certification submitted under this subchapter shall contain certification by a responsible official as to truth, accuracy and completeness. This certification and other certification required under this subchapter shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.

008 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Alternative 1: The owner/operator shall operate the collection system with negative pressure at each wellhead except under the following additional conditions:

**SECTION C. Site Level Requirements**

When collection or control systems are experiencing downtimes due to routine maintenance. Routine equipment maintenance includes gas collection header repairs, wellhead and valve repairs, replacement or modifications, and other activities.

When negative pressure has the potential to induce air intrusion.

Alternative 2: A well may be placed on an inactive list if it exhibits a methane quality that is consistently below 40 percent by volume and an oxygen level that is consistently above 5 percent while the throttle is either closed or slightly open with a negative pressure applied to the well of less than one-inch of water column. During the period of inactivity and while on the inactive list, the well will be exempt from negative pressure requirements. If at any time the landfill observes conditions that warrant the operation of a well on the inactive list, the well shall be reactivated and normal regulatory conditions shall apply.

Alternative 3: A well in an area of active waste placement that is inaccessible due to its casing height (generally having a casing height of five feet or greater) may be temporarily placed on the inactive list, whereby the well would be exempt from wellhead monitoring requirements until landfilling around the well allows for safe access.

009 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall maintain a logbook for recording of all daily inspections of visible emissions, fugitive visible emissions and potentially objectionable odors air emissions monitoring along with the name of the company representative monitoring these all daily inspections, the date and time of each occurrence, and the wind direction during each instance. These records shall be retained for a minimum of 5 years and shall be made available to the Department upon request.

010 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with PA-65-00767A, condition #2, the amended design capacity of this facility is established at 32,631,391 cubic yards or approximately 7,033,102 tons of municipal solid waste. This includes the waste deposited in the old unlined disposal area; the Phase I, Phase II, and Phase III areas; and the North and South expansion areas. Any increase in the design capacity above this level is subject to permitting by both Air Quality (AQ) and the Bureau of Waste Management (BWM).

011 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Compliance with the emission limitations contained herein shall be demonstrated using stack test results, operating parameters, vendor guarantees, AP-42 emission factors, material balance calculations, and other methods that are approved by the Department.

012 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

(a) The owner/operator shall, on or before March 1st of each year, submit to PADEP-Air Quality an Annual Inventory and Emission Statement for the previous year on forms provided by the Department.

(i) The owner/operator shall use the value of the methane generation rate constant, k , published at the most recent compilation of air pollution emission factors (AP-42) to calculate NMOC emission rates. Other values of k may be used, provided that the use of an alternate value can be demonstrated through testing or engineering calculations.

(ii) The owner/operator shall use the value of the methane generation potential, L_0 , published at the most recent compilation of air pollution emission factors (AP-42) to calculate NMOC emission rates. Other values of L_0 may be used, provided that the use of an alternate value can be demonstrated through testing or engineering calculations.

(iii) The NMOC

013 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

A plant-wide inspection shall be conducted by the Owner/Operator, at a minimum of once each day, that the facility is in operation. The plant-wide inspection shall be conducted for the presence of the following:

- a. Visible stack emissions;

**SECTION C. Site Level Requirements**

- b. Fugitive emissions; and
- c. Potentially objectionable odors at the property line.

These observations are to ensure continued compliance with source-specific visible emission limitations, fugitive emissions prohibited under 25 Pa. Code §§123.1 or 123.2, and malodors prohibited under 25 Pa. Code §123.31. This observation does not require that it be performed by a person certified as a qualified observer for EPA Method 9 for Visual Determination of the Opacity of Emissions from Stationary Sources. Observations for visible stack emissions shall be conducted during daylight hours and all observations shall be conducted while sources are in operation. If any visible stack emissions, fugitive emissions, or potentially objectionable odors are apparent, the Owner/Operator shall take corrective action.

014 [25 Pa. Code §127.444]**Compliance requirements.**

A person may not cause or permit the operation of a source subject to this article unless the source and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued to the source are operated and maintained in accordance with specifications in the application and conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to this chapter in a manner inconsistent with good operating practices.

015 [25 Pa. Code §129.14]**Open burning operations**

- (a) Air basins. [Paragraph (a) of the regulation is not applicable to this facility.]
- (b) Outside of air basins. No person may permit the open burning of material in an area outside of air basins in a manner that:
 - (1) The emissions are visible, at any time, at the point such emissions pass outside the property of the person on whose land the open burning is being conducted.
 - (2) Malodorous air contaminants from the open burning are detectable outside the property of the person on whose land the open burning is being conducted.
 - (3) The emissions interfere with the reasonable enjoyment of life or property.
 - (4) The emissions cause damage to vegetation or property.
 - (5) The emissions are or may be deleterious to human or animal health.
- (c) Exceptions: The requirements of subsections (a) and (b) do not apply where the open burning operations result from:
 - (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
 - (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
 - (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
 - (4) [Not applicable]
 - (5) [Not applicable]
 - (6) A fire set solely for recreational or ceremonial purposes.

**SECTION C. Site Level Requirements**

(7) A fire set solely for cooking food.

(d) Clearing and grubbing wastes. The following is applicable to clearing and grubbing wastes:

(1) As used in this subsection the following terms shall have the following meanings:

Air curtain destructor -- A mechanical device which forcefully projects a curtain of air across a pit in which open burning is being conducted so that combustion efficiency is increased and smoke and other particulate matter are contained.

Clearing and grubbing wastes -- Trees, shrubs, and other native vegetation which are cleared from land during or prior to the process of construction. The term does not include demolition wastes and dirt laden roots.

(2) [Not applicable]

(3) Subsection (b) notwithstanding clearing and grubbing wastes may be burned outside of an air basin, subject to the following limitations:

(i) Upon receipt of a complaint or determination by the Department that an air pollution problem exists, the Department may order that the open burning cease or comply with subsection (b) of this section.

(ii) Authorization for open burning under this paragraph does not apply to clearing and grubbing wastes transported from an air basin for disposal outside of an air basin.

(4) During an air pollution episode, open burning is limited by Chapter 137 (relating to air pollution episodes) and shall cease as specified in such chapter.

[This permit does not constitute authorization to burn solid waste pursuant to Section 610(3) of the Solid Waste Management Act, 35 P.S. Section 6018.610(3), or any other provision of the Solid Waste Management Act.]

016 [25 Pa. Code §135.4]**Report format**

Source reports shall contain sufficient information to enable the Department to complete its emission inventory. Source reports shall be made by the source owner or operator in a format specified by the Department.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.**# 017 [25 Pa. Code §123.43]****Measuring techniques**

Visible emissions may be measured using either of the following:

(1) A device approved by the Department and maintained to provide accurate opacity measurements.

(2) Observers, trained and qualified to measure plume opacity with the naked eye or with the aid of any devices approved by the Department.

IV. RECORDKEEPING REQUIREMENTS.**# 018 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

A detailed record describing the time, location, type, and amount of roadway surface treatment shall be maintained at the

**SECTION C. Site Level Requirements**

landfill site for at least five years.

019 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall maintain the following comprehensive and accurate records:

- (a) Facility-wide emissions on a 12-month rolling basis for NO_x, CO, SO_x, VOC, PM, PM₁₀, PM_{2.5}, NH₃, total HAPs, HCHO, and CO₂e.
- (b) Results of facility-wide inspections for visible stack emissions, fugitive emissions, and/or potentially objectionable odors including the date, time, name, and title of the observer, along with any corrective action taken as a result.
- (c) Results of AVO inspections including the date, time, name, and title of the observer, along with any corrective action taken as a result.
- (d) Copies of the manufacturer's recommended maintenance schedule for each air source and air cleaning device.
- (e) All maintenance performed on each source and air cleaning device.

020 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

All logs and required records shall be maintained on site, or at an alternative location acceptable to the Department, for a minimum of five years and shall be made available to the Department upon request.

021 [25 Pa. Code §127.442]**Reporting requirements.**

- (a) The permittee shall report malfunctions, emergencies or incidents of excess emissions to the Department. A malfunction is any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. An emergency is any situation arising from sudden and reasonably unforeseeable events beyond the control of the owner or operator of a facility which requires immediate corrective action to restore normal operation and which causes the emission source to exceed emissions, due to unavoidable increases in emissions attributable to the situation. An emergency shall not include situations caused by improperly designed equipment, lack of preventive maintenance, careless or improper operation, or operator error.
- (b) When the malfunction, emergency or incident of excess emissions poses an imminent danger to the public health, safety, welfare, or environment, it shall be reported to the Department and the County Emergency Management Agency by telephone within one (1) hour after the discovery of the malfunction, emergency or incident of excess emissions. The owner or operator shall submit a written or emailed report of instances of such malfunctions, emergencies or incidents of excess emissions to the Department within three (3) business days of the telephone report.
- (c) The report shall describe the following:
 - 1. name, permit or authorization number, and location of the facility,
 - 2. nature and cause of the malfunction, emergency or incident,
 - 3. date and time when the malfunction, emergency or incident was first observed,
 - 4. expected duration of excess emissions,
 - 5. estimated rate of emissions,
 - 6. corrective actions or preventative measures taken.
- (d) Any malfunction, emergency or incident of excess emissions that is not subject to the notice requirements of paragraph (b) of this condition shall be reported to the Department by telephone within 24 hours (or by 4:00 PM of the next business day, whichever is later) of discovery and in writing or by e-mail within five (5) business days of discovery. The report shall contain the same information required by paragraph (c), and any permit specific malfunction reporting requirements.
- (e) During an emergency an owner or operator may continue to operate the source at their discretion provided they submit justification for continued operation of a source during the emergency and follow all the notification and reporting requirements in accordance with paragraphs (b)-(d), as applicable, including any permit specific malfunction reporting requirements.

**SECTION C. Site Level Requirements**

(f) Reports regarding malfunctions, emergencies or incidents of excess emissions shall be submitted to the appropriate DEP Regional Office Air Program Manager.

022 [25 Pa. Code §127.511]**Monitoring and related recordkeeping and reporting requirements.**

(a) The permittee shall maintain a record of the daily monitoring conducted to determine the presence of fugitive emissions, objectionable odors and visible emissions.

(b) This recordkeeping shall contain a listing or notation of any and all sources of fugitive emissions or visible emissions; the cause of the fugitive emissions or visible emissions; duration of the emission; and the corrective action taken to abate the deviation and prevent future occurrences.

(c) This observation does not require that it be performed by a person certified as a qualified observer for EPA Method 9 for Visual Determination of the Opacity of Emissions from Stationary Sources. Observations shall be conducted during daylight hours and all observations shall be conducted while sources are in operation. Observations are not required on days when the facility is closed.

023 [25 Pa. Code §135.5]**Recordkeeping**

Source owners or operators shall maintain and make available upon request by the Department records including computerized records that may be necessary to comply with 25 PA Code 135.3 and 135.21 (relating to reporting; and emission statements). These may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed informed by indirect means.

V. REPORTING REQUIREMENTS.**# 024 [25 Pa. Code §127.11a]****Reactivation of sources.**

(a) Except as provided by § 127.215 (relating to reactivation), a source which has been out of operation or production for at least 1 year but less than or equal to 5 years may be reactivated and will not be considered a new source if the following conditions are satisfied:

(1) The owner or operator shall, within 1 year of the deactivation submit to the Department and implement a maintenance plan which includes the measures to be taken, including maintenance, upkeep, repair or rehabilitation procedures, which will enable the source to be reactivated in accordance with the terms of the permit issued to the source.

(2) The owner or operator shall submit a reactivation plan to the Department for approval at least 60 days prior to the proposed date of reactivation. The reactivation plan shall include sufficient measures to ensure that the source will be reactivated in compliance with the permit requirements. The permittee may submit a reactivation plan to the Department at any time during the term of its operating permit. The reactivation plan may also be submitted to and reviewed by the Department as part of the plan approval or permit application or renewal process.

(3) The owner or operator of the source shall submit a notice to the Department within 1 year of deactivation requesting preservation of emissions in the inventory and indicating the intent to reactivate the source.

(4) The owner or operator of the source shall comply with the terms and conditions of the maintenance plan while the source is deactivated, and shall comply with the terms of the reactivation plan and operating permit upon reactivation.

(5) The owner or operator of the source with an approved reactivation plan and operating permit shall notify the Department in writing at least 30 days prior to reactivation of the source.

(b) A source which has been out of operation or production for more than 5 years but less than 10 years may be reactivated and will not be considered a new source if the following conditions are satisfied:

**SECTION C. Site Level Requirements**

(1) The owner or operator of the source complies with the requirements of subsection (a).

(2) The owner or operator of the source obtains a plan approval and operating permit which requires that the emission of air contaminants from the source will be controlled to the maximum extent, consistent with the best available technology as determined by the Department as of the date of reactivation.

(c) A source which has been out of operation for 10 or more years shall meet the requirements of this chapter applicable to a new source.

(d) [Not applicable since applicability date has already passed.]

(e) A source located in a nonattainment area that would emit an air contaminant related to the nonattainment designation or a source that would emit NO_x or VOC emissions may not be reactivated unless the proposed emissions are included in the SIP emission inventory or until the proposed emissions of these contaminants from the source are submitted to and approved by the EPA as an amendment of the SIP. The Department may refuse to allow reactivation of such a source for cause.

(f) The source shall have an operating permit prior to reactivation.

025 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

(a) The owner/operator shall, on or before March 1st of each year, submit to PADEP-Air Quality an Annual Inventory and Emission Statement for the previous year on forms provided by the Department.

026 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The following requirements apply to landfill gas extraction wells:

In recordkeeping and compliance reporting to regulatory agencies, the landfill shall identify the basis for determination of compliance of each well (i.e., which conditions apply-default NSPS, Alternative 1, Alternative 2, and Alternative 3. A summary list of all inactive LFG wells shall be provided in each semi-annual report. This list will include the rationale for placing each well on the list, and the dates that they were deemed inactive.

027 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

In accordance with 25 Pa. Code § 135.3, the owner or operator of a facility shall submit to the Department via AES*Online or AES*XML at www.depgreenport.state.pa.us/ by March 1st of each year, a facility inventory report for the preceding calendar year for all sources regulated under this plan approval. The inventory report shall include all emissions information for all sources operated during the preceding calendar year from the annual report required in (c) above. Emissions data including, but not limited to, the following shall be reported:

- (i) NO_x;
- (ii) CO;
- (iii) SO_x;
- (iv) PM₁₀;
- (v) PM_{2.5};
- (vi) VOC;
- (vii) Speciated HAP including, but not limited to, benzene, ethyl benzene, formaldehyde, n-hexane, toluene, isomers and mixtures of xylenes, and 2,2,4-trimethylpentane;
- (viii) Total HAP;
- (ix) CO₂;
- (x) CH₄; and
- (xi) N₂O.

**SECTION C. Site Level Requirements****# 028 [25 Pa. Code §127.511]****Monitoring and related recordkeeping and reporting requirements.**

Owner/operator shall submit the semi-annual monitoring reports for this facility by January 31 and July 31 of each year. The January 31 semi-annual monitoring report shall cover the period from July 1 through December 31. This semi-annual monitoring report may be included in January 31 Title V Compliance Certification required by Title 25 PA Code § 127.513. The July 31 semi-annual monitoring report shall cover the period from January 1 through June 30. However, in accordance with Title 25 PA Code § 127.511(c), in no case shall the semi-annual monitoring report be submitted less often than every six (6) months. This may require that an interim semi-annual monitoring report (covering a period less than six (6) months) be submitted to bring the facility into compliance with this schedule.

029 [25 Pa. Code §127.512]**Operating permit terms and conditions.**

The permittee can modify the mixture of pollutants regulated under Section 112 of the Clean Air Act (42 U.S.C.A. 7412) which are VOCs or PM10 so long as the emission limitations of this permit are not violated. The permittee shall keep a log which identifies the mixture of pollutants regulated under section 112 and report the changes in the mixture of pollutants regulated under section 112 with the next report required to be provided to the Department.

030 [25 Pa. Code §127.513]**Compliance certification.**

Permittee shall submit Compliance Certification Forms sufficient to demonstrate compliance with terms and conditions contained in the permit. Each Compliance Certification shall include the following:

- (a) The identification of each term or condition of the permit that is the basis of the certification.
- (b) The compliance status.
- (c) The methods used for determining the compliance status of the source, currently and over the reporting period.
- (d) Whether compliance was continuous or intermittent.
- (e) Other facts the Department may require to determine the compliance status of the source.

Compliance Certifications shall be submitted to the Administrator of the EPA, as well as to the Department. EPA requests that Compliance Certifications be e-mailed to them at the following address: R3_APD_Permits@epa.gov

031 [25 Pa. Code §127.513]**Compliance certification.**

Owner/operator shall submit a Title V Compliance Certification for this facility by January 31 of each year. The Title V Compliance Certification shall cover the previous calendar year, for the period January 1 through December 31. However, in accordance with Title 25 PA Code § 127.513(5)(i), in no case shall the Title V Compliance Certification be submitted less often than annually. This may require that an interim Title V Compliance Certification (covering a period less than one year) be submitted to bring the facility into compliance with this schedule.

032 [25 Pa. Code §135.21]**Emission statements**

(a) Except as provided in subsection (d), this section applies to stationary sources or facilities:

(1) Located in an area designated by the Clean Air Act as a marginal, moderate, serious, severe or extreme ozone nonattainment area and which emit oxides of nitrogen or VOC.

(2) Not located in an area described in paragraph (1) and included in the Northeast Ozone Transport Region which emit or have the potential to emit 100 tons or more of oxides of nitrogen or 50 tons or more of VOC per year.

(b) The owner or operator of each stationary source emitting oxides of nitrogen or VOCs shall provide the Department with a statement, in a form as the Department may prescribe, for classes or categories of sources, showing the actual emissions of oxides of nitrogen and VOCs from that source for each reporting period, a description of the method used to

**SECTION C. Site Level Requirements**

calculate the emissions and the time period over which the calculation is based. The statement shall contain a certification by a company officer or the plant manager that the information contained in the statement is accurate.

(c) Annual emission statements are due by March 1 for the preceding calendar year beginning with March 1, 1993, for calendar year 1992 and shall provide data consistent with requirements and guidance developed by the EPA. The guidance document is available from: United States Environmental Protection Agency, 401 M Street, S.W., Washington, D.C. 20460. The Department may require more frequent submittals if the Department determines that one or more of the following applies:

- (1) A more frequent submission is required by the EPA.
- (2) Analysis of the data on a more frequent basis is necessary to implement the requirements of the act.

(d) [Paragraph (d) of the regulation is not applicable to this facility.]

033 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4]

Subpart A - General Provisions

Address.

All applicable requests, reports, applications, submittals, and other communications shall be forwarded to both the EPA and the Department at the addresses below unless otherwise noted.

United States Environmental Protection Agency, Region III
Office of Air Enforcement and Compliance Assistance (3AP20)
Four Penn Center
1600 John F. Kennedy Blvd.
Philadelphia, PA 19103-2029

PA Department of Environmental Protection
Office of Air Quality
400 Waterfront Drive

034 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.13]

Subpart A--General Provisions

Addresses of State air pollution control agencies and EPA Regional Offices.

The facility is subject National Emission Standards for Hazardous Air Pollutants from 40 CFR Part 63 Subparts ZZZZ. In accordance with 40 CFR §63.13, copies of all requests, reports, applications, submittals, and other communications regarding the affected sources shall be forwarded to the Department at the address listed below unless otherwise noted.

Pennsylvania Department of Environmental Protection
Air Quality Program
400 Waterfront Drive
Pittsburgh, PA 15222-4745

Copies of all requests, reports, applications, submittals, and other communications shall also be submitted to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI) accessible at <https://cdx.epa.gov/> unless electronic reporting is not available, in which case a copy shall be sent to the following address:

United States Environmental Protection Agency, Region III
Office of Air Enforcement and Compliance Assistance (3AP20)
Four Penn Center
1600 John F. Kennedy Blvd.
Philadelphia, PA 19103-2029

**SECTION C. Site Level Requirements****VI. WORK PRACTICE REQUIREMENTS.****# 035 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

(a) - (b) [Paragraphs (a) and (b) of 25 Pa. Code § 123.1 are printed under Emission Restrictions in this section of permit.]

(c) A person responsible for any source specified in 25 Pa. Code § (a)(1) -- (7) or (9) [Condition 001 above in this section of the permit] shall take all reasonable actions to prevent particulate matter from becoming airborne. These actions shall include, but not be limited to, the following:

(1) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.

(2) Application of asphalt, oil, water or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.

(3) Paving and maintenance of roadways.

(4) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

(d) [Paragraph (d) of the regulation is not applicable to this facility.]

036 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Fugitive Emission Criteria: This criterion specifies the reasonable actions that are necessary for the prevention of fugitive dust emissions from the operation of landfill in accordance with these requirements. The Fugitive Emission Control Criteria are as follows:

(a) The landfill access roadways from the public highways to the landfill shall be paved a minimum of 500 feet. The access roadways shall be maintained to prevent particulate matter from becoming airborne as specified in 25 Pa. Code §123.1(c).

(b) The unpaved portions of the access roadways shall have a crown so that water runs off and does not pool. The access roadways shall be maintained to prevent particulate matter from becoming airborne as specified in 25 Pa. Code §123.1(c).

(c) All reasonable measure shall be taken to suppress fugitive dust emissions on access roadways or public highways for a distance of 500 feet in both directions from the landfill entrance(s) and exit(s), caused by landfill operations. When applicable, reasonable accommodations shall be made with governmental entity with primary responsibility for a public highway maintenance and care to ensure that any fugitive emissions in the area of public highway denoted above, caused by landfill operations, are appropriately suppressed.

(d) No waste oil shall be used as dust suppressant for the unpaved surface.

(e) Earth or other material deposited by trucking or other means shall be promptly removed from the paved portions of the access roadways.

(f) Upon leaving the landfill, the undercarriage, wheels and chassis of the vehicles used to transport wastes and earth shall be washed, as necessary, to prevent earthen carryout onto roadways.

(g) All waste hauling trucks entering the landfill shall be covered.

(h) Speed limits of not more than 25 mph (miles per hour) shall be observed on all paved access roadways and not more than 15 mph on all unpaved areas. Speed limit signs shall be posted consistent with the requirements of PennDOT (overall dimension 30"x24", "SPEED LIMIT" in 4 inch letters and 10 inch numerals). The permittee may elect to post speed limit signs which are more restrictive than 25 mph for paved roadways and more restrictive than 15 mph for unpaved roadways.



SECTION C. Site Level Requirements

[Empty rectangular box]

VII. ADDITIONAL REQUIREMENTS.

037 [40 CFR Part 61 NESHAPs §40 CFR 61.12]

Subpart A--General Provisions

Compliance with standards and maintenance requirements.

The owner or operator of each stationary source shall maintain and operate the source, including associated equipment for air pollution control, in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operating and maintenance procedures, and inspection of the source.

038 [40 CFR Part 61 NESHAPs §40 CFR 61.154]

**Subpart M--National Emission Standard for Asbestos
Standard for active waste disposal sites.**

Each owner or operator of an active waste disposal site that receives asbestos-containing waste material from a source covered under 61.149, 61.150, or 61.155 shall meet the requirements of this section:

(a) Either there must be no visible emissions to the outside air from any active waste disposal site where asbestos-containing waste material has been deposited, or the requirements of paragraph (c) or (d) of this section must be met.

(b) Unless a natural barrier adequately deters access by the general public, either warning signs and fencing must be installed and maintained as follows, or the requirements of paragraph (c)(1) of this section must be met.

(1) Warning signs must be displayed at all entrances and at intervals of 100 m (330 ft) or less along the property line of the site or along the perimeter of the sections of the site where asbestos-containing waste material is deposited. The warning signs must:

(i) Be posted in such a manner and location that a person can easily read the legend; and

(ii) Conform to the requirements of 51 cm 36 cm (20"X14") upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those specified in this paragraph.

| Legend | Notation |
|---|---------------------------------------|
| Asbestos Waste Disposal Site Block | 2.5 cm (1 inch) Sans Serif, Gothic or |
| Do Not Create Dust..... or Block | 1.9 cm (3/4 inch) Sans Serif, Gothic |
| Breathing Asbestos is Hazardous to Your Health | 14 Point Gothic. |

Spacing between any two lines must be at least equal to the height of the upper of the two lines.

(2) The perimeter of the disposal site must be fenced in a manner adequate to deter access by the general public.

**SECTION C. Site Level Requirements**

(3) Upon request and supply of appropriate information, the Administrator will determine whether a fence or a natural barrier adequately deters access by the general public.

(c) Rather than meet the no visible emission requirement of paragraph (a) of this section, at the end of each operating day, or at least once every 24-hour period while the site is in continuous operation, the asbestos-containing waste material that has been deposited at the site during the operating day or previous 24-hour period shall:

(1) Be covered with at least 15 centimeters (6 inches) of compacted nonasbestos-containing material, or

(2) Be covered with a resinous or petroleum-based dust suppression agent that effectively binds dust and controls wind erosion. Such an agent shall be used in the manner and frequency recommended for the particular dust by the dust suppression agent manufacturer to achieve and maintain dust control. Other equally effective dust suppression agents may be used upon prior approval by the Administrator. For purposes of this paragraph, any used, spent, or other waste oil is not considered a dust suppression agent.

(d) Rather than meet the no visible emission requirement of paragraph (a) of this section, use an alternative emissions control method that has received prior written approval by the Administrator according to the procedures described in 61.149(c)(2).

(e) For all asbestos-containing waste material received, the owner or operator of the active waste disposal site shall:

(1) Maintain waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name, address, and telephone number of the transporter(s).

(iii) The quantity of the asbestos-containing waste material in cubic meters (cubic yards).

(iv) The presence of improperly enclosed or uncovered waste, or any asbestos-containing waste material not sealed in leak-tight containers. Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site, by the following working day, the presence of a significant amount of improperly enclosed or uncovered waste. Submit a copy of the waste shipment record along with the report.

(v) The date of the receipt.

(2) As soon as possible and no longer than 30 days after receipt of the waste, send a copy of the signed waste shipment record to the waste generator.

(3) Upon discovering a discrepancy between the quantity of waste designated on the waste shipment records and the quantity actually received, attempt to reconcile the discrepancy with the waste generator. If the discrepancy is not resolved within 15 days after receiving the waste, immediately report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site. Describe the discrepancy and attempts to reconcile it, and submit a copy of the waste shipment record along with the report.

(4) Retain a copy of all records and reports required by this paragraph for at least 2 years.

(f) Maintain, until closure, records of the location, depth and area, and quantity in cubic meters (cubic yards) of asbestos-containing waste material within the disposal site on a map or diagram of the disposal area.

(g) Upon closure, comply with all the provisions of 61.151.

**SECTION C. Site Level Requirements**

(h) Submit to the Administrator, upon closure of the facility, a copy of records of asbestos waste disposal locations and quantities.

(i) Furnish upon request, and make available during normal business hours for inspection by the Administrator, all records required under this section.

(j) Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site and is covered. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original notification. Include the following information in the notice:

(1) Scheduled starting and completion dates.

(2) Reason for disturbing the waste.

(3) Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.

(4) Location of any temporary storage site and the final disposal site.
(Secs. 112 and 301(a) of the Clean Air Act as amended (42 USC 7412, 7601(a))

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to Title V General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.


***** Permit Shield In Effect *****

**SECTION D. Source Level Requirements**

Source ID: 101

Source Name: LANDFILL GAS COLLECTION AND CONTROL

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Particulate matter emissions from the flare shall not exceed 0.02 grains per dry standard cubic foot.

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The thermal oxidizer will receive and oxidize a waste gas stream generated as a byproduct of landfill gas treatment at all times that the process operates. During periods of downtime of the thermal oxidizer, treated byproduct shall be sent to the enclosed flare.

003 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Waste gas stream flow rate will not exceed 1,021 scfm.

004 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The thermal oxidizer shall achieve either a minimum NMOC destruction and efficiency of 98% or an outlet NMOC concentration of less than 20 ppmvd as hexane at 3% oxygen.

005 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Temperature of the thermal oxidizer combustion chamber will be maintained at or above 1,400-degree Fahrenheit.

006 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The thermal oxidizer shall be equipped with a natural gas-fired burner rated at 3.0 MMBtu/hr. Maximum capacity of the thermal oxidizer will be 4.8 MMBtu/hr.

007 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16710]**Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014****Scope and delegated authorities.**

This subpart establishes emission control requirements and compliance schedules for the control of designated pollutants from certain designated municipal solid waste (MSW) landfills in accordance with section 111(d) of the Clean Air Act and subpart B of 40 CFR part 60.

(a) If you own or operate a designated facility as described in §62.16711, then you must comply with this subpart.

(b) The following authorities will not be delegated to state, local, or tribal agencies:

(1) Approval of alternative methods to determine the site-specific nonmethane organic compounds (NMOC) concentration or a site-specific methane generation rate constant (k).

(2) Alternative emission standards.

**SECTION D. Source Level Requirements**

(3) Major alternatives to test methods. Major alternatives to test methods or to monitoring are modifications made to a federally enforceable test method or to a Federal monitoring requirement. These changes may involve the use of unproven technology or modified procedures or an entirely new method.

(4) Waivers of recordkeeping.

[Source: 86 FR 27770, May 21, 2021]

008 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16711]

Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014

Designated facilities.

(a) The designated facility to which this subpart applies is each municipal solid waste landfill in each state, protectorate, and portion of Indian country that meets the conditions of paragraphs (a)(1) and (2) of this section, except for landfills exempted by paragraphs (b) and (c) of this section.

(1) The municipal solid waste landfill commenced construction, reconstruction, or modification on or before July 17, 2014.

(2) The municipal solid waste landfill has accepted waste at any time since November 8, 1987, or the landfill has additional capacity for future waste deposition.

(b) A municipal solid waste landfill regulated by an EPA-approved and currently effective state or tribal plan implementing 40 CFR 60, subpart Cf, is not subject to the requirements of this subpart.

(c) A municipal solid waste landfill located in a state, locality, or portion of Indian country that submitted a negative declaration letter is not subject to the requirements of this subpart other than the requirements in the definition of design capacity in §62.16730 to recalculate the site-specific density annually and in §62.16724(b) to submit an amended design capacity report in the event that the recalculated design capacity is equal to or greater than 2.5 million megagrams and 2.5 million cubic meters. However, if the existing municipal solid waste landfill already has a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters, then it is subject to the requirements of this Federal plan.

(d) Physical or operational changes made to an existing MSW landfill solely to comply with an emission guideline implemented by a state or Federal plan are not considered a modification or reconstruction and would not subject an existing MSW landfill to the requirements of 40 CFR 60, subpart XXX. Landfills that commence construction, modification, or reconstruction after July 17, 2014, are subject to 40 CFR part 60, subpart XXX.

(e) For purposes of obtaining an operating permit under title V of the Clean Air Act, the owner or operator of an MSW landfill subject to this subpart with a design capacity less than 2.5 million megagrams or 2.5 million cubic meters is not subject to the requirement to obtain an operating permit for the landfill under 40 CFR part 70 or 71, unless the landfill is otherwise subject to either 40 CFR part 70 or 71. For purposes of submitting a timely application for an operating permit under 40 CFR part 70 or 71, the owner or operator of an MSW landfill subject to this subpart with a design capacity greater than or equal to 2.5 million megagrams and 2.5 million cubic meters, and not otherwise subject to either 40 CFR part 70 or 71, becomes subject to the requirements of §70.5(a)(1)(i) or 71.5(a)(1)(i) of this chapter 90 days after the effective date of such CAA section 111(d) program approval, even if the design capacity report is submitted earlier.

(f) When an MSW landfill subject to this subpart is closed as defined in this subpart, the owner or operator is no longer subject to the requirement to maintain an operating permit under 40 CFR part 70 or 71 for the landfill if the landfill is not otherwise subject to the requirements of either 40 CFR part 70 or 71 and if either of the following conditions are met:

(1) The landfill was never subject to the requirement to install and operate a gas collection and control system under §62.16714; or

(2) The landfill meets the conditions for control system removal specified in §62.16714(f).

(h) When an MSW landfill subject to this subpart is a legacy controlled landfill, as defined in §62.16730, the owner or

**SECTION D. Source Level Requirements**

operator is not subject to the following reports of this subpart, provided the owner or operator submitted these reports under 40 CFR part 60, subpart WWW; subpart GGG of this part; or a state plan implementing 40 CFR part 60, subpart Cc on or before June 21, 2021.

- (1) Initial design capacity report specified in §62.16724(a).
- (2) Initial or subsequent NMOC emission rate report specified in §62.16724(c).
- (3) Collection and control system design plan specified in §62.16724(d).
- (5) Initial annual report specified in §62.16724(h).
- (4) Initial performance test report in §62.16724(i).

[Source: 86 FR 27770, May 21, 2021]

009 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16712]**Subpart OOO - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014****Compliance schedule and increments of progress.**

Planning, awarding of contracts, installing, and starting up MSW landfill air emission collection and control equipment that is capable of meeting the emission standards of §62.16714 must be completed within 30 months after the date an NMOC emission rate report shows NMOC emissions equal or exceed 34 megagrams per year; or within 30 months after the date of the most recent NMOC emission rate report that shows NMOC emissions equal or exceed 34 megagrams per year, if Tier 4 surface emissions monitoring (SEM) shows a surface emission concentration of 500 parts per million methane or greater. Legacy controlled landfills who have not yet reached increment 5 (full compliance) must demonstrate compliance with any remaining increments of progress on this schedule. However, they must use the date of their first report submitted under 40 CFR part 60, subpart WWW, 40 CFR part 62, subpart GGG or a state plan implementing 40 CFR part 60, subpart Cc showing NMOC emissions at or above 50 megagrams. The owner or operator must follow the requirements in paragraphs (a) through (d) of this section.

(a) Increments of progress. The owner or operator of a designated facility that has a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters and a NMOC emission rate greater than or equal to 34 megagrams per year must achieve the increments of progress specified in paragraphs (a)(1) through (5) of this section to install air pollution control devices to meet the emission standards specified in §62.16714(b) and (c) of this subpart. Refer to §62.16730 for a definition of each increment of progress.

(1) Submit control plan. Submit a final control plan (collection and control system design plan) according to the requirements of §62.16724(d).

(2) Award contract(s). Award contract(s) to initiate on-site construction or initiate on-site installation of emission collection and/or control equipment.

(3) Initiate on-site construction. Initiate on-site construction or initiate on-site installation of emission collection and/or control equipment as described in the EPA-approved final control plan.

(4) Complete on-site construction. Complete on-site construction and installation of emission collection and/or control equipment.

(5) Achieve final compliance. Complete construction in accordance with the design specified in the EPA-approved final control plan and connect the landfill gas collection system and air pollution control equipment such that they are fully operating. The initial performance test must be conducted within 180 days after the date the facility is required to achieve final compliance. For a legacy controlled landfill, the initial or most recent performance test conducted to comply with 40 CFR part 60, subpart WWW, subpart GGG of this part, or a state plan implementing 40 CFR part 60, subpart Cc is sufficient for compliance with this part. The test report does not have to be resubmitted.

**SECTION D. Source Level Requirements**

(b) Compliance date. For each designated facility that has a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters and a NMOC emission rate greater than or equal to 34 megagrams per year (50 megagrams per year for closed landfill subcategory), planning, awarding of contracts, and installation of municipal solid waste landfill air emission collection and control equipment capable of meeting the standards in §62.16714(b) and (c) must be accomplished within 30 months after the date the initial emission rate report (or the annual emission rate report) first shows that the NMOC emission rate equals or exceeds 34 megagrams per year (50 megagrams per year for closed landfill subcategory), except as provided in §62.16712(c)(3).

(c) Compliance schedules. The owner or operator of a designated facility that has a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters and a NMOC emission rate greater than or equal to 34 megagrams per year (50 megagrams per year for closed landfill subcategory) must achieve the increments of progress specified in paragraphs (a)(1) through (5) of this section according to the schedule specified in paragraph (c)(1), (2), or (3) of this section.

(1) Achieving Increments of Progress. The owner or operator of a designated facility must achieve the increments of progress according to the schedule in table 1 of this subpart. Once this subpart becomes effective, any designated facility to which this subpart applies will remain subject to the schedule in table 1 if a subsequently approved state or tribal plan contains a less stringent schedule, (i.e., a schedule that provides more time to comply with increments 1, 4 and/or 5 than does this Federal plan).

(2) Tier 4. The owner or operator of a designated facility that is using the Tier 4 procedures specified in §62.16718(a)(6) must achieve the increments of progress according to the schedule in table 1 of this subpart.

(d) Alternative dates. For designated facilities that are subject to the schedule requirements of paragraph (c)(1) of this section, the owner or operator (or the state or tribal air pollution control authority) may submit to the appropriate EPA Regional Office for approval alternative dates for achieving increments 2 and 3.

[Source: 86 FR 27770, May 21, 2021]

**# 010 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16714]
Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014
Standards for municipal solid waste landfill emissions.**

(a) Landfills. Each owner or operator of an MSW landfill having a design capacity greater than or equal to 2.5 million megagrams by mass and 2.5 million cubic meters by volume must collect and control MSW landfill emissions at each MSW landfill that meets the following conditions:

(1) Waste acceptance date. The landfill has accepted waste at any time since November 8, 1987, or has additional design capacity available for future waste deposition.

(2) Construction commencement date. The landfill commenced construction, reconstruction, or modification on or before July 17, 2014.

(3) NMOC emission rate. The landfill has an NMOC emission rate greater than or equal to 34 megagrams per year or Tier 4 SEM shows a surface emission concentration of 500 parts per million methane or greater.

(4) Closed subcategory. The landfill in the closed landfill subcategory and has an NMOC emission rate greater than or equal to 50 megagrams per year.

(b) Collection system. Install a gas collection and control system meeting the requirements in paragraphs (b)(1) through (3) and (c) of this section at each MSW landfill meeting the conditions in paragraph (a) of this section.

(1) Collection system. Install and start up a collection and control system that captures the gas generated within the landfill within 30 months after:

(i) The first annual report in which the NMOC emission rate equals or exceeds 34 megagrams per year, unless Tier 2 or

**SECTION D. Source Level Requirements**

Tier 3 sampling demonstrates that the NMOC emission rate is less than 34 megagrams per year, as specified in §62.16724(d)(4), or

- (ii) The first annual report in which the NMOC emission rate equals or exceeds 50 megagrams per year submitted under previously applicable regulations 40 CFR part 60, subpart WWW, 40 CFR part 62, subpart GGG, or a state plan implementing 40 CFR part 60, subpart Cc for a legacy controlled landfill or landfill in the closed landfill subcategory, or
- (iii) The most recent NMOC emission rate report in which the NMOC emission rate equals or exceeds 34 megagrams per year based on Tier 2, if the Tier 4 SEM shows a surface methane emission concentration of 500 parts per million methane or greater as specified in §62.16724 (d)(4)(iii).

(2) Active. An active collection system must:

- (i) Be designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control system equipment.
- (ii) Collect gas from each area, cell, or group of cells in the landfill in which the initial solid waste has been placed for a period of 5 years or more if active; or 2 years or more if closed or at final grade.
- (iii) Collect gas at a sufficient extraction rate.
- (iv) Be designed to minimize off-site migration of subsurface gas.

(3) Passive. A passive collection system must:

- (i) Comply with the provisions specified in paragraphs (b)(2)(i), (ii), and (iv) of this section.
 - (ii) Be installed with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 CFR 258.40.
- (c) Control system. Control the gas collected from within the landfill through the use of control devices meeting the following requirements, except as provided in 40 CFR 60.24.
- (1) A non-enclosed flare designed and operated in accordance with the parameters established in 40 CFR 60.18 except as noted in §62.16722(d); or
 - (2) A control system designed and operated to reduce NMOC by 98 weight percent; or when an enclosed combustion device is used for control, to either reduce NMOC by 98 weight percent or reduce the outlet NMOC concentration to less than 20 parts-per-million by volume, dry basis as hexane at 3-percent oxygen or less. The reduction efficiency or concentration in parts-per-million by volume must be established by an initial performance test to be completed no later than 180 days after the initial startup of the approved control system using the test methods specified in §62.16718(d). The performance test is not required for boilers and process heaters with design heat input capacities equal to or greater than 44 megawatts that burn landfill gas for compliance with this subpart.
- (i) If a boiler or process heater is used as the control device, the landfill gas stream must be introduced into the flame zone.
 - (ii) The control device must be operated within the parameter ranges established during the initial or most recent performance test. The operating parameters to be monitored are specified in §62.16722.
 - (iii) Legacy controlled landfills or landfills in the closed landfill subcategory that have already installed control systems and completed initial or subsequent performance tests may comply with this subpart using the initial or most recent performance test conducted to comply with 40 CFR part 60, subpart WWW; subpart GGG of this part; or a state plan implementing subpart Cc of part 60, is sufficient for compliance with this subpart.

(3) Route the collected gas to a treatment system that processes the collected gas for subsequent sale or beneficial use such as fuel for combustion, production of vehicle fuel, production of high-Btu gas for pipeline injection, or use as a raw

**SECTION D. Source Level Requirements**

material in a chemical manufacturing process. Venting of treated landfill gas to the ambient air is not allowed. If the treated landfill gas cannot be routed for subsequent sale or beneficial use, then the treated landfill gas must be controlled according to either paragraph (c)(1) or (2) of this section.

(4) All emissions from any atmospheric vent from the gas treatment system are subject to the requirements of paragraph (b) or (c) of this section. For purposes of this subpart, atmospheric vents located on the condensate storage tank are not part of the treatment system and are exempt from the requirements of paragraph (b) or (c) of this section.

(d) Design capacity. Each owner or operator of an MSW landfill having a design capacity less than 2.5 million megagrams by mass or 2.5 million cubic meters by volume must submit an initial design capacity report to the Administrator as provided in §62.16724(a). The landfill may calculate design capacity in either megagrams or cubic meters for comparison with the exemption values. Any density conversions must be documented and submitted with the report. Submittal of the initial design capacity report fulfills the requirements of this subpart except as provided in paragraphs (d)(1) and (2) of this section.

(1) The owner or operator must submit an amended design capacity report as provided in §62.16724(b).

(2) When an increase in the maximum design capacity of a landfill with an initial design capacity less than 2.5 million megagrams or 2.5 million cubic meters results in a revised maximum design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters, the owner or operator must comply with paragraph (e) of this section.

(B) If the landfill is permanently closed, a closure report must be submitted to the Administrator as provided in §62.16724(f), except for exemption allowed under §62.16711(g)(4).

(f) Removal criteria. The collection and control system may be capped, removed, or decommissioned if the following criteria are met:

(1) The landfill is a closed landfill (as defined in §62.16730). A closure report must be submitted to the Administrator as provided in §62.16724(f).

(2) The collection and control system has been in operation a minimum of 15 years or the landfill owner or operator demonstrates that the gas collection and control system will be unable to operate for 15 years due to declining gas flow.

(3) Following the procedures specified in §62.16718(b), the calculated NMOC emission rate at the landfill is less than 34 megagrams per year on three successive test dates. The test dates must be no less than 90 days apart, and no more than 180 days apart.

[Source: 86 FR 27770, May 21, 2021]

**# 011 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16716]
Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014
Operational standards for collection and control systems.**

Each owner or operator must comply with the provisions for the operational standards in this section (as well as the provisions in §§62.16720 and 62.16722), or the operational standards in §63.1958 of this chapter (as well as the provisions in §§63.1960 and 63.1961 of this chapter), or both as alternative means of compliance, for an MSW landfill with a gas collection and control system used to comply with the provisions of §62.16714(b) and (c). Once the owner or operator begins to comply with the provisions of §63.1958 of this chapter, the owner or operator must continue to operate the collection and control device according to those provisions and cannot return to the provisions of this section.

**SECTION D. Source Level Requirements**

**# 012 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16728]
Subpart OOO - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014
Specifications for active collection systems.**

Follow the specifications for active collection systems in this section.

(a) Each owner or operator seeking to comply with §62.16714(b) must site active collection wells, horizontal collectors, surface collectors, or other extraction devices at a sufficient density throughout all gas producing areas using the following procedures unless alternative procedures have been approved by the Administrator.

(1) The collection devices within the interior must be certified to achieve comprehensive control of surface gas emissions by a professional engineer. The following issues must be addressed in the design: Depths of refuse, refuse gas generation rates and flow characteristics, cover properties, gas system expandability, leachate and condensate management, accessibility, compatibility with filling operations, integration with closure end use, air intrusion control, corrosion resistance, fill settlement, resistance to the refuse decomposition heat, and ability to isolate individual components or sections for repair or troubleshooting without shutting down entire collection system.

(2) The sufficient density of gas collection devices determined in paragraph (a)(1) of this section must address landfill gas migration issues and augmentation of the collection system through the use of active or passive systems at the landfill perimeter or exterior.

(3) The placement of gas collection devices determined in paragraph (a)(1) of this section must control all gas producing areas, except as provided by paragraphs (a)(3)(i) and (ii) of this section.

(i) Any segregated area of asbestos or nondegradable material may be excluded from collection if documented as provided under §62.16726(d). The documentation must provide the nature, date of deposition, location and amount of asbestos or nondegradable material deposited in the area, and must be provided to the Administrator upon request.

(ii) Any nonproductive area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than 1 percent of the total amount of NMOC emissions from the landfill. The amount, location, and age of the material must be documented and provided to the Administrator upon request. A separate NMOC emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the NMOC emissions estimate for the entire landfill.

(A) The NMOC emissions from each section proposed for exclusion must be computed using Equation 7:

$$Q_i = 2kL_oM_i(e^{-kt_i})(CNMOC)(3.6 \times 10^{-9}) \quad (\text{Eq. 7})$$

Where:

Q_i = NMOC emission rate from the i th section, megagrams per year.

k = Methane generation rate constant, year^{-1} .

L_o = Methane generation potential, cubic meters per megagram solid waste.

M_i = Mass of the degradable solid waste in the i th section, megagram.

t_i = Age of the solid waste in the i th section, years.

CNMOC = Concentration of NMOC, parts-per-million by volume.

3.6×10^{-9} = Conversion factor.

(B) If the owner or operator is proposing to exclude, or cease gas collection and control from, nonproductive physically



SECTION D. Source Level Requirements

separated (e.g., separately lined) closed areas that already have gas collection systems, NMOC emissions from each physically separated closed area must be computed using either Equation 3 in §62.16718 or Equation 7 in paragraph (a)(3)(ii)(A) of this section.

(iii) The values for k and CNMOC determined in field testing must be used if field testing has been performed in determining the NMOC emission rate or the radii of influence (the distance from the well center to a point in the landfill where the pressure gradient applied by the blower or compressor approaches zero). If field testing has not been performed, the default values for k , L_0 , and CNMOC provided in §62.16718 or the alternative values from §62.16718 must be used. The mass of nondegradable solid waste contained within the given section may be subtracted from the total mass of the section when estimating emissions provided the nature, location, age, and amount of the nondegradable material is documented as provided in paragraph (a)(3)(i) of this section.

(b) Each owner or operator seeking to comply with §62.16714(b) must construct the gas collection devices using the following equipment or procedures:

(1) The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard to the need to prevent excessive air infiltration.

(2) Vertical wells must be placed so as not to endanger underlying liners and must address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors must be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices must be designed so as not to allow indirect short circuiting of air into the cover or refuse into the collection system or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.

(3) Collection devices may be connected to the collection header pipes below or above the landfill surface. The connector assembly must include a positive closing throttle valve, any necessary seals and couplings, access couplings and at least one sampling port. The collection devices must be constructed of PVC, HDPE, fiberglass, stainless steel, or other nonporous material of suitable thickness.

(c) Each owner or operator seeking to comply with §62.16714(c) must convey the landfill gas to a control system in compliance with §62.16714(c) through the collection header pipe(s). The gas mover equipment must be sized to handle the maximum gas generation flow rate expected over the intended use period of the gas moving equipment using the following procedures:

(1) For existing collection systems, the flow data must be used to project the maximum flow rate. If no flow data exist, the procedures in paragraph (c)(2) of this section must be used.

(2) For new collection systems, the maximum flow rate must be in accordance with §62.16720(a)(1).

Source: 86 FR 27770, May 21, 2021]

II. TESTING REQUIREMENTS.

013 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The outlet NMOC, CO, and NO_x mass flow rates in the flare exhaust shall be tested once every five years.

All performance tests shall be conducted in accordance with an approved sourced test protocol and the Department's source testing procedures described in the latest Source Testing Manual referenced in 25 PA. Code 139.4(5).

**SECTION D. Source Level Requirements****# 014 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

All available operating parameters, including but not limited to, landfill gas flow rate and flare temperature shall be recorded during the duration of the stack tests.

015 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The Owner/Operator shall submit a pre-test protocol to the Department for review at least 90 days prior to the performance of any EPA reference method stack test. The test report may be submitted via PSIMS*Online at <https://www.depgreenport.state.pa.us/ecomm/Login.jsp>. All proposed performance test methods shall be identified in the pre-test protocol and approved by the Department prior to testing.

The Department Source Testing Manual is available at this web address:

<http://www.depgreenport.state.pa.us/elibrary/GetFolderFolderID=4563>

(a) At least 90 calendar days prior to commencing an emissions testing program, a test protocol shall be submitted to the Department for review and approval in accordance with paragraph (8) of this condition. The test protocol shall meet all applicable requirements specified in the most current version of the Department's Source Testing Manual.

(b) When testing of a source is required on a recurring basis, a single procedural protocol may be submitted for approval; thereafter, a letter, submitted at least 90 calendar days prior to commencing an emissions testing program, referencing the previously approved procedural protocol is sufficient if the letter is approved by the Department. The letter shall be submitted as required in paragraph (a). If modifications are made to the process(es), if a different stack testing company is used, or if an applicable section of the stack test manual has been revised since the approval, a new protocol shall be submitted for approval.

(c) At least 15 calendar days prior to commencing an emission testing program, notification as to the date and time of testing shall be given to the Department in accordance with paragraph (h) of this condition. Notification shall not be made without prior receipt of a protocol acceptance letter from the Department.

(d) If the proposed testing did not occur per the required notification in paragraph (b) above, an electronic mail notification shall be sent within 15 calendar days after the expected completion date of the onsite testing to the Department, in accordance with paragraph (h) of this condition, indicating why the proposed completion date of the on-site testing was not adhered to.

(e) A complete test report shall be submitted to the Department no later than 60 calendar days after completion of the onsite testing portion of an emission test program.

(1) The test report shall include a summary of the emission results on the first page of the report indicating if each pollutant measured is within permitted limits and a statement of compliance or non-compliance with all applicable permit conditions.

(2) The summary results will include, at a minimum, the following information:

(A) A statement that the owner or operator has reviewed the report from the emissions testing body and agrees with the findings.

(B) Permit number(s) and condition(s) which are the basis for the evaluation.

(C) Summary of results with respect to each applicable permit condition.

(D) Statement of compliance or non-compliance with each applicable permit condition.

(f) Pursuant to 25 Pa. Code § 139.3, all submittals shall meet all applicable requirements specified in the most current version of the Department's Source Testing Manual.

(g) All testing shall be performed in accordance with the provisions of Chapter 139 of the Rules and Regulations of the Department of Environmental Protection.

(h) Pursuant to 25 Pa. Code §§ 139.53(a)(1) and 139.53(a)(3):

(1) All submittals, except test notifications & portable emission monitor tests, shall be accomplished through PSIMS*Online, available through <https://www.depgreenport.state.pa.us/ecomm/Login.jsp>, if it is available.

(2) For test notifications & portable analyzer results, or if internet submittal cannot be accomplished, one electronic copy of the test submission (notifications, protocols, reports, supplemental information, etc.) shall be sent to both PSIMS Administration in Central Office and to the Regional Office AQ Program Manager at the following addresses.

CENTRAL OFFICE:

RA-EPstacktesting@pa.gov

SOUTHWEST REGIONAL OFFICE:

**SECTION D. Source Level Requirements**

RA-EPSWstacktesting@pa.gov

(i) The permittee shall ensure all federal reporting requirements contained in the applicable subpart of 40 CFR are followed, including timelines more stringent than those contained herein. In the event of an inconsistency or any conflicting requirements between state and the federal, the most stringent provision, term, condition, method or rule shall be used by default.

(j) Actions Related to Noncompliance Demonstrated by a Stack Test:

(1) If the results of a stack test, performed as required by this approval, exceed the level specified in any condition of this approval, the Permittee shall take appropriate corrective actions. Within 30 days of the Permittee receiving the stack test results, a written description of the corrective actions shall be submitted to the Department. The Permittee shall take appropriate action to minimize emissions from the affected facility while the corrective actions are being implemented. The Department shall notify the Permittee within 30 days, if the corrective actions taken are deficient. Within 30 days of receipt of the notice of deficiency, the Permittee shall submit a description of additional corrective actions to the Department. The Department reserves the authority to use enforcement activities to resolve noncompliant stack tests.

(2) If the results of the required stack test exceed any limit defined in this permit, the test was not performed in accordance with the stack test protocol or the source and/or air cleaning device was not operated in accordance with the permit, then another stack test shall be performed to determine compliance. Within 120 days of the Permittee receiving the original stack test results, a retest shall be performed. The Department may extend the retesting deadline if the Permittee demonstrates, to the Department's satisfaction, that retesting within 120 days is not practicable. Failure of the second test to demonstrate compliance with the limits in the permit, not performing the test in accordance with the stack test protocol or not operating the source and/or air cleaning device in accordance with the permit may be grounds for immediate revocation of the permit to operate the affected source.

016 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16718]**Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014
Test methods and procedures.**

Calculate the landfill NMOC emission rate and conduct a surface emission monitoring demonstration according to the provisions in this section.

(a)(1) NMOC Emission rate. The landfill owner or operator must calculate the NMOC emission rate using either Equation 1 provided in paragraph (a)(1)(i) of this section or Equation 2 provided in paragraph (a)(1)(ii) of this section. Both Equation 1 and Equation 2 may be used if the actual year-to-year solid waste acceptance rate is known, as specified in paragraph (a)(1)(i) of this section, for part of the life of the landfill and the actual year-to-year solid waste acceptance rate is unknown, as specified in paragraph (a)(1)(ii) of this section, for part of the life of the landfill. The values to be used in both Equation 1 and Equation 2 are 0.05 per year for k , 170 cubic meters per megagram for L_0 , and 4,000 parts per million by volume as hexane for the CNMOC. For landfills located in geographical areas with a 30-year annual average precipitation of less than 25 inches, as measured at the nearest representative official meteorological site, the k value to be used is 0.02 per year.

(i)(A) Equation 1 must be used if the actual year-to-year solid waste acceptance rate is known.

$$MNMOC = \text{summation from } i=1 [2kL_0M_i(e^{-kt_i})(CNMOC)(3.6 \times 10^{-9})] \text{ (Eq. 1)}$$

Where:

MNMOC = Total NMOC emission rate from the landfill, megagrams per year.

k = Methane generation rate constant, year⁻¹.

L_0 = Methane generation potential, cubic meters per megagram solid waste.

M_i = Mass of solid waste in the i th section, megagrams.

t_i = Age of the i th section, years.

**SECTION D. Source Level Requirements**

CNMOC = Concentration of NMOC, parts per million by volume as hexane.

3.6×10^{-9} = Conversion factor.

(B) The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value for M_i if documentation of the nature and amount of such wastes is maintained.

(ii)(A) Equation 2 must be used if the actual year-to-year solid waste acceptance rate is unknown.

$MNMOC = 2LoR(e^{-kc} - e^{-kt})(CNMOC)(3.6 \times 10^{-9})$ (Eq. 2)

Where:

$MNMOC$ = Mass emission rate of NMOC, megagrams per year.

Lo = Methane generation potential, cubic meters per megagram solid waste.

R = Average annual acceptance rate, megagrams per year.

k = Methane generation rate constant, year^{-1} .

t = Age of landfill, years.

CNMOC = Concentration of NMOC, parts per million by volume as hexane.

c = Time since closure, years; for an active landfill $c = 0$ and $e^{-kc} = 1$.

3.6×10^{-9} = Conversion factor.

(B) The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value of R , if documentation of the nature and amount of such wastes is maintained.

(2) Tier 1. The owner or operator must compare the calculated NMOC mass emission rate to the standard of 34 megagrams per year.

(i) If the NMOC emission rate calculated in paragraph (a)(1) of this section is less than 34 megagrams per year, then the owner or operator must submit an NMOC emission rate report according to §62.16724(c) and must recalculate the NMOC mass emission rate annually as required under §62.16714(e).

(ii) If the NMOC emission rate calculated in paragraph (a)(1) of this section is equal to or greater than 34 megagrams per year, then the landfill owner or operator must either:

(A) Submit a gas collection and control system design plan within 1 year as specified in §62.16724(d) and install and operate a gas collection and control system within 30 months according to §62.16714(b) and (c);

(B) Determine a site-specific NMOC concentration and recalculate the NMOC emission rate using the Tier 2 procedures provided in paragraph (a)(3) of this section; or

(C) Determine a site-specific methane generation rate constant and recalculate the NMOC emission rate using the Tier 3 procedures provided in paragraph (a)(4) of this section.

(3) Tier 2. The landfill owner or operator must determine the site-specific NMOC concentration using the following sampling procedure. The landfill owner or operator must install at least two sample probes per hectare, evenly distributed over the landfill surface that has retained waste for at least 2 years. If the landfill is larger than 25 hectares in area, only 50 samples are required. The probes should be evenly distributed across the sample area. The sample probes should be located to avoid known areas of nondegradable solid waste. The owner or operator must collect and analyze one sample of landfill

**SECTION D. Source Level Requirements**

gas from each probe to determine the NMOC concentration using EPA Method 25 or 25C of appendix A-7 of 40 CFR part 60. Taking composite samples from different probes into a single cylinder is allowed; however, equal sample volumes must be taken from each probe. For each composite, the sampling rate, collection times, beginning and ending cylinder vacuums, or alternative volume measurements must be recorded to verify that composite volumes are equal. Composite sample volumes should not be less than one liter unless evidence can be provided to substantiate the accuracy of smaller volumes. Terminate compositing before the cylinder approaches ambient pressure where measurement accuracy diminishes. If more than the required number of samples is taken, all samples must be used in the analysis. The landfill owner or operator must divide the NMOC concentration from EPA Method 25 or 25C of appendix A-7 of 40 CFR part 60 by 6 to convert from CNMOC as carbon to CNMOC as hexane. If the landfill has an active or passive gas removal system in place, EPA Method 25 or 25C samples may be collected from these systems instead of surface probes provided the removal system can be shown to provide sampling as representative as the two sampling probes per hectare requirement. For active collection systems, samples may be collected from the common header pipe. The sample location on the common header pipe must be before any gas moving, condensate removal, or treatment system equipment. For active collection systems, a minimum of three samples must be collected from the header pipe.

(i) Within 60 days after the date of determining the NMOC concentration and corresponding NMOC emission rate, the owner or operator must submit the results according to §62.16724(j)(2).

(ii) The landfill owner or operator must recalculate the NMOC mass emission rate using Equation 1 or Equation 2 provided in paragraph (a)(1)(i) or (ii) of this section using the average site-specific NMOC concentration from the collected samples instead of the default value provided in paragraph (a)(1) of this section.

(iii) If the resulting NMOC mass emission rate is less than 34 megagrams per year, then the owner or operator must submit a periodic estimate of NMOC emissions in an NMOC emission rate report according to §62.16724(c) and must recalculate the NMOC mass emission rate annually as required under §62.16714(e). The site-specific NMOC concentration must be retested every 5 years using the methods specified in this section.

(iv) If the NMOC mass emission rate as calculated using the Tier 2 site-specific NMOC concentration is equal to or greater than 34 megagrams per year, the owner or operator must either:

(A) Submit a gas collection and control system design plan within 1 year as specified in §62.16724(d) and install and operate a gas collection and control system within 30 months according to §62.16714(b) and (c);

(B) Determine a site-specific methane generation rate constant and recalculate the NMOC emission rate using the site-specific methane generation rate using the Tier 3 procedures specified in paragraph (a)(4) of this section; or

(C) Conduct a surface emission monitoring demonstration using the Tier 4 procedures specified in paragraph (a)(6) of this section.

(4) Tier 3. The site-specific methane generation rate constant must be determined using the procedures provided in EPA Method 2E of appendix A-1 of 40 CFR part 60. The landfill owner or operator must estimate the NMOC mass emission rate using Equation 1 or Equation 2 in paragraph (a)(1)(i) or (ii) of this section and using a site-specific methane generation rate constant, and the site-specific NMOC concentration as determined in paragraph (a)(3) of this section instead of the default values provided in paragraph (a)(1) of this section. The landfill owner or operator must compare the resulting NMOC mass emission rate to the standard of 34 megagrams per year.

(i) If the NMOC mass emission rate as calculated using the Tier 2 site-specific NMOC concentration and Tier 3 site-specific methane generation rate is equal to or greater than 34 megagrams per year, the owner or operator must either:

(A) Submit a gas collection and control system design plan within 1 year as specified in §62.16724(d) and install and operate a gas collection and control system within 30 months according to §62.16714(b) and (c); or

(B) Conduct a surface emission monitoring demonstration using the Tier 4 procedures specified in paragraph (a)(6) of this section.

(ii) If the NMOC mass emission rate is less than 34 megagrams per year, then the owner or operator must recalculate the

**SECTION D. Source Level Requirements**

NMOC mass emission rate annually using Equation 1 or Equation 2 in paragraph (a)(1) of this section and using the site-specific Tier 2 NMOC concentration and Tier 3 methane generation rate constant and submit a periodic NMOC emission rate report as provided in §62.16724(c). The calculation of the methane generation rate constant is performed only once, and the value obtained from this test must be used in all subsequent annual NMOC emission rate calculations.

(5) Alternative methods. The owner or operator may use other methods to determine the NMOC concentration or a site-specific methane generation rate constant as an alternative to the methods required in paragraphs (a)(3) and (4) of this section if the method has been approved by the Administrator.

(6) Tier 4. Demonstrate that surface methane emissions are below 500 parts per million. Surface emission monitoring must be conducted on a quarterly basis using the following procedures. Tier 4 is allowed only if the landfill owner or operator can demonstrate that NMOC emissions are greater than or equal to 34 megagrams per year but less than 50 megagrams per year using Tier 1 or Tier 2. If both Tier 1 and Tier 2 indicate NMOC emissions are megagrams per year or greater, then Tier 4 cannot be used. In addition, the landfill must meet the criteria in paragraph (a)(6)(viii) of this section.

(i) Measure surface concentrations of methane along the entire perimeter of the landfill and along a pattern that traverses the landfill at no more than 30-meter intervals using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in §62.16720(d).

(ii) The background concentration must be determined by moving the probe inlet upwind and downwind at least 30 meters from the waste mass boundary of the landfill.

(iii) Surface emission monitoring must be performed in accordance with section 8.3.1 of EPA Method 21 of appendix A-7 of 40 CFR part 60, except that the probe inlet must be placed no more than 5 centimeters above the landfill surface; the constant measurement of distance above the surface should be based on a mechanical device such as with a wheel on a pole.

(A) The owner or operator must use a wind barrier, similar to a funnel, when onsite average wind speed exceeds 4 miles per hour or 2 meters per second or gust exceeding 10 miles per hour. Average on-site wind speed must also be determined in an open area at 5-minute intervals using an on-site anemometer with a continuous recorder and data logger for the entire duration of the monitoring event. The wind barrier must surround the SEM monitor, and must be placed on the ground, to ensure wind turbulence is blocked. The SEM cannot be conducted if average wind speed exceeds 25 miles per hour.

(B) Landfill surface areas where visual observations indicate elevated concentrations of landfill gas, such as distressed vegetation and cracks or seeps in the cover, and all cover penetrations must also be monitored using a device meeting the specifications provided in §62.16720(d).

(iv) Each owner or operator seeking to comply with the Tier 4 provisions in paragraph (a)(6) of this section must maintain records of surface emission monitoring as provided in §62.16726(g) and submit a Tier 4 surface emissions report as provided in §62.16724(d)(4)(iii).

(v) If there is any measured concentration of methane of 500 parts per million or greater from the surface of the landfill, the owner or operator must submit a gas collection and control system design plan within 1 year of the first measured concentration of methane of 500 parts per million or greater from the surface of the landfill according to §62.16724(d) and install and operate a gas collection and control system according to §62.16714(b) and (c) within 30 months of the most recent NMOC emission rate report in which the NMOC emission rate equals or exceeds 34 megagrams per year based on Tier 2.

(vi) If after four consecutive quarterly monitoring periods at a landfill, other than a closed landfill, there is no measured concentration of methane of 500 parts per million or greater from the surface of the landfill, the owner or operator must continue quarterly surface emission monitoring using the methods specified in this section.

(vii) If after four consecutive quarterly monitoring periods at a closed landfill there is no measured concentration of methane of 500 parts per million or greater from the surface of the landfill, the owner or operator must conduct annual surface emission monitoring using the methods specified in this section.

**SECTION D. Source Level Requirements**

(viii) If a landfill has installed and operates a collection and control system that is not required by this subpart, then the collection and control system must meet the following criteria:

(A) The gas collection and control system must have operated for at least 6,570 out of 8,760 hours preceding the Tier 4 SEM demonstration.

(B) During the Tier 4 SEM demonstration, the gas collection and control system must operate as it normally would to collect and control as much landfill gas as possible.

(b) After the installation and startup of a collection and control system in compliance with this subpart, the owner or operator must calculate the NMOC emission rate for purposes of determining when the system can be capped, removed, or decommissioned as provided in §62.16714(f), using Equation 3:

$$\text{MNMOC} = 1.89 \times 10^{-3} \text{QLFG CNMOC (Eq. 3)}$$

Where:

MNMOC = Mass emission rate of NMOC, megagrams per year.

QLFG = Flow rate of landfill gas, cubic meters per minute.

CNMOC = NMOC concentration, parts per million by volume as hexane.

(1) Flow rate. The flow rate of landfill gas, QLFG, must be determined by measuring the total landfill gas flow rate at the common header pipe that leads to the control system using a gas flow measuring device calibrated according to the provisions of section 10 of EPA Method 2E of appendix A-1 of 40 CFR part 60.

(2) NMOC concentration. The average NMOC concentration, CNMOC, must be determined by collecting and analyzing landfill gas sampled from the common header pipe before the gas moving or condensate removal equipment using the procedures in EPA Method 25 or EPA Method 25C of appendix A-7 of 40 CFR part 60. The sample location on the common header pipe must be before any condensate removal or other gas refining units. The landfill owner or operator must divide the NMOC concentration from EPA Method 25 or EPA Method 25C of appendix A-7 of 40 CFR part 60 by six to convert from CNMOC as carbon to CNMOC as hexane.

(3) Gas flow rate method. The owner or operator may use another method to determine landfill gas flow rate and NMOC concentration if the method has been approved by the Administrator.

(i) Within 60 days after the date of calculating the NMOC emission rate for purposes of determining when the system can be capped or removed, the owner or operator must submit the results according to §62.16724(j)(2).

(ii) [Reserved]

(c) When calculating emissions for Prevention of Significant Deterioration purposes, the owner or operator of each MSW landfill subject to the provisions of this subpart must estimate the NMOC emission rate for comparison to the Prevention of Significant Deterioration major source and significance levels in §§51.166 or 52.21 of this chapter using Compilation of Air Pollutant Emission Factors, Volume I: Stationary Point and Area Sources (AP-42) or other approved measurement procedures.

(d) For the performance test required in §62.16714(c)(1), the net heating value of the combusted landfill gas as determined in 40 CFR 60.18(f)(3) of this chapter is calculated from the concentration of methane in the landfill gas as measured by EPA Method 3C. A minimum of three 30-minute EPA Method 3C samples are determined. The measurement of other organic components, hydrogen, and carbon monoxide is not applicable. EPA Method 3C may be used to determine the landfill gas molecular weight for calculating the flare gas exit velocity under 40 CFR 60.18(f)(4) of this chapter.

(1) Performance test results. Within 60 days after the date of completing each performance test (as defined in §60.8 of this chapter), the owner or operator must submit the results of the performance tests required by paragraph (b) or (d) of this

**SECTION D. Source Level Requirements**

section, including any associated fuel analyses, according to §62.16724(j)(1).

(2) [Reserved]

(e) For the performance test required in §62.16714(c)(2), EPA Method 25 or 25C (EPA Method 25C may be used at the inlet only) of appendix A-7 of 40 CFR part 60 must be used to determine compliance with the 98 weight-percent efficiency or the 20 parts-per-million by volume outlet NMOC concentration level, unless another method to demonstrate compliance has been approved by the Administrator as provided by §62.16724(d)(2). EPA Method 3, 3A, or 3C of appendix A-2 of 40 CFR part 60 must be used to determine oxygen for correcting the NMOC concentration as hexane to 3 percent. In cases where the outlet concentration is less than 50 parts-per-million NMOC as carbon (8 parts-per-million NMOC as hexane), EPA Method 25A should be used in place of EPA Method 25. EPA Method 18 of appendix A-6 of 40 CFR part 60 may be used in conjunction with EPA Method 25A on a limited basis (compound specific, e.g., methane) or EPA Method 3C may be used to determine methane. The methane as carbon should be subtracted from the EPA Method 25A total hydrocarbon value as carbon to give NMOC concentration as carbon. The landfill owner or operator must divide the NMOC concentration as carbon by 6 to convert the CNMOC as carbon to CNMOC as hexane. Equation 4 must be used to calculate efficiency.

Control Efficiency = $(\text{NMOC}_{\text{in}} - \text{NMOC}_{\text{out}}) / (\text{NMOC}_{\text{in}})$ (Eq. 4)

Where:

NMOC_{in} = Mass of NMOC entering control device.

NMOC_{out} = Mass of NMOC exiting control device.

(1) Performance test submission. Within 60 days after the date of completing each performance test (as defined in §60.8 of this chapter), the owner or operator must submit the results of the performance tests, including any associated fuel analyses, according to §62.16724(j)(1).

(2) [Reserved]

[Source: 86 FR 27770, May 21, 2021]

017 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1959]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills NMOC calculation procedures.

(a) Calculate the NMOC emission rate using the procedures specified in § 60.754(a) of this chapter, except:

(1) NMOC emission rate. Beginning no later than September 27, 2021 the landfill owner or operator must calculate the NMOC emission rate using either Equation 1 provided in paragraph (a)(1)(i) of this section or Equation 2 provided in paragraph (a)(1)(ii) of this section. Both Equation 1 and Equation 2 may be used if the actual year-to-year solid waste acceptance rate is known, as specified in paragraph (a)(1)(i) of this section, for part of the life of the landfill and the actual year-to-year solid waste acceptance rate is unknown, as specified in paragraph (a)(1)(ii) of this section, for part of the life of the landfill. The values to be used in both Equation 1 and Equation 2 are 0.05 per year for k, 170 cubic meters per megagram (m³/Mg) for L_o, and 4,000 parts per million by volume (ppmv) as hexane for the CNMOC. For landfills located in geographical areas with a 30-year annual average precipitation of less than 25 inches, as measured at the nearest representative official meteorologic site, the k value to be used is 0.02 per year.

(i)

(A) Equation 1 must be used if the actual year-to-year solid waste acceptance rate is known.

Where:

MNMOC = Total NMOC emission rate from the landfill, Mg/yr.

k = Methane generation rate constant, year⁻¹.

L_o = Methane generation potential, m³/Mg solid waste.

M_i = Mass of solid waste in the ith section, Mg.

t_i = Age of the ith section, years.

CNMOC = Concentration of NMOC, ppmv as hexane.

**SECTION D. Source Level Requirements**

3.6×10^{-9} = Conversion factor.

(B) The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value for M_i if documentation of the nature and amount of such wastes is maintained.

(ii)

(A) Equation 2 must be used if the actual year-to-year solid waste acceptance rate is unknown.

Where:

MNMOC = Mass emission rate of NMOC, Mg/yr.

L_o = Methane generation potential, m³/Mg solid waste.

R = Average annual acceptance rate, Mg/yr.

k = Methane generation rate constant, year⁻¹.

t = Age of landfill, years.

CNMOC = Concentration of NMOC, ppmv as hexane.

c = Time since closure, years; for active landfill c=0 and $e^{-kc} = 1$.

3.6×10^{-9} = Conversion factor.

(B) The mass of nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value of R, if documentation of the nature and amount of such wastes is maintained.

(2) Tier 1. The owner or operator must compare the calculated NMOC mass emission rate to the standard of 50 Mg/yr.

(i) If the NMOC emission rate calculated in paragraph (a)(1) of this section is less than 50 Mg/yr, then the landfill owner or operator must submit an NMOC emission rate report according to § 63.1981(c) and must recalculate the NMOC mass emission rate annually as required under paragraph (b) of this section.

(ii) If the calculated NMOC emission rate as calculated in paragraph (a)(1) of this section is equal to or greater than 50 Mg/yr, then the landfill owner must either:

(A) Submit a gas collection and control system design plan within 1 year as specified in § 63.1981(d) and install and operate a gas collection and control system within 30 months of the first annual report in which the NMOC emission rate equals or exceeds 50 Mg/yr, according to paragraphs (b)(2)(ii) and (iii) of this section;

(B) Determine a site-specific NMOC concentration and recalculate the NMOC emission rate using the Tier 2 procedures provided in paragraph (a)(3) of this section; or

(C) Determine a site-specific methane generation rate constant and recalculate the NMOC emission rate using the Tier 3 procedures provided in paragraph (a)(4) of this section.

(3) Tier 2. The landfill owner or operator must determine the site-specific NMOC concentration using the following sampling procedure. The landfill owner or operator must install at least two sample probes per hectare, evenly distributed over the landfill surface that has retained waste for at least 2 years. If the landfill is larger than 25 hectares in area, only 50 samples are required. The probes should be evenly distributed across the sample area. The sample probes should be located to avoid known areas of nondegradable solid waste. The owner or operator must collect and analyze one sample of landfill gas from each probe to determine the NMOC concentration using EPA Method 25 or 25C of appendix A-7 to part 60. Taking composite samples from different probes into a single cylinder is allowed; however, equal sample volumes must be taken from each probe. For each composite, the sampling rate, collection times, beginning and ending cylinder vacuums, or alternative volume measurements must be recorded to verify that composite volumes are equal. Composite sample volumes should not be less than one liter unless evidence can be provided to substantiate the accuracy of smaller volumes. Terminate compositing before the cylinder approaches ambient pressure where measurement accuracy diminishes. If more than the required number of samples are taken, all samples must be used in the analysis. The landfill owner or operator must divide the NMOC concentration from EPA Method 25 or 25C of appendix A-7 to part 60 by 6 to convert from CNMOC as carbon to CNMOC as hexane. If the landfill has an active or passive gas removal system in place, EPA Method 25 or 25C samples may be collected from these systems instead of surface probes provided the removal system can be shown to provide sampling as representative as the two sampling probe per hectare requirement. For active collection systems, samples may be collected from the common header pipe. The sample location on the common header pipe must be before any gas moving, condensate removal, or treatment system equipment. For active collection systems, a minimum of three samples must be collected from the header pipe.

(i) Within 60 days after the date of completing each performance test (as defined in § 63.7 of subpart A), the owner or operator must submit the results according to § 63.1981(l)(1).

(ii) The landfill owner or operator must recalculate the NMOC mass emission rate using Equation 1 or Equation 2 provided in paragraph (a)(1)(i) or (ii) of this section and use the average site-specific NMOC concentration from the collected samples instead of the default value provided in paragraph (a)(1) of this section.

(iii) If the resulting NMOC mass emission rate is less than 50 Mg/yr, then the owner or operator must submit a periodic estimate of NMOC emissions in an NMOC emission rate report according to § 63.1981(c) and must recalculate the NMOC

**SECTION D. Source Level Requirements**

mass emission rate annually as required under paragraph (b) of this section. The site-specific NMOC concentration must be retested every 5 years using the methods specified in this section.

(iv) If the NMOC mass emission rate as calculated using the Tier 2 site-specific NMOC concentration is equal to or greater than 50 Mg/yr, the landfill owner or operator must either:

- (A) Submit a gas collection and control system design plan within 1 year as specified in § 63.1981(d) and install and operate a gas collection and control system within 30 months according to paragraphs (b)(2)(ii) and (iii) of this section; or
- (B) Determine a site-specific methane generation rate constant and recalculate the NMOC emission rate using the site-specific methane generation rate using the Tier 3 procedures specified in paragraph (a)(4) of this section.

(4) Tier 3. The site-specific methane generation rate constant must be determined using the procedures provided in EPA Method 2E of appendix A-1 to part 60 of this chapter. The landfill owner or operator must estimate the NMOC mass emission rate using Equation 1 or Equation 2 in paragraph (a)(1)(i) or (ii) of this section and using a site-specific methane generation rate constant, and the site-specific NMOC concentration as determined in paragraph (a)(3) of this section instead of the default values provided in paragraph (a)(1) of this section. The landfill owner or operator must compare the resulting NMOC mass emission rate to the standard of 50 Mg/yr.

(i) If the NMOC mass emission rate as calculated using the Tier 2 site-specific NMOC concentration and Tier 3 site-specific methane generation rate is equal to or greater than 50 Mg/yr, the owner or operator must:

(A) Submit a gas collection and control system design plan within 1 year as specified in § 63.1981(d) and install and operate a gas collection and control system within 30 months of the first annual report in which the NMOC emission rate equals or exceeds 50 Mg/yr, according to paragraphs (b)(2)(ii) and (iii) of this section.

(B) [Reserved]

(ii) If the NMOC mass emission rate is less than 50 Mg/yr, then the owner or operator must recalculate the NMOC mass emission rate annually using Equation 1 or Equation 2 in paragraph (a)(1) of this section and using the site-specific Tier 2 NMOC concentration and Tier 3 methane generation rate constant and submit a periodic NMOC emission rate report as provided in § 63.1981(c). The calculation of the methane generation rate constant is performed only once, and the value obtained from this test must be used in all subsequent annual NMOC emission rate calculations.

(5) Other methods. The owner or operator may use other methods to determine the NMOC concentration or a site-specific methane generation rate constant as an alternative to the methods required in paragraphs (a)(3) and (4) of this section if the method has been approved by the Administrator.

(b) Each owner or operator of an affected source having a design capacity equal to or greater than 2.5 million Mg and 2.5 million m³ must either comply with paragraph (b)(2) of this section or calculate an NMOC emission rate for the landfill using the procedures specified in paragraph (a) of this section. The NMOC emission rate must be recalculated annually, except as provided in § 63.1981(c)(1)(ii)(A).

(1) If the calculated NMOC emission rate is less than 50 Mg/yr, the owner or operator must:

(i) Submit an annual NMOC emission rate emission report to the Administrator, except as provided for in § 63.1981(c)(1)(ii); and

(ii) Recalculate the NMOC emission rate annually using the procedures specified in paragraph (a)(1) of this section until such time as the calculated NMOC emission rate is equal to or greater than 50 Mg/yr, or the landfill is closed.

(A) If the calculated NMOC emission rate, upon initial calculation or annual recalculation required in paragraph (b) of this section, is equal to or greater than 50 Mg/yr, the owner or operator must either: comply with paragraph (b)(2) of this section or calculate NMOC emissions using the next higher tier in paragraph (a) of this section.

(B) If the landfill is permanently closed, a closure report must be submitted to the Administrator as provided for in § 63.1981(f).

(2) If the calculated NMOC emission rate is equal to or greater than 50 Mg/yr using Tier 1, 2, or 3 procedures, the owner or operator must either:

(i) Submit a collection and control system design plan prepared by a professional engineer to the Administrator within 1 year as specified in § 63.1981(d) or calculate NMOC emissions using the next higher tier in paragraph (a) of this section. The collection and control system must meet the requirements in paragraphs (b)(2)(ii) and (iii) of this section.

(ii) Collection system. Install and start up a collection and control system that captures the gas generated within the landfill as required by paragraphs (b)(2)(ii)(B) or (C) and (b)(2)(iii) of this section within 30 months after:

(A) The first annual report in which the NMOC emission rate equals or exceeds 50 Mg/yr, unless Tier 2 or Tier 3 sampling demonstrates that the NMOC emission rate is less than 50 Mg.

(B) An active collection system must:

(1) Be designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control system equipment;

(2) Collect gas from each area, cell, or group of cells in the landfill in which the initial solid waste has been placed for a period of 5 years or more if active; or 2 years or more if closed or at final grade;

**SECTION D. Source Level Requirements**

- (3) Collect gas at a sufficient extraction rate; and
 (4) Be designed to minimize off-site migration of subsurface gas.
- (C) A passive collection system must:
- (1) Comply with the provisions specified in paragraphs (b)(2)(ii)(B)(1), (2), and (3) of this section; and
 (2) Be installed with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under § 258.40 of this chapter.
- (iii) Control system. Route all the collected gas to a control system that complies with the requirements in either paragraph (b)(2)(iii)(A), (B), or (C) of this section.
- (A) A non-enclosed flare designed and operated in accordance with the parameters established in § 63.11(b) except as noted in paragraph (e) of this section; or
 (B) A control system designed and operated to reduce NMOC by 98 weight-percent, or, when an enclosed combustion device is used for control, to either reduce NMOC by 98 weight-percent or reduce the outlet NMOC concentration to less than 20 ppmv, dry basis as hexane at 3-percent oxygen. The reduction efficiency or ppmv must be established by an initial performance test to be completed no later than 180 days after the initial startup of the approved control system using the test methods specified in paragraph (e) of this section. The performance test is not required for boilers and process heaters with design heat input capacities equal to or greater than 44 megawatts that burn landfill gas for compliance with this subpart.
- (1) If a boiler or process heater is used as the control device, the landfill gas stream must be introduced into the flame zone.
 (2) The control device must be operated within the parameter ranges established during the initial or most recent performance test. The operating parameters to be monitored are specified in §§ 63.1961(b) through (e);
 (C) A treatment system that processes the collected gas for subsequent sale or beneficial use such as fuel for combustion, production of vehicle fuel, production of high-British thermal unit (Btu) gas for pipeline injection, or use as a raw material in a chemical manufacturing process. Venting of treated landfill gas to the ambient air is not allowed. If the treated landfill gas cannot be routed for subsequent sale or beneficial use, then the treated landfill gas must be controlled according to either paragraph (b)(2)(iii)(A) or (B) of this section.
- (D) All emissions from any atmospheric vent from the gas treatment system are subject to the requirements of paragraph (b)(2)(iii)(A) or (B) of this section. For purposes of this subpart, atmospheric vents located on the condensate storage tank are not part of the treatment system and are exempt from the requirements of paragraph (b)(2)(iii)(A) or (B) of this section.
- (c) After the installation and startup of a collection and control system in compliance with this subpart, the owner or operator must calculate the NMOC emission rate for purposes of determining when the system can be capped, removed, or decommissioned as provided in § 63.1957(b)(3), using Equation 3:

Where:

MNMOC = Mass emission rate of NMOC, Mg/yr.

QLFG = Flow rate of landfill gas, m³ per minute.

CNMOC = Average NMOC concentration, ppmv as hexane.

1.89×10^{-3} = Conversion factor.

- (1) The flow rate of landfill gas, QLFG, must be determined by measuring the total landfill gas flow rate at the common header pipe that leads to the control system using a gas flow measuring device calibrated according to the provisions of section 10 of EPA Method 2E of appendix A-1 of part 60.
- (2) The average NMOC concentration, CNMOC, must be determined by collecting and analyzing landfill gas sampled from the common header pipe before the gas moving or condensate removal equipment using the procedures in EPA Method 25 or 25C of appendix A-7 to part 60 of this chapter. The sample location on the common header pipe must be before any condensate removal or other gas refining units. The landfill owner or operator must divide the NMOC concentration from EPA Method 25 or 25C of appendix A-7 to part 60 by 6 to convert from CNMOC as carbon to CNMOC as hexane.
- (3) The owner or operator may use another method to determine landfill gas flow rate and NMOC concentration if the method has been approved by the Administrator.
- (i) Within 60 days after the date of completing each performance test (as defined in § 63.7), the owner or operator must submit the results of the performance test, including any associated fuel analyses, according to § 63.1981(l)(1).
 (ii) [Reserved]
- (d) For the performance test required in §63.1959(b)(2)(iii)(B), EPA Method 25 or 25C (EPA Method 25C of appendix A-7 to part 60 of this chapter may be used at the inlet only) of appendix A of this part must be used to determine compliance with the 98 weight-percent efficiency or the 20- ppmv outlet concentration level, unless another method to demonstrate compliance has been approved by the Administrator as provided by §63.1981(d)(2). EPA Method 3, 3A, or 3C of appendix A-7 to part 60 must be used to determine oxygen for correcting the NMOC concentration as hexane to 3 percent. In cases

**SECTION D. Source Level Requirements**

where the outlet concentration is less than 50 ppm NMOC as carbon (8 ppm NMOC as hexane), EPA Method 25A should be used in place of EPA Method 25. EPA Method 18 may be used in conjunction with EPA Method 25A on a limited basis (compound specific, e.g., methane) or EPA Method 3C may be used to determine methane. The methane as carbon should be subtracted from the EPA Method 25A total hydrocarbon value as carbon to give NMOC concentration as carbon. The landowner or operator must divide the NMOC concentration as carbon by 6 to convert from the CNMOC as carbon to CNMOC as hexane. Equation 4 must be used to calculate efficiency:

[Refer to regulation for pdf of equation 4.]

Where:

NMOC_{in} = Mass of NMOC entering control device.

NMOC_{out} = Mass of NMOC exiting control device.

(e) For the performance test required in §63.1959(b)(2)(iii)(A), the net heating value of the combusted landfill gas as determined in §63.11(b)(6)(ii) is calculated from the concentration of methane in the landfill gas as measured by EPA Method 3C of appendix A to part 60 of this chapter. A minimum of three 30-minute EPA Method 3C samples are determined. The measurement of other organic components, hydrogen, and carbon monoxide is not applicable. EPA Method 3C may be used to determine the landfill gas molecular weight for calculating the flare gas exit velocity under §63.11(b)(7) of subpart A.

(1) Within 60 days after the date of completing each performance test (as defined in §63.7), the owner or operator must submit the results of the performance tests, including any associated fuel analyses, required by §63.1959(c) or (e) according to §63.1981(l)(1).

(2) [Reserved]

(f) The performance tests required in §§63.1959(b)(2)(iii)(A) and (B), must be conducted under such conditions as the Administrator specifies to the owner or operator based on representative performance of the affected source for the period being tested. Representative conditions exclude periods of startup and shutdown unless specified by the Administrator. The owner or operator may not conduct performance tests during periods of malfunction. The owner or operator must record the process information that is necessary to document operating conditions during the test and include in such record an explanation to support that such conditions represent normal operation. Upon request, the owner or operator shall make available to the Administrator such records as may be necessary to determine the conditions of performance tests.

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64400, Oct. 13, 2020]

III. MONITORING REQUIREMENTS.

018 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The enclosed flare shall at all times be equipped with devices for measuring the presence of a flame and/or the operating temperature of the flare.

019 [25 Pa. Code §127.441]

Operating permit terms and conditions.

. All air contamination sources, and air pollution control devices shall be operated in a manner consistent with the manufacturer's specifications and good engineering practices.

020 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Temperature of the thermal oxidizer combustion chamber will be continuously monitored and recorded at a minimum of once every 15 minutes.

021 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16722]

Subpart OOO - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014

**SECTION D. Source Level Requirements****Monitoring of operations.**

Follow the monitoring provisions in this section (as well as the provisions in §§62.16716 and 62.16720), except as provided in §62.16724(d)(2), or the monitoring provisions in §63.1961 of this chapter (as well as the provisions in §§63.1958 and 63.1960 of this chapter), or both as alternative means of compliance, for an MSW landfill with a gas collection and control system used to comply with the provisions of §62.16714(b) and (c). Once the owner or operator begins to comply with the provisions of §63.1961 of this chapter, the owner or operator must continue to operate the collection and control device according to those provisions and cannot return to the provisions of this section.

(i) ASTM D6522-11 Standard Test Method for Determination of Nitrogen Oxides, Carbon Monoxide, and Oxygen Concentrations in Emissions from Natural Gas-Fired Reciprocating Engines, Combustion Turbines, Boilers, and Process Heaters Using Portable Analyzers, approved December 1, 2011.

(ii) [Reserved]

[Source: 86 FR 27770, May 21, 2021]

022 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1960]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills Compliance provisions.**

(a) Except as provided in §63.1981(d)(2), the specified methods in paragraphs (a)(1) through (5) of this section must be used to determine whether the gas collection system is in compliance with §63.1959(b)(2)(ii).

(1) For the purposes of calculating the maximum expected gas generation flow rate from the landfill to determine compliance with §63.1959(b)(2)(ii)(C)(1), either Equation 5 or Equation 6 must be used. The owner or operator may use another method to determine the maximum gas generation flow rate, if the method has been approved by the Administrator. The methane generation rate constant (k) and methane generation potential (Lo) kinetic factors should be those published in the most recent Compilation of Air Pollutant Emission Factors (AP-42) or other site-specific values demonstrated to be appropriate and approved by the Administrator. If k has been determined as specified in §63.1959(a)(4), the value of k determined from the test must be used. A value of no more than 15 years must be used for the intended use period of the gas mover equipment. The active life of the landfill is the age of the landfill plus the estimated number of years until closure.

(i) For sites with unknown year-to-year solid waste acceptance rate:

[Refer to regulation for pdf of equation 5.]

Where:

Qm = Maximum expected gas generation flow rate, m³/yr.

Lo = Methane generation potential, m³/Mg solid waste.

R = Average annual acceptance rate, Mg/yr.

k = Methane generation rate constant, year⁻¹.

t = Age of the landfill at equipment installation plus the time the owner or operator intends to use the gas mover equipment or active life of the landfill, whichever is less. If the equipment is installed after closure, t is the age of the landfill at installation, years.

c = Time since closure, years (for an active landfill c = 0 and e^{-kc} = 1).

Z = Constant.

(ii) For sites with known year-to-year solid waste acceptance rate:

[Refer to regulation for pdf of equation 6.]

Where:

Qm = Maximum expected gas generation flow rate, m³/yr.

k = Methane generation rate constant, year⁻¹.

Lo = Methane generation potential, m³/Mg solid waste.

Mi = Mass of solid waste in the ith section, Mg.

**SECTION D. Source Level Requirements**

t_i = Age of the i th section, years.

(iii) If a collection and control system has been installed, actual flow data may be used to project the maximum expected gas generation flow rate instead of, or in conjunction with, Equation 5 or Equation 6 in paragraphs (a)(1)(i) and (ii) of this section. If the landfill is still accepting waste, the actual measured flow data will not equal the maximum expected gas generation rate, so calculations using Equation 5 or Equation 6 in paragraph (a)(1)(i) or (ii) of this section or other methods must be used to predict the maximum expected gas generation rate over the intended period of use of the gas control system equipment.

(2) For the purposes of determining sufficient density of gas collectors for compliance with §63.1959(b)(2)(ii)(B)(2), the owner or operator must design a system of vertical wells, horizontal collectors, or other collection devices, satisfactory to the Administrator, capable of controlling and extracting gas from all portions of the landfill sufficient to meet all operational and performance standards.

(3) For the purpose of demonstrating whether the gas collection system flow rate is sufficient to determine compliance with §63.1959(b)(2)(ii)(B)(3), the owner or operator must measure gauge pressure in the gas collection header applied to each individual well monthly. Any attempted corrective measure must not cause exceedances of other operational or performance standards. An alternative timeline for correcting the exceedance may be submitted to the Administrator for approval. If a positive pressure exists, follow the procedures as specified in §60.755(a)(3), except:

(i) Beginning no later than September 27, 2021, if a positive pressure exists, action must be initiated to correct the exceedance within 5 days, except for the three conditions allowed under §63.1958(b).

(A) If negative pressure cannot be achieved without excess air infiltration within 15 days of the first measurement of positive pressure, the owner or operator must conduct a root cause analysis and correct the exceedance as soon as practicable, but no later than 60 days after positive pressure was first measured. The owner or operator must keep records according to §63.1983(e)(3).

(B) If corrective actions cannot be fully implemented within 60 days following the positive pressure measurement for which the root cause analysis was required, the owner or operator must also conduct a corrective action analysis and develop an implementation schedule to complete the corrective action(s) as soon as practicable, but no more than 120 days following the positive pressure measurement. The owner or operator must submit the items listed in §63.1981(h)(7) as part of the next semi-annual report. The owner or operator must keep records according to §63.1983(e)(4).

(C) If corrective action is expected to take longer than 120 days to complete after the initial exceedance, the owner or operator must submit the root cause analysis, corrective action analysis, and corresponding implementation timeline to the Administrator, according to §63.1981(j). The owner or operator must keep records according to §63.1983(e)(5).

(ii) [Reserved]

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the temperature and nitrogen or oxygen operational standards in introductory paragraph §63.1958(c), for the purpose of identifying whether excess air infiltration into the landfill is occurring, the owner or operator must follow the procedures as specified in §60.755(a)(5) of this chapter, except:

(i) Once an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1), the owner or operator must monitor each well monthly for temperature. If a well exceeds the operating parameter for temperature as provided in §63.1958(c)(1), action must be initiated to correct the exceedance within 5 days. Any attempted corrective measure must not cause exceedances of other operational or performance standards.

(A) If a landfill gas temperature less than or equal to 62.8 degrees Celsius (145 degrees Fahrenheit) cannot be achieved within 15 days of the first measurement of landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit), the owner or operator must conduct a root cause analysis and correct the exceedance as soon as practicable, but no later than 60 days after a landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit) was first measured. The owner or operator must keep records according to §63.1983(e)(3).

**SECTION D. Source Level Requirements**

(B) If corrective actions cannot be fully implemented within 60 days following the temperature measurement for which the root cause analysis was required, the owner or operator must also conduct a corrective action analysis and develop an implementation schedule to complete the corrective action(s) as soon as practicable, but no more than 120 days following the measurement of landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit). The owner or operator must submit the items listed in §63.1981(h)(7) as part of the next semi-annual report. The owner or operator must keep records according to §63.1983(e)(4).

(C) If corrective action is expected to take longer than 120 days to complete after the initial exceedance, the owner or operator must submit the root cause analysis, corrective action analysis, and corresponding implementation timeline to the Administrator, according to §63.1981(h)(7) and (j). The owner or operator must keep records according to §63.1983(e)(5).

(D) If a landfill gas temperature measured at either the wellhead or at any point in the well is greater than or equal to 76.7 degrees Celsius (170 degrees Fahrenheit) and the carbon monoxide concentration measured, according to the procedures in §63.1961(a)(5)(vi) is greater than or equal to 1,000 ppmv the corrective action(s) for the wellhead temperature standard (62.8 degrees Celsius or 145 degrees Fahrenheit) must be completed within 15 days.

(5) An owner or operator seeking to demonstrate compliance with §63.1959(b)(2)(ii)(B)(4) through the use of a collection system not conforming to the specifications provided in §63.1962 must provide information satisfactory to the Administrator as specified in §63.1981(d)(3) demonstrating that off-site migration is being controlled.

(b) For purposes of compliance with §63.1958(a), each owner or operator of a controlled landfill must place each well or design component as specified in the approved design plan as provided in §63.1981(d). Each well must be installed no later than 60 days after the date on which the initial solid waste has been in place for a period of:

- (1) 5 years or more if active; or
- (2) 2 years or more if closed or at final grade.

(c) The following procedures must be used for compliance with the surface methane operational standard as provided in §63.1958(d).

(1) After installation and startup of the gas collection system, the owner or operator must monitor surface concentrations of methane along the entire perimeter of the collection area and along a pattern that traverses the landfill at 30 meter intervals (or a site-specific established spacing) for each collection area on a quarterly basis using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in paragraph (d) of this section.

(2) The background concentration must be determined by moving the probe inlet upwind and downwind outside the boundary of the landfill at a distance of at least 30 meters from the perimeter wells.

(3) Surface emission monitoring must be performed in accordance with section 8.3.1 of EPA Method 21 of appendix A-7 of part 60 of this chapter, except that the probe inlet must be placed within 5 to 10 centimeters of the ground. Monitoring must be performed during typical meteorological conditions.

(4) Any reading of 500 ppm or more above background at any location must be recorded as a monitored exceedance and the actions specified in paragraphs (c)(4)(i) through (v) of this section must be taken. As long as the specified actions are taken, the exceedance is not a violation of the operational requirements of §63.1958(d).

(i) The location of each monitored exceedance must be marked and the location and concentration recorded. Beginning no later than September 27, 2021, the location must be recorded using an instrument with an accuracy of at least 4 meters. The coordinates must be in decimal degrees with at least five decimal places.

(ii) Cover maintenance or adjustments to the vacuum of the adjacent wells to increase the gas collection in the vicinity of each exceedance must be made and the location must be re-monitored within 10 days of detecting the exceedance.

**SECTION D. Source Level Requirements**

(iii) If the re-monitoring of the location shows a second exceedance, additional corrective action must be taken and the location must be monitored again within 10 days of the second exceedance. If the re-monitoring shows a third exceedance for the same location, the action specified in paragraph (c)(4)(v) of this section must be taken, and no further monitoring of that location is required until the action specified in paragraph (c)(4)(v) of this section has been taken.

(iv) Any location that initially showed an exceedance but has a methane concentration less than 500 ppm methane above background at the 10-day re-monitoring specified in paragraph (c)(4)(ii) or (iii) of this section must be re-monitored 1 month from the initial exceedance. If the 1-month re-monitoring shows a concentration less than 500 ppm above background, no further monitoring of that location is required until the next quarterly monitoring period. If the 1-month re-monitoring shows an exceedance, the actions specified in paragraph (c)(4)(iii) or (v) of this section must be taken.

(v) For any location where monitored methane concentration equals or exceeds 500 ppm above background three times within a quarterly period, a new well or other collection device must be installed within 120 days of the initial exceedance. An alternative remedy to the exceedance, such as upgrading the blower, header pipes or control device, and a corresponding timeline for installation may be submitted to the Administrator for approval.

(5) The owner or operator must implement a program to monitor for cover integrity and implement cover repairs as necessary on a monthly basis.

(d) Each owner or operator seeking to comply with the provisions in paragraph (c) of this section must comply with the following instrumentation specifications and procedures for surface emission monitoring devices:

(1) The portable analyzer must meet the instrument specifications provided in section 6 of EPA Method 21 of appendix A of part 60 of this chapter, except that "methane" replaces all references to "VOC".

(2) The calibration gas must be methane, diluted to a nominal concentration of 500 ppm in air.

(3) To meet the performance evaluation requirements in section 8.1 of EPA Method 21 of appendix A of part 60 of this chapter, the instrument evaluation procedures of section 8.1 of EPA Method 21 of appendix A of part 60 must be used.

(4) The calibration procedures provided in sections 8 and 10 of EPA Method 21 of appendix A of part 60 of this chapter must be followed immediately before commencing a surface monitoring survey.

(e) (1) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standards in introductory paragraph §63.1958(e), the provisions of this subpart apply at all times, except during periods of SSM, provided that the duration of SSM does not exceed 5 days for collection systems and does not exceed 1 hour for treatment or control devices. You must comply with the provisions in Table 1 to subpart AAAA that apply before September 28, 2021.

(2) Once an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard in §63.1958(e)(1), the provisions of this subpart apply at all times, including periods of SSM. During periods of SSM, you must comply with the work practice requirement specified in §63.1958(e) in lieu of the compliance provisions in §63.1960.

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64400, Oct. 13, 2020]

023 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1961]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills Monitoring of operations.

Except as provided in §63.1981(d)(2):

(a) Each owner or operator seeking to comply with §63.1959(b)(2)(ii)(B) for an active gas collection system must install a sampling port and a thermometer, other temperature measuring device, or an access port for temperature measurements at each wellhead and:

(1) Measure the gauge pressure in the gas collection header on a monthly basis as provided in §63.1960(a)(3); and

**SECTION D. Source Level Requirements**

(2) Monitor nitrogen or oxygen concentration in the landfill gas on a monthly basis as follows:

(i) The nitrogen level must be determined using EPA Method 3C of appendix A-2 to part 60 of this chapter, unless an alternative test method is established as allowed by §63.1981(d)(2).

(ii) Unless an alternative test method is established as allowed by §63.1981(d)(2), the oxygen level must be determined by an oxygen meter using EPA Method 3A or 3C of appendix A-2 to part 60 of this chapter or ASTM D6522-11 (incorporated by reference, see §63.14). Determine the oxygen level by an oxygen meter using EPA Method 3A or 3C of appendix A-2 to part 60 or ASTM D6522-11 (if sample location is prior to combustion) except that:

- (A) The span must be set between 10- and 12-percent oxygen;
- (B) A data recorder is not required;
- (C) Only two calibration gases are required, a zero and span;
- (D) A calibration error check is not required; and
- (E) The allowable sample bias, zero drift, and calibration drift are ± 10 percent.

(iii) A portable gas composition analyzer may be used to monitor the oxygen levels provided:

- (A) The analyzer is calibrated; and
- (B) The analyzer meets all quality assurance and quality control requirements for EPA Method 3A of appendix A-2 to part 60 of this chapter or ASTM D6522-11 (incorporated by reference, see §63.14).

(3) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the temperature and nitrogen or oxygen operational standards in introductory paragraph §63.1958(c), the owner or operator must follow the procedures as specified in §60.756(a)(2) and (3) of this chapter. Monitor temperature of the landfill gas on a monthly basis as provided in §63.1960(a)(4). The temperature measuring device must be calibrated annually using the procedure in Section 10.3 of EPA Method 2 of appendix A-1 to part 60 of this chapter.

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1), monitor temperature of the landfill gas on a monthly basis as provided in §63.1960(a)(4). The temperature measuring device must be calibrated annually using the procedure in Section 10.3 of EPA Method 2 of appendix A-1 to part 60 of this chapter. Keep records specified in §63.1983(e).

(5) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1), unless a higher operating temperature value has been approved by the Administrator under this subpart or under 40 CFR part 60, subpart WWW; 40 CFR part 60, subpart XXX; or a federal plan or EPA-approved and effective state plan or tribal plan that implements either 40 CFR part 60, subpart Cc or 40 CFR part 60, subpart Cf, you must initiate enhanced monitoring at each well with a measurement of landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit) as follows:

(i) Visual observations for subsurface oxidation events (smoke, smoldering ash, damage to well) within the radius of influence of the well.

(ii) Monitor oxygen concentration as provided in paragraph (a)(2) of this section;

(iii) Monitor temperature of the landfill gas at the wellhead as provided in paragraph (a)(4) of this section.

(iv) Monitor temperature of the landfill gas every 10 vertical feet of the well as provided in paragraph (a)(6) of this section.

(v) Monitor the methane concentration with a methane meter using EPA Method 3C of appendix A-6 to part 60, EPA

**SECTION D. Source Level Requirements**

Method 18 of appendix A-6 to part 60 of this chapter, or a portable gas composition analyzer to monitor the methane levels provided that the analyzer is calibrated and the analyzer meets all quality assurance and quality control requirements for EPA Method 3C or EPA Method 18.

(vi) Monitor carbon monoxide concentrations, as follows:

(A) Collect the sample from the wellhead sampling port in a passivated canister or multi-layer foil gas sampling bag (such as the Cali-5-Bond Bag) and analyze that sample using EPA Method 10 of appendix A-4 to part 60 of this chapter, or an equivalent method with a detection limit of at least 100 ppmv of carbon monoxide in high concentrations of methane; and

(B) Collect and analyze the sample from the wellhead using EPA Method 10 of appendix A-4 to part 60 to measure carbon monoxide concentrations.

(vii) The enhanced monitoring this paragraph (a)(5) must begin 7 days after the first measurement of landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit); and

(viii) The enhanced monitoring in this paragraph (a)(5) must be conducted on a weekly basis. If four consecutive weekly carbon monoxide readings are under 100 ppmv, then enhanced monitoring may be decreased to monthly. However, if carbon monoxide readings exceed 100 ppmv again, the landfill must return to weekly monitoring.

(ix) The enhanced monitoring in this paragraph (a)(5) can be stopped once a higher operating value is approved, at which time the monitoring provisions issued with the higher operating value should be followed, or once the measurement of landfill gas temperature at the wellhead is less than or equal to 62.8 degrees Celsius (145 degrees Fahrenheit).

(6) For each wellhead with a measurement of landfill gas temperature greater than or equal to 73.9 degrees Celsius (165 degrees Fahrenheit), annually monitor temperature of the landfill gas every 10 vertical feet of the well. This temperature can be monitored either with a removable thermometer, or using temporary or permanent thermocouples installed in the well.

(b) Each owner or operator seeking to comply with §63.1959(b)(2)(iii) using an enclosed combustor must calibrate, maintain, and operate according to the manufacturer's specifications, the following equipment:

(1) A temperature monitoring device equipped with a continuous recorder and having a minimum accuracy of ± 1 percent of the temperature being measured expressed in degrees Celsius or ± 0.5 degrees Celsius, whichever is greater. A temperature monitoring device is not required for boilers or process heaters with design heat input capacity equal to or greater than 44 megawatts.

(2) A device that records flow to the control device and bypass of the control device (if applicable). The owner or operator must:

(i) Install, calibrate, and maintain a gas flow rate measuring device that must record the flow to the control device at least every 15 minutes; and

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism must be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(c) Each owner or operator seeking to comply with §63.1959(b)(2)(iii) using a non-enclosed flare must install, calibrate, maintain, and operate according to the manufacturer's specifications the following equipment:

(1) A heat sensing device, such as an ultraviolet beam sensor or thermocouple, at the pilot light or the flame itself to indicate the continuous presence of a flame; and

(2) A device that records flow to the flare and bypass of the flare (if applicable). The owner or operator must:

**SECTION D. Source Level Requirements**

(i) Install, calibrate, and maintain a gas flow rate measuring device that records the flow to the control device at least every 15 minutes; and

(ii) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism must be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(d) Each owner or operator seeking to demonstrate compliance with §63.1959(b)(2)(iii) using a device other than a non-enclosed flare or an enclosed combustor or a treatment system must provide information satisfactory to the Administrator as provided in §63.1981(d)(2) describing the operation of the control device, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator must review the information and either approve it, or request that additional information be submitted. The Administrator may specify additional appropriate monitoring procedures.

(e) Each owner or operator seeking to install a collection system that does not meet the specifications in §63.1962 or seeking to monitor alternative parameters to those required by §§63.1958 through 63.1961 must provide information satisfactory to the Administrator as provided in §63.1981(d)(2) and (3) describing the design and operation of the collection system, the operating parameters that would indicate proper performance, and appropriate monitoring procedures. The Administrator may specify additional appropriate monitoring procedures.

(f) Each owner or operator seeking to demonstrate compliance with the 500-ppm surface methane operational standard in §63.1958(d) must monitor surface concentrations of methane according to the procedures in §63.1960(c) and the instrument specifications in §63.1960(d). If you are complying with the 500-ppm surface methane operational standard in §63.1958(d)(2), for location, you must determine the latitude and longitude coordinates of each exceedance using an instrument with an accuracy of at least 4 meters and the coordinates must be in decimal degrees with at least five decimal places. In the semi-annual report in §63.1981(h), you must report the location of each exceedance of the 500-ppm methane concentration as provided in §63.1958(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month. Any closed landfill that has no monitored exceedances of the operational standard in three consecutive quarterly monitoring periods may skip to annual monitoring. Any methane reading of 500 ppm or more above background detected during the annual monitoring returns the frequency for that landfill to quarterly monitoring.

(g) Each owner or operator seeking to demonstrate compliance with §63.1959(b)(2)(iii)(C) using a landfill gas treatment system must calibrate, maintain, and operate according to the manufacturer's specifications a device that records flow to the treatment system and bypass of the treatment system (if applicable). Beginning no later than September 27, 2021, each owner or operator must maintain and operate all monitoring systems associated with the treatment system in accordance with the site-specific treatment system monitoring plan required in §63.1983(b)(5)(ii). The owner or operator must:

(1) Install, calibrate, and maintain a gas flow rate measuring device that records the flow to the treatment system at least every 15 minutes; and

(2) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism must be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.

(h) The monitoring requirements of paragraphs (a), (b), (c), (d), and (g) of this section apply at all times the affected source is operating, except for periods of monitoring system malfunctions, repairs associated with monitoring system malfunctions, and required monitoring system quality assurance or quality control activities. A monitoring system malfunction is any sudden, infrequent, not reasonably preventable failure of the monitoring system to provide valid data. Monitoring system failures that are caused in part by poor maintenance or careless operation are not malfunctions. You are required to complete monitoring system repairs in response to monitoring system malfunctions and to return the monitoring system to operation as expeditiously as practicable. Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the temperature and nitrogen or oxygen operational standards in introductory paragraph §63.1958(c)(1), (d)(2), and (e)(1), the standards apply at all times.

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64401, Oct. 13, 2020]

**SECTION D. Source Level Requirements****# 024 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1975]****Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****How do I calculate the 3-hour block average used to demonstrate compliance?**

Beginning no later than September 27, 2021, averages are calculated according to §§63.1983(b)(2)(i) and 63.1983(c)(1)(i) and the data collected during the events listed in paragraphs (a) through (d) of this section are included in any average computed under this subpart.

- (a) Monitoring system breakdowns, repairs, calibration checks, and zero (low-level) and high-level adjustments.
- (b) Startups.
- (c) Shutdowns.
- (d) Malfunctions.

[Source: 85 FR 17261, Mar. 26, 2020]

IV. RECORDKEEPING REQUIREMENTS.**# 025 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16726]****Subpart OOO - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014****Recordkeeping guidelines.**

Follow the recordkeeping provisions in this section.

(a) Except as provided in §62.16724(d)(2), each owner or operator of an MSW landfill subject to the provisions of §62.16714(e) must keep for at least 5 years up-to-date, readily accessible, on-site records of the design capacity report that triggered §62.16714(e), the current amount of solid waste in-place, and the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

(b) Except as provided in §62.16724(d)(2), each owner or operator of a controlled landfill must keep up-to-date, readily accessible records for the life of the control system equipment of the data listed in paragraphs (b)(1) through (5) of this section as measured during the initial performance test or compliance determination. Records of subsequent tests or monitoring must be maintained for a minimum of 5 years. Records of the control device vendor specifications must be maintained until removal.

(1) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §62.16714(b):

(i) The maximum expected gas generation flow rate as calculated in §62.16720(a)(1). The owner or operator may use another method to determine the maximum gas generation flow rate, if the method has been approved by the Administrator.

(ii) The density of wells, horizontal collectors, surface collectors, or other gas extraction devices determined using the procedures specified in §62.16728(a)(1).

(2) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §62.16714(c) through use of an enclosed combustion device other than a boiler or process heater with a design heat input capacity equal to or greater than 44 megawatts:

(i) The average temperature measured at least every 15 minutes and averaged over the same time period of the performance test.

(ii) The percent reduction of NMOC determined as specified in §62.16714(c)(2) achieved by the control device.

(3) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with

**SECTION D. Source Level Requirements**

§62.16714(c)(2)(i) through use of a boiler or process heater of any size: A description of the location at which the collected gas vent stream is introduced into the boiler or process heater over the same time period of the performance testing.

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §62.16714(c)(1) through use of a non-enclosed flare, the flare type (i.e., steam-assisted, air-assisted, or non-assisted), all visible emission readings, heat content determination, flow rate or bypass flow rate measurements, and exit velocity determinations made during the performance test as specified in 40 CFR 60.18 of this chapter; and continuous records of the flare pilot flame or flare flame monitoring and records of all periods of operations during which the pilot flame or the flare flame is absent.

(5) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §62.16714(c)(3) through use of a landfill gas treatment system:

(i) Bypass records. Records of the flow of landfill gas to, and bypass of, the treatment system.

(ii) Site-specific treatment monitoring plan. A site-specific treatment monitoring plan, to include:

(A) Monitoring records of parameters that are identified in the treatment system monitoring plan and that ensure the treatment system is operating properly for each intended end use of the treated landfill gas. At a minimum, records should include records of filtration, de-watering, and compression parameters that ensure the treatment system is operating properly for each intended end use of the treated landfill gas.

(B) Monitoring methods, frequencies, and operating ranges for each monitored operating parameter based on manufacturer's recommendations or engineering analysis for each intended end use of the treated landfill gas.

(C) Documentation of the monitoring methods and ranges, along with justification for their use.

(D) Identify who is responsible (by job title) for data collection.

(E) Processes and methods used to collect the necessary data.

(F) Description of the procedures and methods that are used for quality assurance, maintenance, and repair of all continuous monitoring systems.

(c) Except as provided in §62.16724(d)(2), each owner or operator of a controlled landfill subject to the provisions of this subpart must keep for 5 years up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in §62.16722 as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.

(1) The following constitute exceedances that must be recorded and reported under §62.16724:

(i) For enclosed combustors except for boilers and process heaters with design heat input capacity of 44 megawatts (150 million British thermal unit per hour) or greater, all 3-hour periods of operation during which the average temperature was more than 28 degrees Celsius (82 degrees Fahrenheit) below the average combustion temperature during the most recent performance test at which compliance with §62.16714(c) was determined.

(ii) For boilers or process heaters, whenever there is a change in the location at which the vent stream is introduced into the flame zone as required under paragraph (b)(3) of this section.

(2) Each owner or operator subject to the provisions of this subpart must keep up-to-date, readily accessible continuous records of the indication of flow to the control system and the indication of bypass flow or records of monthly inspections of car-seals or lock-and-key configurations used to seal bypass lines, specified under §62.16722.

(3) Each owner or operator subject to the provisions of this subpart who uses a boiler or process heater with a design heat input capacity of 44 megawatts or greater to comply with §62.16714(c) must keep an up-to-date, readily accessible record of all periods of operation of the boiler or process heater. Examples of such records could include records of steam use, fuel

**SECTION D. Source Level Requirements**

use, or monitoring data collected pursuant to other state, local, tribal, or Federal regulatory requirements.

(4) Each owner or operator seeking to comply with the provisions of this subpart by use of a non-enclosed flare must keep up-to-date, readily accessible continuous records of the flame or flare pilot flame monitoring specified under §62.16722(c), and up-to-date, readily accessible records of all periods of operation in which the flame or flare pilot flame is absent.

(5) Each owner or operator of a landfill seeking to comply with §62.16714(e) using an active collection system designed in accordance with §62.16714(b) must keep records of periods when the collection system or control device is not operating.

(d) Except as provided in §62.16724(d)(2), each owner or operator subject to the provisions of this subpart must keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label on each collector that matches the labeling on the plot map.

(1) Each owner or operator subject to the provisions of this subpart must keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors as specified under §62.16720(b).

(2) Each owner or operator subject to the provisions of this subpart must keep readily accessible documentation of the nature, date of deposition, amount, and location of asbestos-containing or nondegradable waste excluded from collection as provided in §62.16728(a)(3)(i) as well as any nonproductive areas excluded from collection as provided in §62.16728(a)(3)(ii).

(e) Except as provided in §62.16724(d)(2), each owner or operator subject to the provisions of this subpart must keep for at least 5 years up-to-date, readily accessible records of the items in paragraphs (e)(1) through (5) of this section. Each owner or operator that chooses to comply with the provisions in §§63.1958, 63.1960, and 63.1961 of this chapter, as allowed in §§62.16716, 62.16720, and 62.16722, must keep the records in paragraph (e)(6) of this section and must keep records according to §63.1983(e)(1) through (5) of this chapter in lieu of paragraphs (e)(1) through (5) of this section.

(1) All collection and control system exceedances of the operational standards in §62.16716, the reading in the subsequent month whether or not the second reading is an exceedance, and the location of each exceedance.

(2) Each owner or operator subject to the provisions of this subpart must also keep records of each wellhead temperature monitoring value of 55 degrees Celsius (131 degrees Fahrenheit) or above, each wellhead nitrogen level at or above 20 percent, and each wellhead oxygen level at or above 5 percent.

(3) For any root cause analysis for which corrective actions are required in §62.16720(a)(3) or §62.16720(a)(4), keep a record of the root cause analysis conducted, including a description of the recommended corrective action(s) taken, and the date(s) the corrective action(s) were completed.

(4) For any root cause analysis for which corrective actions are required in §62.16720(a)(3)(ii) or §62.16720(a)(4)(ii), keep a record of the root cause analysis conducted, the corrective action analysis, the date for corrective action(s) already completed following the positive pressure reading or high temperature reading, and, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates.

(5) For any root cause analysis for which corrective actions are required in §62.16720(a)(3)(iii) or §62.16720(a)(4)(iii), keep a record of the root cause analysis conducted, the corrective action analysis, the date for corrective action(s) already completed following the positive pressure reading or high temperature reading, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates, and a copy of any comments or final approval on the corrective action analysis or schedule from the regulatory agency.

(6) Each owner or operator that chooses to comply with the provisions in §§63.1958, 63.1960, and 63.1961 of this chapter, as allowed in §§62.16716, 62.16720, and 62.16722, must keep records of the date upon which the owner or operator started complying with the provisions in §§63.1958, 63.1960, and 63.1961 of this chapter.

(f) Landfill owners or operators who convert design capacity from volume to mass or mass to volume to demonstrate that landfill design capacity is less than 2.5 million megagrams or 2.5 million cubic meters, as provided in the definition of "design capacity," must keep readily accessible, on-site records of the annual recalculation of site-specific density, design

**SECTION D. Source Level Requirements**

capacity, and the supporting documentation. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

(g) Landfill owners or operators seeking to demonstrate that site-specific surface methane emissions are below 500 parts-per-million by conducting SEM under the Tier 4 procedures specified in §62.16718(a)(6) must keep for at least 5 years up-to-date, readily accessible records of all SEM and information related to monitoring instrument calibrations conducted according to sections 8 and 10 of EPA Method 21 of appendix A-7 of 40 CFR part 60 of this chapter, including all of the following items:

(1) Calibration records.

(i) Date of calibration and initials of operator performing the calibration.

(ii) Calibration gas cylinder identification, certification date, and certified concentration.

(iii) Instrument scale(s) used.

(iv) A description of any corrective action taken if the meter readout could not be adjusted to correspond to the calibration gas value.

(v) If an owner or operator makes their own calibration gas, a description of the procedure used.

(2) Digital photographs of the instrument setup. The photographs must be time and date-stamped and taken at the first sampling location prior to sampling and at the last sampling location after sampling at the end of each sampling day, for the duration of the Tier 4 monitoring demonstration.

(3) Timestamp of each surface scan reading.

(i) Timestamp should be detailed to the nearest second, based on when the sample collection begins.

(ii) A log for the length of time each sample was taken using a stopwatch (e.g., the time the probe was held over the area).

(4) Location of each surface scan reading. The owner or operator must determine the coordinates using an instrument with an accuracy of at least 4 meters. Coordinates must be in decimal degrees with at least five decimal places.

(5) Monitored methane concentration (parts per million) of each reading.

(6) Background methane concentration (parts per million) after each instrument calibration test.

(7) Adjusted methane concentration using most recent calibration (parts-per-million).

(8) For readings taken at each surface penetration, the unique identification location label matching the label specified in paragraph (d) of this section.

(9) Records of the operating hours of the gas collection system for each destruction device.

(h) Except as provided in §62.16724(d)(2), each owner or operator subject to the provisions of this subpart must keep for at least 5 years up-to-date, readily accessible records of all collection and control system monitoring data for parameters measured in §62.16722(a)(1), (2), and (3).

(i) Any records required to be maintained by this subpart that are submitted electronically via the EPA's CDX may be maintained in electronic format.

(j) For each owner or operator reporting leachate or other liquids addition under §62.16724(l), keep records of any engineering calculations or company records used to estimate the quantities of leachate or liquids added, the surface areas for which the leachate or liquids were applied, and the estimates of annual waste acceptance or total waste in place

**SECTION D. Source Level Requirements**

in the areas where leachate or liquids were applied.

026 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.10]**Subpart A--General Provisions****Recordkeeping and reporting requirements.**

[Paragraphs 63.10(b)(2)(i) through (b)(2)(v) are printed below as referenced by Table 1 to 40 CFR Part 63 Subpart AAAA. Refer to regulation for remaining paragraphs from §63.10.]

(b) General recordkeeping requirements.

(2) The owner or operator of an affected source subject to the provisions of this part shall maintain relevant records for such source of --

(i) The occurrence and duration of each startup or shutdown when the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards;

(ii) The occurrence and duration of each malfunction of operation (i.e., process equipment) or the required air pollution control and monitoring equipment;

(iii) All required maintenance performed on the air pollution control and monitoring equipment;

(iv) (A) Actions taken during periods of startup or shutdown when the source exceeded applicable emission limitations in a relevant standard and when the actions taken are different from the procedures specified in the affected source's startup, shutdown, and malfunction plan (see §63.6(e)(3)); or

(B) Actions taken during periods of malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) when the actions taken are different from the procedures specified in the affected source's startup, shutdown, and malfunction plan (see §63.6(e)(3));

(v) All information necessary, including actions taken, to demonstrate conformance with the affected source's startup, shutdown, and malfunction plan (see §63.6(e)(3)) when all actions taken during periods of startup or shutdown (and the startup or shutdown causes the source to exceed any applicable emission limitation in the relevant emission standards), and malfunction (including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its normal or usual manner of operation) are consistent with the procedures specified in such plan. (The information needed to demonstrate conformance with the startup, shutdown, and malfunction plan may be recorded using a "checklist," or some other effective form of recordkeeping, in order to minimize the recordkeeping burden for conforming events);

(vi) - (xiv) [Refer to regulation for paragraphs (vi) through (xiv).]

[59 FR 12430, Mar. 16, 1994, as amended at 64 FR 7468, Feb. 12, 1999; 67 FR 16604, Apr. 5, 2002; 68 FR 32601, May 30, 2003; 69 FR 21752, Apr. 22, 2004; 71 FR 20455, Apr. 20, 2006; 85 FR 73886, Nov. 19, 2020]

027 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1964]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****How is compliance determined?**

Compliance is determined using performance testing, collection system monitoring, continuous parameter monitoring, and other credible evidence. In addition, continuous parameter monitoring data collected under §63.1961(b)(1), (c)(1), and (d) are used to demonstrate compliance with the operating standards for control systems. If a deviation occurs, you have failed to meet the control device operating standards described in this subpart and have deviated from the requirements of this subpart.

(a) N/A

**SECTION D. Source Level Requirements**

(b) After September 27, 2021, the SSM provisions of §63.6(e) of subpart A no longer apply to this subpart and the SSM plan developed under paragraph (a) of this section no longer applies. Compliance with the emissions standards and the operating standards of §63.1958 of this subpart is required at all times.

[Source: 85 FR 17261, Mar. 26, 2020]

028 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1983]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What records must I keep?**

You must keep records as specified in this subpart. You must also keep records as specified in the general provisions of 40 CFR part 63 as shown in Table 1 to this subpart.

(a) Except as provided in §63.1981(d)(2), each owner or operator of an MSW landfill subject to the provisions of §63.1959(b)(2)(ii) and (iii) of this chapter must keep for at least 5 years up-to-date, readily accessible, on-site records of the design capacity report that triggered §63.1959(b), the current amount of solid waste in-place, and the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

(b) Except as provided in §63.1981(d)(2), each owner or operator of a controlled landfill must keep up-to-date, readily accessible records for the life of the control system equipment of the data listed in paragraphs (b)(1) through (5) of this section as measured during the initial performance test or compliance determination. Records of subsequent tests or monitoring must be maintained for a minimum of 5 years. Records of the control device vendor specifications must be maintained until removal.

(1) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §63.1959(b)(2)(ii):

(i) The maximum expected gas generation flow rate as calculated in §63.1960(a)(1).

(ii) The density of wells, horizontal collectors, surface collectors, or other gas extraction devices determined using the procedures specified in §63.1962(a)(1) and (2).

(2) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §63.1959(b)(2)(iii) through use of an enclosed combustion device other than a boiler or process heater with a design heat input capacity equal to or greater than 44 megawatts:

(i) The average temperature measured at least every 15 minutes and averaged over the same time period of the performance test.

(ii) The percent reduction of NMOC determined as specified in §63.1959(b)(2)(iii)(B) achieved by the control device.

(3) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §63.1959(b)(2)(iii)(B)(1) through use of a boiler or process heater of any size: A description of the location at which the collected gas vent stream is introduced into the boiler or process heater over the same time period of the performance testing.

(4) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §63.1959(b)(2)(iii)(A) through use of a non-enclosed flare, the flare type (i.e., steam-assisted, air-assisted, or nonassisted), all visible emission readings, heat content determination, flow rate or bypass flow rate measurements, and exit velocity determinations made during the performance test as specified in §63.111; continuous records of the flare pilot flame or flare flame monitoring and records of all periods of operations during which the pilot flame or the flare flame is absent.

(5) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with §63.1959(b)(2)(iii)(C) through use of a landfill gas treatment system:

(i) Bypass records. Records of the flow of landfill gas to, and bypass of, the treatment system.

**SECTION D. Source Level Requirements**

(ii) Site-specific treatment monitoring plan. Beginning no later than September 27, 2021, the owner or operator must prepare a site-specific treatment monitoring plan to include:

(A) Monitoring records of parameters that are identified in the treatment system monitoring plan and that ensure the treatment system is operating properly for each intended end use of the treated landfill gas. At a minimum, records should include records of filtration, de-watering, and compression parameters that ensure the treatment system is operating properly for each intended end use of the treated landfill gas.

(B) Monitoring methods, frequencies, and operating ranges for each monitored operating parameter based on manufacturer's recommendations or engineering analysis for each intended end use of the treated landfill gas.

(C) Documentation of the monitoring methods and ranges, along with justification for their use.

(D) List of responsible staff (by job title) for data collection.

(E) Processes and methods used to collect the necessary data.

(F) Description of the procedures and methods that are used for quality assurance, maintenance, and repair of all continuous monitoring systems (CMS).

(c) Except as provided in §63.1981(d)(2), each owner or operator of a controlled landfill subject to the provisions of this subpart must keep for 5 years up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in §63.1961 as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.

(1) The following constitute exceedances that must be recorded and reported under §63.1981(h):

(i) For enclosed combustors except for boilers and process heaters with design heat input capacity of 44 megawatts (150 million Btu per hour) or greater, all 3-hour periods of operation during which the average temperature was more than 28 degrees Celsius (82 degrees Fahrenheit) below the average combustion temperature during the most recent performance test at which compliance with §63.1959(b)(2)(iii) was determined.

(ii) For boilers or process heaters, whenever there is a change in the location at which the vent stream is introduced into the flame zone as required under paragraph (b)(3) of this section.

(2) Each owner or operator subject to the provisions of this subpart must keep up-to-date, readily accessible continuous records of the indication of flow to the control system and the indication of bypass flow or records of monthly inspections of car-seals or lock-and-key configurations used to seal bypass lines, specified under §63.1961(b)(2)(ii), (c)(2)(ii), and (g)(2).

(3) Each owner or operator subject to the provisions of this subpart who uses a boiler or process heater with a design heat input capacity of 44 megawatts or greater to comply with §63.1959(b)(2)(iii) must keep an up-to-date, readily accessible record of all periods of operation of the boiler or process heater. Examples of such records could include records of steam use, fuel use, or monitoring data collected pursuant to other state, local, tribal, or federal regulatory requirements.

(4) Each owner or operator seeking to comply with the provisions of this subpart by use of a non-enclosed flare must keep up-to-date, readily accessible continuous records of the flame or flare pilot flame monitoring specified under §63.1961(c), and up-to-date, readily accessible records of all periods of operation in which the flame or flare pilot flame is absent.

(5) Each owner or operator of a landfill seeking to comply with §63.1959(b)(2) using an active collection system designed in accordance with §63.1959(b)(2)(ii) must keep records of periods when the collection system or control device is not operating.

(6) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard in §63.1958(e)(1), the date, time, and duration of each startup and/or shutdown period, recording the periods when the affected source was subject to the standard applicable to startup and shutdown.

**SECTION D. Source Level Requirements**

(7) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard in §63.1958(e)(1), in the event that an affected unit fails to meet an applicable standard, record the information below in this paragraph:

(i) For each failure record the date, time and duration of each failure and the cause of such events (including unknown cause, if applicable).

(ii) For each failure to meet an applicable standard; record and retain a list of the affected sources or equipment.

(iii) Record actions taken to minimize emissions in accordance with the general duty of §63.1955(c) and any corrective actions taken to return the affected unit to its normal or usual manner of operation.

(8) Beginning no later than September 27, 2021, in lieu of the requirements specified in §63.8(d)(3) of subpart A you must keep the written procedures required by §63.8(d)(2) on record for the life of the affected source or until the affected source is no longer subject to the provisions of this part, to be made available for inspection, upon request, by the Administrator. If the performance evaluation plan is revised, you must keep previous (i.e., superseded) versions of the performance evaluation plan on record to be made available for inspection, upon request, by the Administrator, for a period of 5 years after each revision to the plan. The program of corrective action should be included in the plan required under §63.8(d)(2).

(d) Except as provided in §63.1981(d)(2), each owner or operator subject to the provisions of this subpart must keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label for each collector.

(1) Each owner or operator subject to the provisions of this subpart must keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors as specified under §63.1960(b).

(2) Each owner or operator subject to the provisions of this subpart must keep readily accessible documentation of the nature, date of deposition, amount, and location of asbestos-containing or nondegradable waste excluded from collection as provided in §63.1962(a)(3)(i) as well as any nonproductive areas excluded from collection as provided in §63.1962(a)(3)(ii).

(e) Except as provided in §63.1981(d)(2), each owner or operator subject to the provisions of this subpart must keep for at least 5 years up-to-date, readily accessible records of the following:

(1) All collection and control system exceedances of the operational standards in §63.1958, the reading in the subsequent month whether or not the second reading is an exceedance, and the location of each exceedance.

(2) Each owner or operator subject to the control provisions of this subpart must keep records of each wellhead temperature monitoring value of greater than 55 degrees Celsius (131 degrees Fahrenheit), each wellhead nitrogen level at or above 20 percent, and each wellhead oxygen level at or above 5 percent, except:

(i) When an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the compliance provisions for wellhead temperature in §63.1958(c)(1), but no later than September 27, 2021, the records of each wellhead temperature monitoring value of 62.8 degrees Celsius (145 degrees Fahrenheit) or above instead of values greater than 55 degrees Celsius (131 degrees Fahrenheit).

(ii) Each owner or operator required to conduct the enhanced monitoring provisions in §63.1961(a)(5), must also keep records of all enhanced monitoring activities.

(iii) Each owner or operator required to submit the 24-hour high temperature report in §63.1981(k), must also keep a record of the email transmission.

(3) For any root cause analysis for which corrective actions are required in §63.1960(a)(3)(i)(A) or (a)(4)(i)(A), keep a record of the root cause analysis conducted, including a description of the recommended corrective action(s) taken, and the date(s) the corrective action(s) were completed.

**SECTION D. Source Level Requirements**

(4) For any root cause analysis for which corrective actions are required in §63.1960(a)(3)(i)(B) or (a)(4)(i)(B), keep a record of the root cause analysis conducted, the corrective action analysis, the date for corrective action(s) already completed following the positive pressure reading or high temperature reading, and, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates.

(5) For any root cause analysis for which corrective actions are required in §63.1960(a)(3)(i)(C) or (a)(4)(i)(C), keep a record of the root cause analysis conducted, the corrective action analysis, the date for corrective action(s) already completed following the positive pressure reading or high temperature reading, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates, and a copy of any comments or final approval on the corrective action analysis or schedule from the Administrator.

(f) Landfill owners or operators who convert design capacity from volume to mass or mass to volume to demonstrate that landfill design capacity is less than 2.5 million Mg or 2.5 million m³, as provided in the definition of “design capacity,” must keep readily accessible, on-site records of the annual recalculation of site-specific density, design capacity, and the supporting documentation. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.

(g) Except as provided in §63.1981(d)(2), each owner or operator subject to the provisions of this subpart must keep for at least 5 years up-to-date, readily accessible records of all collection and control system monitoring data for parameters measured in §63.1961(a)(1) through (6).

(h) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1), you must keep the following records.

(1) Records of the landfill gas temperature on a monthly basis as monitored in §63.1960(a)(4).

(2) Records of enhanced monitoring data at each well with a measurement of landfill gas temperature greater than 62.8 degrees Celsius (145 degrees Fahrenheit) as gathered in §63.1961(a)(5) and (6).

(i) Any records required to be maintained by this subpart that are submitted electronically via the EPA's CEDRI may be maintained in electronic format. This ability to maintain electronic copies does not affect the requirement for facilities to make records, data, and reports available upon request to a delegated air agency or the EPA as part of an on-site compliance evaluation.

(ii) [Reserved]

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64401, Oct. 13, 2020]

V. REPORTING REQUIREMENTS.**# 029 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16724]****Subpart 000 - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014****Reporting guidelines**

Follow the reporting provisions listed in this section, as applicable, except as provided under 40 CFR 60.24 and §§62.16711(g), (h), and 62.16724(d)(2).

(a) Design capacity report. Submit the initial design capacity report no later than September 20, 2021. The initial design capacity report must contain the following information:

(1) A map or plot of the landfill, providing the size and location of the landfill, and identifying all areas where solid waste may be landfilled according to the permit issued by the state, local, or tribal agency responsible for regulating the landfill.

(2) The maximum design capacity of the landfill. Where the maximum design capacity is specified in the permit issued by the state, local, or tribal agency responsible for regulating the landfill, a copy of the permit specifying the maximum design capacity may be submitted as part of the report. If the maximum design capacity of the landfill is not specified in the permit,

**SECTION D. Source Level Requirements**

the maximum design capacity must be calculated using good engineering practices. The calculations must be provided, along with the relevant parameters as part of the report. The landfill may calculate design capacity in either megagrams or cubic meters for comparison with the exemption values. If the owner or operator chooses to convert the design capacity from volume to mass or from mass to volume to demonstrate its design capacity is less than 2.5 million megagrams or 2.5 million cubic meters, the calculation must include a site-specific density, which must be recalculated annually. Any density conversions must be documented and submitted with the design capacity report. The state, local, or tribal agency or the Administrator may request other reasonable information as may be necessary to verify the maximum design capacity of the landfill.

(b) Amended design capacity report. An amended design capacity report must be submitted providing notification of an increase in the design capacity of the landfill, within 90 days of an increase in the maximum design capacity of the landfill to meet or exceed 2.5 million megagrams and 2.5 million cubic meters. This increase in design capacity may result from an increase in the permitted volume of the landfill or an increase in the density as documented in the annual recalculation required in §62.16726(f).

(c) NMOC emission rate report. For existing MSW landfills covered by this subpart with a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters, the NMOC emission rate report must be submitted following the procedure specified in paragraph (j)(2) of this section no later than 90 days after the effective date of this subpart. The NMOC emission rate report must be submitted to the Administrator annually following the procedure specified in paragraph (j)(2) of this section, except as provided for in paragraph (c)(3) of this section. The Administrator may request such additional information as may be necessary to verify the reported NMOC emission rate.

(1) The NMOC emission rate report must contain an annual or 5-year estimate of the NMOC emission rate calculated using the formula and procedures provided in §62.16718(a) or (b), as applicable.

(2) The NMOC emission rate report must include all the data, calculations, sample reports and measurements used to estimate the annual or 5-year emissions.

(3) If the estimated NMOC emission rate as reported in the annual report to the Administrator is less than 34 megagrams per year in each of the next 5 consecutive years, the owner or operator may elect to submit, following the procedure specified in paragraph (j)(2) of this section, an estimate of the NMOC emission rate for the next 5-year period in lieu of the annual report. This estimate must include the current amount of solid waste-in-place and the estimated waste acceptance rate for each year of the 5 years for which an NMOC emission rate is estimated. All data and calculations upon which this estimate is based must be provided to the Administrator. This estimate must be revised at least once every 5 years. If the actual waste acceptance rate exceeds the estimated waste acceptance rate in any year reported in the 5-year estimate, a revised 5-year estimate must be submitted to the Administrator. The revised estimate must cover the 5-year period beginning with the year in which the actual waste acceptance rate exceeded the estimated waste acceptance rate.

(4) Each owner or operator subject to the requirements of this subpart is exempted from the requirements to submit an NMOC emission rate report, after installing a collection and control system that complies with §62.16714(b) and (c), during such time as the collection and control system is in operation and in compliance with §§62.16716 and 62.16720.

(d) Collection and control system design plan. The collection and control system design plan must be prepared and approved by a professional engineer and must meet the following requirements:

(1) The collection and control system as described in the design plan must meet the design requirements in §62.16714(b) and (c).

(2) The collection and control system design plan must include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping, or reporting provisions of §§62.16716 through 62.16726 proposed by the owner or operator.

(3) The collection and control system design plan must either conform to specifications for active collection systems in §62.16728 or include a demonstration to the Administrator's satisfaction of the sufficiency of the alternative provisions to §62.16728.

**SECTION D. Source Level Requirements**

(4) Each owner or operator of an MSW landfill having a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters must submit a copy of the collection and control system design plan cover page that contains the engineer's seal to the Administrator within 1 year of the first NMOC emission rate report in which the NMOC emission rate equals or exceeds 34 megagrams per year, except as follows:

(i) If the owner or operator elects to recalculate the NMOC emission rate after Tier 2 NMOC sampling and analysis as provided in §62.16718(a)(3) and the resulting rate is less than 34 megagrams per year, annual periodic reporting must be resumed, using the Tier 2 determined site-specific NMOC concentration, until the calculated NMOC emission rate is equal to or greater than 34 megagrams per year or the landfill is closed. The revised NMOC emission rate report, with the recalculated NMOC emission rate based on NMOC sampling and analysis, must be submitted, following the procedures in paragraph (j)(2) of this section, within 180 days of the first calculated exceedance of 34 megagrams per year.

(ii) If the owner or operator elects to recalculate the NMOC emission rate after determining a site-specific methane generation rate constant k , as provided in Tier 3 in §62.16718(a)(4), and the resulting NMOC emission rate is less than 34 megagrams per year, annual periodic reporting must be resumed. The resulting site-specific methane generation rate constant k must be used in the NMOC emission rate calculation until such time as the emissions rate calculation results in an exceedance. The revised NMOC emission rate report based on the provisions of §62.16718(a)(4) and the resulting site-specific methane generation rate constant k must be submitted, following the procedure specified in paragraph (j)(2) of this section, to the Administrator within 1 year of the first calculated NMOC emission rate equaling or exceeding 34 megagrams per year.

(iii) If the owner or operator elects to demonstrate that site-specific surface methane emissions are below 500 parts-per-million methane, based on the provisions of §62.16718(a)(6), then the owner or operator must submit annually a Tier 4 surface emissions report as specified in this paragraph following the procedure specified in paragraph (j)(2) of this section until a surface emissions reading of 500 parts-per-million methane or greater is found. If the Tier 4 surface emissions report shows no surface emissions readings of 500 parts-per-million methane or greater for four consecutive quarters at a closed landfill, then the landfill owner or operator may reduce Tier 4 monitoring from a quarterly to an annual frequency. The Administrator may request such additional information as may be necessary to verify the reported instantaneous surface emission readings. The Tier 4 surface emissions report must clearly identify the location, date and time (to the nearest second), average wind speeds including wind gusts, and reading (in parts-per-million) of any value 500 parts-per-million methane or greater, other than non-repeatable, momentary readings. For location, you must determine the latitude and longitude coordinates using an instrument with an accuracy of at least 4 meters. The coordinates must be in decimal degrees with at least five decimal places. The Tier 4 surface emission report should also include the results of the most recent Tier 1 and Tier 2 results in order to verify that the landfill does not exceed 50 megagrams per year of NMOC.

(A) The initial Tier 4 surface emissions report must be submitted annually, starting within 30 days of completing the fourth quarter of Tier 4 SEM that demonstrates that site-specific surface methane emissions are below 500 parts-per-million methane, and following the procedure specified in paragraph (j)(2) of this section

(B) The Tier 4 surface emissions rate report must be submitted within 1 year of the first measured surface exceedance of 500 parts-per-million methane, following the procedure specified in paragraph (j)(2) of this section.

(iv) If the landfill is in the closed landfill subcategory, the owner or operator is exempt from submitting a collection and control system design plan to the Administrator provided that conditions in §62.16711(g)(3) are met. If not, the owner or operator shall follow the submission procedures and timing in §62.16724(d)(ii) and (iii) using a level of 50 Mg/yr instead of 34 Mg/yr.

(5) The landfill owner or operator must notify the Administrator that the design plan is completed and submit a copy of the plan's signature page. The Administrator has 90 days to decide whether the design plan should be submitted for review. If the Administrator chooses to review the plan, the approval process continues as described in paragraph (c)(6) of this section. However, if the Administrator indicates that submission is not required or does not respond within 90 days, the landfill owner or operator can continue to implement the plan with the recognition that the owner or operator is proceeding at their own risk. In the event that the design plan is required to be modified to obtain approval, the owner or operator must take any steps necessary to conform any prior actions to the approved design plan and any failure to do so could result in an enforcement action.

**SECTION D. Source Level Requirements**

(6) Upon receipt of an initial or revised design plan, the Administrator must review the information submitted under paragraphs (d)(1) through (3) of this section and either approve it, disapprove it, or request that additional information be submitted. Because of the many site-specific factors involved with landfill gas system design, alternative systems may be necessary. A wide variety of system designs are possible, such as vertical wells, combination horizontal and vertical collection systems, or horizontal trenches only, leachate collection components, and passive systems. If the Administrator does not approve or disapprove the design plan, or does not request that additional information be submitted within 90 days of receipt, then the owner or operator may continue with implementation of the design plan, recognizing they would be proceeding at their own risk.

(7) If the owner or operator chooses to demonstrate compliance with the emission control requirements of this subpart using a treatment system as defined in this subpart, then the owner or operator must prepare a site-specific treatment system monitoring plan as specified in §62.16726(b)(5). Legacy controlled landfills must prepare the monitoring plan no later than May 23, 2022.

(e) Revised design plan. The owner or operator who has already been required to submit a design plan under paragraph (d) of this section, or under subpart GGG of this part; 40 CFR part 60, subpart WWW; or a state plan implementing subpart Cc of 40 CFR part 60, must submit a revised design plan to the Administrator for approval as follows:

(1) At least 90 days before expanding operations to an area not covered by the previously approved design plan.

(2) Prior to installing or expanding the gas collection system in a way that is not consistent with the design plan that was submitted to the Administrator according to paragraph (d) of this section.

(f) Closure report. Each owner or operator of a controlled landfill must submit a closure report to the Administrator within 30 days of ceasing waste acceptance. The Administrator may request additional information as may be necessary to verify that permanent closure has taken place in accordance with the requirements of 40 CFR 258.60. If a closure report has been submitted to the Administrator, no additional wastes may be placed into the landfill without filing a notification of modification as described under 40 CFR 60.7(a)(4).

(g) Equipment removal report. Each owner or operator of a controlled landfill must submit an equipment removal report to the Administrator 30 days prior to removal or cessation of operation of the control equipment.

(1) The equipment removal report must contain the following items:

(i) A copy of the closure report submitted in accordance with paragraph (f) of this section; and

(ii) A copy of the initial performance test report demonstrating that the 15-year minimum control period has expired, unless the report of the results of the performance test has been submitted to the EPA via the EPA's Central Data Exchange (CDX), or information that demonstrates that the gas collection and control system will be unable to operate for 15 years due to declining gas flows. In the equipment removal report, the process unit(s) tested, the pollutant(s) tested, and the date that such performance test was conducted may be submitted in lieu of the performance test report if the report has been previously submitted to the EPA's CDX; and

(iii) Dated copies of three successive NMOC emission rate reports demonstrating that the landfill is no longer producing 34 megagrams or greater of NMOC per year, unless the NMOC emission rate reports have been submitted to the EPA via the EPA's CDX. If the NMOC emission rate reports have been previously submitted to the EPA's CDX, a statement that the NMOC emission rate reports have been submitted electronically and the dates that the reports were submitted to the EPA's CDX may be submitted in the equipment removal report in lieu of the NMOC emission rate reports; or

(2) The Administrator may request such additional information as may be necessary to verify that all of the conditions for removal in §62.16714(f) have been met.

(h) Annual report. The owner or operator of a landfill seeking to comply with §62.16714(e)(2) using an active collection system designed in accordance with §62.16714(b) must submit to the Administrator, following the procedures specified in paragraph (j)(2) of this section, an annual report of the recorded information in paragraphs (h)(1) through (7) of this section. The initial annual report must be submitted within 180 days of installation and startup of the collection and control system

**SECTION D. Source Level Requirements**

except for legacy controlled landfills that have already submitted an initial report under 40 CFR part 60, subpart WWW; subpart GGG of this part; or a state plan implementing 40 CFR part 60, subpart Cc. Except for legacy controlled landfills, the initial annual report must include the initial performance test report required under 40 CFR 60.8, as applicable, unless the report of the results of the performance test has been submitted to the EPA via the EPA's CDX. Legacy controlled landfills are exempted from submitting performance test reports in EPA's CDX provided that those reports were submitted under 40 CFR part 60, subpart WWW; subpart GGG of this part; or a state plan implementing 40 CFR part 60, subpart Cc. In the initial annual report, the process unit(s) tested, the pollutant(s) tested and the date that such performance test was conducted may be submitted in lieu of the performance test report if the report has been previously submitted to the EPA's CDX. The initial performance test report must be submitted, following the procedure specified in paragraph (j)(1) of this section, no later than the date that the initial annual report is submitted. For enclosed combustion devices and flares, reportable exceedances are defined under §62.16726(c)(1). Legacy controlled landfills are required to submit the annual report no later than one year after the most recent annual report submitted. If complying with the operational provisions of §§63.1958, 63.1960, and 63.1961 of this chapter, as allowed at §§62.16716, 62.16720, and 62.16722, the owner or operator must follow the semi-annual reporting requirements in §63.1981(h) of this chapter in lieu of this paragraph.

- (1) Value and length of time for exceedance of applicable parameters monitored under §62.16722(a)(1), (b), (c), (d), and (g).
 - (2) Description and duration of all periods when the gas stream was diverted from the control device or treatment system through a bypass line or the indication of bypass flow as specified under §62.16722.
 - (3) Description and duration of all periods when the control device or treatment system was not operating and length of time the control device or treatment system was not operating.
 - (4) All periods when the collection system was not operating.
 - (5) The location of each exceedance of the 500 parts-per-million methane concentration as provided in §62.16716(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month. For location, you must determine the latitude and longitude coordinates using an instrument with an accuracy of at least 4 meters. The coordinates must be in decimal degrees with at least five decimal places.
 - (6) The date of installation and the location of each well or collection system expansion added pursuant to §62.16720(a)(3), (4), (b), and (c)(4).
 - (7) For any corrective action analysis for which corrective actions are required in §62.16720(a)(3) or (4) and that take more than 60 days to correct the exceedance, the root cause analysis conducted, including a description of the recommended corrective action(s), the date for corrective action(s) already completed following the positive pressure or elevated temperature reading, and, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates.
- (i) Initial performance test report. Each owner or operator seeking to comply with §62.16714(c) must include the following information with the initial performance test report required under 40 CFR 60.8 of this chapter:
- (1) A diagram of the collection system showing collection system positioning including all wells, horizontal collectors, surface collectors, or other gas extraction devices, including the locations of any areas excluded from collection and the proposed sites for the future collection system expansion;
 - (2) The data upon which the sufficient density of wells, horizontal collectors, surface collectors, or other gas extraction devices and the gas mover equipment sizing are based;
 - (3) The documentation of the presence of asbestos or nondegradable material for each area from which collection wells have been excluded based on the presence of asbestos or nondegradable material;
 - (4) The sum of the gas generation flow rates for all areas from which collection wells have been excluded based on nonproductivity and the calculations of gas generation flow rate for each excluded area;
 - (5) The provisions for increasing gas mover equipment capacity with increased gas generation flow rate, if the present gas

**SECTION D. Source Level Requirements**

mover equipment is inadequate to move the maximum flow rate expected over the life of the landfill; and

(6) The provisions for the control of off-site migration.

(j) Electronic reporting. The owner or operator must submit reports electronically according to paragraphs (j)(1) and (2) of this section.

(1) Within 60 days after the date of completing each performance test (as defined in 40 CFR 60.8 of this chapter), the owner or operator must submit the results of each performance test according to the following procedures:

(i) For data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT website (https://www3.epa.gov/ttn/chief/ert/ert__info.html) at the time of the test, you must submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI). The CEDRI can be accessed through the EPA's CDX (<https://cdx.epa.gov/>). Performance test data must be submitted in a file format generated through the use of the EPA's ERT or an alternative file format consistent with the extensible markup language (XML) schema listed on the EPA's ERT website, once the XML schema is available. If you claim that some of the performance test information being submitted is confidential business information (CBI), you must submit a complete file generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT website, including information claimed to be CBI, on a compact disc, flash drive, or other commonly used electronic storage media to the EPA. The electronic media must be clearly marked as CBI and mailed to U.S. EPA/OAQPS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same ERT or alternate file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described earlier in this paragraph.

(ii) For data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the test, you must submit the results of the performance test to the Administrator at the appropriate address listed in 40 CFR 60.4 of this chapter.

(2) Each owner or operator required to submit reports following the procedure specified in this paragraph must submit reports to the EPA via the CEDRI (CEDRI can be accessed through the EPA's CDX). The owner or operator must use the appropriate electronic report in CEDRI for this subpart or an alternate electronic file format consistent with the XML schema listed on the CEDRI website (<https://www3.epa.gov/ttn/chief/cedri/index.html>). If the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the owner or operator must submit the report to the Administrator at the appropriate address listed in 40 CFR 60.4 of this chapter. Once the form has been available in CEDRI for 90 calendar days, the owner or operator must begin submitting all subsequent reports via CEDRI. The reports must be submitted by the deadlines specified in this subpart, regardless of the method in which the reports are submitted.

(k) Corrective action and the corresponding timeline. The owner or operator must submit according to paragraphs (k)(1) and (2) of this section. If complying with the operational provisions of 40 CFR 63.1958, 63.1960, and 63.1961 of this chapter, as allowed at §§62.16716, 62.16720, and 62.16722, the owner or operator must follow the corrective action and the corresponding timeline reporting requirements in §63.1981(j) of this chapter in lieu of paragraphs (k)(1) and (2) of this section.

(1) For corrective action that is required according to §62.16720(a)(3)(iii) or 62.16720(a)(4)(iii) and is expected to take longer than 120 days after the initial exceedance to complete, you must submit the root cause analysis, corrective action analysis, and corresponding implementation timeline to the Administrator as soon as practicable but no later than 75 days after the first measurement of positive pressure or temperature monitoring value of 55 degrees Celsius (131 degrees Fahrenheit) or above. The Administrator must approve the plan for corrective action and the corresponding timeline.

(2) For corrective action that is required according to §62.16720(a)(3)(iii) or §62.16720(a)(4)(iii) and is not completed within 60 days after the initial exceedance, you must submit a notification to the Administrator as soon as practicable but no later than 75 days after the first measurement of positive pressure or temperature exceedance.

(l) Liquids addition. The owner or operator of a designated facility with a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters that has employed leachate recirculation or added liquids based on a Research, Development, and Demonstration permit (issued through Resource Conservation and Recovery Act (RCRA), subtitle D, part 258) within the last 10 years must submit to the Administrator, annually, following the procedure specified in paragraph (j)(2)

**SECTION D. Source Level Requirements**

of this section, the following information:

- (1) Volume of leachate recirculated (gallons per year) and the reported basis of those estimates (records or engineering estimates).
 - (2) Total volume of all other liquids added (gallons per year) and the reported basis of those estimates (records or engineering estimates).
 - (3) Surface area (acres) over which the leachate is recirculated (or otherwise applied).
 - (4) Surface area (acres) over which any other liquids are applied.
 - (5) The total waste disposed (megagrams) in the areas with recirculated leachate and/or added liquids based on on-site records to the extent data are available, or engineering estimates and the reported basis of those estimates.
 - (6) The annual waste acceptance rates (megagrams per year) in the areas with recirculated leachate and/or added liquids, based on on-site records to the extent data are available, or engineering estimates.
 - (7) The initial report must contain items in paragraph (l)(1) through (6) of this section per year for the most recent 365 days as well as for each of the previous 10 years, to the extent historical data are available in on-site records, and the report must be submitted no later than June 21, 2022.
 - (8) Subsequent annual reports must contain items in paragraph (l)(1) through (6) of this section for the 365-day period following the 365-day period included in the previous annual report, and the report must be submitted no later than 365 days after the date the previous report was submitted.
 - (9) Landfills in the closed landfill subcategory are exempt from reporting requirements contained in paragraphs (l)(1) through (7) of this section.
 - (10) Landfills may cease annual reporting of items in paragraphs (l)(1) through (6) of this section once they have submitted the closure report in §62.16724(f).
- (m) Tier 4 notification. (1) The owner or operator of a designated facility with a design capacity equal to or greater than 2.5 million megagrams and 2.5 million cubic meters must provide a notification of the date(s) upon which it intends to demonstrate site-specific surface methane emissions are below 500 parts-per-million methane, based on the Tier 4 provisions of §62.16718(a)(6). The landfill must also include a description of the wind barrier to be used during the SEM in the notification. Notification must be postmarked not less than 30 days prior to such date.
- (2) If there is a delay to the scheduled Tier 4 SEM date due to weather conditions, including not meeting the wind requirements in §62.16718(a)(6)(A), the owner or operator of a landfill shall notify the Administrator by email or telephone no later than 48 hours before any known delay in the original test date, and arrange an updated date with the Administrator by mutual agreement.
- (n) Notification of meeting Tier 4. The owner or operator of a designated facility must submit a notification to the EPA Regional office within 10 business days of completing each increment of progress. Each notification must indicate which increment of progress specified in §62.16712 has been achieved. The notification must be signed by the owner or operator of the landfill.
- (1) For the first increment of progress (submit control plan), you must follow paragraph (p) of this section in addition to submitting the notification described in paragraph (n) of this section. A copy of the design plan must also be kept on site at the landfill.
- (2) For the second increment of progress, a signed copy of the contract(s) awarded must be submitted in addition to the notification described in paragraph (n) of this section.
- (o) Notification of failing to meet an increment of progress. The owner or operator of a designated facility who fails to meet

**SECTION D. Source Level Requirements**

any increment of progress specified in §62.16712(a)(1) through (5) according to the applicable schedule in §62.16712 must submit notification that the owner or operator failed to meet the increment to the EPA Regional office within 10 business days of the applicable date in §62.16712.

(p) Alternate dates for increments 2 and 3. The owner or operator (or the state or tribal air pollution control authority) that is submitting alternative dates for increments 2 and 3 according to §62.16712(d) must do so by the date specified for submitting the final control plan. The date for submitting the final control plan is specified in §62.16712(c), as applicable. The owner or operator (or the state or tribal air pollution control authority) must submit a justification if any of the alternative dates are later than the increment dates in table 1 of this subpart. In addition to submitting the alternative dates to the appropriate EPA Regional office, the owner or operator must also submit the alternative dates to the state or tribe.

(q) 24-hour high temperature report. Each owner or operator that chooses to comply with the provisions in §§63.1958, 63.1960, and 63.1961 of this chapter, as allowed in §§62.16716, 62.16720, and 62.16722, must submit the 24-hour high temperature report according to §63.1981(k) of this chapter.

[Source: 86 FR 27770, May 21, 2021]

030 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1965]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What is a deviation?

A deviation is defined in §63.1990. For the purposes of the landfill monitoring and SSM plan requirements, deviations include the items in paragraphs (a) through (c) of this section.

(a) A deviation occurs when the control device operating parameter boundaries described in §63.1983(c)(1) are exceeded.

(b) A deviation occurs when 1 hour or more of the hours during the 3-hour block averaging period does not constitute a valid hour of data. A valid hour of data must have measured values for at least three 15-minute monitoring periods within the hour.

[Source: 85 FR 17261, Mar. 26, 2020]

031 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1981]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What reports must I submit?

You must submit the reports specified in this section and the reports specified in Table 1 to this subpart. If you have previously submitted a design capacity report, amended design capacity report, initial NMOC emission rate report, initial or revised collection and control system design plan, closure report, equipment removal report, or initial performance test under 40 CFR part 60, subpart WWW; 40 CFR part 60, subpart XXX; or a federal plan or EPA-approved and effective state plan or tribal plan that implements either 40 CFR part 60, subpart Cc or 40 CFR part 60, subpart Cf, then that submission constitutes compliance with the design capacity report in paragraph (a) of this section, the amended design capacity report in paragraph (b) of this section, the initial NMOC emission rate report in paragraph (c) of this section, the initial collection and control system design plan in paragraph (d) of this section, the revised design plan in paragraph (e) of this section, the closure report in paragraph (f) of this section, the equipment removal report in paragraph (g) of this section, and the initial performance test report in paragraph (i) of this section. You do not need to re-submit the report(s). However, you must include a statement certifying prior submission of the respective report(s) and the date of submittal in the first semi-annual report required in this section.

(a) Initial design capacity report. The initial design capacity report must contain the information specified in §60.757(a)(2) of this chapter, except beginning no later than September 28, 2021, the report must contain:

(1) A map or plot of the landfill, providing the size and location of the landfill, and identifying all areas where solid waste may be landfilled according to the permit issued by the state, local, or tribal agency responsible for regulating the landfill.

(2) The maximum design capacity of the landfill. Where the maximum design capacity is specified in the permit issued by the state, local, or tribal agency responsible for regulating the landfill, a copy of the permit specifying the maximum design

**SECTION D. Source Level Requirements**

capacity may be submitted as part of the report. If the maximum design capacity of the landfill is not specified in the permit, the maximum design capacity must be calculated using good engineering practices. The calculations must be provided, along with the relevant parameters as part of the report. The landfill may calculate design capacity in either Mg or m³ for comparison with the exemption values. If the owner or operator chooses to convert the design capacity from volume to mass or from mass to volume to demonstrate its design capacity is less than 2.5 million Mg or 2.5 million m³, the calculation must include a site-specific density, which must be recalculated annually. Any density conversions must be documented and submitted with the design capacity report. The state, tribal, local agency or Administrator may request other reasonable information as may be necessary to verify the maximum design capacity of the landfill.

(b) Amended design capacity report. An amended design capacity report must be submitted to the Administrator providing notification of an increase in the design capacity of the landfill, within 90 days of an increase in the maximum design capacity of the landfill to meet or exceed 2.5 million Mg and 2.5 million m³. This increase in design capacity may result from an increase in the permitted volume of the landfill or an increase in the density as documented in the annual recalculation required in §63.1983(f).

(c) NMOC emission rate report. Each owner or operator subject to the requirements of this subpart must submit a copy of the latest NMOC emission rate report that was submitted according to §60.757(b) of this chapter or submit an NMOC emission rate report to the Administrator initially and annually thereafter, except as provided for in paragraph (c)(1)(ii)(A) of this section. The Administrator may request such additional information as may be necessary to verify the reported NMOC emission rate. If you have submitted an annual report under 40 CFR part 60, subpart WWW; 40 CFR part 60, subpart XXX; or a Federal plan or EPA-approved and effective state plan or tribal plan that implements either 40 CFR part 60, subpart Cc or 40 CFR part 60, subpart Cf, then that submission constitutes compliance with the annual NMOC emission rate report in this paragraph. You do not need to re-submit the annual report for the current year. Beginning no later than September 27, 2021, the report must meet the following requirements:

(1) The NMOC emission rate report must contain an annual or 5-year estimate of the NMOC emission rate calculated using the formula and procedures provided in §63.1959(a) or (b), as applicable.

(i) The initial NMOC emission rate report must be submitted no later than 90 days after the date of commenced construction, modification, or reconstruction for landfills that commence construction, modification, or reconstruction on or after March 12, 1996.

(ii) Subsequent NMOC emission rate reports must be submitted annually thereafter, except as provided for in paragraph (c)(1)(ii)(A) of this section.

(A) If the estimated NMOC emission rate as reported in the annual report to the Administrator is less than 50 Mg/yr in each of the next 5 consecutive years, the owner or operator may elect to submit, an estimate of the NMOC emission rate for the next 5-year period in lieu of the annual report. This estimate must include the current amount of solid waste-in-place and the estimated waste acceptance rate for each year of the 5 years for which an NMOC emission rate is estimated. All data and calculations upon which this estimate is based must be provided to the Administrator. This estimate must be revised at least once every 5 years. If the actual waste acceptance rate exceeds the estimated waste acceptance rate in any year reported in the 5-year estimate, a revised 5-year estimate must be submitted to the Administrator. The revised estimate must cover the 5-year period beginning with the year in which the actual waste acceptance rate exceeded the estimated waste acceptance rate.

(B) The report must be submitted following the procedure specified in paragraph (l)(2) of this section.

(2) The NMOC emission rate report must include all the data, calculations, sample reports and measurements used to estimate the annual or 5-year emissions.

(3) Each owner or operator subject to the requirements of this subpart is exempted from the requirements to submit an NMOC emission rate report, after installing a collection and control system that complies with §63.1959(b)(2), during such time as the collection and control system is in operation and in compliance with §§63.1958 and 63.1960.

(d) Collection and control system design plan. Each owner or operator subject to the provisions of §63.1959(b)(2) must submit a collection and control system design plan to the Administrator for approval according to §60.757(c) of this chapter

**SECTION D. Source Level Requirements**

and the schedule in §60.757(c)(1) and (2). Beginning no later than September 27, 2021, each owner or operator subject to the provisions of §63.1959(b)(2) must submit a collection and control system design plan to the Administrator according to paragraphs (d)(1) through (6) of this section. The collection and control system design plan must be prepared and approved by a professional engineer.

(1) The collection and control system as described in the design plan must meet the design requirements in §63.1959(b)(2).

(2) The collection and control system design plan must include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping or reporting provisions of §§63.1957 through 63.1983 proposed by the owner or operator.

(3) The collection and control system design plan must either conform with specifications for active collection systems in §63.1962 or include a demonstration to the Administrator's satisfaction of the sufficiency of the alternative provisions to §63.1962.

(4) Each owner or operator of an MSW landfill affected by this subpart must submit a collection and control system design plan to the Administrator for approval within 1 year of becoming subject to this subpart.

(5) The landfill owner or operator must notify the Administrator that the design plan is completed and submit a copy of the plan's signature page. The Administrator has 90 days to decide whether the design plan should be submitted for review. If the Administrator chooses to review the plan, the approval process continues as described in paragraph (d)(6) of this section. In the event that the design plan is required to be modified to obtain approval, the owner or operator must take any steps necessary to conform any prior actions to the approved design plan and any failure to do so could result in an enforcement action.

(6) Upon receipt of an initial or revised design plan, the Administrator must review the information submitted under paragraphs (d)(1) through (3) of this section and either approve it, disapprove it, or request that additional information be submitted. Because of the many site-specific factors involved with landfill gas system design, alternative systems may be necessary. A wide variety of system designs are possible, such as vertical wells, combination horizontal and vertical collection systems, or horizontal trenches only, leachate collection components, and passive systems.

(e) Revised design plan. Beginning no later than September 27, 2021, the owner or operator who has already been required to submit a design plan under paragraph (d) of this section must submit a revised design plan to the Administrator for approval as follows:

(1) At least 90 days before expanding operations to an area not covered by the previously approved design plan.

(2) Prior to installing or expanding the gas collection system in a way that is not consistent with the design plan that was submitted to the Administrator according to paragraph (d) of this section.

(f) Closure report. Each owner or operator of a controlled landfill must submit a closure report to the Administrator within 30 days of waste acceptance cessation. The Administrator may request additional information as may be necessary to verify that permanent closure has taken place in accordance with the requirements of §258.60 of this chapter. If a closure report has been submitted to the Administrator, no additional wastes may be placed into the landfill without filing a notification of modification as described under §63.9(b) of subpart A.

(g) Equipment removal report. Each owner or operator of a controlled landfill must submit an equipment removal report as provided in §60.757(e) of this chapter. Each owner or operator of a controlled landfill must submit an equipment removal report to the Administrator 30 days prior to removal or cessation of operation of the control equipment.

(1) Beginning no later than September 27, 2021, the equipment removal report must contain all of the following items:

(i) A copy of the closure report submitted in accordance with paragraph (f) of this section;

(ii) A copy of the initial performance test report demonstrating that the 15-year minimum control period has expired, or

**SECTION D. Source Level Requirements**

information that demonstrates that the gas collection and control system will be unable to operate for 15 years due to declining gas flows. In the equipment removal report, the process unit(s) tested, the pollutant(s) tested, and the date that such performance test was conducted may be submitted in lieu of the performance test report if the report has been previously submitted to the EPA's Central Data Exchange (CDX); and

(iii) Dated copies of three successive NMOC emission rate reports demonstrating that the landfill is no longer producing 50 Mg or greater of NMOC per year. If the NMOC emission rate reports have been previously submitted to the EPA's CDX, a statement that the NMOC emission rate reports have been submitted electronically and the dates that the reports were submitted to the EPA's CDX may be submitted in the equipment removal report in lieu of the NMOC emission rate reports.

(2) The Administrator may request such additional information as may be necessary to verify that all of the conditions for removal in §63.1957(b) have been met.

(h) Semi-annual report. The owner or operator of a landfill seeking to comply with §63.1959(b)(2) using an active collection system designed in accordance with §63.1959(b)(2)(ii) must submit to the Administrator semi-annual reports. Beginning no later than September 27, 2021, you must submit the report, following the procedure specified in paragraph (l) of this section. The initial report must be submitted within 180 days of installation and startup of the collection and control system and must include the initial performance test report required under §63.7 of subpart A, as applicable. In the initial report, the process unit(s) tested, the pollutant(s) tested, and the date that such performance test was conducted may be submitted in lieu of the performance test report if the report has been previously submitted to the EPA's CDX. For enclosed combustion devices and flares, reportable exceedances are defined under §63.1983(c). The semi-annual reports must contain the information in paragraphs (h)(1) through (8) of this section.

(1) Number of times that applicable parameters monitored under §63.1958(b), (c), and (d) were exceeded and when the gas collection and control system was not operating under §63.1958(e), including periods of SSM. For each instance, report the date, time, and duration of each exceedance.

(i) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the temperature and nitrogen or oxygen operational standards in introductory paragraph §63.1958(c), provide a statement of the wellhead operational standard for temperature and oxygen you are complying with for the period covered by the report. Indicate the number of times each of those parameters monitored under §63.1961(a)(3) were exceeded. For each instance, report the date, time, and duration of each exceedance.

(ii) Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1), provide a statement of the wellhead operational standard for temperature and oxygen you are complying with for the period covered by the report. Indicate the number of times each of those parameters monitored under §63.1961(a)(4) were exceeded. For each instance, report the date, time, and duration of each exceedance.

(iii) Beginning no later than September 27, 2021, number of times the parameters for the site-specific treatment system in §63.1961(g) were exceeded.

(2) Description and duration of all periods when the gas stream was diverted from the control device or treatment system through a bypass line or the indication of bypass flow as specified under §63.1961.

(3) Description and duration of all periods when the control device or treatment system was not operating and length of time the control device or treatment system was not operating.

(4) All periods when the collection system was not operating.

(5) The location of each exceedance of the 500-ppm methane concentration as provided in §63.1958(d) and the concentration recorded at each location for which an exceedance was recorded in the previous month. Beginning no later than September 27, 2021, for location, you record the latitude and longitude coordinates of each exceedance using an instrument with an accuracy of at least 4 meters. The coordinates must be in decimal degrees with at least five decimal places.

**SECTION D. Source Level Requirements**

(6) The date of installation and the location of each well or collection system expansion added pursuant to §63.1960(a)(3) and (4), (b), and (c)(4).

(7) For any corrective action analysis for which corrective actions are required in §63.1960(a)(3)(i) or (a)(5) and that take more than 60 days to correct the exceedance, the root cause analysis conducted, including a description of the recommended corrective action(s), the date for corrective action(s) already completed following the positive pressure or high temperature reading, and, for action(s) not already completed, a schedule for implementation, including proposed commencement and completion dates.

(8) Each owner or operator required to conduct enhanced monitoring in §§63.1961(a)(5) and (6) must include the results of all monitoring activities conducted during the period.

(i) For each monitoring point, report the date, time, and well identifier along with the value and units of measure for oxygen, temperature (wellhead and downwell), methane, and carbon monoxide.

(ii) Include a summary trend analysis for each well subject to the enhanced monitoring requirements to chart the weekly readings over time for oxygen, wellhead temperature, methane, and weekly or monthly readings over time, as applicable for carbon monoxide.

(iii) Include the date, time, staff person name, and description of findings for each visual observation for subsurface oxidation event.

(i) Initial performance test report. Each owner or operator seeking to comply with §63.1959(b)(2)(iii) must include the following information with the initial performance test report required under §63.7 of subpart A:

(1) A diagram of the collection system showing collection system positioning including all wells, horizontal collectors, surface collectors, or other gas extraction devices, including the locations of any areas excluded from collection and the proposed sites for the future collection system expansion;

(2) The data upon which the sufficient density of wells, horizontal collectors, surface collectors, or other gas extraction devices and the gas mover equipment sizing are based;

(3) The documentation of the presence of asbestos or nondegradable material for each area from which collection wells have been excluded based on the presence of asbestos or nondegradable material;

(4) The sum of the gas generation flow rates for all areas from which collection wells have been excluded based on nonproductivity and the calculations of gas generation flow rate for each excluded area;

(5) The provisions for increasing gas mover equipment capacity with increased gas generation flow rate, if the present gas mover equipment is inadequate to move the maximum flow rate expected over the life of the landfill; and

(6) The provisions for the control of off-site migration.

(j) Corrective action and the corresponding timeline. The owner or operator must submit information regarding corrective actions according to paragraphs (j)(1) and (2) of this section.

(1) For corrective action that is required according to §63.1960(a)(3) or (4) and is not completed within 60 days after the initial exceedance, you must submit a notification to the Administrator as soon as practicable but no later than 75 days after the first measurement of positive pressure or temperature exceedance.

(2) For corrective action that is required according to §63.1960(a)(3) or (4) and is expected to take longer than 120 days after the initial exceedance to complete, you must submit the root cause analysis, corrective action analysis, and corresponding implementation timeline to the Administrator as soon as practicable but no later than 75 days after the first measurement of positive pressure or temperature monitoring value of 62.8 degrees Celsius (145 degrees Fahrenheit) or above. The Administrator must approve the plan for corrective action and the corresponding timeline.

**SECTION D. Source Level Requirements**

(k) 24-hour high temperature report. Where an owner or operator subject to the provisions of this subpart seeks to demonstrate compliance with the operational standard for temperature in §63.1958(c)(1) and a landfill gas temperature measured at either the wellhead or at any point in the well is greater than or equal to 76.7 degrees Celsius (170 degrees Fahrenheit) and the carbon monoxide concentration measured is greater than or equal to 1,000 ppmv, then you must report the date, time, well identifier, temperature and carbon monoxide reading via email to the Administrator within 24 hours of the measurement unless a higher operating temperature value has been approved by the Administrator for the well under this subpart or under 40 CFR part 60, subpart WWW; 40 CFR part 60, subpart XXX; or a Federal plan or EPA approved and effective state plan or tribal plan that implements either 40 CFR part 60, subpart Cc or 40 CFR part 60, subpart Cf.

(l) Electronic reporting. Beginning no later than September 27, 2021, the owner or operator must submit reports electronically according to paragraphs (l)(1) and (2) of this section.

(1) Within 60 days after the date of completing each performance test required by this subpart, you must submit the results of the performance test following the procedures specified in paragraphs (l)(1)(i) through (iii) of this section.

(i) Data collected using test methods supported by the EPA's Electronic Reporting Tool (ERT) as listed on the EPA's ERT website (<https://www.epa.gov/electronic-reporting-air-emissions/electronic-reporting-tool-ert>) at the time of the test. Submit the results of the performance test to the EPA via the Compliance and Emissions Data Reporting Interface (CEDRI), which can be accessed through the EPA's CDX (<https://cdx.epa.gov/>). The data must be submitted in a file format generated through the use of the EPA's ERT. Alternatively, you may submit an electronic file consistent with the extensible markup language (XML) schema listed on the EPA's ERT website.

(ii) Data collected using test methods that are not supported by the EPA's ERT as listed on the EPA's ERT website at the time of the test. The results of the performance test must be included as an attachment in the ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT website. Submit the ERT generated package or alternative file to the EPA via CEDRI.

(iii) Confidential business information (CBI). If you claim some of the information submitted under paragraph (a) of this section is CBI, you must submit a complete file, including information claimed to be CBI, to the EPA. The file must be generated through the use of the EPA's ERT or an alternate electronic file consistent with the XML schema listed on the EPA's ERT website. Submit the file on a compact disc, flash drive, or other commonly used electronic storage medium and clearly mark the medium as CBI. Mail the electronic medium to U.S. EPA/OAQPS/CORE CBI Office, Attention: Group Leader, Measurement Policy Group, MD C404-02, 4930 Old Page Rd., Durham, NC 27703. The same file with the CBI omitted must be submitted to the EPA via the EPA's CDX as described in paragraph (l)(1)(i) of this section.

(2) Each owner or operator required to submit reports following the procedure specified in this paragraph must submit reports to the EPA via CEDRI. CEDRI can be accessed through the EPA's CDX. The owner or operator must use the appropriate electronic report in CEDRI for this subpart or an alternate electronic file format consistent with the XML schema listed on the CEDRI website (<https://www.epa.gov/electronic-reporting-air-emissions/compliance-and-emissions-data-reporting-interface-cedri>). Once the spreadsheet template upload/forms for the reports have been available in CEDRI for 90 days, the owner or operator must begin submitting all subsequent reports via CEDRI. The reports must be submitted by the deadlines specified in this subpart, regardless of the method in which the reports are submitted. The NMOC emission rate reports, semi-annual reports, and bioreactor 40-percent moisture reports should be electronically reported as a spreadsheet template upload/form to CEDRI. If the reporting forms specific to this subpart are not available in CEDRI at the time that the reports are due, the owner or operator must submit the reports to the Administrator at the appropriate address listed in §63.13 of subpart A.

(m) Claims of EPA system outage. Beginning no later than September 27, 2021, if you are required to electronically submit a report through CEDRI in the EPA's CDX, you may assert a claim of EPA system outage for failure to comply timely with the reporting requirement. To assert a claim of EPA system outage, you must meet the following requirements:

(1) You must have been or will be precluded from accessing CEDRI and submitting a required report within the time prescribed due to an outage of either the EPA's CEDRI or CDX systems.

(2) The outage must have occurred within the period of time beginning 5 business days prior to the date that the submission is due.

**SECTION D. Source Level Requirements**

(3) The outage may be planned or unplanned.

(4) You must submit notification to the Administrator in writing as soon as possible following the date you first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

(5) You must provide to the Administrator a written description identifying:

(i) The date(s) and time(s) when CDX or CEDRI was accessed and the system was unavailable;

(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to EPA system outage;

(iii) Measures taken or to be taken to minimize the delay in reporting; and

(iv) The date by which you propose to report, or if you have already met the reporting requirement at the time of the notification, the date you reported.

(6) The decision to accept the claim of EPA system outage and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

(7) In any circumstance, the report must be submitted electronically as soon as possible after the outage is resolved.

(n) Claims of force majeure. Beginning no later than September 2, 2021, if you are required to electronically submit a report through CEDRI in the EPA's CDX, you may assert a claim of force majeure for failure to comply timely with the reporting requirement. To assert a claim of force majeure, you must meet the following requirements:

(1) You may submit a claim if a force majeure event is about to occur, occurs, or has occurred or there are lingering effects from such an event within the period of time beginning 5 business days prior to the date the submission is due. For the purposes of this section, a force majeure event is defined as an event that will be or has been caused by circumstances beyond the control of the affected facility, its contractors, or any entity controlled by the affected facility that prevents you from complying with the requirement to submit a report electronically within the time period prescribed. Examples of such events are acts of nature (e.g., hurricanes, earthquakes, or floods), acts of war or terrorism, or equipment failure or safety hazard beyond the control of the affected facility (e.g., large scale power outage).

(2) You must submit notification to the Administrator in writing as soon as possible following the date you first knew, or through due diligence should have known, that the event may cause or has caused a delay in reporting.

(3) You must provide to the Administrator:

(i) A written description of the force majeure event;

(ii) A rationale for attributing the delay in reporting beyond the regulatory deadline to the force majeure event;

(iii) Measures taken or to be taken to minimize the delay in reporting; and

(iv) The date by which you propose to report, or if you have already met the reporting requirement at the time of the notification, the date you reported.

(4) The decision to accept the claim of force majeure and allow an extension to the reporting deadline is solely within the discretion of the Administrator.

(5) In any circumstance, the reporting must occur as soon as possible after the force majeure event occurs.

[Source: 85 FR 17261, Mar. 26, 2020]

**SECTION D. Source Level Requirements****VI. WORK PRACTICE REQUIREMENTS.****# 032 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The enclosed flare shall be equipped and operated with an intermittent pilot ignition source using propane as an auxiliary fuel.

033 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The enclosed flare shall be operated with no visible flame.

034 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The enclosed flare and gas extraction system shall be equipped with a backup power source such as a diesel generator such that power shall not be interrupted in the event of a power outage.

035 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The owner/operator shall maintain and operate the emergency telephone notification system at all times. Notification system shall call up to four plant personnel telephone numbers so that someone may be notified that the enclosed flare has shut down.

036 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The enclosed flare shall be operated with a flame present at all times. The enclosed flare shall be equipped and operated with an automatic shutoff mechanism designed to immediately stop the flow of gases when a flame out occurs. During restart or startup, there shall be sufficient flow of auxiliary fuel to the burner such that unburned landfill gases are not emitted to the atmosphere.

037 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1955]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What requirements must I meet?**

(a) Beginning no later than September 28, 2021, the collection and control system design plan may include for approval collection and control systems that include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping, or reporting provisions, as provided in §63.1981(d)(2).

(b) [Paragraph (b) is not applicable to landfills which do not operate bioreactors.]

(c) At all times, beginning no later than September 27, 2021, the owner or operator must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require the owner or operator to make any further efforts to reduce emissions if the requirements of this subpart have been achieved. Determination of whether a source is operating in compliance with operation and maintenance requirements will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[Source: 85 FR 17261, Mar. 26, 2020]

038 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1957]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****Requirements for gas collection and control system installation and removal.**

(a) Operation. Operate the collection and control device in accordance with the provisions of §§63.1958, 63.1960, and 63.1961.

(b) Removal criteria. The collection and control system may be capped, removed, or decommissioned if the following criteria are met:

(1) The landfill is a closed landfill (as defined in §63.1990). A closure report must be submitted to the Administrator as

**SECTION D. Source Level Requirements**

provided in §63.1981(f);

(2) The gas collection and control system has been in operation a minimum of 15 years or the landfill owner or operator demonstrates that the gas collection and control system will be unable to operate for 15 years due to declining gas flow; and

(3) Following the procedures specified in §63.1959(c), the calculated NMOC emission rate at the landfill is less than 50 Mg/yr on three successive test dates. The test dates must be no less than 90 days apart, and no more than 180 days apart.

[Source: 85 FR 17261, Mar. 26, 2020]

039 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1958]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills
Operational standards for collection and control systems.**

§ 63.1958 Operational standards for collection and control systems.

Each owner or operator of an MSW landfill with a gas collection and control system used to comply with the provisions of § 63.1957 must:

(a) Operate the collection system such that gas is collected from each area, cell, or group of cells in the MSW landfill in which solid waste has been in place for:

(1) 5 years or more if active; or

(2) 2 years or more if closed or at final grade;

(b) Operate the collection system with negative pressure at each wellhead except under the following conditions:

(1) A fire or increased well temperature. The owner or operator must record instances when positive pressure occurs in efforts to avoid a fire. These records must be submitted with the semi-annual reports as provided in § 63.1981(h);

(2) Use of a geomembrane or synthetic cover. The owner or operator must develop acceptable pressure limits in the design plan;

(3) A decommissioned well. A well may experience a static positive pressure after shut down to accommodate for declining flows. All design changes must be approved by the Administrator as specified in § 63.1981(d)(2);

(c) Operate each interior wellhead in the collection system as specified in § 60.753(c), except:

(1) Beginning no later than September 27, 2021, operate each interior wellhead in the collection system with a landfill gas temperature less than 62.8 degrees Celsius (145 degrees Fahrenheit).

(2) The owner or operator may establish a higher operating temperature value at a particular well. A higher operating value demonstration must be submitted to the Administrator for approval and must include supporting data demonstrating that the elevated parameter neither causes fires nor significantly inhibits anaerobic decomposition by killing methanogens. The demonstration must satisfy both criteria in order to be approved (i.e., neither causing fires nor killing methanogens is acceptable).

(d)(1) Operate the collection system so that the methane concentration is less than 500 parts per million (ppm) above background at the surface of the landfill. To determine if this level is exceeded, the owner or operator must conduct surface testing around the perimeter of the collection area and along a pattern that traverses the landfill at no more than 30-meter intervals and where visual observations indicate elevated concentrations of landfill gas, such as distressed vegetation and cracks or seeps in the cover. The owner or operator may establish an alternative traversing pattern that ensures equivalent coverage. A surface monitoring design plan must be developed that includes a topographical map with the monitoring route and the rationale for any site-specific deviations from the 30-meter intervals. Areas with steep slopes or other dangerous areas may be excluded from the surface testing.

**SECTION D. Source Level Requirements**

(2) Beginning no later than September 27, 2021, the owner or operator must:

(i) Conduct surface testing using an organic vapor analyzer, flame ionization detector, or other portable monitor meeting the specifications provided in § 63.1960(d).

(ii) Conduct surface testing at all cover penetrations. Thus, the owner or operator must monitor any cover penetrations that are within an area of the landfill where waste has been placed and a gas collection system is required.

(iii) Determine the latitude and longitude coordinates of each exceedance using an instrument with an accuracy of at least 4 meters. The coordinates must be in decimal degrees with at least five decimal places.

(e) Operate the system as specified in § 60.753(e) of this chapter, except:

(1) Beginning no later than September 27, 2021, operate the system in accordance to § 63.1955(c) such that all collected gases are vented to a control system designed and operated in compliance with § 63.1959(b)(2)(iii). In the event the collection or control system is not operating:

(i) The gas mover system must be shut down and all valves in the collection and control system contributing to venting of the gas to the atmosphere must be closed within 1 hour of the collection or control system not operating; and

(ii) Efforts to repair the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be returned to operation.

(2) [Reserved]

(f) Operate the control system at all times when the collected gas is routed to the system.

(g) If monitoring demonstrates that the operational requirements in paragraph (b), (c), or (d) of this section are not met, corrective action must be taken as specified in § 63.1960(a)(3) and (5) or (c). If corrective actions are taken as specified in § 63.1960, the monitored exceedance is not a deviation of the operational requirements in this section.

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64400, Oct. 13, 2020]

040 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1962]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills Specifications for active collection systems.

(a) Each owner or operator seeking to comply with §63.1959(b)(2)(i) must site active collection wells, horizontal collectors, surface collectors, or other extraction devices at a sufficient density throughout all gas producing areas using the following procedures unless alternative procedures have been approved by the Administrator as provided in §63.1981(d)(2) and (3):

(1) The collection devices within the interior must be certified to achieve comprehensive control of surface gas emissions by a professional engineer. The following issues must be addressed in the design: Depths of refuse, refuse gas generation rates and flow characteristics, cover properties, gas system expandability, leachate and condensate management, accessibility, compatibility with filling operations, integration with closure end use, air intrusion control, corrosion resistance, fill settlement, resistance to the refuse decomposition heat, and ability to isolate individual components or sections for repair or troubleshooting without shutting down entire collection system.

(2) The sufficient density of gas collection devices determined in paragraph (a)(1) of this section must address landfill gas migration issues and augmentation of the collection system through the use of active or passive systems at the landfill perimeter or exterior.

(3) The placement of gas collection devices determined in paragraph (a)(1) of this section must control all gas producing areas, except as provided by paragraphs (a)(3)(i) and (ii) of this section.

(i) Any segregated area of asbestos or nondegradable material may be excluded from collection if documented as

**SECTION D. Source Level Requirements**

provided under §63.1983(d). The documentation must provide the nature, date of deposition, location and amount of asbestos or nondegradable material deposited in the area and must be provided to the Administrator upon request.

(ii) Any nonproductive area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than 1 percent of the total amount of NMOC emissions from the landfill. The amount, location, and age of the material must be documented and provided to the Administrator upon request. A separate NMOC emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the NMOC emissions estimate for the entire landfill.

(A) The NMOC emissions from each section proposed for exclusion must be computed using Equation 7:

[Refer to regulation for pdf of equation 7.]

Where:

- Q_i = NMOC emission rate from the i th section, Mg/yr.
- k = Methane generation rate constant, year⁻¹.
- L_0 = Methane generation potential, m³/Mg solid waste.
- M_i = Mass of the degradable solid waste in the i th section, Mg.
- t_i = Age of the solid waste in the i th section, years.
- CNMOC = Concentration of NMOC, ppmv.
- 3.6×10^{-9} = Conversion factor.

(B) If the owner/operator is proposing to exclude, or cease gas collection and control from, nonproductive physically separated (e.g., separately lined) closed areas that already have gas collection systems, NMOC emissions from each physically separated closed area must be computed using either Equation 3 in §63.1959(c) or Equation 7 in paragraph (a)(3)(ii)(A) of this section.

(iii) The values for k and CNMOC determined in field testing must be used if field testing has been performed in determining the NMOC emission rate or the radii of influence (the distance from the well center to a point in the landfill where the pressure gradient applied by the blower or compressor approaches zero). If field testing has not been performed, the default values for k , L_0 and CNMOC provided in §63.1959(a)(1) or the alternative values from §63.1959(a)(5) must be used. The mass of nondegradable solid waste contained within the given section may be subtracted from the total mass of the section when estimating emissions provided the nature, location, age, and amount of the nondegradable material is documented as provided in paragraph (a)(3)(i) of this section.

(b) Each owner or operator seeking to comply with §63.1959(b)(2)(ii) must construct the gas collection devices using the following equipment or procedures:

(1) The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard to the need to prevent excessive air infiltration.

(2) Vertical wells must be placed so as not to endanger underlying liners and must address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors must be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices must be designed so as not to allow indirect short circuiting of air into the cover or refuse into the collection system or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.

(3) Collection devices may be connected to the collection header pipes below or above the landfill surface. The connector assembly must include a positive closing throttle valve, any necessary seals and couplings, access couplings and at least one sampling port. The collection devices must be constructed of PVC, HDPE, fiberglass, stainless steel, or

**SECTION D. Source Level Requirements**

other nonporous material of suitable thickness.

(c) Each owner or operator seeking to comply with §63.1959(b)(2)(iii) must convey the landfill gas to a control system in compliance with §63.1959(b)(2)(iii) through the collection header pipe(s). The gas mover equipment must be sized to handle the maximum gas generation flow rate expected over the intended use period of the gas moving equipment using the following procedures:

(1) For existing collection systems, the flow data must be used to project the maximum flow rate. If no flow data exists, the procedures in paragraph (c)(2) of this section must be used.

(2) For new collection systems, the maximum flow rate must be in accordance with §63.1960(a)(1).

[Source: 85 FR 17261, Mar. 26, 2020]

VII. ADDITIONAL REQUIREMENTS.**# 041 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The enclosed flare is a John Zink Company, LLC Model ZTOF Enclosed Flare System, rated at 5,500 CFM. The flare is equipped with the following as described in application: programmable logic controller, flame scanner, high and low temperature sensor and shutdown switches, automatic shutdown valve, inlet flame arrestor, temperature monitoring and recording equipment, automatic phone dialer, and landfill gas flow meter.

042 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Landfill gas (LFG) collection and control system shall continue to be operated at all times:

- a) LFG shall be collected in accordance with 25 PA Code 273.292 so as to prevent off-site migration.
- b) The landfill gas shall be conveyed to an enclosed flare or other approved control system.
- c) Alternate methods for the destruction or treatment of landfill gas must receive Departmental approval.
- d) The enclosed ground flare shall be operated with no visible emissions except for periods not to exceed a total of 5 minutes during any two consecutive hours.
- e) The enclosed flare shall be operated with a 3-hour average combustion temperature at a minimum of 1500 degrees F or at no less than 28 degrees C (82 degrees F) below the operating temperature at which the required 98% NMOC destruction efficiency (or outlet NMOC concentration of less than 20 ppmvd as hexane at 3% oxygen) was demonstrated through performance testing. Operating temperature shall be continuously monitored and recorded. The gas residence time above 1500 degrees F shall be at least 0.3 seconds.
- f) A destruction/removal efficiency of at least 98% by weight for non-methane organic compounds or an outlet NMOC concentration of less than 20 ppmv as hexane at 3 percent oxygen shall be maintained at all times.

043 [40 CFR Part 61 NESHAPs §40 CFR 61.12]**Subpart A--General Provisions****Compliance with standards and maintenance requirements.**

The owner or operator of each stationary source shall maintain and operate the source, including associated equipment for air pollution control, in a manner consistent with good air pollution control practice for minimizing emissions. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operating and maintenance procedures,

**SECTION D. Source Level Requirements**

and inspection of the source.

044 [40 CFR Part 61 NESHAPs §40 CFR 61.154]**Subpart M--National Emission Standard for Asbestos Standard for active waste disposal sites.**

Each owner or operator of an active waste disposal site that receives asbestos-containing waste material from a source covered under 61.149, 61.150, or 61.155 shall meet the requirements of this section:

(a) Either there must be no visible emissions to the outside air from any active waste disposal site where asbestos-containing waste material has been deposited, or the requirements of paragraph (c) or (d) of this section must be met.

(b) Unless a natural barrier adequately deters access by the general public, either warning signs and fencing must be installed and maintained as follows, or the requirements of paragraph (c)(1) of this section must be met.

(1) Warning signs must be displayed at all entrances and at intervals of 100 m (330 ft) or less along the property line of the site or along the perimeter of the sections of the site where asbestos-containing waste material is deposited. The warning signs must:

(i) Be posted in such a manner and location that a person can easily read the legend; and

(ii) Conform to the requirements of 51 cm 36 cm (20"X14") upright format signs specified in 29 CFR 1910.145(d)(4) and this paragraph; and

(iii) Display the following legend in the lower panel with letter sizes and styles of a visibility at least equal to those specified in this paragraph.

| Legend | Notation |
|---|---------------------------------------|
| Asbestos Waste Disposal Site Block | 2.5 cm (1 inch) Sans Serif, Gothic or |
| Do Not Create Dust..... or Block | 1.9 cm (3/4 inch) Sans Serif, Gothic |
| Breathing Asbestos is Hazardous to Your Health | 14 Point Gothic. |

Spacing between any two lines must be at least equal to the height of the upper of the two lines.

(2) The perimeter of the disposal site must be fenced in a manner adequate to deter access by the general public.

(3) Upon request and supply of appropriate information, the Administrator will determine whether a fence or a natural barrier adequately deters access by the general public.

(c) Rather than meet the no visible emission requirement of paragraph (a) of this section, at the end of each operating day, or at least once every 24-hour period while the site is in continuous operation, the asbestos-containing waste material that has been deposited at the site during the operating day or previous 24-hour period shall:

(1) Be covered with at least 15 centimeters (6 inches) of compacted nonasbestos-containing material, or

(2) Be covered with a resinous or petroleum-based dust suppression agent that effectively binds dust and controls wind

**SECTION D. Source Level Requirements**

erosion. Such an agent shall be used in the manner and frequency recommended for the particular dust by the dust suppression agent manufacturer to achieve and maintain dust control. Other equally effective dust suppression agents may be used upon prior approval by the Administrator. For purposes of this paragraph, any used, spent, or other waste oil is not considered a dust suppression agent.

(d) Rather than meet the no visible emission requirement of paragraph (a) of this section, use an alternative emissions control method that has received prior written approval by the Administrator according to the procedures described in 61.149(c)(2).

(e) For all asbestos-containing waste material received, the owner or operator of the active waste disposal site shall:

(1) Maintain waste shipment records, using a form similar to that shown in Figure 4, and include the following information:

(i) The name, address, and telephone number of the waste generator.

(ii) The name, address, and telephone number of the transporter(s).

(iii) The quantity of the asbestos-containing waste material in cubic meters (cubic yards).

(iv) The presence of improperly enclosed or uncovered waste, or any asbestos-containing waste material not sealed in leak-tight containers. Report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site, by the following working day, the presence of a significant amount of improperly enclosed or uncovered waste. Submit a copy of the waste shipment record along with the report.

(v) The date of the receipt.

(2) As soon as possible and no longer than 30 days after receipt of the waste, send a copy of the signed waste shipment record to the waste generator.

(3) Upon discovering a discrepancy between the quantity of waste designated on the waste shipment records and the quantity actually received, attempt to reconcile the discrepancy with the waste generator. If the discrepancy is not resolved within 15 days after receiving the waste, immediately report in writing to the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the waste generator (identified in the waste shipment record), and, if different, the local, State, or EPA Regional office responsible for administering the asbestos NESHAP program for the disposal site. Describe the discrepancy and attempts to reconcile it, and submit a copy of the waste shipment record along with the report.

(4) Retain a copy of all records and reports required by this paragraph for at least 2 years.

(f) Maintain, until closure, records of the location, depth and area, and quantity in cubic meters (cubic yards) of asbestos-containing waste material within the disposal site on a map or diagram of the disposal area.

(g) Upon closure, comply with all the provisions of 61.151.

(h) Submit to the Administrator, upon closure of the facility, a copy of records of asbestos waste disposal locations and quantities.

(i) Furnish upon request, and make available during normal business hours for inspection by the Administrator, all records required under this section.

(j) Notify the Administrator in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at a waste disposal site and is covered. If the excavation will begin on a date other than the one contained in the original notice, notice of the new start date must be provided to the Administrator at least 10 working days before excavation begins and in no event shall excavation begin earlier than the date specified in the original

**SECTION D. Source Level Requirements**

notification. Include the following information in the notice:

(1) Scheduled starting and completion dates.

(2) Reason for disturbing the waste.

(3) Procedures to be used to control emissions during the excavation, storage, transport, and ultimate disposal of the excavated asbestos-containing waste material. If deemed necessary, the Administrator may require changes in the emission control procedures to be used.

(4) Location of any temporary storage site and the final disposal site.
(Secs. 112 and 301(a) of the Clean Air Act as amended (42 USC 7412, 7601(a))

045 [40 CFR Part 62 Approval and Promulgation of State Plans §40 CFR 62.16720]**Subpart OOO - Federal Plan Requirements for Municipal Solid Waste Landfills That Commenced Construction On or Before July 17, 2014 and Have Not Been Modified or Reconstructed Since July 17, 2014****Compliance provisions.**

Follow the compliance provisions in this section (as well as the provisions in §§62.16716 and 62.16722), or the compliance provisions in §63.1960 of this chapter (as well as the provisions in §§63.1958 and 63.1961 of this chapter), or both as alternative means of compliance, for an MSW landfill with a gas collection and control system used to comply with the provisions of §62.16714(b) and (c). Once the owner or operator begins to comply with the provisions of §63.1960 of this chapter, the owner or operator must continue to operate the collection and control device according to those provisions and cannot return to the provisions of this section.

[Source: 86 FR 27770, May 21, 2021]

046 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63 Subpart AAAAA Table 1]**Subpart AAAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills
Applicability of NESHAP General Provisions to Subpart AAAAA**

As specified in this subpart, you must meet each requirement in the following table that applies to you. The owner or operator may begin complying with the provisions that apply no later than September 27, 2021, any time before that date.

Table 1 to Subpart AAAAA of Part 63—Applicability of NESHAP General Provisions to Subpart AAAAA

| Part 63 citation | Description | Applicable to subpart AAAAA Before September 28, 2021 | Applicable to subpart AAAAA no later than September 27, 2021 | Explanation |
|------------------|---|---|--|-------------|
| §63.1(a) | Applicability: General applicability of NESHAP in this part | Yes | Yes | |
| §63.1(b) | Applicability determination for stationary sources | Yes | Yes | |
| §63.1(c) | Applicability after a standard has been set | No (note 1) | Yes | |
| §63.1(e) | Applicability of permit program before relevant standard is set | Yes | Yes | |
| §63.2 | Definitions | Yes | Yes | |
| §63.3 | Units and abbreviations | No (note 1) | Yes | |

**SECTION D. Source Level Requirements**

| | | | | |
|---------------------|---|-------------|-----|---|
| §63.4 | Prohibited activities and circumvention | Yes | Yes | |
| §63.5(a) | Construction/reconstruction | No (note 1) | Yes | |
| §63.5(b) | Requirements for existing, newly constructed, and reconstructed sources | Yes | Yes | |
| §63.5(d) | Application for approval of construction or reconstruction | No (note 1) | Yes | |
| §63.5(e) and (f) | Approval of construction and reconstruction | No (note 1) | Yes | |
| §63.6(a) | Compliance with standards and maintenance requirements -- applicability | No (note 1) | Yes | |
| §63.6(b) and (c) | Compliance dates for new, reconstructed, and existing sources | No (note 1) | Yes | |
| §63.6(e)(1)(i)-(ii) | Operation and maintenance requirements | Yes | No | See §63.1955(c) for general duty requirements |
| 63.6(e)(3)(i)-(ix) | SSM plan | Yes | No | |
| 63.6(f)(1) | Exemption of nonopacity emission standards during SSM | Yes | No | |
| §63.6(f)(2) and (3) | Compliance with nonopacity emission standards | Yes | Yes | |
| §63.6(g) | Use of an alternative nonopacity standard | No (note 1) | Yes | |
| §63.6(h) | Compliance with opacity and visible emission standards | No (note 1) | No | Subpart AAAA does not prescribe opacity or visible emission standards. |
| §63.6(i) | Extension of compliance with emission standards | No (note 1) | Yes | |
| §63.6(j) | Exemption from compliance with emission standards | No (note 1) | Yes | |
| §63.7 | Performance testing | No (note 1) | Yes | |
| §63.7(e)(1) | Conditions for performing performance tests | No (note 1) | No | 40 CFR 63.1959(f) specifies the conditions for performing performance tests. |
| §63.8(a) and (b) | Monitoring requirements -- Applicability and conduct of monitoring | No (note 1) | Yes | |
| §63.8(c)(1) | Operation and Maintenance of continuous emissions monitoring system | No (note 1) | Yes | |
| §63.8(c)(1)(i) | Operation and Maintenance Requirements | No (note 1) | No | Unnecessary due to the requirements of §63.8(c)(1) and the requirements for a quality control plan for monitoring equipment in §63.8(d)(2). |
| §63.8(c)(1)(ii) | Operation and Maintenance Requirements | No (note 1) | No | |
| §63.8(c)(1)(iii) | SSM plan for monitors | No (note 1) | No | |
| §63.8(c)(2)-(8) | Monitoring requirements | No (note 1) | Yes | |
| §63.8(d)(1) | Quality control for monitors | No (note 1) | Yes | |
| §63.8(d)(2) | Quality control for monitors | No (note 1) | Yes | |
| §63.8(d)(3) | Quality control records | No (note 1) | No | See §63.1983(c)(8). |

**SECTION D. Source Level Requirements**

| | | | | |
|------------------------|---|-------------|--------------|---|
| §63.9(a), (c), and (d) | Notifications | No (note 1) | Yes | |
| §63.9(b) | Initial notifications | No (note 1) | Yes (note 2) | |
| §63.9(e) | Notification of performance test | No (note 1) | Yes (note 2) | |
| §63.9(f) | Notification of visible emissions/opacity test | No (note 1) | No | Subpart AAAA does not prescribe opacity or visible emission standards. |
| §63.9(g) | Notification when using CMS | No (note 1) | Yes (note 2) | |
| §63.9(h) | Notification of compliance status | No (note 1) | Yes (note 2) | |
| §63.9(i) | Adjustment of submittal deadlines | No (note 1) | Yes | |
| §63.9(j) | Change in information already provided | No (note 1) | Yes | |
| §63.10(a) | Recordkeeping and reporting -- general | No (note 1) | Yes | |
| §63.10(b)(1) | General recordkeeping | No (note 1) | Yes | |
| §63.10(b)(2)(i) | Startup and shutdown records | Yes | No | See §63.1983(c)(6) for recordkeeping for periods of startup and shutdown. |
| §63.10(b)(2)(ii) | Recordkeeping of failures to meet a standard | Yes | No | See §63.1983(c)(6)-(7) for recordkeeping for any exceedance of a standard. |
| §63.10(b)(2)(iii) | Recordkeeping of maintenance on air pollution control equipment | Yes | Yes | |
| §63.10(b)(2)(iv)-(v) | Actions taken to minimize emissions during SSM | Yes | No | See §63.1983(c)(7) for recordkeeping of corrective actions to restore compliance. |
| §63.10(b)(vi) | Recordkeeping for CMS malfunctions | No (note 1) | Yes | |
| §63.10(b)(vii)-(xiv) | Other Recordkeeping of compliance measurements | No (note 1) | Yes | |
| §63.10(c) | Additional recordkeeping for sources with CMS | No (note 1) | No | See §63.1983 for required CMS recordkeeping. |
| §63.10(d)(1) | General reporting | No (note 1) | Yes | |
| §63.10(d)(2) | Reporting of performance test results | No (note 1) | Yes | |
| §63.10(d)(3) | Reporting of visible emission observations | No (note 1) | Yes | |
| §63.10(d)(4) | Progress reports for compliance date extensions | No (note 1) | Yes | |
| §63.10(d)(5) | SSM reporting | Yes | No | All exceedances must be reported in the semi-annual report required by §63.1981(h). |
| §63.10(e) | Additional reporting for CMS systems | No (note 1) | Yes | |
| §63.10(f) | Recordkeeping/reporting waiver | No (note 1) | Yes | |
| §63.11 | Control device requirements/flares | No (note 1) | Yes | §60.18 is required before September 27, 2021. However, §60.18 and 63.11 are equivalent. |
| §63.12(a) | State authority | Yes | Yes | |
| §63.12(b)-(c) | State delegations | No (note 1) | Yes | |
| §63.13 | Addresses | No (note 1) | Yes | |
| §63.14 | Incorporation by reference | No (note 1) | Yes | |
| §63.15 | Availability of information and | Yes | Yes | |

**SECTION D. Source Level Requirements**

confidentiality

Note 1: Before September 28, 2021, this subpart requires affected facilities to follow 40 CFR part 60, subpart WWW, which incorporates the General Provisions of 40 CFR part 60.

Note 2: If an owner or operator has complied with requirements that are parallel to the requirements of the part 63 citation of this table under 40 CFR part 60, subpart WWW or subpart XXX, or a state or federal plan that implements 40 CFR part 60, subpart Cc or Cf, then additional notification for that requirement is not required.

[85 FR 17261, Mar. 26, 2020, as amended at 85 FR 64401, Oct. 13, 2020]

047 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1930]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What is the purpose of this subpart?

§ 63.1930 What is the purpose of this subpart?

This subpart establishes national emission standards for hazardous air pollutants for existing and new municipal solid waste (MSW) landfills.

(a) N/A

(b) Beginning no later than September 27, 2021, all landfills described in § 63.1935 must meet the requirements of this subpart. A landfill may choose to meet the requirements of this subpart rather than the requirements identified in § 63.1930(a) at any time before September 27, 2021. The requirements of this subpart apply at all times, including during periods of SSM, and the SSM requirements of the General Provisions of this part do not apply.

[Source: 85 FR 17261, Mar. 26, 2020]

048 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1935]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

Am I subject to this subpart?

§ 63.1935 Am I subject to this subpart?

You are subject to this subpart if you meet the criteria in paragraph (a) or (b) of this section.

(a) You are subject to this subpart if you own or operate an MSW landfill that has accepted waste since November 8, 1987, or has additional capacity for waste deposition and meets any one of the three criteria in paragraphs (a)(1) through (3) of this section:

(1) - (2) [Not applicable because this landfill is not a major source and is not collocated with a major source.]

(3) Your MSW landfill is an area source landfill that has a design capacity equal to or greater than 2.5 million megagrams (Mg) and 2.5 million cubic meters (m³) and has estimated uncontrolled emissions equal to or greater than 50 megagrams per year (Mg/yr) NMOC as calculated according to § 63.1959.

(b) [Paragraph (b) of the regulation is not applicable to landfills which do not have bioreactors.]

[Source: 85 FR 17261, Mar. 26, 2020]

049 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1940]

Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills

What is the affected source of this subpart?

(a) An affected source of this subpart is an MSW landfill, as defined in §63.1990, that meets the criteria in §63.1935(a) or (b). The affected source includes the entire disposal facility in a contiguous geographic space where household waste is placed in or on land, including any portion of the MSW landfill operated as a bioreactor.

**SECTION D. Source Level Requirements**

(b) A new affected source of this subpart is an affected source that commenced construction or reconstruction after November 7, 2000. An affected source is reconstructed if it meets the definition of reconstruction in §63.2 of subpart A.

(c) An affected source of this subpart is existing if it is not new.

[Source: 85 FR 17261, Mar. 26, 2020]

050 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1945]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****When do I have to comply with this subpart?**

(a) If your landfill is a new affected source, you must comply with this subpart by January 16, 2003, or at the time you begin operating, whichever is later.

(b) If your landfill is an existing affected source, you must comply with this subpart by January 16, 2004.

[Source: 85 FR 17261, Mar. 26, 2020]

051 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1950]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****When am I no longer required to comply with this subpart?**

You are no longer required to comply with the requirements of this subpart when your landfill meets the collection and control system removal criteria in §63.1957(b).

[Source: 85 FR 17261, Mar. 26, 2020]

052 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1985]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****Who enforces this subpart?**

(a) This subpart can be implemented and enforced by the EPA, or a delegated authority such as the applicable state, local, or tribal agency. If the EPA Administrator has delegated authority to a state, local, or tribal agency, then that agency as well as the EPA has the authority to implement and enforce this subpart. Contact the applicable EPA Regional office to find out if this subpart is delegated to a state, local, or tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a state, local, or tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the EPA Administrator and are not transferred to the state, local, or tribal agency.

(c) The authorities that will not be delegated to state, local, or tribal agencies are as follows. Approval of alternatives to the standards in §§63.1955 through 63.1962. Where this subpart references 40 CFR part 60, subpart WWW, the cited provisions will be delegated according to the delegation provisions of 40 CFR part 60, subpart WWW. For this subpart, the EPA also retains the authority to approve methods for determining the NMOC concentration in §63.1959(a)(3) and the method for determining the site-specific methane generation rate constant k in §63.1959(a)(4).

[Source: 85 FR 17261, Mar. 26, 2020]

053 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.1990]**Subpart AAAA - National Emission Standards for Hazardous Air Pollutants: Municipal Solid Waste Landfills****What definitions apply to this subpart?**

Terms used in this subpart are defined in the Clean Air Act, 40 CFR part 60, subparts A, Cc, Cf, WWW, and XXX; 40 CFR part 62, subpart GGG, and subpart A of this part, and this section that follows:

Active collection system means a gas collection system that uses gas mover equipment.

Active landfill means a landfill in which solid waste is being placed or a landfill that is planned to accept waste in the future.

Bioreactor means an MSW landfill or portion of an MSW landfill where any liquid other than leachate (leachate includes

**SECTION D. Source Level Requirements**

landfill gas condensate) is added in a controlled fashion into the waste mass (often in combination with recirculating leachate) to reach a minimum average moisture content of at least 40 percent by weight to accelerate or enhance the anaerobic (without oxygen) biodegradation of the waste.

Closed area means a separately lined area of an MSW landfill in which solid waste is no longer being placed. If additional solid waste is placed in that area of the landfill, that landfill area is no longer closed. The area must be separately lined to ensure that the landfill gas does not migrate between open and closed areas.

Closed landfill means a landfill in which solid waste is no longer being placed, and in which no additional solid wastes will be placed without first filing a notification of modification as prescribed under §63.9(b). Once a notification of modification has been filed, and additional solid waste is placed in the landfill, the landfill is no longer closed.

Closure means that point in time when a landfill becomes a closed landfill.

Commercial solid waste means all types of solid waste generated by stores, offices, restaurants, warehouses, and other nonmanufacturing activities, excluding residential and industrial wastes.

Controlled landfill means any landfill at which collection and control systems are required under this subpart as a result of the nonmethane organic compounds emission rate. The landfill is considered controlled at the time a collection and control system design plan is submitted in compliance with §60.752(b)(2)(i) of this chapter or in compliance with §63.1959(b)(2)(i).

Corrective action analysis means a description of all reasonable interim and long-term measures, if any, that are available, and an explanation of why the selected corrective action(s) is/are the best alternative(s), including, but not limited to, considerations of cost effectiveness, technical feasibility, safety, and secondary impacts.

Cover penetration means a wellhead, a part of a landfill gas collection or operations system, and/or any other object that completely passes through the landfill cover. The landfill cover includes that portion which covers the waste, as well as the portion which borders the waste extended to the point where it is sealed with the landfill liner or the surrounding land mass. Examples of what is not a penetration for purposes of this subpart include but are not limited to: Survey stakes, fencing including litter fences, flags, signs, utility posts, and trees so long as these items do not pass through the landfill cover.

Design capacity means the maximum amount of solid waste a landfill can accept, as indicated in terms of volume or mass in the most recent permit issued by the state, local, or tribal agency responsible for regulating the landfill, plus any in-place waste not accounted for in the most recent permit. If the owner or operator chooses to convert the design capacity from volume to mass or from mass to volume to demonstrate its design capacity is less than 2.5 million Mg or 2.5 million m³, the calculation must include a site-specific density, which must be recalculated annually.

Disposal facility means all contiguous land and structures, other appurtenances, and improvements on the land used for the disposal of solid waste.

Emissions limitation means any emission limit, opacity limit, operating limit, or visible emissions limit.

Enclosed combustor means an enclosed firebox which maintains a relatively constant limited peak temperature generally using a limited supply of combustion air. An enclosed flare is considered an enclosed combustor.

EPA approved State plan means a State plan that EPA has approved based on the requirements in 40 CFR part 60, subpart B to implement and enforce 40 CFR part 60, subparts Cc or Cf. An approved state plan becomes effective on the date specified in the document published in the Federal Register announcing EPA's approval.

EPA approved Tribal plan means a plan submitted by a tribal authority pursuant to 40 CFR parts 9, 35, 49, 50, and 81 to implement and enforce 40 CFR part 60, subpart Cc or subpart Cf.

Federal plan means the EPA plan to implement 40 CFR part 60, subparts Cc or Cf for existing MSW landfills located in states and Indian country where state plans or tribal plans are not currently in effect. On the effective date of an EPA approved state or tribal plan, the Federal Plan no longer applies. The Federal Plan implementing 40 CFR part 60, subpart Cc is found at 40 CFR part 62, subpart GGG.

**SECTION D. Source Level Requirements**

Flare means an open combustor without enclosure or shroud.

Gas mover equipment means the equipment (i.e., fan, blower, compressor) used to transport landfill gas through the header system.

Household waste means any solid waste (including garbage, trash, and sanitary waste in septic tanks) derived from households (including, but not limited to, single and multiple residences, hotels and motels, bunkhouses, ranger stations, crew quarters, campgrounds, picnic grounds, and day-use recreation areas). Household waste does not include fully segregated yard waste. Segregated yard waste means vegetative matter resulting exclusively from the cutting of grass, the pruning and/or removal of bushes, shrubs, and trees, the weeding of gardens, and other landscaping maintenance activities. Household waste does not include construction, renovation, or demolition wastes, even if originating from a household.

Industrial solid waste means solid waste generated by manufacturing or industrial processes that is not a hazardous waste regulated under Subtitle C of the Resource Conservation and Recovery Act, 40 CFR parts 264 and 265. Such waste may include, but is not limited to, waste resulting from the following manufacturing processes: Electric power generation; fertilizer/agricultural chemicals; food and related products/by-products; inorganic chemicals; iron and steel manufacturing; leather and leather products; nonferrous metals manufacturing/foundries; organic chemicals; plastics and resins manufacturing; pulp and paper industry; rubber and miscellaneous plastic products; stone, glass, clay, and concrete products; textile manufacturing; transportation equipment; and water treatment. This term does not include mining waste or oil and gas waste.

Interior well means any well or similar collection component located inside the perimeter of the landfill waste. A perimeter well located outside the landfilled waste is not an interior well.

Landfill means an area of land or an excavation in which wastes are placed for permanent disposal, and that is not a land application unit, surface impoundment, injection well, or waste pile as those terms are defined under §257.2 of this chapter.

Lateral expansion means a horizontal expansion of the waste boundaries of an existing MSW landfill. A lateral expansion is not a modification unless it results in an increase in the design capacity of the landfill.

Leachate recirculation means the practice of taking the leachate collected from the landfill and reapplying it to the landfill by any of one of a variety of methods, including pre-wetting of the waste, direct discharge into the working face, spraying, infiltration ponds, vertical injection wells, horizontal gravity distribution systems, and pressure distribution systems.

Modification means an increase in the permitted volume design capacity of the landfill by either lateral or vertical expansion based on its permitted design capacity after November 7, 2000. Modification does not occur until the owner or operator commences construction on the lateral or vertical expansion.

Municipal solid waste landfill or MSW landfill means an entire disposal facility in a contiguous geographical space where household waste is placed in or on land. An MSW landfill may also receive other types of RCRA Subtitle D wastes (§257.2 of this chapter) such as commercial solid waste, nonhazardous sludge, conditionally exempt small quantity generator waste, and industrial solid waste. Portions of an MSW landfill may be separated by access roads. An MSW landfill may be publicly or privately owned. An MSW landfill may be a new MSW landfill, an existing MSW landfill, or a lateral expansion.

Municipal solid waste landfill emissions or MSW landfill emissions means gas generated by the decomposition of organic waste deposited in an MSW landfill or derived from the evolution of organic compounds in the waste.

NMOC means nonmethane organic compounds, as measured according to the provisions of §63.1959.

Nondegradable waste means any waste that does not decompose through chemical breakdown or microbiological activity. Examples are, but are not limited to, concrete, municipal waste combustor ash, and metals.

Passive collection system means a gas collection system that solely uses positive pressure within the landfill to move the gas rather than using gas mover equipment.

**SECTION D. Source Level Requirements**

Root cause analysis means an assessment conducted through a process of investigation to determine the primary cause, and any other contributing causes, of an exceedance of a standard operating parameter at a wellhead.

Segregated yard waste means vegetative matter resulting exclusively from the cutting of grass, the pruning and/or removal of bushes, shrubs, and trees, the weeding of gardens, and other landscaping maintenance activities.

Sludge means the term sludge as defined in §258.2 of this chapter.

Solid waste means the term solid waste as defined in §258.2 of this chapter.

Sufficient density means any number, spacing, and combination of collection system components, including vertical wells, horizontal collectors, and surface collectors, necessary to maintain emission and migration control as determined by measures of performance set forth in this subpart.

Sufficient extraction rate means a rate sufficient to maintain a negative pressure at all wellheads in the collection system without causing air infiltration, including any wellheads connected to the system as a result of expansion or excess surface emissions, for the life of the blower.

Treated landfill gas means landfill gas processed in a treatment system as defined in this subpart.

Treatment system means a system that filters, de-waters, and compresses landfill gas for sale or beneficial use.

Untreated landfill gas means any landfill gas that is not treated landfill gas.

Work practice requirement means any design, equipment, work practice, or operational standard, or combination thereof, that is promulgated pursuant to section 112(h) of the Clean Air Act.

[Source: 85 FR 17261, Mar. 26, 2020]

054 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.2]

Subpart A--General Provisions

Definitions.

The terms used in this part are defined in the Act or in this section as follows:

[Selected definitions are printed below. Refer to regulation for remaining definitions.]

Act means the Clean Air Act (42 U.S.C. 7401 et seq., as amended by Pub. L. 101-549, 104 Stat. 2399).

Commenced means, with respect to construction or reconstruction of an affected source, that an owner or operator has undertaken a continuous program of construction or reconstruction or that an owner or operator has entered into a contractual obligation to undertake and complete, within a reasonable time, a continuous program of construction or reconstruction.

Construction means the on-site fabrication, erection, or installation of an affected source. Construction does not include the removal of all equipment comprising an affected source from an existing location and reinstallation of such equipment at a new location. The owner or operator of an existing affected source that is relocated may elect not to reinstall minor ancillary equipment including, but not limited to, piping, ductwork, and valves. However, removal and reinstallation of an affected source will be construed as reconstruction if it satisfies the criteria for reconstruction as defined in this section. The costs of replacing minor ancillary equipment must be considered in determining whether the existing affected source is reconstructed.

Malfunction means any sudden, infrequent, and not reasonably preventable failure of air pollution control and monitoring equipment, process equipment, or a process to operate in a normal or usual manner which causes, or has the potential to cause, the emission limitations in an applicable standard to be exceeded. Failures that are caused in part by poor maintenance or careless operation are not malfunctions.

**SECTION D. Source Level Requirements**

New source means any affected source the construction or reconstruction of which is commenced after the Administrator first proposes a relevant emission standard under this part establishing an emission standard applicable to such source.

One-hour period, unless otherwise defined in an applicable subpart, means any 60-minute period commencing on the hour.

Reconstruction, unless otherwise defined in a relevant standard, means the replacement of components of an affected or a previously nonaffected source to such an extent that:

(1) The fixed capital cost of the new components exceeds 50 percent of the fixed capital cost that would be required to construct a comparable new source; and

(2) It is technologically and economically feasible for the reconstructed source to meet the relevant standard(s) established by the Administrator (or a State) pursuant to section 112 of the Act. Upon reconstruction, an affected source, or a stationary source that becomes an affected source, is subject to relevant standards for new sources, including compliance dates, irrespective of any change in emissions of hazardous air pollutants from that source.

Shutdown means the cessation of operation of an affected source or portion of an affected source for any purpose.

Startup means the setting in operation of an affected source or portion of an affected source for any purpose.

Visible emission means the observation of an emission of opacity or optical density above the threshold of vision.

Working day means any day on which Federal Government offices (or State government offices for a State that has obtained delegation under section 112(l)) are open for normal business. Saturdays, Sundays, and official Federal (or where delegated, State) holidays are not working days.

[59 FR 12430, Mar. 16, 1994, as amended at 67 FR 16596, Apr. 5, 2002; 68 FR 32600, May 30, 2003; 69 FR 21752, Apr. 22, 2004; 72 FR 27443, May 16, 2007; 85 FR 63418, Oct. 7, 2020; 85 FR 73885, Nov. 19, 2020]


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 102

Source Name: PAVED & UNPAVED ROADS

Source Capacity/Throughput:

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 104

Source Name: LEACHATE STORAGE TANKS

Source Capacity/Throughput:

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 105

Source Name: LANDFILL CONSTRUCTION/OPERATION

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

All reasonable actions shall be taken to prevent particulate matter from becoming airborne. These actions include, but are not limited to, the following:

- i. Proper installation of a water spray dust suppression system and operation or proper design, installation, and operation of a fabric collector.
- ii. Application of asphalt, water or suitable chemicals on dirt roads, material stockpiles and other surfaces that may give rise to airborne dusts.
- iii. Paving and maintenance of plant roadways.
- iv. Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosions by water, or other means.

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The screens shall not be operated within 1/4 of a mile from any residence.

003 [25 Pa. Code §127.447]**Alternate operating scenarios.**

Alternate operating scenarios.

The owner/operator may process soil with a crusher under this alternate operating scenario provided that the following recordkeeping requirements are met.

The owner/operator shall record in a log a record of the scenario under which it is operating at all times and a minimum shall include:

- a) The number of hours the engine is operated per month.
- b) The amount of fuel used per month.

II. TESTING REQUIREMENTS.**# 004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.675]****Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants****Test methods and procedures.**

In conducting the performance tests required in 60.8, the owner or operator shall use as reference methods and procedures the test methods in appendix A of this part or other methods and procedures as specified in this section, except as provided in 60.8(b). Acceptable alternative methods and procedures are given in paragraph (e) of this section.

The owner or operator shall determine compliance with the particulate matter standards in 60.272(a) as follows:

- (1) Method 5 or Method 17 shall be used to determine the particulate matter concentration. The sample volume shall be at least 1.70 dscm (60 dscf). For Method 5, if the gas stream being sampled is at ambient temperature, the sampling probe and filter may be operated without heaters. If the gas stream is above ambient temperature, the sampling probe and filter

**SECTION D. Source Level Requirements**

may be operated at a temperature high enough, but no higher than 121C (250F), to prevent water condensation on the filter.
 (2) Method 9 and the procedures in 60.11 shall be used to determine opacity.

(c) In determining compliance with the particulate matter standards in 60.672 (b) and (c), the owner or operator shall use Method 9 and the procedures in 60.11, with the following additions:

(1) The minimum distance between the observer and the emission source shall be 4.57 meters (15 feet).

(2) The observer shall, when possible, select a position that minimizes interference from other fugitive emission sources (e.g., road dust). The required observer position relative to the sun (Method 9, Section 2.1) must be followed.

(3) For affected facilities using wet dust suppression for particulate matter control, a visible mist is sometimes generated by the spray. The water mist must not be confused with particulate matter emissions and is not to be considered a visible emission. When a water mist of this nature is present, the observation of emissions is to be made at a point in the plume where the mist is no longer visible.

(d) In determining compliance with 60.672(e), the owner or operator shall use Method 22 to determine fugitive emissions. The performance test shall be conducted while all affected facilities inside the building are operating. The performance test for each building shall be at least 75 minutes in duration, with each side of the building and the roof being observed for at least 15 minutes.

(e) The owner or operator may use the following as alternatives to the reference methods and procedures specified in this section:

(1) For the method and procedure of paragraph (c) of this section, if emissions from two or more facilities continuously interfere so that the opacity of fugitive emissions from an individual affected facility cannot be read, either of the following procedures may be used:

(i) Use for the combined emission stream the highest fugitive opacity standard applicable to any of the individual affected facilities contributing to the emissions stream.

(ii) Separate the emissions so that the opacity of emissions from each affected facility can be read.

(f) To comply with 60.676(d), the owner or operator shall record the measurements as required 60.676(c) using the monitoring devices in 60.674(a) and (b) during each particulate matter run and shall determine the averages.

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The owner/operator shall record in a log a record of the scenario under which it is operating at all times and a minimum shall include:

- a) The number of hours the engine is operated per month.
- b) The amount of fuel used per month.

006 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.676]

Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants**Reporting and recordkeeping.**

(a) [Paragraph (a) of the regulation is printed under REPORTING REQUIREMENTS in this section of the permit.]

(b) (1) Owners or operators of affected facilities (as defined in §§60.670 and 60.671) for which construction, modification, or reconstruction commenced on or after April 22, 2008, must record each periodic inspection required under §60.674(b) or

**SECTION D. Source Level Requirements**

(c), including dates and any corrective actions taken, in a logbook (in written or electronic format). The owner or operator must keep the logbook onsite and make hard or electronic copies (whichever is requested) of the logbook available to the Administrator upon request.

(2) - (3) [Paragraphs (b)(2) & (b)(3) are not applicable.]

(c) - (k) [Paragraphs (c) through (k) of the regulation are printed under REPORTING REQUIREMENTS in this section of the permit.]

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The portable nonmetallic mineral processing plant and any associated air cleaning devices shall be:

- a. Operated in such a manner as not to cause air pollution, as the term is defined in 25 Pa. Code § 121.1.
- b. Operated and maintained in a manner consistent with good operating and maintenance practices.
- c. Operated and maintained in accordance with the manufacturer's specifications and the applicable terms and conditions of this permit.

008 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Water spray dust suppression systems on portable nonmetallic mineral processing plants shall be operated on any and all occasions that the respective plant is operated. Operation without simultaneous operation of the water spray dust suppression system can take place only in those unusual instances where processed materials contain sufficient moisture so as not to create air contaminant emissions in excess of the limitations. If, however, the water spray dust suppression system is incapable of operation due to weather conditions or any other reason, the permittee may not operate the plant. A pressure gauge will be installed to indicate a normal operation of the dust suppression system.

009 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall keep on hand such equipment and materials as are necessary to take reasonable action (including, but not limited to the application of water, oil or chemicals) to prevent fugitive particulate matter resulting from the use of any roadways and/or material stockpiling operations associated with the plant from becoming airborne and shall be used, as necessary, to prevent such fugitive particulate matter from becoming airborne.

010 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Material fed to the screens shall have adequate moisture to minimize fugitive emissions.

011 [25 Pa. Code §127.447]**Alternate operating scenarios.**

Alternate operating scenarios.

Water spray dust suppression systems on portable nonmetallic mineral processing plants (crusher) shall be operated on any and all occasions that the respective plant is operated. Operation without simultaneous operation of the water spray dust suppression can take place only in those unusual instances where processed materials contain sufficient moisture so as not to create air contaminant emission in excess of the limitations and standards of this permit.

**SECTION D. Source Level Requirements****VII. ADDITIONAL REQUIREMENTS.****# 012 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.670]****Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants****Applicability and designation of affected facility.**

(a) (1) Except as provided in paragraphs (a)(2), (b), (c), and (d) of this section, the provisions of this subpart are applicable to the following affected facilities in fixed or portable nonmetallic mineral processing plants: each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railcar loading station. Also, crushers and grinding mills at hot mix asphalt facilities that reduce the size of nonmetallic minerals embedded in recycled asphalt pavement and subsequent affected facilities up to, but not including, the first storage silo or bin are subject to the provisions of this subpart.

(2) [Not applicable.]

(b) - (c) [Not applicable.]

(d) (1) When an existing facility is replaced by a piece of equipment of equal or smaller size, as defined in §60.671, having the same function as the existing facility, and there is no increase in the amount of emissions, the new facility is exempt from the provisions of §§60.672, 60.674, and 60.675 except as provided for in paragraph (d)(3) of this section.

(2) An owner or operator complying with paragraph (d)(1) of this section shall submit the information required in §60.676(a).

(3) An owner or operator replacing all existing facilities in a production line with new facilities does not qualify for the exemption described in paragraph (d)(1) of this section and must comply with the provisions of §§60.672, 60.674 and 60.675.

(e) An affected facility under paragraph (a) of this section that commences construction, modification, or reconstruction after August 31, 1983, is subject to the requirements of this part.

(f) Table 1 of this subpart specifies the provisions of subpart A of this part 60 that do not apply to owners and operators of affected facilities subject to this subpart or that apply with certain exceptions.


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 106

Source Name: SOIL PROCESSING

Source Capacity/Throughput:

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.**# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Water sprays shall be operated as necessary to minimize the formation of airborne dust.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 107

Source Name: OVERBURDEN BLASTING

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §123.2]****Fugitive particulate matter**

A person may not permit fugitive particulate matter to be emitted into the outdoor atmosphere from a source specified in 123.1(a)(1) -- (9) (relating to prohibition of certain fugitive emissions) if such emissions are visible at the point the emissions pass outside the person's property.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.**# 002 [25 Pa. Code §123.2]****Fugitive particulate matter**

The daily inspection for visible fugitive emissions shall be performed during the blasting event.

003 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The daily inspection for visible fugitive emissions shall be performed during each blasting event.

IV. RECORDKEEPING REQUIREMENTS.**# 004 [25 Pa. Code §123.2]****Fugitive particulate matter**

A record describing the time and date of blasting and the visible emissions inspection shall be maintained at the landfill site for at least five years.

005 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

A record describing the time and date of blasting and the visible emissions inspection shall be maintained at the landfill site for a minimum of five years.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

**SECTION D. Source Level Requirements****VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 111

Source Name: ROCK CRUSHING

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Water sprays shall be operated as necessary to minimize the formation of airborne dust.

002 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.670]**Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants****Applicability and designation of affected facility.**

60.670(a)

60.670(a)(1)

Except as provided in paragraphs (a)(2), (b), (c), and (d) of this section, the provisions of this subpart are applicable to the following affected facilities in fixed or portable nonmetallic mineral processing plants: each crusher, grinding mill, screening operation, bucket elevator, belt conveyor, bagging operation, storage bin, enclosed truck or railcar loading station. Also, crushers and grinding mills at hot mix asphalt facilities that reduce the size of nonmetallic minerals embedded in recycled asphalt pavement and subsequent affected facilities up to, but not including, the first storage silo or bin are subject to the provisions of this subpart.

60.670(a)(2)

The provisions of this subpart do not apply to the following operations: All facilities located in underground mines; plants without crushers or grinding mills above ground; and wet material processing operations (as defined in §60.671).

60.670(b)

An affected facility that is subject to the provisions of subparts F or I of this part or that follows in the plant process any facility subject to the provisions of subparts F or I of this part is not subject to the provisions of this subpart.

60.670(c)

Facilities at the following plants are not subject to the provisions of this subpart:

60.670(c)(1)

Fixed sand and gravel plants and crushed stone plants with capacities, as defined in §60.671, of 23 megagrams per hour (25 tons per hour) or less;

60.670(c)(2)

Portable sand and gravel plants and crushed stone plants with capacities, as defined in §60.671, of 136 megagrams per hour (150 tons per hour) or less; and

60.670(c)(3)

Common clay plants and pumice plants with capacities, as defined in §60.671, of 9 megagrams per hour (10 tons per hour) or less.

60.670(d)

60.670(d)(1)

When an existing facility is replaced by a piece of equipment of equal or smaller size, as defined in §60.671, having the same function as the existing facility, and there is no increase in the amount of emissions, the new facility is exempt from the provisions of §§60.672, 60.674, and 60.675 except as provided for in paragraph (d)(3) of this section.

60.670(d)(2)

An owner or operator complying with paragraph (d)(1) of this section shall submit the information required in §60.676(a).

60.670(d)(3)

An owner or operator replacing all existing facilities in a production line with new facilities does not qualify for the exemption described in paragraph (d)(1) of this section and must comply with the provisions of §§60.672, 60.674 and 60.675.

60.670(e)

An affected facility under paragraph (a) of this section that commences construction, modification, or reconstruction after August 31, 1983, is subject to the requirements of this part.

60.670(f)

**SECTION D. Source Level Requirements****II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

**# 003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.676]
Subpart 000 - Standards of Performance for Nonmetallic Mineral Processing Plants
Reporting and recordkeeping.**

(a) Each owner or operator seeking to comply with 60.670(d) shall submit to the Administrator the following information about the existing facility being replaced and the replacement piece of equipment.

(1) For a crusher, grinding mill, bucket elevator, bagging operation, or enclosed truck or railcar loading station:

- (i) The rated capacity in tons per hour of the existing facility being replaced and
- (ii) The rated capacity in tons per hour of the replacement equipment.

(2) For a screening operation:

- (i) The total surface area of the top screen of the existing screening operation being replaced and
- (ii) The total surface area of the top screen of the replacement screening operation.

(3) For a conveyor belt:

- (i) The width of the existing belt being replaced and
- (ii) The width of the replacement conveyor belt.

(4) For a storage bin:

- (i) The rated capacity in tons of the existing storage bin being replaced and
- (ii) The rated capacity in tons of replacement storage bins.

(b) Each owner or operator seeking to comply with 60.670(d) shall submit the following data to the Director of the Emission Standards and Engineering Division, (MD-13), U.S. Environmental Protection Agency, Research Triangle Park, North Carolina 27711.

(1) The information described in 60.676(a).

(2) A description of the control device used to reduce particulate matter emissions from the existing facility and a list of all other pieces of equipment controlled by the same control device; and

**SECTION D. Source Level Requirements**

(3) The estimated age of the existing facility.

(c) Not Applicable.

(d) Not Applicable

(e) Not Applicable.

(f) The owner or operator of any affected facility shall submit written reports of the results of all performance tests conducted to demonstrate compliance with the standards set forth in 60.672, including reports of opacity observations made using Method 9 to demonstrate compliance with 60.672(b) and (c) and reports of observations using Method 22 to demonstrate compliance with 60.672(e).

(g) The requirements of this paragraph remain in force until and unless the Agency, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such States. In that event, affected sources within the State will be relieved of the obligation to comply with paragraphs (a), (c), (d), (e), and (f) of this section, provided that they comply with requirements established by the State. Compliance with paragraph (b) of this section will still be required.

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 112

Source Name: 2,128 BHP CUMMINS C1540 N6CB ENGINE

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The emissions from the Cummins engine (Source ID 112) shall not exceed the following:

At 100% of highest achievable load, plus or minus 10%

- (a) NO_x – 0.10 g/bhp-hr
- (b) CO – 0.27 g/bhp-hr
- (c) NMNEHC (as propane excluding HCHO) – 0.15 g/bhp-hr*
- (d) Formaldehyde – 0.05 g/bhp-hr**

At all operating conditions less than rated capacity:

- (a) NO_x – 0.47 lb/hr
- (b) CO – 1.27 lb/hr
- (c) NMNEHC (as propane excluding HCHO) – 0.70 lb/hr*
- (d) Formaldehyde – 0.23 lb/hr**
- (e) Ammonia – 10 ppmvd at 15% oxygen

* Based on U.S. EPA Methods 18/25A or ALT-106 (or Department approved equivalent, does not include formaldehyde)

** Based on U.S. EPA Method 320 (or Department approved equivalent)

002 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (a) Equal to or greater than 10% for a period or periods aggregating more than 3 minutes in any 1 hour.
- (b) Equal to or greater than 30% at any time.

003 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4233]**Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines****What emission standards must I meet if I am an owner or operator of a stationary SI internal combustion engine?**

(a)-(d) N/A

(e) Owners and operators of stationary SI ICE with a maximum engine power greater than or equal to 75 KW (100 HP) (except gasoline and rich burn engines that use LPG) must comply with the emission standards in Table 1 to this subpart for their stationary SI ICE. For owners and operators of stationary SI ICE with a maximum engine power greater than or equal to 100 HP (except gasoline and rich burn engines that use LPG) manufactured prior to January 1, 2011 that were certified to the certification emission standards in 40 CFR part 1048 applicable to engines that are not severe duty engines, if such stationary SI ICE was certified to a carbon monoxide (CO) standard above the standard in Table 1 to this subpart, then the owners and operators may meet the CO certification (not field testing) standard for which the engine was certified.

(f)-(h) N/A

**SECTION D. Source Level Requirements**

**# 004 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4234]
Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines
How long must I meet the emission standards if I am an owner or operator of a stationary SI internal combustion engine**

Owners and operators of stationary SI ICE must operate and maintain stationary SI ICE that achieve the emission standards as required in §60.4233 over the entire life of the engine.

II. TESTING REQUIREMENTS.**# 005 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Testing for formaldehyde shall be conducted at a minimum of once every five years from the previous EPA method test.

006 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

Testing for NO_x, CO, and NMNEHC (VOC) shall be performed in accordance with NSPS Subpart JJJJ every 8,760 hours of operation or 3 years, whichever comes first.

007 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4243]**Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines****What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?**

(a) N/A

(b) If you are an owner or operator of a stationary SI internal combustion engine and must comply with the emission standards specified in §60.4233(d) or (e), you must demonstrate compliance according to one of the methods specified in paragraphs (b)(1) and (2) of this section.

(1) Purchasing an engine certified according to procedures specified in this subpart, for the same model year and demonstrating compliance according to one of the methods specified in paragraph (a) of this section.

(2) Purchasing a non-certified engine and demonstrating compliance with the emission standards specified in §60.4233(d) or (e) and according to the requirements specified in §60.4244, as applicable, and according to paragraphs (b)(2)(i) and (ii) of this section.

(i) N/A

(ii) If you are an owner or operator of a stationary SI internal combustion engine greater than 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test and conduct subsequent performance testing every 8,760 hours or 3 years, whichever comes first, thereafter to demonstrate compliance.

(c)-(i) N/A

008 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4243]**Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines****What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?**

(a) Each performance test must be conducted within 10 percent of 100 percent peak (or the highest achievable) load and according to the requirements in §60.8 and under the specific conditions that are specified by Table 2 to this subpart.

(b) You may not conduct performance tests during periods of startup, shutdown, or malfunction, as specified in §60.8(c). If your stationary SI internal combustion engine is non-operational, you do not need to startup the engine solely to conduct a performance test; however, you must conduct the performance test immediately upon startup of the engine.

(c) You must conduct three separate test runs for each performance test required in this section, as specified in §60.8(f). Each test run must be conducted within 10 percent of 100 percent peak (or the highest achievable) load and last at least 1 hour.

(d) To determine compliance with the NO_x mass per unit output emission limitation, convert the concentration of NO_x in the engine exhaust using Equation 1 of this section:

$$ER = (Cd * 1.912 * 10^{(-3)} * Q * T) / (HP * hr) \text{ (Eq. 1)}$$

**SECTION D. Source Level Requirements**

Where:

ER = Emission rate of NO_x in g/HP-hr

C_d = Measured NO_x concentration in parts per million by volume (ppmv).

1.912×10^{-3} = Conversion constant for ppm NO_x to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meter per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, horsepower-hour (HP-hr).

(e) To determine compliance with the CO mass per unit output emission limitation, convert the concentration of CO in the engine exhaust using Equation 2 of this section:

$$ER = (C_d * 1.164 * 10^{-3} * Q * T) / (HP-hr) \text{ (Eq. 2)}$$

Where:

ER = Emission rate of CO in g/HP-hr.

C_d = Measured CO concentration in ppmv.

1.164×10^{-3} = Conversion constant for ppm CO to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meters per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, in HP-hr.

(f) For purposes of this subpart, when calculating emissions of VOC, emissions of formaldehyde should not be included. To determine compliance with the VOC mass per unit output emission limitation, convert the concentration of VOC in the engine exhaust using Equation 3 of this section:

$$ER = (C_d * 1.833 * 10^{-3} * Q * T) / (HP-hr) \text{ (Eq. 3)}$$

Where:

ER = Emission rate of VOC in g/HP-hr.

C_d = VOC concentration measured as propane in ppmv.

1.833×10^{-3} = Conversion constant for ppm VOC measured as propane, to grams per standard cubic meter at 20 degrees Celsius.

Q = Stack gas volumetric flow rate, in standard cubic meters per hour, dry basis.

T = Time of test run, in hours.

HP-hr = Brake work of the engine, in HP-hr.

(g) If the owner/operator chooses to measure VOC emissions using either Method 18 of 40 CFR part 60, appendix A, or Method 320 of 40 CFR part 63, appendix A, then it has the option of correcting the measured VOC emissions to account for

**SECTION D. Source Level Requirements**

the potential differences in measured values between these methods and Method 25A. The results from Method 18 and Method 320 can be corrected for response factor differences using Equations 4 and 5 of this section. The corrected VOC concentration can then be placed on a propane basis using Equation 6 of this section.

$$RF_i = CM_i/CA_i \text{ (Eq. 4)}$$

Where:

RF_i = Response factor of compound i when measured with EPA Method 25A.

CM_i = Measured concentration of compound i in ppmv as carbon.

CA_i = True concentration of compound i in ppmv as carbon.

$$C_{icorr} = RF_i * C_{imeas} \text{ (Eq. 5)}$$

Where:

C_{icorr} = Concentration of compound i corrected to the value that would have been measured by EPA Method 25A, ppmv as carbon.

C_{imeas} = Concentration of compound i measured by EPA Method 320, ppmv as carbon.

$$C_{peq} = 0.6098 * C_{icorr} \text{ (Eq. 6)}$$

Where:

C_{peq} = Concentration of compound i in mg of propane equivalent per DSCM.

III. MONITORING REQUIREMENTS.**# 009 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

Every 2,500 hours of operation and no sooner than forty-five (45) calendar days from the previous test, the permittee shall perform periodic monitoring for NO_x and CO emissions to verify continued compliance upon each of the respective engines. A Department-approved test that has been performed within 45 calendar days prior to the scheduled periodic monitoring may be used in lieu of the periodic monitoring for that time period. A portable gas analyzer may be used to satisfy the requirements of this condition utilizing three test runs of twenty (20) minutes for each test run. The Department may alter the frequency of portable analyzer tests based on the test results. The frequency of portable gas analyzer tests may be altered only with the Department's prior written approval. The portable gas analyzer shall be used and maintained according to the manufacturer's specifications and the procedures specified in ASTM D6522 or equivalent procedures, as approved by the Department.

010 [25 Pa. Code §127.441]**Operating permit terms and conditions.**

The permittee shall continuously monitor and record the pressure differential across the oxidation catalyst and SCR system as well as the catalyst inlet temperature.

IV. RECORDKEEPING REQUIREMENTS.**# 011 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain the following comprehensive and accurate records:

- (a) Pressure differential and inlet temperature across the oxidation catalyst and SCR system.

**SECTION D. Source Level Requirements**

- (b) Hours of operation of the engine on a 12-month rolling basis.
- (c) Amount of fuel used by the engine on a 12-month rolling basis.
- (d) Amount of urea used on a 12-month rolling basis.
- (e) Copies of the report that demonstrates that the engine was operating at rated bhp and speed conditions during performance testing.
- (f) Copies of the manufacturer's specifications and recommended maintenance schedule for the engine and control devices.
- (g) The date and detailed description of any tuning or maintenance conducted on the engine and control devices.

012 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4245]**Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines****What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary SI internal combustion engine?**

- (a) Owners and operators of all stationary SI ICE must keep records of the information in paragraphs (a)(1) through (4) of this section.
 - (1) All notifications submitted to comply with this subpart and all documentation supporting any notification.
 - (2) Maintenance conducted on the engine.
 - (3) If the stationary SI internal combustion engine is a certified engine, documentation from the manufacturer that the engine is certified to meet the emission standards and information as required in 40 CFR parts 90, 1048, 1054, and 1060, as applicable.
 - (4) If the stationary SI internal combustion engine is not a certified engine or is a certified engine operating in a non-certified manner and subject to §60.4243(a)(2), documentation that the engine meets the emission standards.
- (b) N/A
- (c) Owners and operators of stationary SI ICE greater than or equal to 500 HP that have not been certified by an engine manufacturer to meet the emission standards in §60.4231 must submit an initial notification as required in §60.7(a)(1). The notification must include the information in paragraphs (c)(1) through (5) of this section.
 - (1) Name and address of the owner or operator;
 - (2) The address of the affected source;
 - (3) Engine information including make, model, engine family, serial number, model year, maximum engine power, and engine displacement;
 - (4) Emission control equipment; and
 - (5) Fuel used.
- (d) Owners and operators of stationary SI ICE that are subject to performance testing must submit a copy of each performance test as conducted in §60.4244 within 60 days after the test has been completed.
- (e) N/A

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.**# 013 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The engine is a "new" stationary RICE located at an area source. The engine must meet the requirements of 40 CFR Part 63 Subpart ZZZZ by meeting the requirements of 40 CFR Part 60 Subpart JJJJ. No further requirements apply for the engine under 40 CFR Part 63 Subpart ZZZZ.

**SECTION D. Source Level Requirements****# 014 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall comply with all applicable requirements of New Source Performance Standards from 40 CFR Part 60 Subparts JJJJ and National Emission Standards for Hazardous Air Pollutants from 40 CFR Part 63 Subpart ZZZZ.


***** Permit Shield in Effect. *****

**SECTION D. Source Level Requirements**

Source ID: 115

Source Name: COMPRESSED NATURAL GAS FUELING STATION

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).**

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Compressed natural gas dispensing facilities shall meet the following requirements:

iii. The owner or operator of the compressed natural gas fueling station will annually perform a leak detection and repair (LDAR) program that includes either the use of an optical gas imaging camera such as a FLIR camera or a gas leak detector capable of reading methane concentrations in air of 0% to 5% with an accuracy of +1- 0.2% or other leak detection monitoring devices approved by the Department. The LDAR program will be conducted on valves, flanges, connectors, storage vessels/storage tanks, and compressor seals in natural gas or hydrocarbon liquids service. Leaks are to be repaired no later than 15 days after leak detections unless facility shutdowns or ordering of replacement parts are necessary for repair of the leaks. For the storage vessel, any leak detection and repair are to be performed in accordance with 40 CFR Part 60, Subpart 0000.

A. A leak is considered repaired if one of the following can be demonstrated:

1. No detectable emissions consistent with Method 21 specified in 40 CFR Part 60, Appendix A;
2. A Concentration of 2.5% methane or less using a gas leak detector;
3. No visible leak image when using an. optical gas imaging camera;
4. No bubbling at leak interface using a soap solution bubble test specified in Method 21. A procedure based on the formation of bubbles in a soap solution that is sprayed on a potential leak source may be used for those sources that do not have continuously moving parts and that do not have a surface temperature greater than the boiling point or less than the freezing point of the soap solution; or
5. Any other method approved by the Department.

B. Leaks, repair methods, and repair delays are to be recorded and those records should be maintained for five years. If a gas leak detector is used, a leak is to be detected by placing the probe inlet at the surface of a component. The Department may grant an extension for leak detection deadlines or repairs upon written request from the owner or operator of the facility documenting the justification for the requested extension.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).



SECTION D. Source Level Requirements

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

***** Permit Shield in Effect. *****



SECTION E. Source Group Restrictions.



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this Title V facility.



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

**SECTION H. Miscellaneous.**

Insignificant Sources:

Landfill:

3,000 gal diesel fuel AST
1,000 gal diesel fuel AST
500 gal diesel fuel AST
2,000 gal diesel fuel AST
300 gal gasoline AST

Hauling Company:

Used Oil Furnace

200 gal used oil AST

250 gal hydraulic oil AST

250 gal motor oil AST

26 gal parts cleaner

2,000 gal diesel tank AST (divided internally to 1,500 and 500 gal)



***** End of Report *****
