

Post Construction Stormwater Management Plan Narrative

Atlantic Sunrise Project

Permanent Access Roads
Fairmount Township
Luzerne County
Pennsylvania

Prepared For:



TRANSCONTINENTAL GAS PIPE LINE COMPANY, LLC

**2800 Post Oak Blvd
Houston, TX, 77251**

Issued: October 2016
BL Project No. 14C4909

Prepared By:

BL Companies
4242 Carlisle Pike, Suite 260
Camp Hill, PA 17011



Suzanne King, PE
P.E. 082757

CONTENTS

<u>Description</u>	<u>Page</u>
GENERAL INFORMATION	4
Project Description	4
References	4
Permanent Access Roads	5
1.0 COMMON INFORMATION.....	6
1.1 Topographic Features.....	6
1.2 Soil Characteristics	6
1.3 Earth Disturbance Activity	7
1.4 Project Site Runoff	10
1.5 Surface Water Classification	11
1.6 BMP Description Narrative.....	11
1.7 BMP Installation Sequence Narrative	12
1.8 Supporting Calculations and Measurements	12
1.9 Plan Drawings.....	14
1.10 Long Term Operation and Maintenance Schedule	14
1.11 Material Recycling and Disposal.....	17
1.12 Soil Conditions and Geologic Formations	17
1.13 Thermal Impacts	20
1.14 E&SC Plan and PCSM Plan Consistency	21
1.15 Riparian Buffer Waiver.....	21
1.16 Antidegradation Requirements	21
1.17 TMDL	21

APPENDICES

<u>Appendix</u>	<u>Description</u>
Appendix A	<i>Intentionally Omitted by Applicant</i>
Appendix B	<i>Intentionally Omitted by Applicant</i>
Appendix C	United States Department of Agriculture Natural Resources Conservation Service Custom Soil Resource Report (Included under separate cover in Appendix C of the E&SC Narrative for Luzerne County included in Section 2 of the ESCGP-2 NOI.)
Appendix D	Supporting Information
Appendix G*	AR-LU-007.1 Specific Narrative and Calculations

* Road-specific Appendix letters correspond to the road-specific Appendix included in the **E&SC Narrative for Luzerne County included in Section 2 of the ESCGP-2 NOI.** Supporting calculations are provided for permanent access roads only in this narrative.

GENERAL INFORMATION

Project Description

The following post construction stormwater management (PCSM) narrative describes the PCSM designs for the permanent access roads to mainline valves (MLVs) to be constructed within Luzerne County (County), Pennsylvania as part of the Transcontinental Gas Pipe Line Company, LLC (Transco) Atlantic Sunrise Project (“Project”). This narrative supplements the Erosion & Sediment Control (E&SC) Plan and Site Restoration (SR) Plan Narrative included in **Section 2 of the Erosion and Sediment Control General Permit 2 (ESCGP-2) Notice of Intent (NOI)**.

The Project includes modifications to the existing Transco Mainline system to reverse the direction of flow, enabling new north-to-south capabilities (bi-directional flow) to transport this new source of natural gas to existing markets. In Luzerne County, the main Project improvements that the temporary and permanent access roads will support include installation of a 30-inch-diameter greenfield pipeline referred to as the Central Penn Line (CPL) North pipeline.

Where possible, existing public and private roads will be utilized to provide access to the pipeline ROW during and after construction. During construction, E&SC BMPs will be installed along all access roads as shown on the road-specific Soil Erosion Control Plans included in the Erosion & Sediment Control and Layout Plans for Access Roads in **Section 2 of the ESCGP-2 NOI**.

Permanent gravel access roads will be installed, and maintained by Transco, to provide access MLVs and select portions of the pipeline right of way (ROW) for pipeline maintenance and inspections in accordance with applicable regulatory guidelines. The increase in impervious area for the permanent access roads that provide access to the MLVs is permanent. However, the proposed increase in impervious area for the permanent access roads to the pipeline ROW is temporary. Similar to temporary access roads, upon construction completion, the proposed road materials will be removed and the impacted areas will be restored to pre-construction conditions. Transco operations will use the restored road surface to access the ROW as necessary in the future. Typically, pickup trucks will be used to perform routine maintenance and inspections and the trucks are capable of driving over grassy areas similar to the pipeline ROW. The permanent access roads to be restored to pre-construction conditions are not included in this PCSM Narrative. Only the access roads to MLV sites with permanent improvements are included in this PCSM Narrative.

References

E&SC Best Management Practices (E&SC BMPs), in accordance with the standards and specifications in the Pennsylvania Department of Environmental Protection's (PADEP's) "Erosion and Sediment Pollution Control Program Manual," Technical Guidance No. 363-2134-008, as amended and updated (E&SC Manual) will be used during the construction phase of the project. The proposed practices are designed to achieve the regulatory standard of minimizing the potential for accelerated erosion and sedimentation associated with temporary earth disturbance activities. The E&SC BMPs will remain in place until the surrounding area has reached final stabilization. An area shall be considered to have achieved final stabilization when it has a minimum uniform 70% perennial vegetative cover or other permanent non-vegetative cover with a density sufficient to resist accelerated surface erosion and subsurface characteristic sufficient to resist sliding and other movements.

PCSM BMPs, in accordance with the PADEP's "Pennsylvania Stormwater Best Management Practices Manual," Technical Guidance No. 363-0300-002, as amended and updated (PCSM Manual), will be used for site restoration and post construction stormwater management measures.

Impacts to wetlands, streams or waterbodies will be avoided to the maximum extent practicable. Refer to the Wetland Delineation Report provided as **Section 5 of the ESCGP-2 NOI** for information supporting wetland mapping shown on the E&SC Plans (**Section 2 of the ESCGP-2 NOI**).

Permanent Access Roads

The following permanent access roads that will provide access to an MLV are proposed to be constructed in Luzerne County to support the CPL North pipeline:

Access Road	Mile Post (MP)	Major River Basin	Receiving Water	Existing Use	Chapter 93 Designated Use	Impairment	Total Maximum Daily Load
LU-007.1	MP 6.7	Susquehanna River	UNT to Maple Run	None	HQ-CWF, MF	None	None

1.0 COMMON INFORMATION

1.1 Topographic Features

See **Appendices E and F** for road-specific United States Geological Survey mapping.

1.2 Soil Characteristics

AECOM prepared the United States Department of Agriculture Natural Resources Conservation Service (NRCS) Custom Soil Resource Report for the counties crossed by the CPL North pipeline. The NRCS Custom Soil Resource Report for Luzerne County, Pennsylvania and the Soil Association Maps prepared by Wood Group Inc. are included in Appendix C of the **E&SC Narrative for Luzerne County included in Section 2 of the ESCGP-2 NOI**. Soil type and use limitations for the permanent access road to the MLV site in Luzerne County are presented in Table 1.2.1 below.

Table 1.2.1
Soil Type and Use Limitations for Luzerne County

Map Symbol	Soil Name	Slope	Cut Banks Cave	Corrosive to Concrete or Steel	Droughty	Easily Erodible	Flooding	High Water Table	Hydric/Hydric Inclusions	Low Strength	Slow Percolation	Piping	Poor Source of Topsoil	Frost Action	Shrink-Swell	Potential Sinkhole	Ponding	Wetness
LcB	Lackawanna very stony silt loam	0-12%	X	C	X			X	X	X			X	X				X
MsB	Morris very stony silt loam	0-8%	X	C/S	X	X		X	X	X	X		X	X				X
OpD	Oquaga and lordstown ext. stony silt loam	8-25%	X	C	X	X			X		X			X				
WmB	Wellsboro very stony silt loam	3-8%	X	C/S	X	X		X	X	X	X	X		X				X

Source: Appendix E, Table E-1, PADEP, *Erosion and Sediment Pollution Control Program Manual*, Technical Guidance Number 363-2134-008.

Table 1.2.2
Soil Use Limitations Resolutions

Limitation	Resolution
Slopes	Excavations should be stabilized to prevent erosion and contractor should employ proper construction techniques to ensure safety on steep slope areas.
Cut Banks Cave	Excavations will be properly supported by sheeting and shoring to prevent caves.
Corrosive to Concrete or Steel	No concrete or steel piping is proposed without appropriate coatings and protection.
Droughty	Existing suitable topsoil and soil amendments will be used during construction as necessary.
Easily Erodible	Temporary and permanent E&SC BMPs will be employed throughout the construction and operation of the access roads.
Flooding	Ensure that the access roads have proper drainage and no obstructions within floodway/floodplain.
High Water Table	A geotechnical investigation was conducted to minimize conflicts with saturated zones.
Hydric/Hydric Inclusions	A wetland investigation was completed. Impacts to wetlands have been minimized by modifying the access road alignment to avoid wetlands and/or protecting wetlands with E&SC BMPs where existing roads are adjacent to wetlands.
Low Strength	A maximum of 3:1 slopes area proposed.
Slow Percolation	A field investigation of percolation rates at the infiltration areas will be performed to verify the soils percolation capacity.
Piping	Watertight pipe, antiseep collars, clay cores through basin berms, and concrete endwalls will be used to minimize water movement via pipe bedding.
Poor Source of Topsoil	Existing topsoil, which has proven to be suitable, will be reused on the site.
Frost Action	Gravel specified in lieu of pavement to minimize frost effects.
Shrink-Swell	Gravel specified in lieu of pavement.
Potential Sinkhole	Geotechnical Engineer of record recommendations will be followed for any potential occurrences.
Ponding	Surface grading and drainage facilities will be provided to minimize ponding affects.
Wetness	Wet weather construction recommendations, per the Geotechnical Engineer's recommendations, will be employed to minimize the effects of wetness during construction, surface grading. Surface grading and drainage will be provided to minimize wetness affects after construction.

1.3 Earth Disturbance Activity

The proposed permanent access road is located in agricultural lands. The proposed land use is for a permanent access road intended to provide a means of ingress/egress to/from the MLV site for operations. The proposed alteration of the land includes

modifying the existing access road ROW to accommodate a 14 foot wide gravel access road. Installing the access road requires grading activity to construct the new road. See the **E&SC Plans for Luzerne County included in Section 2 of the ESCGP-2 NOI**.

Characterization of Land Use

The characterization of land use within the proposed CPL North project areas is based on interpretation of aerial photographs taken in the spring of 2014 and information gathered from field surveys conducted during 2014 and 2015. Transco classified land uses within the proposed Project areas into the following eight broad types:

1. Agricultural Land – land associated with active cultivation of rROW and field crops; areas of grasses planted for livestock grazing or for the production of hay crops; orchards; and specialty crops, including vineyards, Christmas trees, and fruits and vegetables.
2. Upland Forest/Woodland – includes upland deciduous forest, evergreen forest, and mixed (deciduous and evergreen) forest, but does not include forested wetlands.
3. Industrial/Commercial Land – land used for mines or quarries and associated processing plants; manufacturing or other industrial facilities; and land developed for commercial or retail uses, including malls, strip plazas, business parks, and medical facilities.
4. Transportation Land – land used for transportation purposes, including interstate highways; state, county, and local highways and roads; and railroad lines.
5. Residential Land – residential areas, including yards of individual residences.
6. Open Land – non-forested and undeveloped land not classified for another use, including land maintained as utility ROWs for overhead and underground electric transmission, natural gas transmission, and oil transmission facilities.
7. Wetlands – includes wetlands covered with emergent, scrub-shrub, and forested vegetation.
8. Open Water – include rivers, streams, creeks, canals, and other linear waterbodies, as well as lakes, ponds, and other non-flowing waterbodies.

Area Types

The access road construction ROW is comprised of the following area types:

- **Limit of Disturbance (LOD) Area** – The LOD area is the construction ROW for the access roads. For most roads, this area is 50 feet wide and centered on the centerline of the access road. In areas where grading and/or E&SC BMPs require more room, the LOD has been expanded to encompass the proposed improvement area.
- **ESCGP-2 Permit Boundary/Site Area** – The ESCGP-2 Permit Boundary/Site Area is the area to be permitted for improvements with the Chapter 102 Application. This area is slightly larger than the LOD area. The limit of the ESCGP-2 Permit Boundary/Site Area is typically offset 5 feet from the LOD limit for access roads.
Future changes made to the LOD area that are still within the ESCGP-2 Permit Boundary/ Site Area would likely be considered a minor modification to the Project's Chapter 102 Permit. However, future changes to the LOD area that are outside the ESCGP-2 Permit Boundary/Site Area may require a major modification to the Permit.
- **Area of Minimum Disturbance/Reduced Grading** – The Area of Minimum Disturbance/Reduced Grading is the area within the LOD area that is outside the proposed grading area. Disturbances within the Area of Minimum Disturbance/Reduced Grading will be minimal.
- **LOD Area within Floodway/Floodplain** – The LOD Area within Floodway/Floodplain is the area within the LOD that is within a FEMA (Federal Emergency Management Agency) designated Floodplain or an assumed floodway that extends approximately 50 feet from the top of bank of a stream landward. The LOD Area within Floodway/Floodplain have been coordinated with the Chapter 105 Permit application. For most of the access roads, where the LOD crosses a floodway/floodplain, the LOD area has been minimized and the existing road will be used. Where the existing road cannot support the intended traffic loads, timber matting will be installed to provide an adequate driving surface.
- **Stormwater Management Area** – The Stormwater Management Area is calculated using Worksheet #3. For the permanent access roads, the Stormwater Management Area is equal to the LOD Area because no credit is taken for protected areas. The LOD is minimized at wetlands and streams to minimize impacts. Where the LOD crosses a floodway/floodplain, the existing road will be used with matting, as necessary.

- Area Controlled by BMPs – The Area Controlled by BMPs is the drainage area that discharges to either the vegetated channel or MLV pad. The pre- and post-construction cover types for the Area Controlled by BMPs are summarized in Worksheet #4.

1.4 Project Site Runoff

The E&SC BMPs for the access roads are sized using E&SC Worksheets 1 and 11 of the PADEP E&SC Manual. These worksheets take into consideration the slope length above the sediment barrier and the drainage area contributing to the channel, respectively. (See the road-specific appendices of the **E&SC Narrative for Luzerne County included in Section 2 of the ESCGP-2 NOI** for road-specific worksheets.)

For temporary access roads and permanent access roads that provide access to the pipeline ROW only, no permanent change in cover is proposed. Disturbed areas will be restored to pre-construction conditions. Therefore, no change in runoff rate or volume is anticipated.

For permanent access roads that provide access to MLVs, a summary table presenting the change in runoff volume for the 2-year 24-hour design storm and the change in peak rate of runoff for the 2-year, 5-year, 10-year, 25-year, 50-year and 100-year 24-hour design storms for pre-construction and post construction conditions, along with the supporting calculations, are provided for each permanent access road in the road-specific narratives appended to this narrative.

Act 167 Summary

The proposed permanent access roads located in Luzerne County were designed to meet the Luzerne County Act 167 Phase II Stormwater Management Plan. This PCSM/SR narrative provides evidence that the Act 167 standards for stormwater runoff rate release, stormwater volume, and water quality are met. AR-LU-007.1 is a proposed permanent access road that provides access to a main line valve site. The proposed improvements for AR-LU-007.1 will be permanent and remain in place after construction and throughout the life of the pipeline. Only AR-LU-007.1 will be subject to the PCSM requirements of the Luzerne ACT 167 Plan.

Plan Requirements

The watersheds within Luzerne County were modeled to assess current and future drainage patterns. Release rates were recommended for some subbasins that are more restrictive than CG 1 requirements. However, the two proposed permanent access roads located in Luzerne County are not located in such a management district and will

comply with release rates and water quality guidelines described in the Pennsylvania Stormwater Best Management Practices Manual (BMP Manual).

Rate Controls

Because the locations of the proposed permanent access roads are not subject to more restrictive release rates, they have been designed to reduce the post-development flows to equal to or less than the pre-development flows for the 1-, 2-, 5-, 10-, 25-, 50- and 100-year 24-hour storm events, as required by the Act 167 study.

Infiltration and Water Quality

The Luzerne County Act 167 Phase II requires that water quality and volume control design be provided to meet standards in the BMP Manual. AR-LU-007.1 has been designed to meet the volume control guidelines recommended in the BMP Manual.

Consistency Verification

The PCSM was prepared under the supervision of a Professional Engineer, licensed in Pennsylvania, with experience and training related to E&SC and PCSM/SR. The PCSM/SR Plans attached to this PCSM/SR Narrative demonstrates that the Site is consistent with the Luzerne County Act 167 Phase II Stormwater Management Plan.

1.5 Surface Water Classification

The locations and Chapter 93 designation of the streams and wetlands near the LOD for the permanent access roads are shown on the PCSM Plans (**Section 2 of the ESCGP-2 NOI**).

1.6 BMP Description Narrative

E&SC BMPs, consistent with the PADEP E&SC Manual, are planned to be used along the temporary and permanent access roads before, during, and after earth disturbance activities. E&SC BMPs will be installed prior to disturbance. Installation and maintenance guidelines, as well as E&SC BMP locations are described in the **E&SC Narrative for Luzerne County included in Section 2 of the NOI** and shown on the E&SC Plans (**Section 2 of the ESCGP-2 NOI**) and the Best Management Practices and Quantities Plan.

For permanent access roads that require an increase in impervious area, additional PCSM BMPs will be installed to manage the additional runoff created by the change in pre- and post-development conditions. The PCSM BMPs that will be used for the permanent access roads include the following:

PCSM BMPs

- **Vegetated Channel:** Vegetated channels shall be installed to collect and attenuate runoff volume from adjacent impervious areas, allowing some pollutants to settle out in the process. Permanent Check Dams are used to enhance attenuation and pollutant removal.
- **Check Dams:** Check Dams will be installed as shown on the Plans and Detail Sheets. Check Dams dissipate energy from the concentrated flow in roadside ditches and channels to prevent erosion of the channel and at the outlet. The Check Dams will be earthen check dams with a height of 12 inches, typically.
- **Infiltration Berm:** An infiltration berm will be installed as shown on the Plans and Detail Sheets. The infiltration berm will retain flow and allow for infiltration for volume control.
- **Stone Valve Site Void Storage:** Runoff from the proposed permanent access roads may be detained in the void space between the stone at the MLV sites (mainline valves) to attenuate the peak rate of runoff for up to the 100-year design storm event. The valve sites will be comprised of 6 inches of AASHTO #8 aggregate over a heavy nonwoven geotextile over 12 inches to 30 inches of AASHTO #57 aggregate. The depth of the AASHTO #57 aggregate varies based on the detention volume needed to attenuate the volume of runoff for the 100-year storm. Dewatering calculations for the valve sites are included in the road-specific narratives appended to this narrative.
- **Riprap Aprons/Outlet Protection:** Riprap Aprons shall be installed to dissipate energy from flow concentrated at culverts and drainage channels. Permanent Riprap Aprons will remain in place and be part of the final PCSM design.
- **Permanent Vegetative Stabilization:** Upon reaching final grades, and upon cessation of earth disturbance activities, disturbed areas will receive topsoil, seed, and mulch to establish permanent vegetative stabilization.

1.7 BMP Installation Sequence Narrative

Refer to the E&SC Plans (**Section 2 of the ESCGP-2 NOI**) for the location of the proposed work and the associated E&SC and PCSM BMPs. A road-specific construction sequence is provided in **Appendix E**.

1.8 Supporting Calculations and Measurements

Supporting calculations for each permanent access road design are provided in the road-specific narratives appended to this narrative.

The access roads have been designed to meet the requirements of 25 Pa. Code §§ 102.8, including sections 102.8(g)(2) & 102.8(g)(3) as reproduced below:

(g) PCSM Plan stormwater analysis. Except for regulated activities that require site restoration or reclamation, and small earth disturbance activities identified in subsection (n), PCSM Plans for proposed activities requiring a permit under this chapter require the following additional information:

(1) Predevelopment site characterization and assessment of soil and geology including appropriate infiltration and geotechnical studies that identify location and depths of test sites and methods used.

(2) Analysis demonstrating that the PCSM BMPs will meet the volume reduction and water quality requirements specified in an applicable Department approved and current Act 167 stormwater management watershed plan; or manage the net change for storms up to and including the 2-year/24-hour storm event when compared to preconstruction runoff volume and water quality. The analysis for the 2-year/24-hour storm event shall be conducted using the following minimum criteria:

(i) Existing predevelopment nonforested pervious areas must be considered meadow in good condition or its equivalent except for repair, reconstruction or restoration of roadways or rail lines, or construction, repair, reconstruction or restoration of utility infrastructure when the site will be returned to existing condition.

(ii) When the existing project site contains impervious area, 20% of the existing impervious area to be disturbed must be considered meadow in good condition or better, except for repair, reconstruction or restoration of roadways or rail lines, or construction, repair, reconstruction, or restoration of utility infrastructure when the site will be returned to existing condition.

(iii) When the existing site contains impervious area and the existing site conditions have public health, safety or environmental limitations, the applicant may demonstrate to the Department that it is not practicable to satisfy the requirement in subparagraph (ii), but the stormwater volume reduction and water quality treatment will be maximized to the extent practicable to maintain and protect existing water quality and existing and designated uses.

(iv) Approaches other than that required under paragraph (2) may be proposed by the applicant when the applicant demonstrates to the Department that the alternative will either be more protective than required under paragraph (2) or will maintain and protect existing water quality and existing and designated uses by maintaining the site hydrology, water quality, and erosive impacts of the conditions prior to initiation of any earth disturbance activities.

(3) Analysis demonstrating that the PCSM BMPs will meet the rate requirements specified in an applicable Department approved and current Act 167 stormwater management watershed plan; or manage the net change in peak rate for the 2-, 10-, 50-, and 100-year/24-hour storm events in a manner not to exceed preconstruction rates.

(i) Hydrologic computations or a routing analysis are required to demonstrate that this requirement has been met.

(ii) Exempt from this requirement are Department- approved direct discharges to tidal areas or Department-approved no detention areas.

(iii) Approaches other than that required under paragraph (3) may be proposed by the applicant when the applicant demonstrates to the Department that the alternative will either be more protective than required under paragraph (3) or will maintain and protect existing water quality and existing and designated uses by maintaining the preconstruction site hydrologic impact.

1.9 Plan Drawings

Full size copies of the permanent access road PCSM Plans have been provided under separate cover in Section 3 of the ESCGP-2 NOI.

Preparer Qualifications are included in **Appendix D**.

1.10 Long Term Operation and Maintenance Schedule

E&SC BMPs shall be maintained properly throughout Project construction as described in the **E&SC Narrative for Luzerne County included in Section 2 of the NOI**. Until an access road is stabilized, the associated E&SC BMPs shall be maintained properly. Maintenance shall include inspections of E&SC BMPs after each runoff event and on a weekly basis. Preventative and remedial maintenance work, including clean out, repair,

replacement, re-grading, reseeding, and re-mulching must be initiated immediately. If the E&SC BMPs fail to perform as expected, replacement E&SC BMPs, or modifications of those installed will be required.

After project completion, the PCSM BMPs will be monitored and maintained as described below:

Monitoring

Transco's personnel (Operations) will perform visual inspections on an annual basis after permit closure to ascertain that the PCSM BMPs are functioning and operating effectively to ensure the MLV sites and associated permanent access roads are causing no undue burden on the property owner or adjacent owners. Repairs of deficiencies will be initiated within ten business days of discovery.

Maintenance

The Contractor will be responsible for the maintenance of the PCSM BMPs during construction. After construction, the PCSM BMPs will be owned and maintained by Transco.

Maintenance of the PCSM BMPs after acceptance by the Owner will consist of routine cleaning of accumulated sediment and debris. The specific maintenance steps and schedule are listed below:

PCSM BMPs Inspection

PCSM BMPs (vegetated channels and rock within the MLV site) are to be inspected annually for sediment, build-up and erosion debris. The sediment, debris, trash and any other waste material removed from the PCSM BMPs shall be disposed of at a suitable disposal or recycling site and in compliance with local, state and federal waste regulations.

- Vegetated Channel and Check Dams: Vegetated channels shall be inspected annually and within 48 hours after every major storm event (> 1 inch rainfall depth) as follows:
 - Inspect and correct erosion problems, damage to vegetation, and sediment and debris accumulation (address when > 3 inches at any spot or covering vegetation);
 - Inspect vegetation on side slopes for erosion and formation of rills or gullies, correct as needed;

- Inspect for pools of standing water; dewater and discharge to an approved location and restore to design grade;
- Mow and trim vegetation to ensure safety, aesthetics, proper vegetated channel operation, or to suppress weeds and invasive vegetation; dispose of cuttings in a local composting facility; mow only when vegetated channel is dry to avoid rutting;
- Inspect for litter; remove prior to mowing;
- Inspect for uniformity in cross-section and longitudinal slope, correct as needed; and
- Inspect vegetated channel inlet and outlet for signs of erosion or blockage, correct as needed.

Maintenance activities to be done as needed:

- Plant alternative grass species in the event of unsuccessful establishment;
 - Reseed bare areas; install appropriate erosion control measures when native soil is exposed or erosion channels are forming;
 - Rototill and replant vegetated channel if draw down time is more than 48 hours;
 - Inspect and correct check dams when signs of altered water flow (channelization, obstructions, erosion, etc.) are identified; and
 - Water during dry periods, fertilize, and apply pesticide only when absolutely necessary.
- Infiltration Berm: The infiltration berm shall be inspected annually and within 48 hours after every major storm event (> 1 inch rainfall depth) as follows:
 - Inspect slope and integrity of berm to ensure proper functionality;
 - Inspect for pools of standing water; dewater and discharge to an approved location and restore to design grade;
 - Mow and trim vegetation to ensure safety, aesthetics, or to suppress weeds and invasive vegetation; dispose of cuttings in a local composting facility;
 - Avoid running heavy equipment over the infiltration area at the base of the berm;
 - Remove accumulated trash and debris; and
 - Inspect for signs of flow channelization; restore level gradient immediately after deficiencies are observed.

- Stone Valve Site Void Storage: MLV sites shall be inspected annually as follows:
 - Inspect and correct erosion problems, disruption to stone, and sediment and debris accumulation;
 - Inspect stone for erosion and formation of rills or gullies, correct as needed;
 - Inspect for pools of standing water; dewater and discharge to an approved location and restore to design grade; and
 - Remove litter.

Annual Records of Maintenance Procedures

The Owner shall maintain a checklist whenever the PCSM BMPs are inspected and cleaned. An annual list of inspections and major cleaning operations and repairs shall be maintained. Upon request, the local CCD or enforcement officials shall have access to those records. The Owner shall ensure compliance with ESCGP-2 Permit requirements by meeting all ongoing recordkeeping maintenance, and other applicable ESCGP-2 and PADEP permit conditions.

1.11 Material Recycling and Disposal

Maintenance of the permanent access roads that provide access to the MLV sites will require the removal of materials (i.e., sediment, debris, and litter). The materials shall be disposed of at suitable disposal or recycling sites in compliance with local, state and federal regulations.

Transco has prepared a Spill Plan for Oil and Hazardous Materials to assist in prevention of any spills that may occur at the MLV site and to respond to any spills that do occur. The Spill Plan for Oil and Hazardous Materials is included as **Attachment 9 to the ECP provided as Section 4 of the ESCGP-2 NOI**.

1.12 Soil Conditions and Geologic Formations

AECOM conducted a review of the proposed CPL North pipeline for the potential of geologic formation which may cause pollution if disturbed or exposed during construction.

Karst Bedrock Formations

As identified by AECOM, naturally-occurring bedrock formations and soils types that may cause pollution are present along portions of the CPL North construction ROW.

Bedrock formations that may cause pollution are associated with karst or acid-forming conditions include the following:

- Conestoga Formation
- Vintage Formation
- Buffalo Springs Formation
- Ledger Formation
- Zooks Corner Formation
- Snitz Creek Formation
- Millbach Formation
- Stonehenge Formation
- Epler Formation
- Richenbach Formation
- Ontelaunee Formation
- Annville Formation
- Hershey-Myerstown Formation
- Keyser-Tonoloway Formation

There are two bedrock formations that do not form significant karst terrain along the proposed CPL North pipelines, which include Hamburg Sequence/limestone unit and Hamilton Group/Tully limestone unit.

Acid-Producing Sulfide Bedrock Formations

In the review of the NRCS data for the proposed CPL North pipeline route, several acid-producing sulfide bedrock formations are located along the proposed route. These formations are as follows:

- Pottsville Formation (anthracite coal-bearing)
- Llewellyn Formation (anthracite coal bearing)

Formations containing variable amounts of pyrite or other sulfide minerals that may only locally be acid-producing are found along the proposed CPL North pipeline. These formations can be determined only by site-specific acid-drainage investigation, and are identified as follows:

- Octoraro schist
- Conestoga phyllite
- Antietam-Harpers schist
- Kinzers shale
- Cocalico shale
- Hamburg/Martinsburg shale

Table 6 in the Best Management Practices and Quantities Plan provides the locations of the acidic bedrock.

Acidic Soils

For the proposed CPL North pipeline, based on review of the attached NRCS Custom Soil Resource Report provided in **Appendix C**, acidity levels of the soils found along the proposed CPL North route do not fall within the pH range that is considered to be a

potential source of pollution that must be mitigated. Should acidic soils with a pH of 4.0 or lower be encountered during the construction of the temporary and permanent access roads, the following Acid Producing Soils and Bedrock Control Plan shall be implemented. Table 5 in the Best Management Practices and Quantities Plan provides the locations of soils and their respective acidity levels. A road specific Soil Acidity Table is included for each road in the road specific appendices attached to this document.

Acid Producing Soils and Bedrock Control Plan

The following acid producing soils control plan was developed to identify BMPs and procedures for minimizing the potential for pollution associated with the disturbance of the areas associated with the construction of the temporary and permanent access roads that contain acid-producing soils with a pH less than 4.0.

1. Contractor shall limit the excavation area and exposure time when high acid-producing soils are encountered. Locations where acidic soils are anticipated to be present along the access roads are provided in the road specific narratives included in this document and on the E&SC plans included in Section 2 of the ESCGP-2 NOI.
2. Contractor shall separately store topsoil stripped from the site away from temporarily stockpiled high acid-producing soils and bedrock.
3. Contractor shall stockpile high acid-producing soils and bedrock material on level ground to minimize its movement, especially when these materials have a high clay content.
4. Contractor shall cover temporarily stockpiled high acid-producing soil and bedrock material to be exposed more than 7 days with properly anchored, heavy-grate sheets of polyethylene, where possible. If not possible, stockpiles shall be covered with a minimum of three to six inches of wood chips to minimize erosion of the stockpile. In addition, the contractor shall install silt fence at the toe of the stockpile slope to contain movement of material. Contractor shall not apply topsoil to the high acid-producing soil or bedrock stockpiles to prevent topsoil contamination.
5. Contractor shall ultimately dispose of high acid-producing soils or bedrock with a pH of four or less, or containing iron sulfide (including borrow from cuts) by placing the material combined with limestone at the rate of 6 tons per acre (or 275 pounds per 1,000 square feet of surface area) and covering the mixture with a minimum of 12 inches of settled soils with a pH of five or more except as follows:

- a. In the areas where trees or shrubs are to be planted, the contractor shall cover the limestone/soil mixture with a minimum of 24 inches of soils with a pH of five or more.
 - b. Contractor shall not locate any disposal area within 24 inches of any surface of a slope or bank, such as berms, stream banks, ditches, and other surface waters to prevent potential lateral leaching damages.
6. At the end of each day, contractor shall clean all equipment used to handle high acid-producing soils or bedrock to prevent spreading of high-acid materials to other parts of the proposed right-of-way, into streams, or stormwater conveyances, and to protect machinery from accelerated corrosion.
7. Contractor shall provide and install non-vegetative erosion controls (stone tracking pads, strategically-place limestone check dams, silt fences, wood chips) to limit the movement of high acid-producing soils from, around, or off areas disturbed for access road construction.
8. Following the burial or removal of high acid-producing soils and bedrock, top soiling, and seeding of the areas restored after the removal of the temporary access roads and permanent access roads that provide access to the pipeline right-of-way, Transco shall monitor the site for approximately six to 12 months to assure there is adequate stabilization and that no high-acid soil or bedrock problems emerge. Contractor shall correct any problems that are discovered within this time period.
9. If problems occur where high acid-producing soils or bedrock have been placed or buried, the applicant shall monitor these areas for at least two years to assure there is no migration of potential acid leachate.

1.13 Thermal Impacts

Thermal impacts associated with access roads will be avoided to the maximum extent practicable by implementing the following measures:

- Limit removal of vegetation, especially tree cover, to only that necessary for construction;
- Install a gravel surface for the access roads rather than asphalt;
- Incorporate the use of stone at mainline valves and vegetated channels with earthen check dams to provide storage for stormwater runoff; and
- Minimize impacts to existing riparian corridors.

See the road-specific narratives for a road-specific discussion on thermal impacts.

1.14 E&SC Plan and PCSM Plan Consistency

The E&SC Plans (**Section 2 of the ESCGP-2 NOI**), the E&SC Narrative, and this PCSM Narrative have been designed and will be constructed to be consistent with the PCSM Plans (**Section 2 of the ESCGP-2 NOI**). Following completion of construction, disturbed areas shall be stabilized and the long-term maintenance of the PCSM BMPs will begin.

1.15 Riparian Buffer Waiver

A comprehensive Riparian Buffer narrative is provided in the “Erosion and Sediment Control Plan Narrative” for the portion of the CPL North pipeline located in Luzerne County (**Section 2 of the ESCGP-2 NOI**).

No permanent access roads within Luzerne County require a riparian buffer waiver.

1.16 Antidegradation Requirements

The permanent access roads have been designed to maintain pre-construction rates of runoff by detaining and infiltrating stormwater within the MLV site and vegetated channels. There are no opportunities for non-discharge alternatives such as connecting to a sewer system or capturing stormwater in rain barrels for reuse as irrigation.

1.17 TMDL

Road-specific Total Maximum Daily Load (TMDL) discussions are provided in the road-specific narratives.

APPENDIX A

Intentionally Omitted by Applicant

APPENDIX B

Intentionally Omitted by Applicant

APPENDIX C

United States Department of Agriculture Natural Resources Conservation Service Custom Soil Resource Report

Included under separate cover in Appendix C of the E&SC Narrative for
Luzerne County included in Section 2 of the ESCGP-2 NOI

APPENDIX D

Supporting Information

Appendix D.1 – Preparer Qualifications

Appendix D.2 – North American Green Product Data

Appendix D.1 – Preparer Qualifications

NAME OF PLAN PREPARER: Suzanne Marie King, PE

FORMAL EDUCATION:

Name of College or Technical Institute: Roger Williams University / Stanford University

Curriculum or Program: General Engineering / Structural Engineering

Dates of Attendance: **From:** RWU: 9/1998 / SU: 9/2002 **To:** RWU: 5/2002 / SU: 5/2003

Degree Received RWU: Bachelor of Science - General Engineering
SU: Masters of Science - Structural Engineering

OTHER TRAINING:

Name of Training: _____

Presented By: _____

Date: _____

EMPLOYMENT HISTORY:

Current Employer: BL Companies

Telephone: 781-619-9500

Former Employer: Woodard & Curran BKF Engineers

Telephone: 401-273-1007 650-482-6300

RECENT PERMANENT STORMWATER FACILITY PLANS PREPARED:

Name of Project:	<u>Treasure Island Redevelopment</u>	<u>Canal Street Improvements</u>	<u>Beechwood Museum</u>
County:	<u>San Francisco</u>	<u>Essex</u>	<u>Newport</u>
Municipality:	<u>San Francisco, CA</u>	<u>Salem, MA</u>	<u>Newport, RI</u>
Permit Number:	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>
Approving Agency:	<u>Treasure Island Development Authority (TIDA)</u>	<u>City of Salem & Massachusetts Emergency Management Agency</u>	<u>City of Newport & Coastal Resources Management Council</u>

Appendix D.2 – North American Green Product Data



ROLLMAX™
ROLLED EROSION CONTROL

Specification Sheet – EroNet™ DS75™ Erosion Control Blanket

DESCRIPTION

The ultra short-term single net erosion control blanket shall be a machine-produced mat of 100% agricultural straw with a functional longevity of up to 45 days. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw evenly distributed over the entire area of the mat. The blanket shall be covered on the top side with a polypropylene netting having an approximate 0.50 x 0.50 (1.27 x 1.27 cm) mesh with photodegradable accelerators to provide breakdown of the netting within approximately 45 days, depending upon geographical location and elevation. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The DS75 shall meet Type 1.C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

Material Content

Matrix	100% Straw Fiber	0.5 lbs/sq yd (0.27 kg/sm)
Netting	Top side only, lightweight photodegradable with photo accelerators	1.5 lb/1000 sq ft (0.73 g/sm)
Thread	Degradable	

Standard Roll Sizes

Width	6.67 (2.03 m)	8.0 ft (2.4 m)	16 ft (4.87 m)
Length	108 ft (32.92 m)	112 ft (34.14 m)	108 ft (32.92 m)
Weight ± 10%	40 lbs (18.14 kg)	50 lbs (22.68 kg)	96 lbs (43.54 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)	192 sq yd (165.5 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.45 in. (11.43 mm)
Resiliency	ECTC Guidelines	78.8%
Water Absorbency	ASTM D1117	375%
Mass/Unit Area	ASTM 6475	8.57 oz/sy (291 g/sm)
Swell	ECTC Guidelines	15%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	6.31 oz-in
Light Penetration	ASTM D6567	10%
Tensile Strength - MD	ASTM D6818	105.6 lbs/ft (1.57 kN/m)
Elongation - MD	ASTM D6818	34%
Tensile Strength - TD	ASTM D6818	42.0 lbs/ft (0.62 kN/m)
Elongation - TD	ASTM D6818	25.2%
Biomass Improvement	ASTM D7322	286%

Design Permissible Shear Stress

Unvegetated Shear Stress	1.55 psf (74 Pa)
Unvegetated Velocity	5.00 fps (1.52 m/s)

Slope Design Data: C Factors

Slope Gradients (S)

Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.029	N/A	N/A
20-50 ft	0.11	N/A	N/A
≥ 50 ft (15.2 m)	0.19	N/A	N/A

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.055
0.50 – 2.0 ft	0.055-0.021
≥ 2.0 ft (0.60 m)	0.021

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RM_X_MPDS_EDS75_5.13



ROLLMAX™
ROLLED EROSION CONTROL

Specification Sheet – EroNet™ C125® Erosion Control Blanket

DESCRIPTION

The long-term double net erosion control blanket shall be a machine-produced mat of 100% coconut fiber with a functional longevity of up to 36 months. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the coconut evenly distributed over the entire area of the mat. The blanket shall be covered on the top and bottom sides with a heavyweight photodegradable polypropylene netting having ultraviolet additives to delay breakdown and an approximate 0.63 x 0.63 in (1.59 x 1.59 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The C125 shall meet Type 4 specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

Material Content

Matrix	100% Coconut Fiber	0.5 lbs/sq yd (0.27 kg/sm)
Netting	Heavyweight photodegradable with UV additives	3 lbs/1000 sq ft (1.47 g/sm)
Thread	Black polypropylene	

Standard Roll Sizes

Width	6.67 (2.03 m)	8 ft (2.44 m)
Length	108 ft (32.92 m)	112 ft (35.14 m)
Weight ± 10%	44 lbs (19.95 kg)	56.25 (25.5 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.22 in. (5.59 mm)
Resiliency	ECTC Guidelines	82%
Water Absorbency	ASTM D1117	167%
Mass/Unit Area	ASTM 6475	7.73 oz/sy (262.8 g/sm)
Swell	ECTC Guidelines	13%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	0.75 oz-in
Light Penetration	ASTM D6567	16.6%
Tensile Strength - MD	ASTM D6818	472.8 lbs/ft (7.01 kN/m)
Elongation - MD	ASTM D6818	25.6%
Tensile Strength - TD	ASTM D6818	225.6 lbs/ft (3.35 kN/m)
Elongation - TD	ASTM D6818	33.9%
Biomass Improvement	ASTM 7322	257%

Design Permissible Shear Stress

Unvegetated Shear Stress	2.25 psf (108 Pa)
Unvegetated Velocity	10.0 fps (3.05 m/s)

Slope Design Data: C Factors

Slope Gradients (S)

Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.001	0.029	0.082
20-50 ft	0.036	0.060	0.096
≥ 50 ft (15.2 m)	0.070	0.090	0.110

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.022
0.50 – 2.0 ft	0.022-0.014
≥ 2.0 ft (0.60 m)	0.014

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RM_X_MPDS_EC125_5.13



ROLLMAX™
ROLLED EROSION CONTROL

Specification Sheet – EroNet™ S75® Erosion Control Blanket

DESCRIPTION

The short-term single net erosion control blanket shall be a machine-produced mat of 100% agricultural straw with a functional longevity of up to 12 months. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw evenly distributed over the entire area of the mat. The blanket shall be covered on the top side with a lightweight photodegradable polypropylene netting having an approximate 0.50 x 0.50 in. (1.27 x 1.27 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The S75 shall meet Type 2.C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

Material Content

Matrix	100% Straw Fiber	0.5 lbs/sq yd (0.27 kg/sm)
Netting	Top side only, lightweight photodegradable	1.5 lb/1000 sq ft (0.73 kg/100 sm)
Thread	Degradable	

Standard Roll Sizes

Width	6.67 ft (2.03 m)	8.0 ft (2.4 m)	16 ft (4.87 m)
Length	108 ft (32.92 m)	112 ft (34.14 m)	108 ft (32.92 m)
Weight ± 10%	40 lbs (18.14 kg)	50 lbs (22.68 kg)	96 lbs (43.54 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)	192 sq yd (165.5 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.50 in. (12.7 mm)
Resiliency	ECTC Guidelines	78.8%
Water Absorbency	ASTM D1117	301%
Mass/Unit Area	ASTM D6475	9.76 oz/sy (332 g/sm)
Swell	ECTC Guidelines	15%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	6.31 oz-in
Light Penetration	ASTM D6567	6.0%
Tensile Strength - MD	ASTM D6818	122.4 lbs/ft (1.81 kN/m)
Elongation - MD	ASTM D6818	36.1%
Tensile Strength - TD	ASTM D6818	79.2 lbs/ft (1.17 kN/m)
Elongation - TD	ASTM D6818	26.8%
Biomass Improvement	ASTM D7322	301%

Design Permissible Shear Stress

Unvegetated Shear Stress	1.55 psf (74 Pa)
Unvegetated Velocity	5.00 fps (1.52 m/s)

Slope Design Data: C Factors

Slope Gradients (S)

Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.029	N/A	N/A
20-50 ft	0.11	N/A	N/A
≥ 50 ft (15.2 m)	0.19	N/A	N/A

NTPEP Large-Scale Slope Testing
ASTM D6459 - C-factor = 0.012

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.055
0.50 – 2.0 ft	0.055-0.021
≥ 2.0 ft (0.60 m)	0.021

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RMX_MPDS_ES75_6.13



ROLLMAX™
ROLLED EROSION CONTROL

Specification Sheet – EroNet™ SC150® Erosion Control Blanket

DESCRIPTION

The extended-term double net erosion control blanket shall be a machine-produced mat of 70% agricultural straw and 30% coconut fiber with a functional longevity of up to 24 months. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw and coconut evenly distributed over the entire area of the mat. The blanket shall be covered on the top side with a heavyweight photodegradable polypropylene netting having ultraviolet additives to delay breakdown and an approximate 0.63 x 0.63 in (1.59 x 1.59 cm) mesh, and on the bottom side with a lightweight photodegradable polypropylene netting with an approximate 0.50 x 0.50 (1.27 x 1.27 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The SC150 shall meet Type 3.B specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

Material Content

Matrix	70% Straw Fiber	0.35 lbs/sq yd (0.19 kg/sm)
	30% Coconut Fiber	0.15 lbs/sq yd (0.08 kg/sm)
Netting	Top: Heavyweight photodegradable with UV additives	3 lbs/1000 sq ft (1.47 kg/100 sm)
	Bottom: lightweight photodegradable	1.5 lb/1000 sq ft (0.73 kg/100 sm)
Thread	Degradable	

Standard Roll Sizes

Width	6.67 ft (2.03 m)	8 ft (2.4 m)	16.0 ft (4.87 m)
Length	108 ft (32.92 m)	112 ft (34.14 m)	108 ft (32.92 m)
Weight ± 10%	44 lbs (19.95 kg)	55 lbs (24.95 kg)	105.6 lbs (47.9 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)	192 sq yd (165.6 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.35 in. (8.89 mm)
Resiliency	ECTC Guidelines	75%
Water Absorbency	ASTM D1117	342%
Mass/Unit Area	ASTM D6475	7.87 oz/sy (267.6 g/sm)
Swell	ECTC Guidelines	30%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	1.11 oz-in
Light Penetration	ASTM D6567	6.2%
Tensile Strength - MD	ASTM D6818	362.4 lbs/ft (5.37 kN/m)
Elongation - MD	ASTM D6818	29.4%
Tensile Strength - TD	ASTM D6818	136.8 lbs/ft (2.03 kN/m)
Elongation - TD	ASTM D6818	27.6%
Biomass Improvement	ASTM D7322	481%

Design Permissible Shear Stress

Unvegetated Shear Stress	2.00 psf (96 Pa)
Unvegetated Velocity	8.0 fps (2.44 m/s)

Slope Design Data: C Factors

Slope Gradients (S)

Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.001	0.048	0.100
20-50 ft	0.051	0.079	0.145
≥ 50 ft (15.2 m)	0.10	0.110	0.190

NTPEP Large-Scale Slope
ASTM D6459 - C-factor = 0.031

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.050
0.50 – 2.0 ft	0.050-0.018
≥ 2.0 ft (0.60 m)	0.018

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RMX_MPDS_ESC150_6.13



ROLLMAX™
ROLLED EROSION CONTROL

Specification Sheet – BioNet® SC150BN™ Erosion Control Blanket

DESCRIPTION

The extended-term double net erosion control blanket shall be a machine-produced mat of 70% agricultural straw and 30% coconut fiber with a functional longevity of up to 18 months. (NOTE: functional longevity may vary depending upon climatic conditions, soil, geographical location, and elevation). The blanket shall be of consistent thickness with the straw and coconut evenly distributed over the entire area of the mat. The blanket shall be covered on the top and bottom sides with a 100% biodegradable woven natural organic fiber netting. The netting shall consist of machine directional strands formed from two intertwined yarns with cross directional strands interwoven through the twisted machine strands (commonly referred to as Leno weave) to form an approximate 0.50 x 1.0 in. (1.27 x 2.54 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers with degradable thread. The blanket shall be manufactured with a colored thread stitched along both outer edges (approximately 2-5 inches [5-12.5 cm] from the edge) as an overlap guide for adjacent mats.

The SC150BN shall meet Type 3.B specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.17

Material Content

Matrix	70% Straw Fiber	0.35 lbs/sq yd (0.19 kg/sm)
	30% Coconut Fiber	0.15 lbs/sq yd (0.08 kg/sm)
Netting	Top: Leno woven 100% biodegradable jute	9.35 lb/1000 sq ft (4.5 kg/100 sm)
	Bottom: 100% biodegradable organic jute	7.7 lb/1000 sq ft (3.76 kg/100 sm)
Thread	Biodegradable	

Standard Roll Sizes

Width	6.67 ft (2.03 m)	8.0 ft (2.4 m)	15.5 ft (4.72 m)
Length	108 ft (32.92 m)	112 ft (34.14 m)	90 ft (27.43 m)
Weight ± 10%	52.22 lbs (23.69 kg)	65.28 lbs (29.61 kg)	101.2 lbs (45.9 kg)
Area	80 sq yd (66.9 sm)	100 sq yd (83.61 sm)	155 sq yd (129.6 sm)
	Leno weave top only	Leno top and bottom	Leno top and bottom

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.25 in. (6.35 mm)
Resiliency	ECTC Guidelines	86%
Water Absorbency	ASTM D1117	311%
Mass/Unit Area	ASTM D6475	8.32 oz/sy (282.9 g/sm)
Swell	ECTC Guidelines	46%
Smolder Resistance	ECTC Guidelines	Yes
Stiffness	ASTM D1388	0.42 oz-in
Light Penetration	ASTM D6567	7.6%
Tensile Strength - MD	ASTM D6818	201.6 lbs/ft (2.99 kN/m)
Elongation - MD	ASTM D6818	13.4%
Tensile Strength - TD	ASTM D6818	164.4 lbs/ft (2.44 kN/m)
Elongation - TD	ASTM D6818	14.2%
Biomass Improvement	ASTM D7322	641 %

Design Permissible Shear Stress

Unvegetated Shear Stress	2.10 psf (100 Pa)
Unvegetated Velocity	8.00 fps (2.44 m/s)

Slope Design Data: C Factors

Slope Gradients (S)			
Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.001	0.029	0.063
20-50 ft	0.051	0.055	0.092
≥ 50 ft (15.2 m)	0.10	0.080	0.120

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.050
0.50 – 2.0 ft	0.050-0.018
≥ 2.0 ft (0.60 m)	0.018

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RMX_MPDS_BSC150BN_6.13



Specification Sheet – VMax® P550® Turf Reinforcement Mat

DESCRIPTION

The composite turf reinforcement mat (C-TRM) shall be a machine-produced mat of 100% UV stable polypropylene fiber matrix incorporated into permanent three-dimensional turf reinforcement matting. The matrix shall be evenly distributed across the entire width of the matting and stitch bonded between a ultra heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings, an ultra heavy UV stabilized, dramatically corrugated (crimped) intermediate netting with 0.5 x 0.5 inch (1.27 x 1.27 cm) openings, and covered by an ultra heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings. The middle corrugated netting shall form prominent closely spaced ridges across the entire width of the mat. The three nettings shall be stitched together on 1.50 inch (3.81cm) centers with UV stabilized polypropylene thread to form permanent three-dimensional turf reinforcement matting. All mats shall be manufactured with a colored thread stitched along both outer edges as an overlap guide for adjacent mats.

The P550 shall meet Type 5A, 5B, and 5C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.18

Material Content

Matrix	100% UV stable polypropylene fiber	0.5 lb/sy (0.27 kg/sm)
Netting	Top and Bottom, UV-Stabilized Polypropylene	24 lb/1000 sf (11.7 kg/100 sm)
	Middle, Corrugated UV-Stabilized Polypropylene	24 lb/1000 sf (11.7 kg/100 sm)
Thread	Polypropylene, UV Stable	

Standard Roll Sizes

Width	6.5 ft (2.0 m)
Length	55.5 ft (16.9 m)
Weight ± 10%	52 lbs (23.59 kg)
Area	40 sy (33.4 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.72 in. (18.29 mm)
Resiliency	ASTM 6524	95%
Density	ASTM D792	0.892 g/cm ³
Mass/Unit Area	ASTM 6566	21.25 oz/sy (723 g/sm)
UV Stability	ASTM D4355/ 1000 HR	100%
Porosity	ECTC Guidelines	96%
Stiffness	ASTM D1388	366.3 oz-in.
Light Penetration	ASTM D6567	16.5%
Tensile Strength – MD	ASTM D6818	1421 lbs/ft (21.07 kN/m)
Elongation – MD	ASTM D6818	40.5%
Tensile Strength – TD	ASTM D6818	1191.6 lbs/ft (17.67 kN/m)
Elongation – TD	ASTM D6818	28.8%
Biomass Improvement	ASTM D7322	378%

Design Permissible Shear Stress

	Short Duration	Long Duration
Phase 1: Unvegetated	4.0 psf (191 Pa)	3.25 psf (156 Pa)
Phase 2: Partially Veg.	12.0 psf (576 Pa)	12.0 psf (576 Pa)
Phase 3: Fully Veg.	14.0 psf (672 Pa)	12.0 psf (576 Pa)
Unvegetated Velocity	12.5 fps (3.8 m/s)	
Vegetated Velocity	25 fps (7.6 m/s)	

NTPEP ASTM D6460 Large Scale Channel

Vegetated Shear Stress	>13.2 psf (632 Pa)
Vegetated Velocity	>24.5 fps (7.47 m/s)

Slope Design Data: C Factors

	Slope Gradients (S)		
Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.0005	0.015	0.043
20-50 ft	0.0173	0.031	0.050
≥ 50 ft (15.2 m)	0.035	0.047	0.057

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.041
0.50 – 2.0 ft	0.040-0.013
≥ 2.0 ft (0.60 m)	0.013

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RMX_MPDS_VMP550_5.13



Specification Sheet – VMax® SC250® Turf Reinforcement Mat

DESCRIPTION

The composite turf reinforcement mat (C-TRM) shall be a machine-produced mat of 70% straw and 30% coconut fiber matrix incorporated into permanent three-dimensional turf reinforcement matting. The matrix shall be evenly distributed across the entire width of the matting and stitch bonded between a heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings, an ultra heavy UV stabilized, dramatically corrugated (crimped) intermediate netting with 0.5 x 0.5 inch (1.27 x 1.27 cm) openings, and covered by an heavy duty UV stabilized nettings with 0.50 x 0.50 inch (1.27 x 1.27 cm) openings. The middle corrugated netting shall form prominent closely spaced ridges across the entire width of the mat. The three nettings shall be stitched together on 1.50 inch (3.81cm) centers with UV stabilized polypropylene thread to form permanent three-dimensional turf reinforcement matting. All mats shall be manufactured with a colored thread stitched along both outer edges as an overlap guide for adjacent mats.

The SC250 shall meet Type 5A, 5B, and 5C specification requirements established by the Erosion Control Technology Council (ECTC) and Federal Highway Administration's (FHWA) FP-03 Section 713.18

Material Content

Matrix	70% Straw Fiber	0.35 lb/sq yd (0.19 kg/sm)
	30% Coconut Fiber	0.15 lbs/sq yd (0.08 kg/sm)
Netting	Top and Bottom, UV-Stabilized Polypropylene	5 lb/1000 sq ft (2.44 kg/100 sm)
	Middle, Corrugated UV-Stabilized Polypropylene	24 lb/1000 sf (11.7 kg/100 sm)
Thread	Polypropylene, UV Stable	

Standard Roll Sizes

Width	6.5 ft (2.0 m)
Length	55.5 ft (16.9 m)
Weight ± 10%	34 lbs (15.42 kg)
Area	40 sq yd (33.4 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.62 in. (15.75 mm)
Resiliency	ASTM 6524	95.2%
Density	ASTM D792	0.891 g/cm ³
Mass/Unit Area	ASTM 6566	16.13 oz/sy (548 g/sm)
UV Stability	ASTM D4355/ 1000 HR	100%
Porosity	ECTC Guidelines	99%
Stiffness	ASTM D1388	222.65 oz-in.
Light Penetration	ASTM D6567	4.1%
Tensile Strength – MD	ASTM D6818	709 lbs/ft (10.51 kN/m)
Elongation – MD	ASTM D6818	23.9%
Tensile Strength – TD	ASTM D6818	712 lbs/ft (10.56 kN/m)
Elongation – TD	ASTM D6818	36.9%
Biomass Improvement	ASTM D7322	441%

Design Permissible Shear Stress

	Short Duration	Long Duration
Phase 1: Unvegetated	3.0 psf (144 Pa)	2.5 psf (120 Pa)
Phase 2: Partially Veg.	8.0 psf (383 Pa)	8.0 psf (383 Pa)
Phase 3: Fully Veg.	10.0 psf (480 Pa)	8.0 psf (383 Pa)
Unvegetated Velocity	9.5 fps (2.9 m/s)	
Vegetated Velocity	15 fps (4.6 m/s)	

Slope Design Data: C Factors

	Slope Gradients (S)		
Slope Length (L)	≤ 3:1	3:1 – 2:1	≥ 2:1
≤ 20 ft (6 m)	0.0010	0.0209	0.0507
20-50 ft	0.0081	0.0266	0.0574
≥ 50 ft (15.2 m)	0.0455	0.0555	0.081

Roughness Coefficients – Unveg.

Flow Depth	Manning's n
≤ 0.50 ft (0.15 m)	0.040
0.50 – 2.0 ft	0.040-0.012
≥ 2.0 ft (0.60 m)	0.011

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RMX_MPDS_VMSC250_5.13



Specification Sheet – VMax® W3000™ High-Performance Turf Reinforcement Mat

DESCRIPTION

The VMax® W3000™ high performance turf reinforcement mat (HPTRM) is a machine-produced mat of 100% UV-stabilized high denier poly yarns woven into permanent, high strength three-dimensional turf reinforcement matting. The mat consists of a woven bottom layer integrally interlaced into a woven corrugated middle layer, with poly tendons on the top side spanning the entire machine direction. The mat is designed to provide sufficient thickness, optimum open area and three-dimensionality for effective erosion control and vegetation reinforcement against high flow induced shear forces. The mat has high tensile strength providing excellent damage resistance and increased bearing capacity of vegetated soils subject to heavy loads from maintenance equipment and other vehicular traffic. The corrugated structure provides a highly frictional surface to prevent sod slippage when sod is installed over the mat. When used as surface protection without sod overlay, the corrugated structure encapsulates the seed and soil in place while promoting self-soil infilling of the system.

Material Content

Bottom	100% UV stable poly fiber weave	Black/Green
Corrugated Middle	100% UV stable poly fiber weave	Black/Green
Top	100% UV stable Poly Tendons	Green

Standard Roll Sizes

Width	10 ft (3.05 m)
Length	90 ft (27.4 m)
Weight ± 10%	90 lbs (41.0 kg)
Area	100 sy (83.6 sm)

Index Property	Test Method	Typical
Thickness	ASTM D6525	0.40 in. (10.2 mm)
Resiliency	ASTM D6524	98%
Mass/Unit Area	ASTM 6566	14.7oz/sy (495 g/m ²)
Tensile Strength - MD	ASTM D6818	3600 lbs/ft (52.6 kN/m)
Elongation - MD	ASTM D6818	35%*
Tensile Strength - TD	ASTM D6818	3800 lbs/ft (55.5 kN/m)
Elongation - TD	ASTM D6818	20%*
Light Penetration	ASTM D6567	12%
UV Stability	ASTM D4355	>80% @3000 hrs

* Measured on fabric prior to corrugation for true measurement of base fabric elongation

Design Permissible Shear Stress*

Vegetated Shear Stress	16 psf (766 Pa)
Vegetated Velocity	25 fps (7.6 m/s)

*Values extrapolated through ASTM D6460 testing

ASTM D6460 Large Scale Channel

Vegetated Shear Stress	>13.2 psf (632 Pa)
Vegetated Velocity	>24.5 fps (7.47 m/s)

Tensar®

NORTH AMERICAN GREEN®

Tensar International Corporation
2500 Northwinds Parkway
Suite 500
Alpharetta, GA 30009
800-TENSAR-1
tensarcorp.com

Tensar International Corporation warrants that at the time of delivery the product furnished hereunder shall conform to the specification stated herein. Any other warranty including merchantability and fitness for a particular purpose, are hereby executed. If the product does not meet specifications on this page and Tensar is notified prior to installation, Tensar will replace the product at no cost to the customer. **This product specification supersedes all prior specifications for the product described above and is not applicable to any products shipped prior to January 1, 2012.**

©2013, Tensar International Corporation

EC_RM_X_MPDS_VW3000_5.13

APPENDIX G

AR-LU-007.1 Specific Narrative and Calculations

G.1 Site Specific Narrative

- a. Narrative
- b. TMDL Discussion**
- c. Minimized Soil Compaction**
- d. Thermal Impact Analysis**
- e. Acidic Soil Management Plan**
- f. Road Specific Construction Sequence**
- g. Permanent Access Road Summary Sheet (NOI PCSM Table)

G.2 Location Map

G.3 Predevelopment Calculations

- a. Predevelopment Drainage Area Map
- b. 1-Year Rainfall Event
- c. 2-Year Rainfall Event
- d. 5-Year Rainfall Event
- e. 10-Year Rainfall Event
- f. 25-Year Rainfall Event
- g. 50-year Rainfall Event
- h. 100-Year Rainfall Event

G.4 Post Development Calculations

- a. Post Development Drainage Area Map
- b. 1-Year Rainfall Event
- c. 2-Year Rainfall Event
- d. 5-Year Rainfall Event
- e. 10-Year Rainfall Event
- f. 25-Year Rainfall Event
- g. 50-year Rainfall Event
- h. 100-Year Rainfall Event

G.5 Conveyance Calculations

- a. E&S Worksheet 11
- b. NAG Swale Lining Analysis
- c. Figure 9.3-Riprap Apron Design

G.6 PCSM BMP Calculations

- a. Check Dam Volume Calculations

G.7 Water Quality Worksheets

- a. Flow Chart A – Stormwater Calculation Process
- b. Worksheet 1. General Site Information
- c. Worksheet 2. Sensitive Natural Resources
- d. Worksheet 3. Nonstructural BMP Credits
- e. Flow Chart B – Control Guideline 1 Process
- f. Worksheet 4. Change in Runoff Volume for 2-Yr Storm Event
- g. Worksheet 5. Structural BMP Volume Credits
- h. Worksheet 10. Water Quality Compliance for Nitrate

G.8 Infiltration Information

- a. Field Observation Report

G.9 Off-Site Discharge Analysis

- a. Adequacy of Off-Site Discharge**

G.10 Storage Volume Analysis

- a. Storage Volume Analysis**

G.1 Site Specific Narrative

- a. Narrative
- b. *TMDL Discussion***
- c. *Minimized Soil Compaction***
- d. *Thermal Impact Analysis***
- e. *Acidic Soil Management Plan***
- f. *Road Specific Construction Sequence***
- g. Permanent Access Road Summary Sheet (NOI PCSM Table)

ACCESS ROAD: AR-LU-007.1

ACT 167 PLAN: Luzerne County Act 167, adopted June 2010

TMDL: None

NARRATIVE:

AR-LU-007.1 is a proposed permanent access road (PAR) located in Fairmount Township, Luzerne County, Pennsylvania. The intent of this PAR is to provide permanent maintenance and operational access to the proposed Main Line Valve 02 (CN-MLV-02) located on the proposed 30" Central Penn Line North Pipeline. The PAR is approximately 100 feet long over relatively hilly terrain. The proposed permanent access road begins at Tripp Road and terminates at the MLV site at approximate milepost 6.7. The access road will be entirely located within the pipeline permanent right of way. **Within the pipeline right of way, the proposed temporary sediment barriers are included in the Pipeline E&S Plan and shown in grey on the Access Road Plan for coordination purposes.**

During construction, the access road will be 14 feet wide with a temporary rock construction entrance and driveway apron sized for the anticipated vehicles and equipment using the road during construction. Upon completion of the construction activities, the temporary construction entrance and driveway apron will be removed and a permanent access road will be constructed. The permanent road will have a width of 14 feet and a cross slope of 2% directing runoff in a northerly direction into a **vegetated channel for infiltration** with check dams. A **vegetated channel for diversion purposes** with check dams will be constructed on the south side of the proposed road and MLV pad in order to capture and divert uphill runoff.

Runoff from a portion of the disturbed site will be directed to the proposed MLV site. The MLV site will be constructed with a 6-inch thick layer of AASHTO #8 stone on top of nonwoven geotextile and an 18-inch thick layer of AASHTO #57 stone. As summarized in the infiltration calculations added to the bottom of Worksheet #5, the detained water stored in the voids of the MLV stone pad will infiltrate to the surrounding ground over approximately 10 hours and the water detained behind the check dams will infiltrate to the surrounding ground over approximately 5 hours.

Water Quality Worksheet #4 was used to complete the Control Guideline 1 (CG-1) volume analysis for the 2 year 24-hour storm. The storage volume provided by the MLV pad is greater than the required volume per Worksheet #4.

Pre-development and post-development runoff hydrographs were developed for the 1, 2, 5, 10, 25, 50 and 100 year 24-hour storm events using the SCS TR-20 method. Directing

runoff from the proposed gravel road to the **vegetated channel for infiltration** and MLV pad mitigates the potential impact from the proposed development.

TMDL DISCUSSION:

The nearest surface waters to receive runoff from this road are not subject to any TMDL restrictions.

MINIMIZED SOIL COMPACTION:

The Project seeks to minimize soils compaction impacts associated with access roads. AR-LU-007.1 is a proposed permanent access road for Main Line Valve 02. Construction and operations traffic will utilize the proposed road. The permanent access road is situated completely within the permanent right of way of the pipeline reducing the area of impact. The roadway width has also been minimized to 14 feet. Additionally, infiltration and evaporation are encouraged in the MLV site pad and in the vegetated channels for infiltration proposed in the permanent road construction.

THERMAL IMPACT ANALYSIS:

Thermal impacts associated with AR-LU-007.1 will be avoided to the maximum extent practicable. The following measures have been implemented to minimize thermal impacts:

- ***AR-LU-007.1 is a permanent access road constructed of impervious pavement. This roadway surface minimizes the thermal impact because it allows for runoff to flow unimpeded over the roadway surface to the proposed perimeter BMPs such as the compost filter sock, vegetated channel for infiltration and MLV pad.***
- ***This road is proposed in a location that minimizes tree removal. The ability to use this road without the removal of additional trees acts to minimize the thermal impact of this road.***
- ***Vegetated channels for infiltration with check dams are proposed adjacent to the proposed permanent access road. The vegetated channels for infiltration and check dams promote infiltration of the runoff from the proposed impervious road. Infiltration allows the runoff to assimilate to ground water temperatures which are minimally influenced by seasonal temperature changes, minimizing the thermal impact of this road.***

ACIDIC SOIL MANAGEMENT PLAN:

AR-LU-007.1 Soil Acidity Table		
Soil Map Symbol	Soil Name	PH
LcB	Lackawanna channery silt loam, 3 to 8 percent slopes, extremely stony	5.1

An Acid Producing Soils Control Plan is included as part of this application. The plan identifies the measures to be used to control pollution associated with construction of access roads that contain acid-producing soils. The plan requires that these measures be applied only for soils with a pH less than 4.0 as recommended by the Natural Resources Conservation Service (NRCS). The table above depicts the soil types present on this road as well as the acidity of the soils. The pH of the soils on this road are outside the threshold established by the Acid Producing Soils Control Plan. Therefore, the measures prescribed in the plan do not need to be implemented for this road.

ANTIDEGGRADATION REQUIREMENTS:

AR-LU-007.1 is located within a special protection watershed. There are no opportunities for non-discharge alternatives such as connecting to a sewer system or capturing stormwater in rain barrels for reuse as irrigation.

AR-LU-007.1 has been designed to maintain pre-construction rates of runoff by detaining and infiltrating stormwater within the MLV site and vegetated channels.

During construction, Antidegradation Best Available Combination of Technologies (ABACT) E&SC BMPs, such as rock construction entrances with wash racks and rock filters with a compost layer on the uphill side, are proposed to be installed on the access roads.

**ROAD SPECIFIC CONSTRUCTION SEQUENCE:
ACCESS ROAD: AR-LU-007.1**

- 1. At least 7 days prior to starting any earth disturbance activities, including clearing and grubbing, the owner and/or operator shall invite all contractors, Environmental Inspectors, the landowner, appropriate municipal officials, the E&S plan preparer, the PCSM plan preparer, the licensed professional responsible for oversight of critical stages of implementation of the PCSM plan, and a representative from the local conservation district to an on-site preconstruction meeting.***
- 2. At least 3 days prior to starting any earth disturbance activities, or expanding into an area previously unmarked, the Pennsylvania One Call System Inc. shall be notified at 1-800-242-1776 for the location of existing underground utilities.***
- 3. Hold pre-construction conference with the Environmental Inspectors, local County Conservation District (CCD), PADEP and Design Engineer.***
- 4. Survey crews locate and stake all special areas of concern (i.e., wetlands, streams, culverts, other utilities, etc.), edge of proposed access road, and field locate the limit of disturbance.***
- 5. Install orange construction fence around areas to be preserved.***
- 6. Locate staging areas and access points including the rock construction entrance with wash rack. Install sediment barriers (compost filter sock) down slope of these areas.***
- 7. Perform tree cutting where required. (Areas with tree cutting shall be restored to meadow in good condition.)***
- 8. Install rock construction entrance with wash rack and gravel driveway apron.***
- 9. Remove brush to effectively install perimeter E&SC BMPs.***
- 10. The Compliance Manager shall provide PADEP at least three days' notice prior to bulk earth disturbance and upon completed installation of perimeter erosion controls.***
- 11. If applicable, install security fence. The necessity of a security fence will be at the discretion of the Contractor.***

- 12. Proceed with major clearing and grubbing.**
- 13. Begin construction staking for layout of access road.**
- 14. Grade the access road as shown on the E&SC Plans.**
- 15. Install vegetated channels for infiltration with check dams and infiltration berm where specified on the E&SC & PCSM Plans (Section 2 of the ESCGP-2 NOI). Note: this is a critical stage of PCSM plan to be observed by a licensed professional or designee. Begin vegetated channel construction only when the upgradient temporary erosion and sediment control measures are in place. Vegetated channels should be constructed and stabilized early in the construction schedule, preferably before mass earthwork and paving increase the rate and volume of runoff. (Erosion and sediment control methods shall adhere to the Pennsylvania Department of Environmental Protection's Erosion and Sediment Pollution Control Program Manual, March 2000 or latest edition.)**
- 16. Rough grade the vegetated channel. Equipment shall avoid excessive compaction and/or land disturbance. Excavating equipment should operate from the side of the channel and never on the bottom. If excavation leads to substantial compaction of the subgrade (where an infiltration trench is not proposed), 18 inches shall be removed and replaced with a blend of topsoil and sand to promote infiltration and biological growth. At the very least, topsoil shall be thoroughly deep plowed into the subgrade in order to penetrate the compacted zone and promote aeration and the formation of macropores. Following this, the area should be disked prior to final grading of topsoil.**
- 17. Construct check dams, if required.**
- 18. Fine grade the vegetated channel. Accurate grading is crucial for channels. Even the smallest nonconformities may compromise flow conditions.**
- 19. Seed, vegetate and install protective lining as per approved plans and according to final planting list. Vegetation should be established as soon as possible to prevent erosion and scour. Seed mix and season of planting are provided under separate cover in the Best Management Practices and Quantities Plan Set.**
- 20. Once all tributary areas are sufficiently stabilized, remove temporary erosion and sediment controls. It is very important that the channel be stabilized before receiving upland stormwater flow. NOTE: If a vegetated channel is used for runoff conveyance during construction, it should be regraded and reseeded immediately after construction and stabilization has**

occurred. Any damaged areas should be fully restored to ensure future functionality of the channel.



- 21. Rough grade the MLV pad. Equipment shall avoid excessive compaction and/or land disturbance. If excavation leads to substantial compaction of the subgrade (where an infiltration trench is not proposed), 18 inches shall be removed and replaced with a blend of topsoil and sand to promote infiltration and biological growth. At the very least, topsoil shall be thoroughly deep plowed into the subgrade in order to penetrate the compacted zone and promote aeration and the formation of macropores. Following this, the area should be disked prior to final grading.***
- 22. Caution shall be observed when excavating above the recently installed gas pipeline. Prior to excavation over the gas pipeline, confirm the depth of cover over the pipe. Decompect the pipe trench backfill as described in the previous Step.***
- 23. Place the stone and geotextile fabric within the MLV pad as specified on the E&SC & PCSM Plans. NOTE: This is a critical stage of PCSM Plan to be observed by a licensed professional or designee.***
- 24. Immediately stabilize the access road with geotextile and gravel surfacing where indicated in the E&SC Plans.***
- 25. Upon temporary cessation of an earth disturbance activity or any stage of an activity where the cessation of earth disturbance activities will exceed four days, the disturbed areas shall be immediately seeded, mulched, or otherwise protected from accelerated erosion and sedimentation pending future earth disturbance activities. For an earth disturbance activity or any stage of an activity to be considered temporarily stabilized, the disturbed areas shall be covered with one of the following: a minimum uniform coverage of mulch and seed, with a density capable of resisting accelerated erosion and sedimentation, or an acceptable E&SC BMPs, which temporarily minimizes accelerated erosion and sedimentation. Temporary stabilization will not occur on active vehicular travel ways within the right of way. The on-site environmental inspector will log daily activity within the limits of disturbance and notify the Contractor of areas requiring temporary stabilization (i.e., areas where work has ceased for at least four days).***
- 26. Upon completion of all earth disturbance activities and permanent stabilization of all disturbed areas, the Owner shall contact the local CCD for an inspection prior to the removal of the E&SC BMPs. Vegetated areas must achieve a minimum uniform 70% perennial cover over the entire disturbed area to be considered stabilized. Roadways and parking areas should have at least a clean subbase in place to be considered stabilized.***

- 27. Upon local CCD and Transco approval of stabilization and re-vegetation, remove temporary E&SC BMPs and stabilize areas disturbed by removal including the perimeter sediment barrier and temporary compost filter sock diversions. Properly dispose of or recycle E&SC BMPs. Remove orange construction fencing and, if necessary, security fencing.***
- 28. Complete access road ROW stabilization, including seed application and mulching in areas disturbed by E&SC BMP removal.***
- 29. Upon completion of all earth disturbance activities, removal of all temporary E&SC BMPs, and permanent stabilization of all disturbed areas, the Owner shall contact the local CCD for a final inspection.***

Permanent Access Road Summary Sheet

Access Road Number:	AR-LU-007.1			
Watershed Name:	Maple Run, CWF, MF			
Act 167 Plan Name:	Luzerne County Act 167		Date Adopted:	June 2010
Design Storm Frequency	2 year	Pre-construction	Post-construction	Net Change
Rainfall Amount	2.88 inches			
Impervious area (acres)		0.000	0.148	0.148
Volume of stormwater runoff (cf) without planned stormwater BMPs		1,812	2,830	1,018
Volume of stormwater runoff (cf) with planned stormwater BMPs			577	(1,235)
Pre- vs. Post-construction Peak Rate of Flow Summary				
Stormwater discharge rate for the design frequency storm (cfs)		Pre-construction	Post-construction	Net Change
1) 1-Year/24-Hour		0.70	0.20	(0.50)
2) 2-Year/24-Hour		1.20	0.45	(0.75)
3) 5-Year/24-Hour		2.01	1.00	(1.01)
4) 10-Year/24-Hour		2.79	1.72	(1.07)
5) 25-Year/24-Hour		4.07	2.28	(1.79)
6) 50-Year/24-Hour		5.29	3.36	(1.93)
7) 100-Year/24-Hour		6.76	4.87	(1.89)
Summary Description of Restoration BMPs - Permanent Access Roads				
BMP		Function	Volume of stormwater treated (cf)	Acres treated
Natural area conservation: Pre-construction drainage pattern intact			0	0.00
Access road design: Ditches Culverts		Infiltration/ Recharge/Storage	125 <small>Included in Ditches</small>	0.08 <small>Included in Ditches</small>
Stormwater energy dissipaters: Riprap Aprons		Infiltration/ Recharge/Storage	0	0.00
Other: MLV Stone Pad Void Storage		Infiltration/ Recharge/Storage	2,128	0.20
Off-site Discharge Analysis:				
The point of interest (POI) for the access road stormwater design is the downstream point where the access road watershed currently discharges off-site. As shown in the tables above, there is no increase in volume or peak rate of runoff at the POI. Therefore, the existing drainage pattern will be unchanged and erosion, damage, or nuisance to off-site properties is not anticipated to be caused by the Project improvements.				
Loading Ratio:				
Maximum Impervious Loading Ratio	4.0	Channel	MLV Pad	
		:1 (5:1 Max)	1.5 :1 (5:1 Max)	
Maximum Total Loading Ratio	7.9	:1 (8:1 Max)	2.6 :1 (8:1 Max)	
Supporting Areas	Channel	MLV Pad	Unit	
Impervious Drainage Area	0.04	0.12	Acres	
Infiltration Area	0.01	0.08	Acres	
Total Drainage Area	0.08	0.20	Acres	

G.2 Location Map

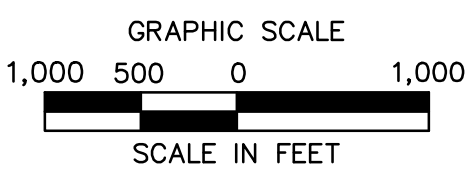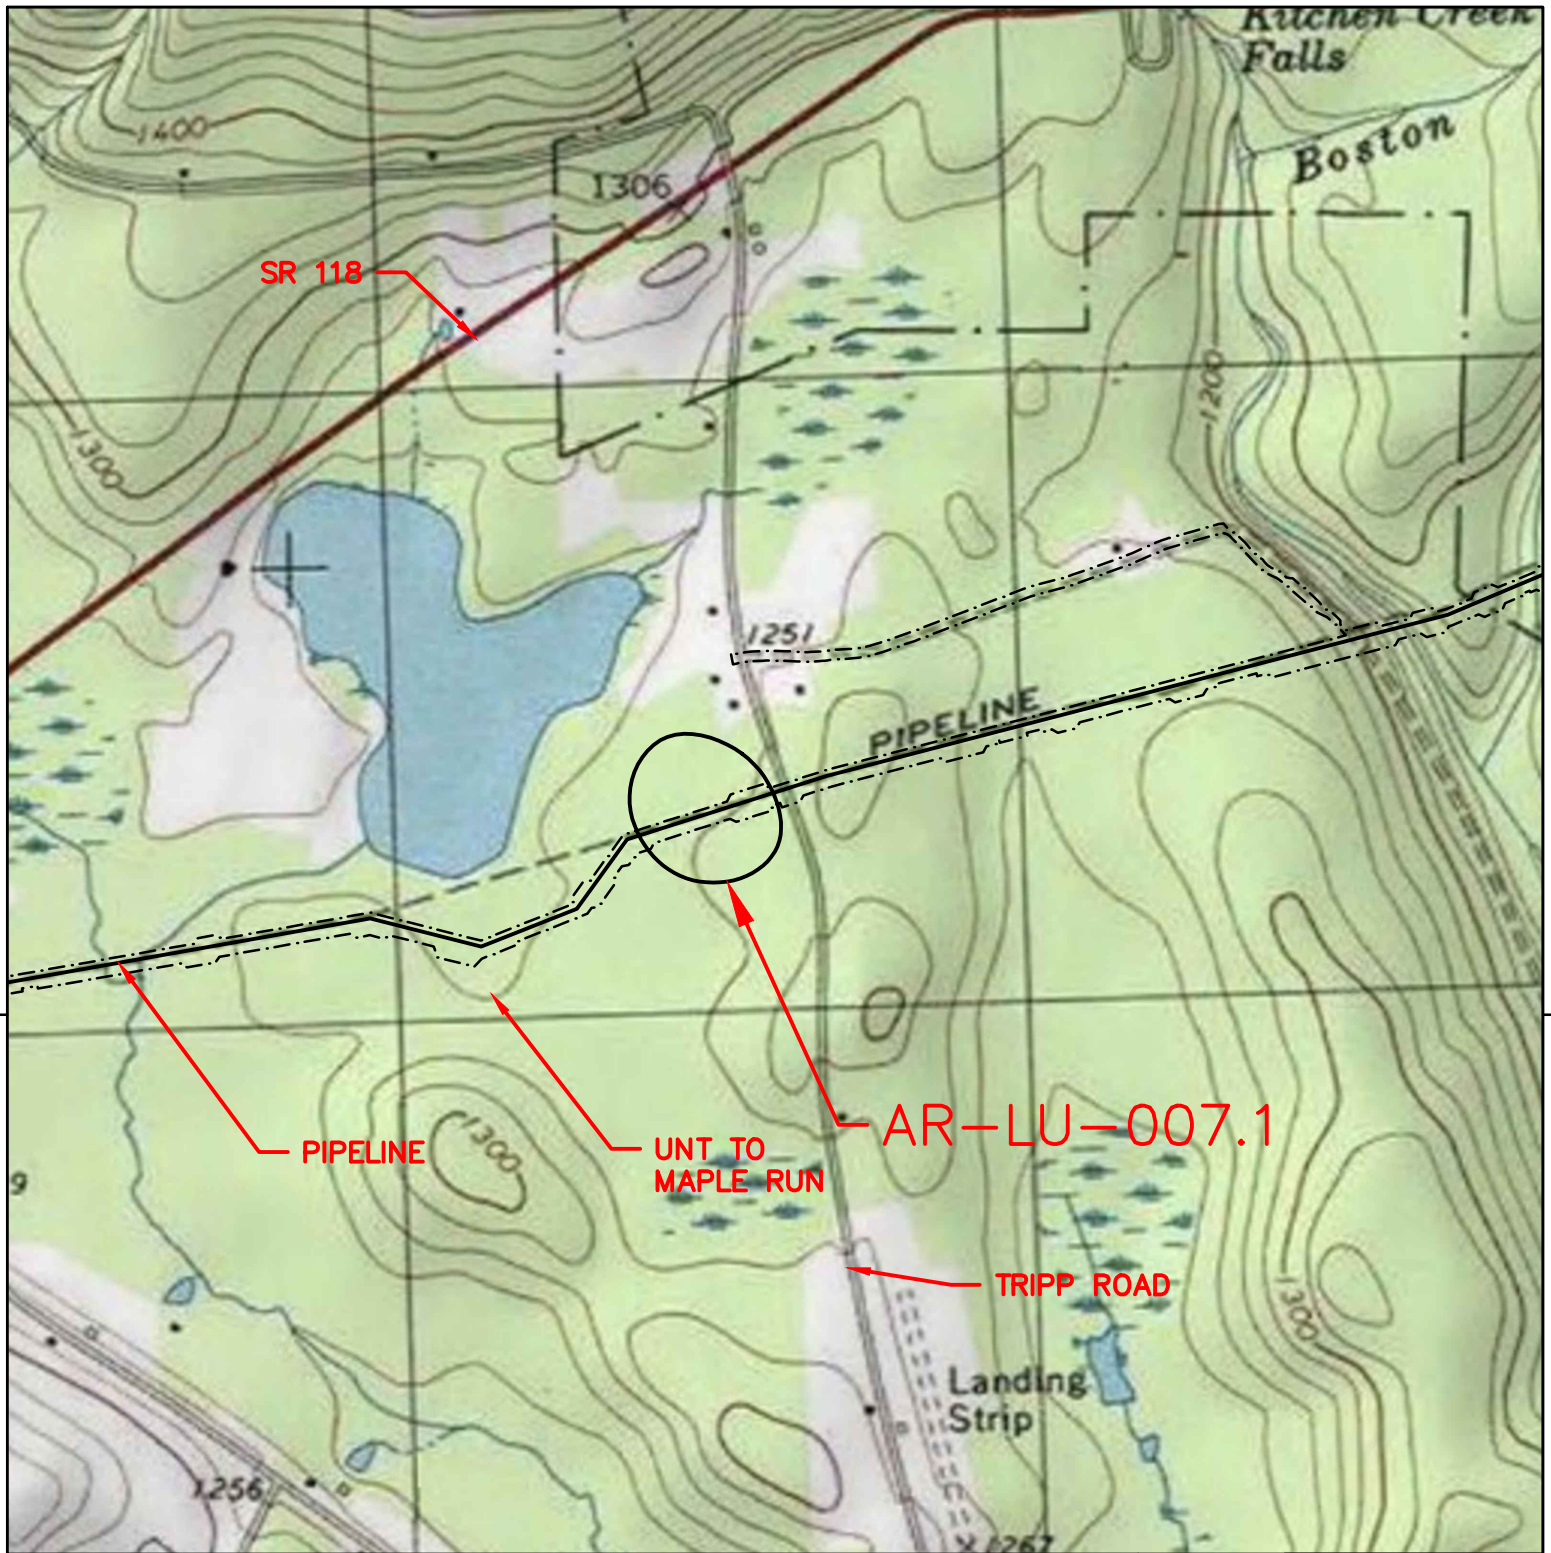

RED
ROCK
QUADRANGLE

SWEET
VALLEY
QUAD

ARCHITECTURE
ENGINEERING
ENVIRONMENTAL
LAND SURVEYING

BL
Companies

ATLANTIC SUNRISE
PROPOSED 30" NATURAL GAS PIPELINE

USGS LOCATION MAP
PERMANENT AR-LU-007.1
FAIRMOUNT TOWNSHIP
LUZERNE COUNTY, PENNSYLVANIA

Williams

NO.	DATE	BY	REVISION DESCRIPTION	W.O. NO.	CHK.	APP.	DRAWN BY:	CLM	DATE:	11/11/15	ISSUED FOR BID:	SCALE: 1"=1,000'
				1161481			CHECKED BY:		DATE:		ISSUED FOR CONSTRUCTION:	
							APPROVED BY:		DATE:		DRAWING NUMBER: 24-1601-70-28-A/ 1683_3-AR-LU-007.1	SHEET 1 OF 1
							WO:	1161481				

G.3 Predevelopment Calculations

- a. Predevelopment Drainage Area Map
- b. 1-Year Rainfall Event
- c. 2-Year Rainfall Event
- d. 5-Year Rainfall Event
- e. 10-Year Rainfall Event
- f. 25-Year Rainfall Event
- g. 50-year Rainfall Event
- h. 100-Year Rainfall Event



PRE-DEVELOPMENT DRAINAGE AREA MAP

LEGEND

TIME OF CONCENTRATION-SHEET FLOW	
TIME OF CONCENTRATION-SHALLOW CONCENTRATED FLOW	
DRAINAGE AREA	
PROPOSED GAS PIPELINE	



ISSUED FOR PERMITTING


ARCHITECTURE
ENGINEERING
ENVIRONMENTAL
LAND SURVEYING

BL
Companies


ATLANTIC SUNRISE PROJECT -
CENTRAL PENN LINE NORTH
PROPOSED 30" NATURAL GAS PIPELINE
ACCESS ROAD DRAINAGE AREA MAP
AR-LY-007.1 PRE
FAIRMOUNT TOWNSHIP
LUZERNE COUNTY, PENNSYLVANIA

Williams



NO.	DATE	BY	REVISION DESCRIPTION	W.O. NO.	CHK.	APP.	DRAWN BY:	OLC	DATE:	11/11/15	ISSUED FOR BID:	SCALE: 1" = 50'
							CHECKED BY:	BJP	DATE:	11/11/15	ISSUED FOR CONSTRUCTION:	
							APPROVED BY:	BJP	DATE:	11/11/15	DRAWING NUMBER:	AR-LU-007.1 PRE
							WO:					



OVERALL DA
PRE-DEVELOPMENT



Existing Conditions



Routing Diagram for AR-LU-007-1

Prepared by Microsoft, Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

AR-LU-007-1

Prepared by Microsoft

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Printed 10/3/2016

Page 2

Area Listing (selected nodes)

Area (sq-ft)	CN	Description (subcatchment-numbers)
13,102	71	Meadow, non-grazed, HSG C (1S)
1,524	98	Paved parking, HSG C (1S)
40,385	70	Woods, Good, HSG C (1S)
55,011	71	TOTAL AREA

AR-LU-007-1

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 3

Soil Listing (selected nodes)

Area (sq-ft)	Soil Group	Subcatchment Numbers
0	HSG A	
0	HSG B	
55,011	HSG C	1S
0	HSG D	
0	Other	
55,011		TOTAL AREA

AR-LU-007-1*Type II 24-hr 1-Year Rainfall=2.40"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 4

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=0.44"
Flow Length=372' Tc=10.9 min CN=71 Runoff=0.70 cfs 2,027 cf**Link 8L: Existing Conditions**Inflow=0.70 cfs 2,027 cf
Primary=0.70 cfs 2,027 cf**Total Runoff Area = 55,011 sf Runoff Volume = 2,027 cf Average Runoff Depth = 0.44"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 0.70 cfs @ 12.05 hrs, Volume= 2,027 cf, Depth= 0.44"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

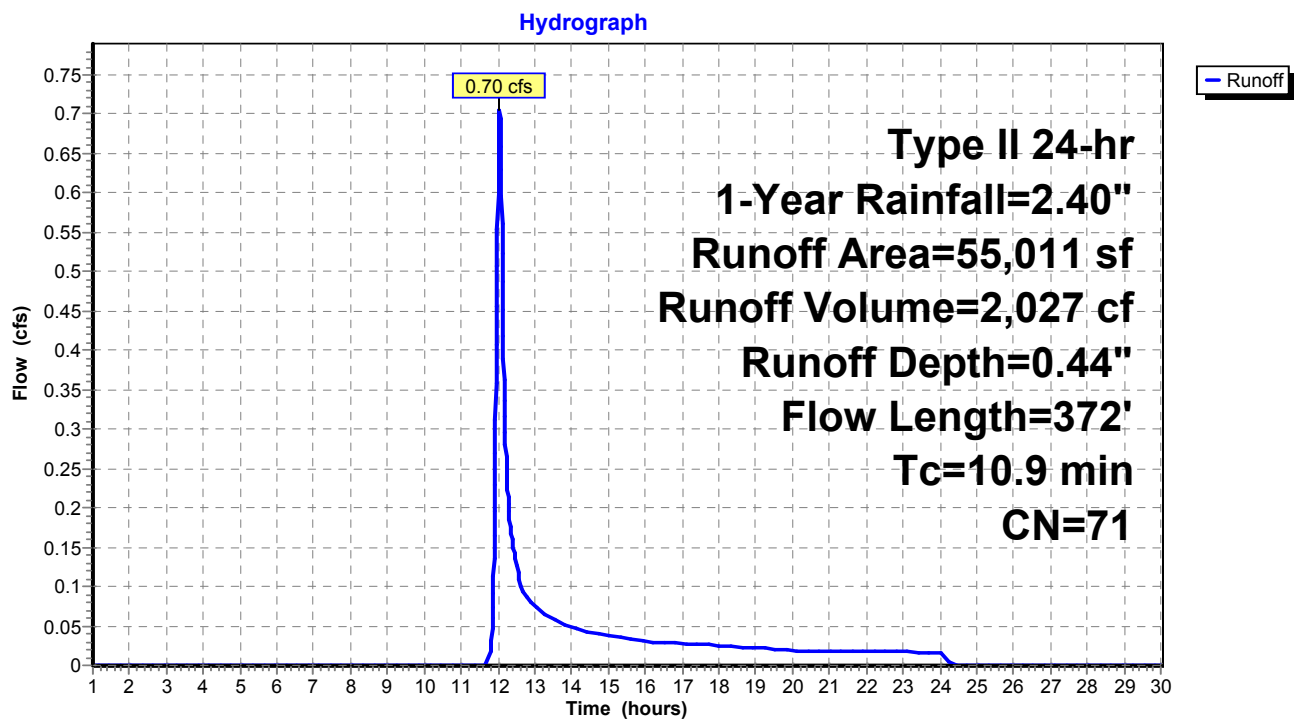Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 0.44" for 1-Year event
Inflow = 0.70 cfs @ 12.05 hrs, Volume= 2,027 cf
Primary = 0.70 cfs @ 12.05 hrs, Volume= 2,027 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

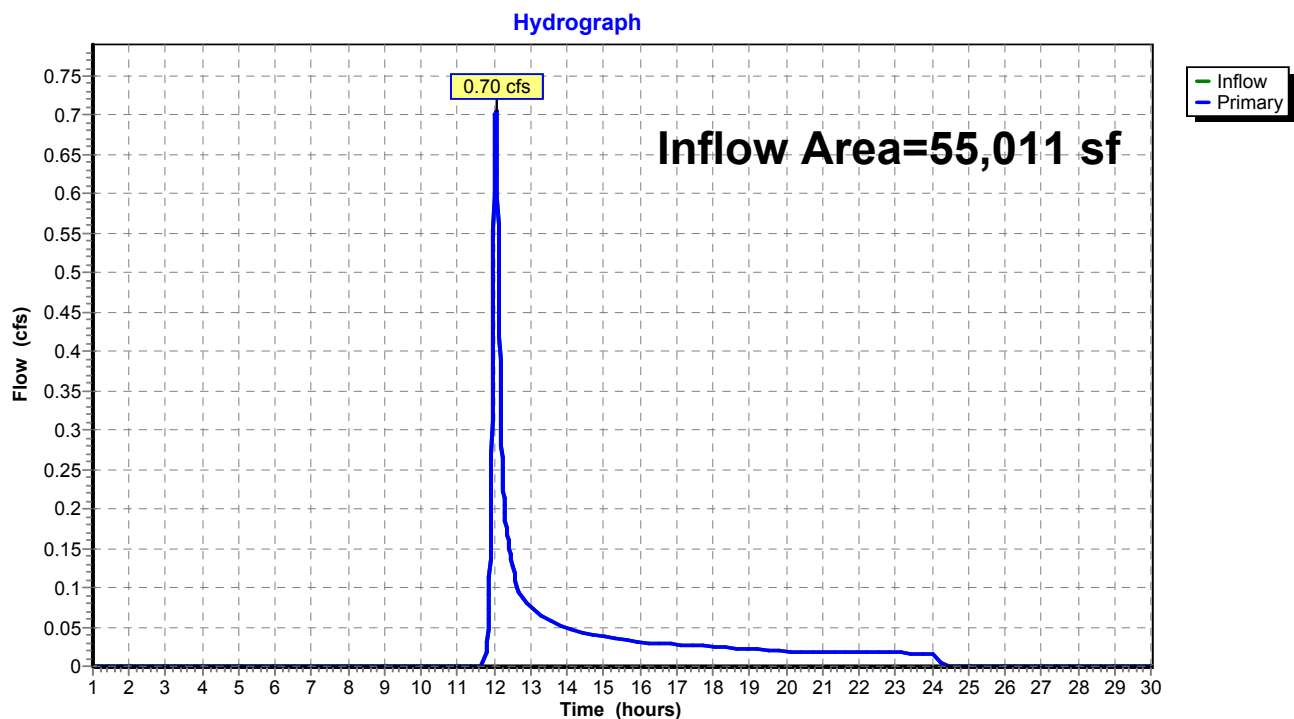Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 2-Year Rainfall=2.88"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 8

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=0.69"
Flow Length=372' Tc=10.9 min CN=71 Runoff=1.20 cfs 3,174 cf**Link 8L: Existing Conditions**Inflow=1.20 cfs 3,174 cf
Primary=1.20 cfs 3,174 cf**Total Runoff Area = 55,011 sf Runoff Volume = 3,174 cf Average Runoff Depth = 0.69"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 1.20 cfs @ 12.04 hrs, Volume= 3,174 cf, Depth= 0.69"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

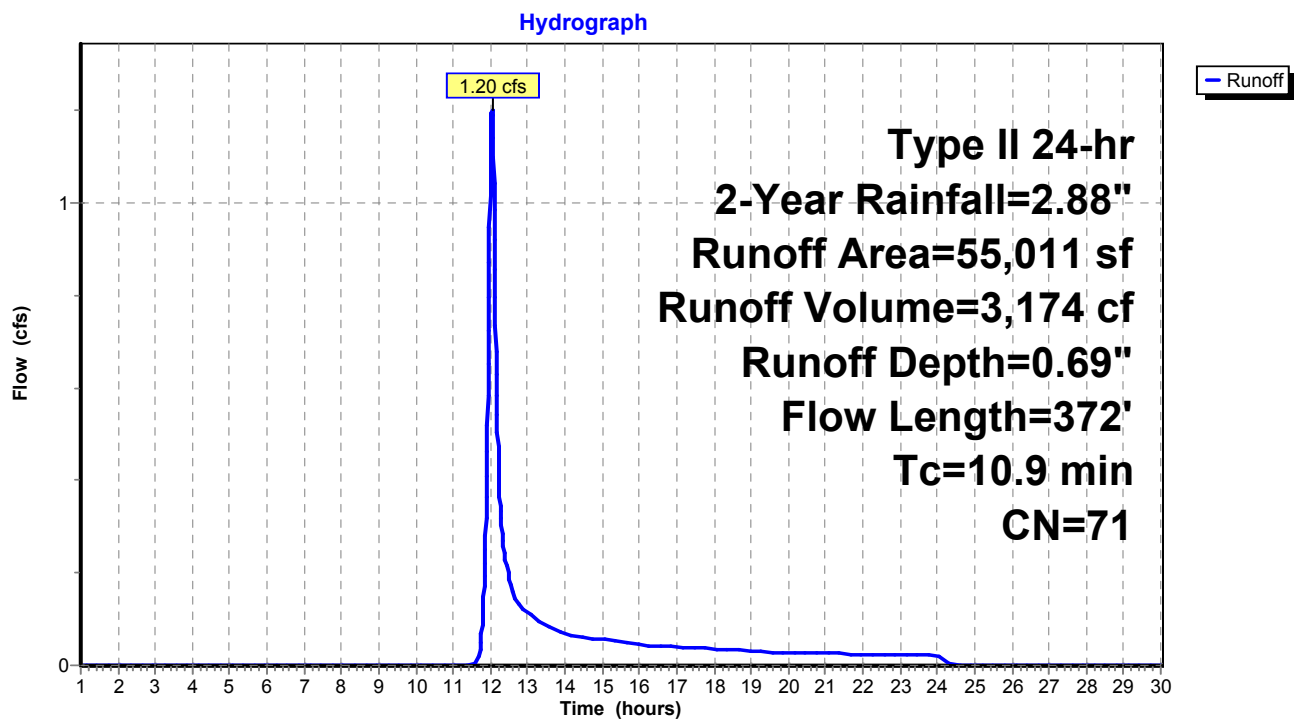Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 0.69" for 2-Year event
Inflow = 1.20 cfs @ 12.04 hrs, Volume= 3,174 cf
Primary = 1.20 cfs @ 12.04 hrs, Volume= 3,174 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

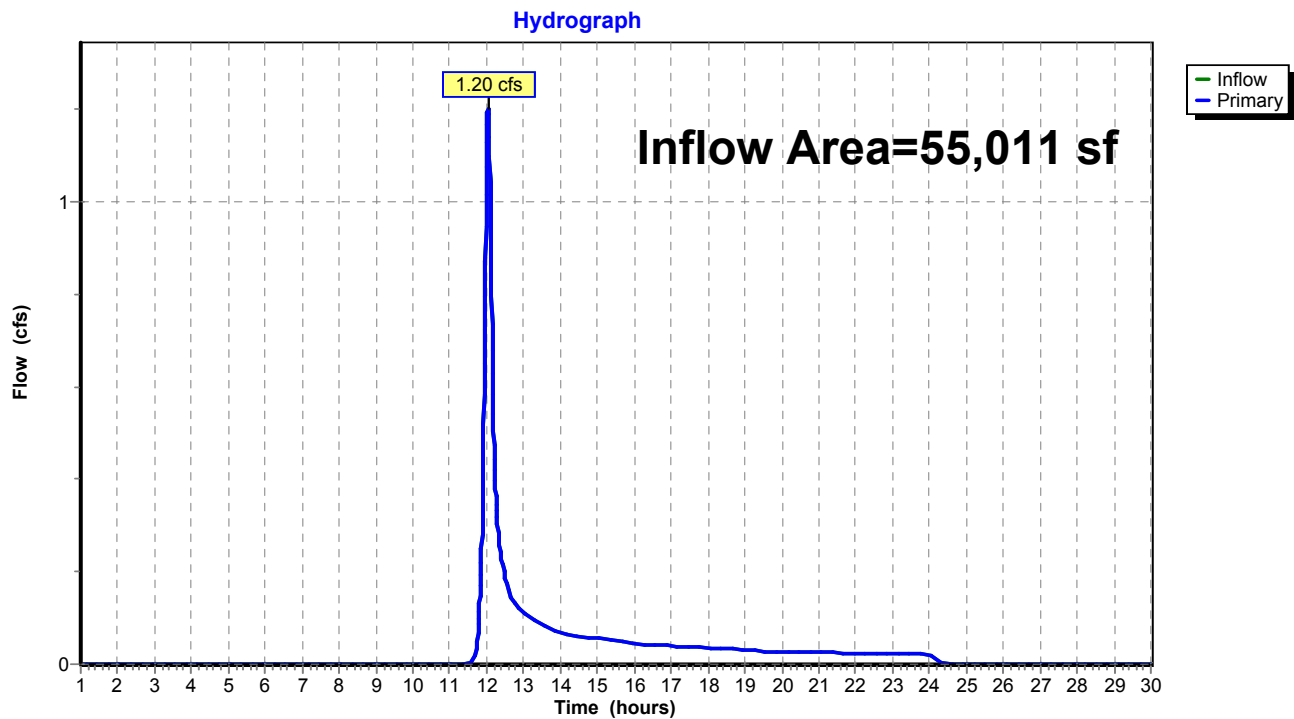Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 5-Year Rainfall=3.56"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 12

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=1.10"
Flow Length=372' Tc=10.9 min CN=71 Runoff=2.01 cfs 5,052 cf**Link 8L: Existing Conditions**Inflow=2.01 cfs 5,052 cf
Primary=2.01 cfs 5,052 cf**Total Runoff Area = 55,011 sf Runoff Volume = 5,052 cf Average Runoff Depth = 1.10"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 2.01 cfs @ 12.04 hrs, Volume= 5,052 cf, Depth= 1.10"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

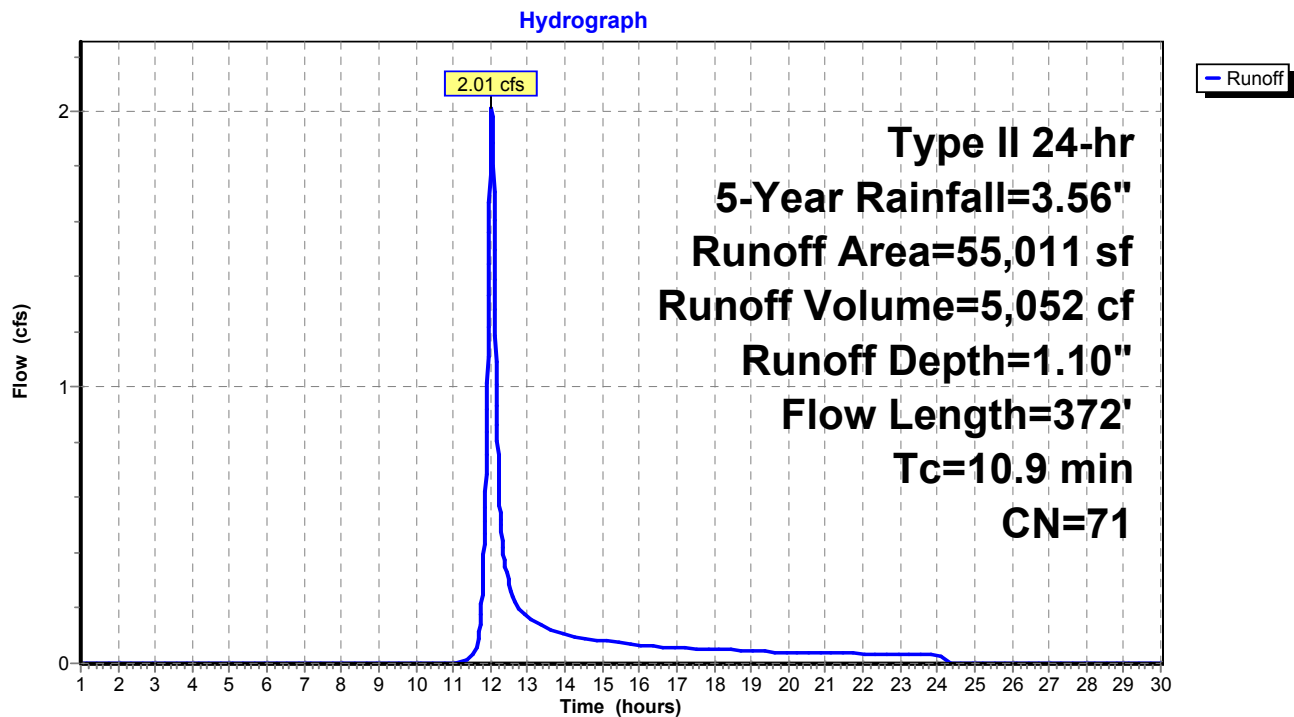Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 1.10" for 5-Year event
Inflow = 2.01 cfs @ 12.04 hrs, Volume= 5,052 cf
Primary = 2.01 cfs @ 12.04 hrs, Volume= 5,052 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

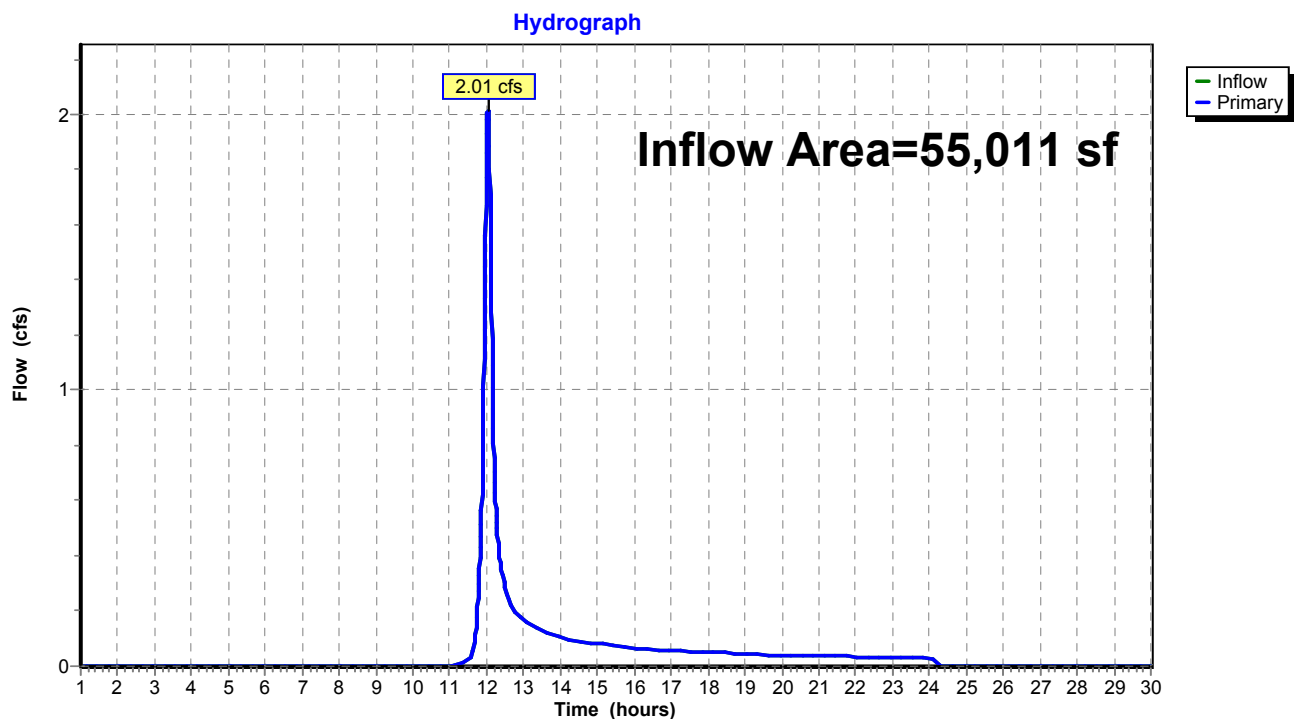Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 10-Year Rainfall=4.15"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 16

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=1.50"
Flow Length=372' Tc=10.9 min CN=71 Runoff=2.79 cfs 6,866 cf**Link 8L: Existing Conditions**Inflow=2.79 cfs 6,866 cf
Primary=2.79 cfs 6,866 cf**Total Runoff Area = 55,011 sf Runoff Volume = 6,866 cf Average Runoff Depth = 1.50"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 2.79 cfs @ 12.03 hrs, Volume= 6,866 cf, Depth= 1.50"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

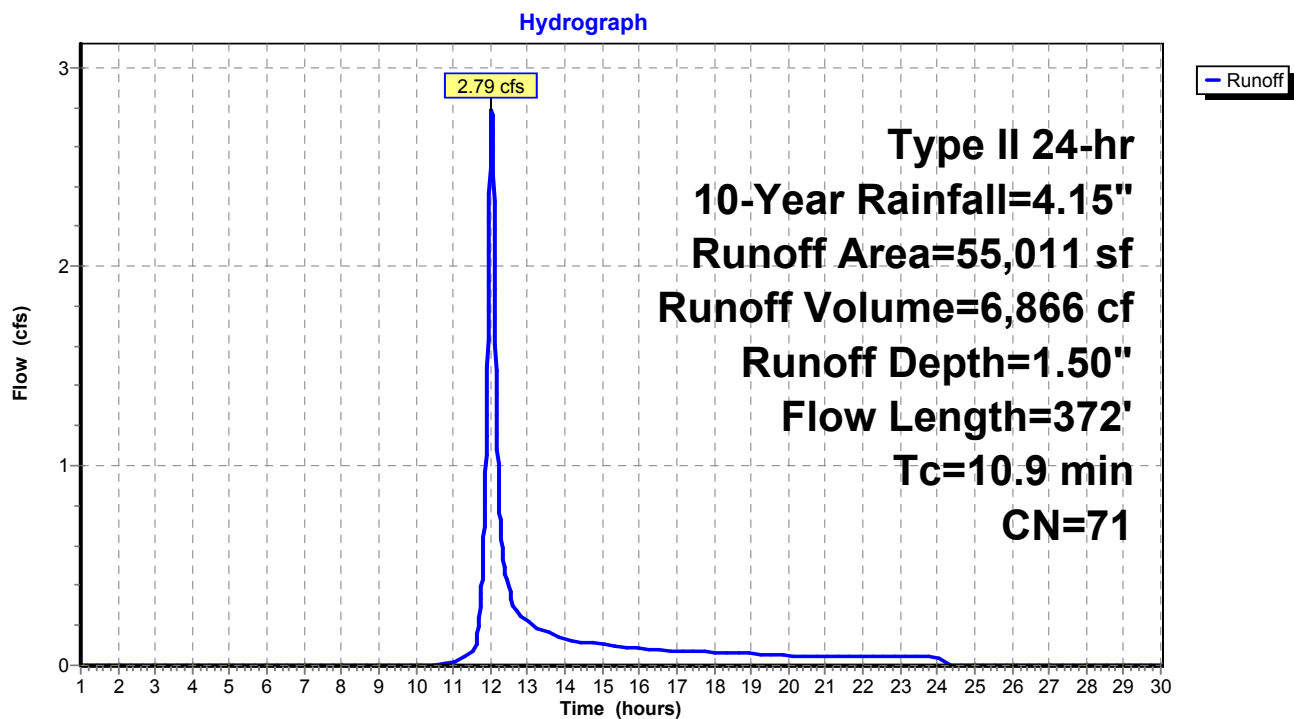Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 1.50" for 10-Year event
Inflow = 2.79 cfs @ 12.03 hrs, Volume= 6,866 cf
Primary = 2.79 cfs @ 12.03 hrs, Volume= 6,866 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

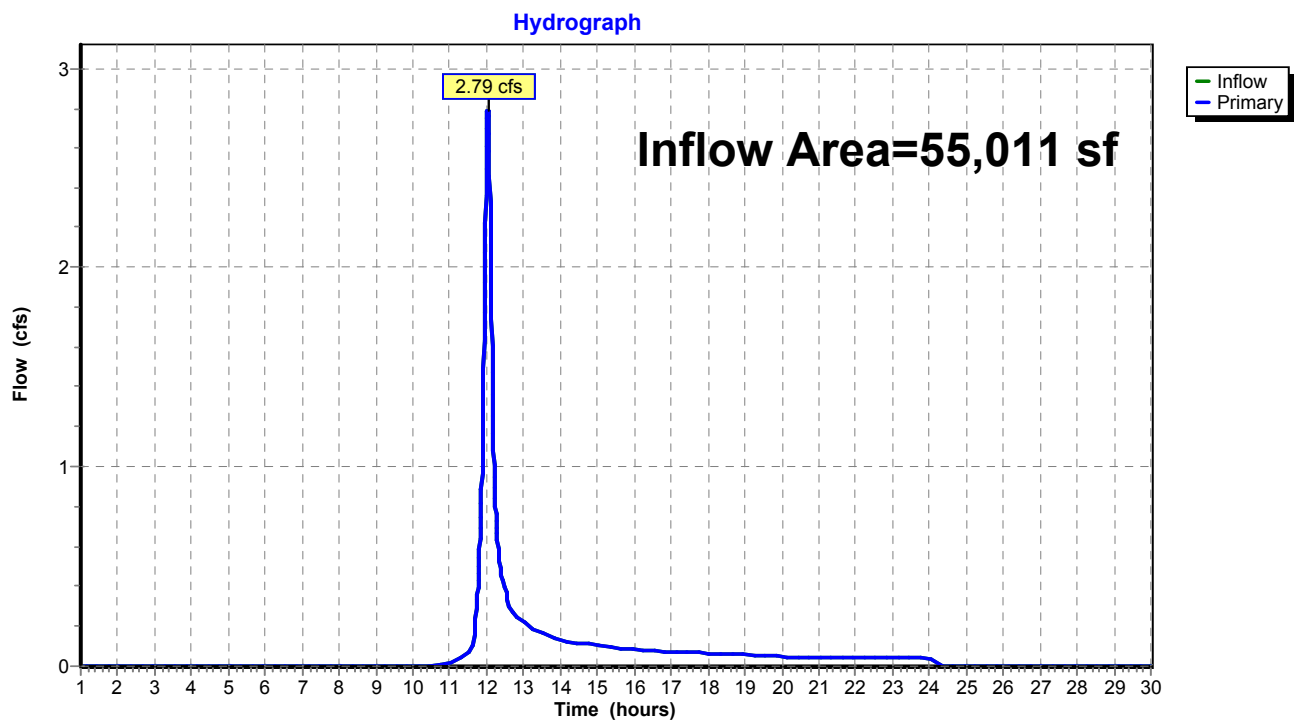Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 25-Year Rainfall=5.06"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 20

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=2.16"
Flow Length=372' Tc=10.9 min CN=71 Runoff=4.07 cfs 9,911 cf**Link 8L: Existing Conditions**Inflow=4.07 cfs 9,911 cf
Primary=4.07 cfs 9,911 cf**Total Runoff Area = 55,011 sf Runoff Volume = 9,911 cf Average Runoff Depth = 2.16"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 4.07 cfs @ 12.03 hrs, Volume= 9,911 cf, Depth= 2.16"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

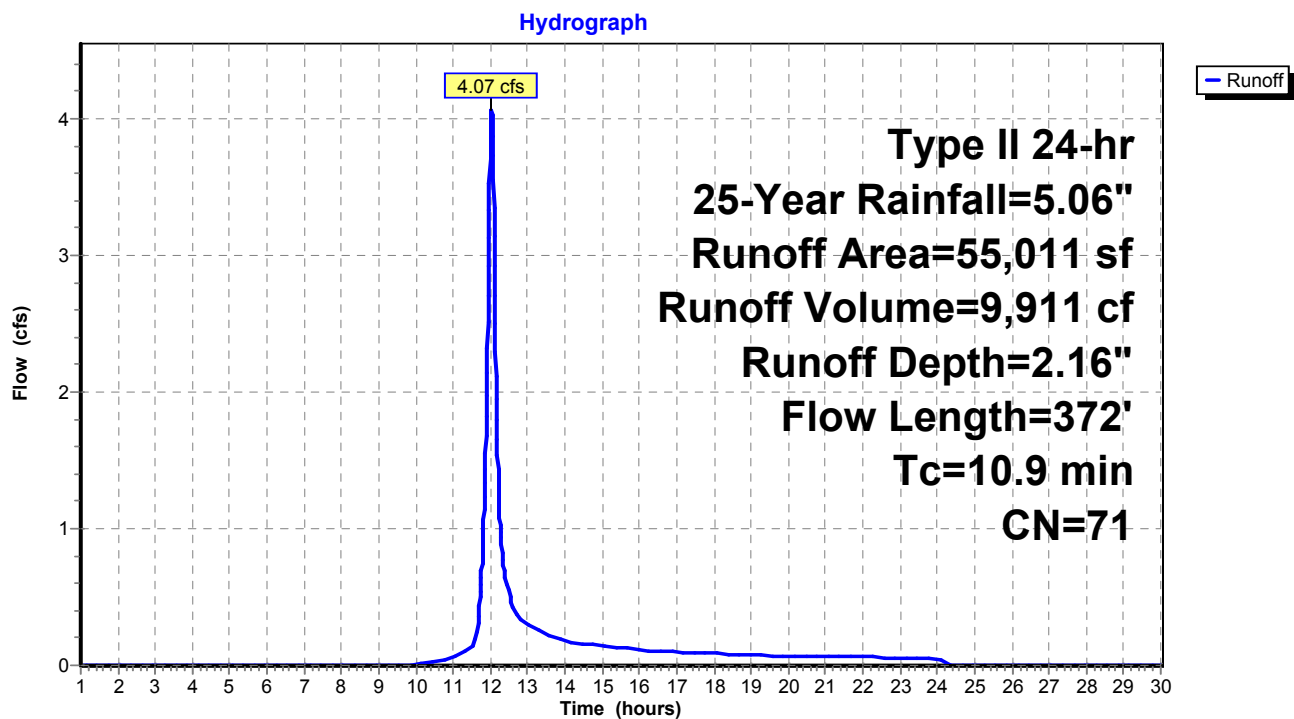Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 2.16" for 25-Year event
Inflow = 4.07 cfs @ 12.03 hrs, Volume= 9,911 cf
Primary = 4.07 cfs @ 12.03 hrs, Volume= 9,911 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

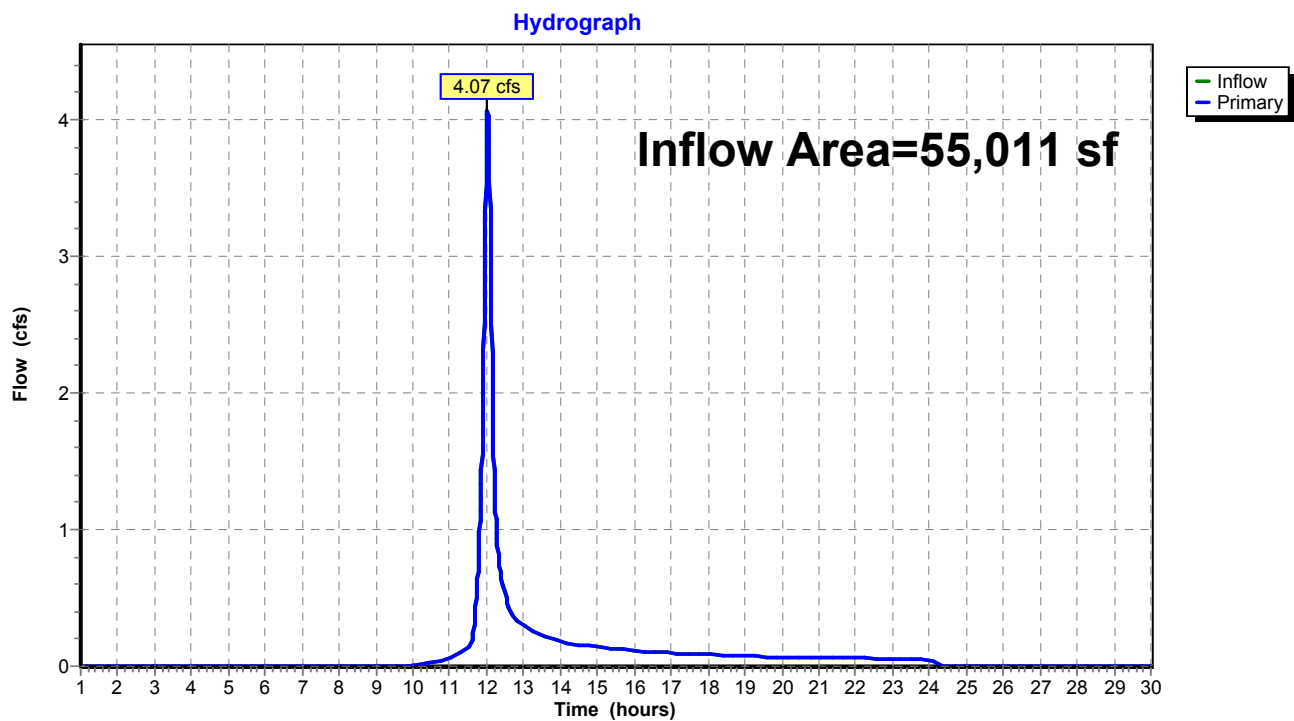Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 50-Year Rainfall=5.88"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 24

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=2.80"
Flow Length=372' Tc=10.9 min CN=71 Runoff=5.29 cfs 12,847 cf**Link 8L: Existing Conditions**Inflow=5.29 cfs 12,847 cf
Primary=5.29 cfs 12,847 cf**Total Runoff Area = 55,011 sf Runoff Volume = 12,847 cf Average Runoff Depth = 2.80"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 5.29 cfs @ 12.03 hrs, Volume= 12,847 cf, Depth= 2.80"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

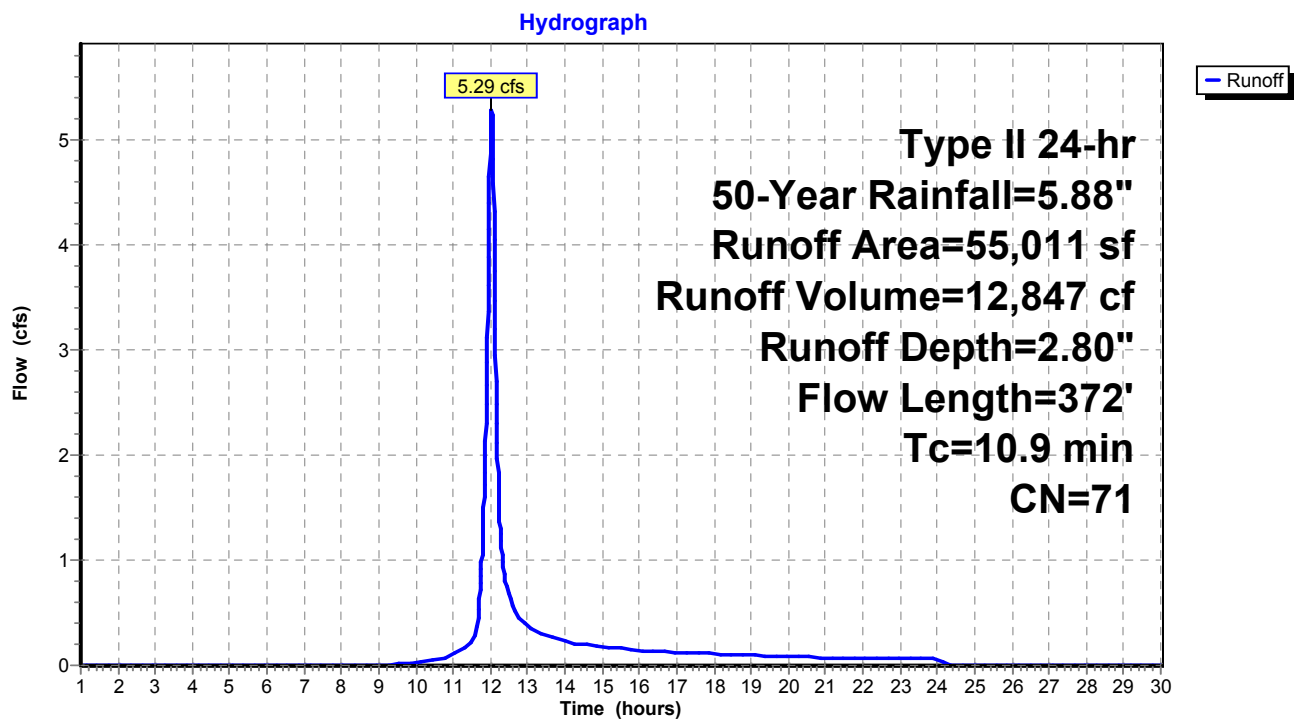Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions

Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 2.80" for 50-Year event
Inflow = 5.29 cfs @ 12.03 hrs, Volume= 12,847 cf
Primary = 5.29 cfs @ 12.03 hrs, Volume= 12,847 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

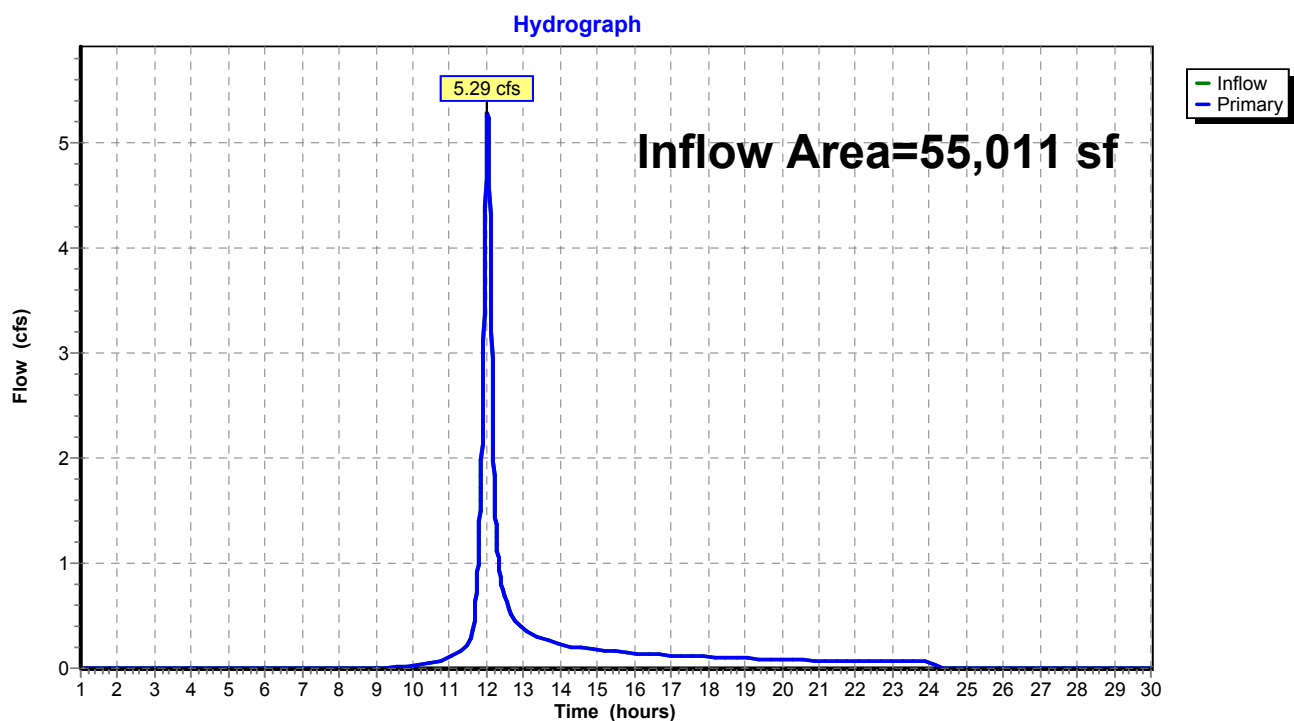Link 8L: Existing Conditions

AR-LU-007-1*Type II 24-hr 100-Year Rainfall=6.84"*

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 28

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment1S: OVERALL DARunoff Area=55,011 sf 2.77% Impervious Runoff Depth=3.59"
Flow Length=372' Tc=10.9 min CN=71 Runoff=6.76 cfs 16,454 cf**Link 8L: Existing Conditions**Inflow=6.76 cfs 16,454 cf
Primary=6.76 cfs 16,454 cf**Total Runoff Area = 55,011 sf Runoff Volume = 16,454 cf Average Runoff Depth = 3.59"**
97.23% Pervious = 53,487 sf 2.77% Impervious = 1,524 sf


Summary for Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Runoff = 6.76 cfs @ 12.03 hrs, Volume= 16,454 cf, Depth= 3.59"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
40,385	70	Woods, Good, HSG C
13,102	71	Meadow, non-grazed, HSG C
1,524	98	Paved parking, HSG C
55,011	71	Weighted Average
53,487		97.23% Pervious Area
1,524		2.77% Impervious Area


Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.8	7	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
5.7	23	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
0.6	67	0.1200	1.73		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
0.6	64	0.0600	1.71		Shallow Concentrated Flow, SC2 Short Grass Pasture Kv= 7.0 fps
2.5	141	0.0350	0.94		Shallow Concentrated Flow, SC3 Woodland Kv= 5.0 fps
10.9	372	Total			

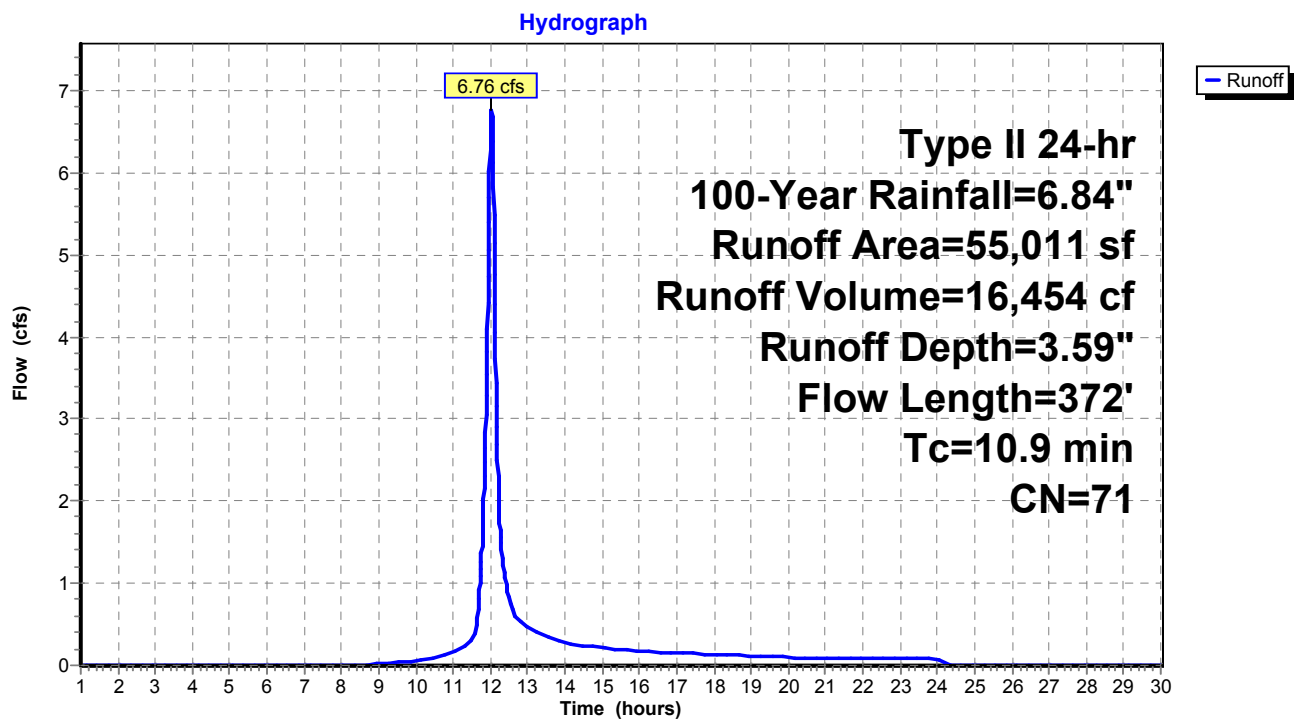Subcatchment 1S: OVERALL DA PRE-DEVELOPMENT

Summary for Link 8L: Existing Conditions


Inflow Area = 55,011 sf, 2.77% Impervious, Inflow Depth = 3.59" for 100-Year event
Inflow = 6.76 cfs @ 12.03 hrs, Volume= 16,454 cf
Primary = 6.76 cfs @ 12.03 hrs, Volume= 16,454 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

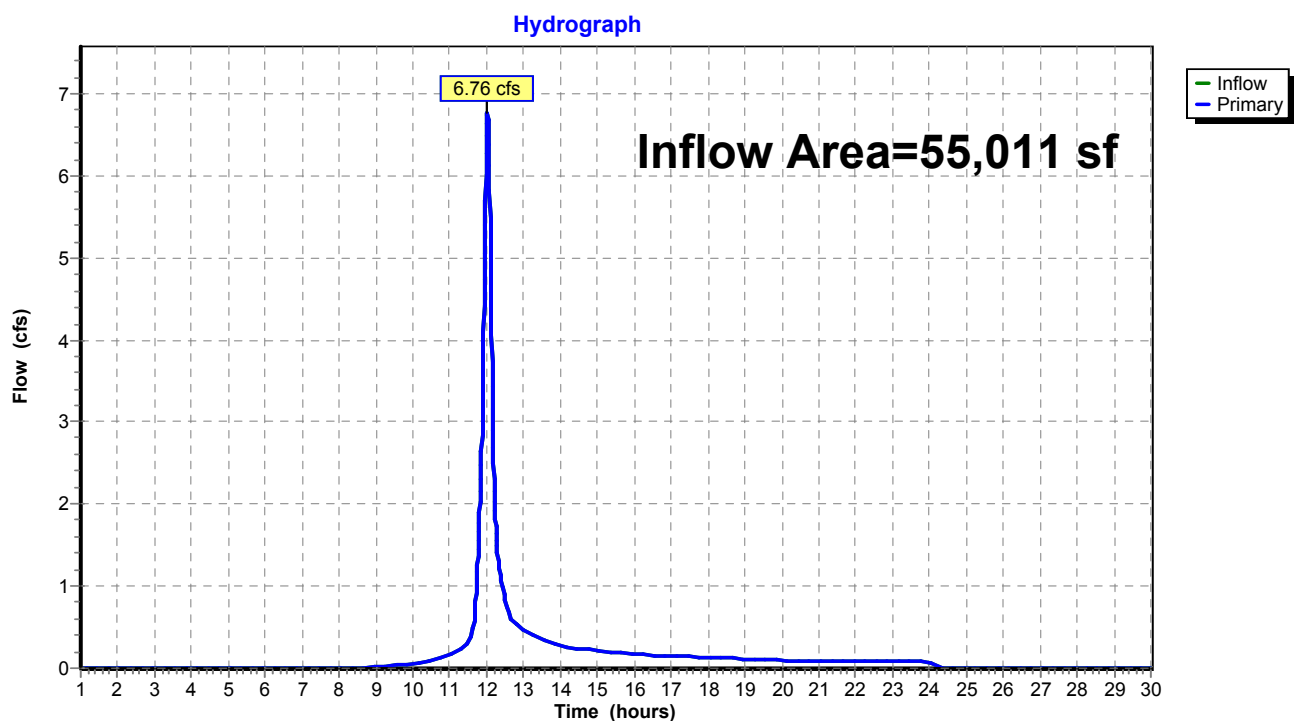Link 8L: Existing Conditions

G.4 Post Development Calculations

- a. Post Development Drainage Area Map
- b. 1-Year Rainfall Event
- c. 2-Year Rainfall Event
- d. 5-Year Rainfall Event
- e. 10-Year Rainfall Event
- f. 25-Year Rainfall Event
- g. 50-year Rainfall Event
- h. 100-Year Rainfall Event

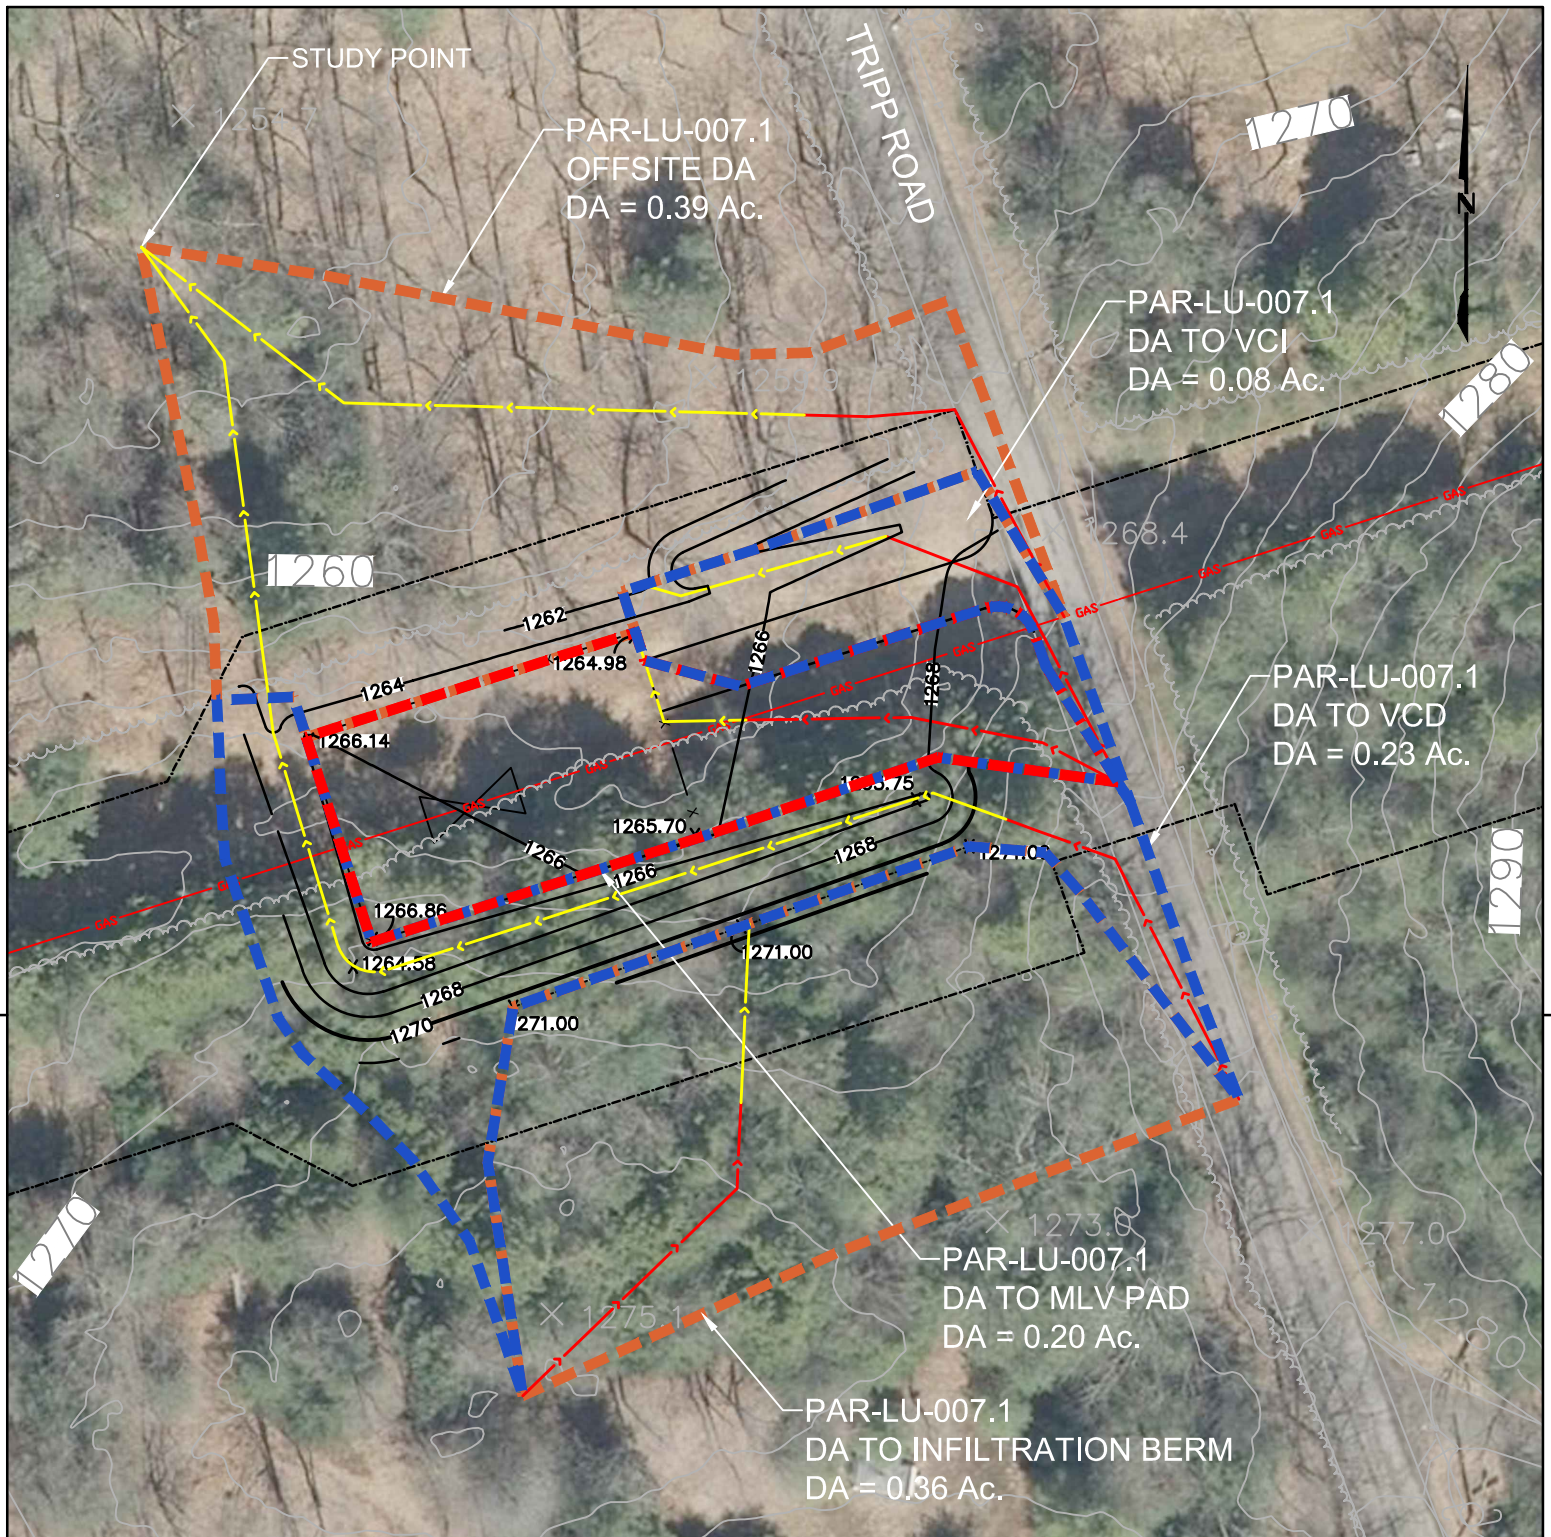

POST-DEVELOPMENT DRAINAGE AREA MAP

LEGEND

TIME OF CONCENTRATION- SHEET FLOW	→ → → → →
TIME OF CONCENTRATION- SHALLOW CONCENTRATED FLOW	→ → → → →
DRAINAGE AREA	— — — — —
PROPOSED GAS PIPELINE	— GAS — GAS —



ISSUED FOR
PERMITTING




ARCHITECTURE
ENGINEERING
ENVIRONMENTAL
LAND SURVEYING

BL
Companies

ATLANTIC SUNRISE PROJECT -
CENTRAL PENN LINE NORTH
PROPOSED 30" NATURAL GAS PIPELINE
ACCESS ROAD DRAINAGE AREA MAP
AR-LY-007.1 POST
FAIRMOUNT TOWNSHIP
LUZERNE COUNTY, PENNSYLVANIA

Williams

NO.	DATE	BY	REVISION DESCRIPTION	W.O. NO.	CHK.	APP.	DRAWN BY:	OLC	DATE:	11/11/15	ISSUED FOR BID:	SCALE: 1" = 50'
							CHECKED BY:	BJP	DATE:	11/11/15	ISSUED FOR CONSTRUCTION:	
							APPROVED BY:	BJP	DATE:	11/11/15	DRAWING NUMBER:	AR-LU-007.1 POST
							WO:					

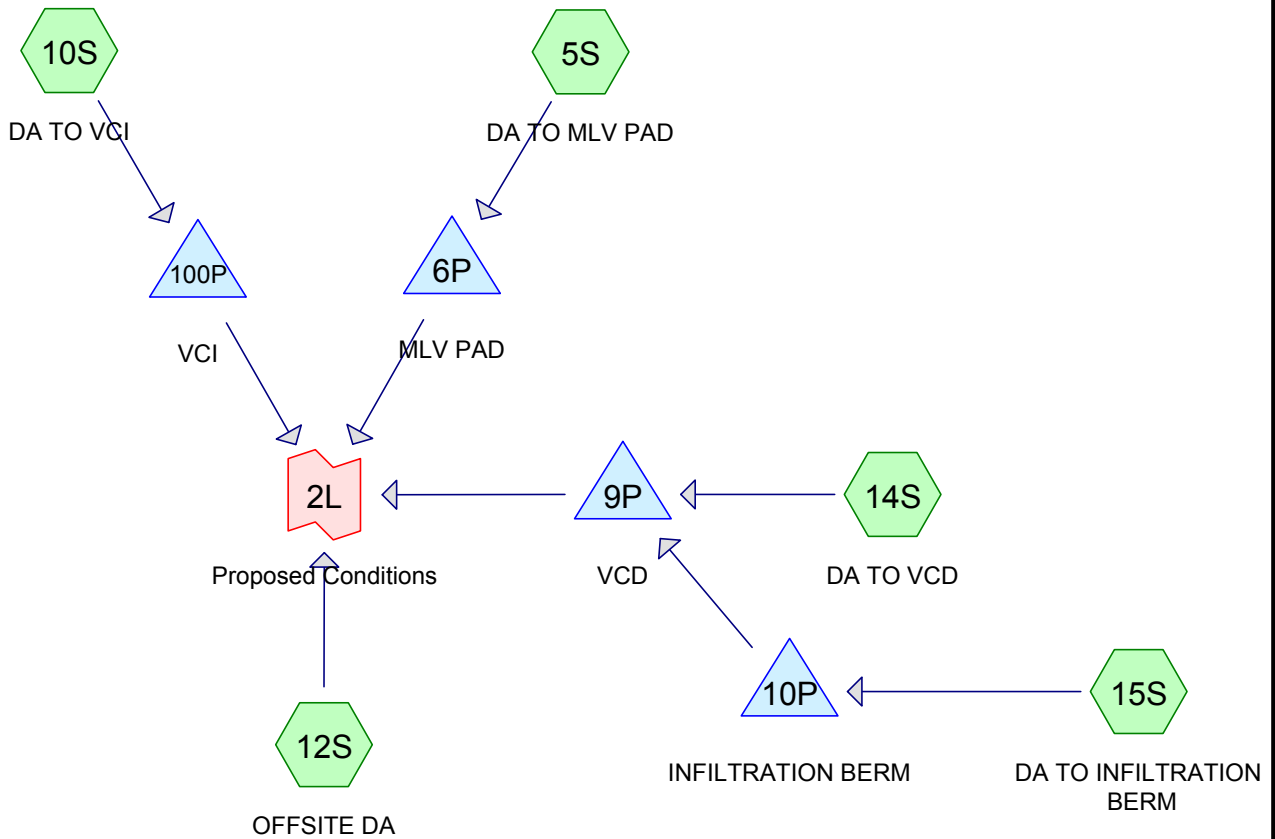

AR-LU-007-1

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 2

Area Listing (selected nodes)

Area (sq-ft)	CN	Description (subcatchment-numbers)
5,040	98	Crushed Stone Pad, HSG C (5S)
1,419	89	Gravel roads, HSG C (5S, 10S)
5,467	71	Meadow Fair, HSG C (5S, 10S)
19,015	71	Meadow, non-grazed, HSG C (12S, 14S, 15S)
1,325	98	Paved parking, HSG C (12S, 14S, 15S)
464	98	Paved road, HSG C (10S)
115	98	Paved roads , HSG C (5S)
22,166	70	Woods, Good, HSG C (12S, 14S, 15S)
55,011	74	TOTAL AREA

AR-LU-007-1

Prepared by Microsoft

Printed 10/3/2016

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Page 3

Soil Listing (selected nodes)

Area (sq-ft)	Soil Group	Subcatchment Numbers
0	HSG A	
0	HSG B	
55,011	HSG C	5S, 10S, 12S, 14S, 15S
0	HSG D	
0	Other	
55,011		TOTAL AREA

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD	Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=1.23" Flow Length=145' Tc=9.4 min CN=87 Runoff=0.40 cfs 911 cf
Subcatchment10S: DA TO VCI	Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=0.87" Flow Length=165' Tc=2.4 min CN=81 Runoff=0.15 cfs 262 cf
Subcatchment12S: OFFSITE DA	Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=0.44" Flow Length=287' Tc=12.1 min CN=71 Runoff=0.20 cfs 619 cf
Subcatchment14S: DA TO VCD	Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=0.51" Flow Length=358' Tc=6.3 min CN=73 Runoff=0.20 cfs 433 cf
Subcatchment15S: DA TO INFILTRATION	Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=0.44" Flow Length=147' Tc=33.7 min CN=71 Runoff=0.10 cfs 575 cf
Pond 6P: MLV PAD	Peak Elev=1,264.33' Storage=911 cf Inflow=0.40 cfs 911 cf Outflow=0.00 cfs 0 cf
Pond 9P: VCD	Peak Elev=1,263.00' Storage=350 cf Inflow=0.20 cfs 433 cf Outflow=0.01 cfs 83 cf
Pond 10P: INFILTRATIONBERM	Peak Elev=1,270.08' Storage=575 cf Inflow=0.10 cfs 575 cf Outflow=0.00 cfs 0 cf
Pond 100P: VCI	Peak Elev=1,263.01' Storage=125 cf Inflow=0.15 cfs 262 cf Outflow=0.02 cfs 137 cf
Link 2L: Proposed Conditions	Inflow=0.20 cfs 838 cf Primary=0.20 cfs 838 cf

Total Runoff Area = 55,011 sf Runoff Volume = 2,800 cf Average Runoff Depth = 0.61"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf


Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 0.40 cfs @ 12.01 hrs, Volume= 911 cf, Depth= 1.23"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

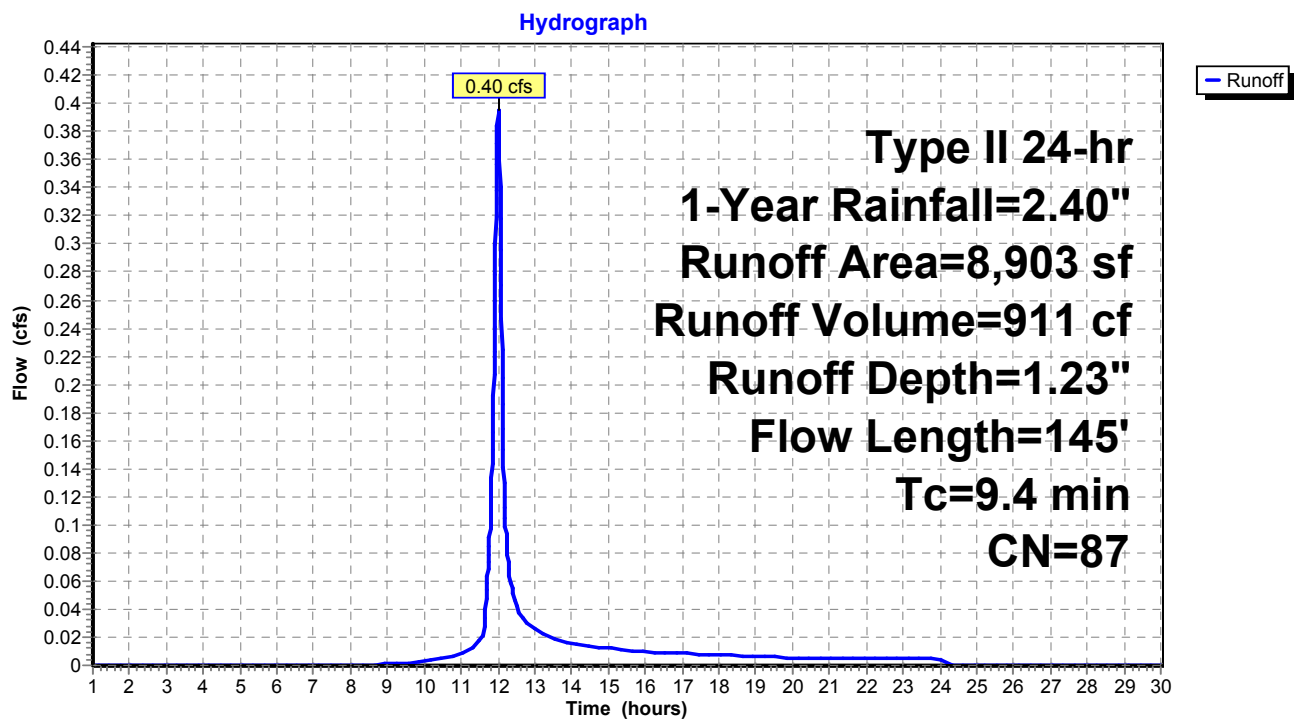Subcatchment 5S: DA TO MLV PAD

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.15 cfs @ 11.93 hrs, Volume= 262 cf, Depth= 0.87"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

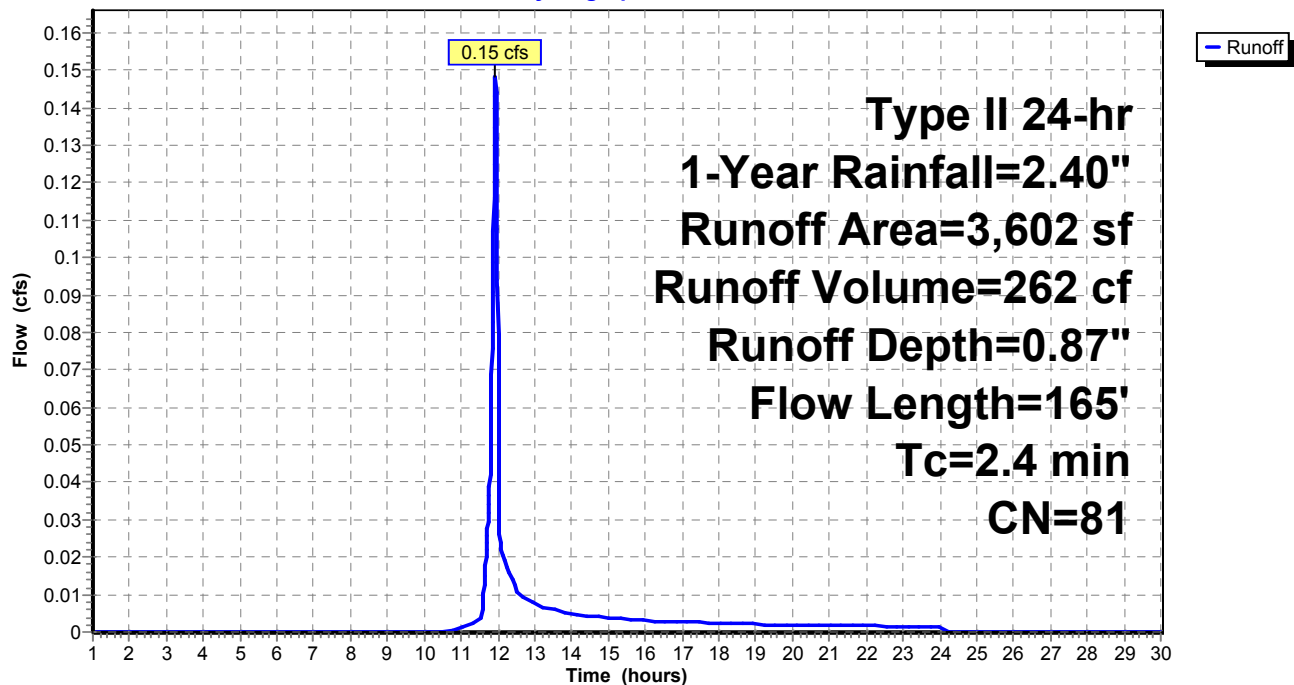

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 0.20 cfs @ 12.06 hrs, Volume= 619 cf, Depth= 0.44"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

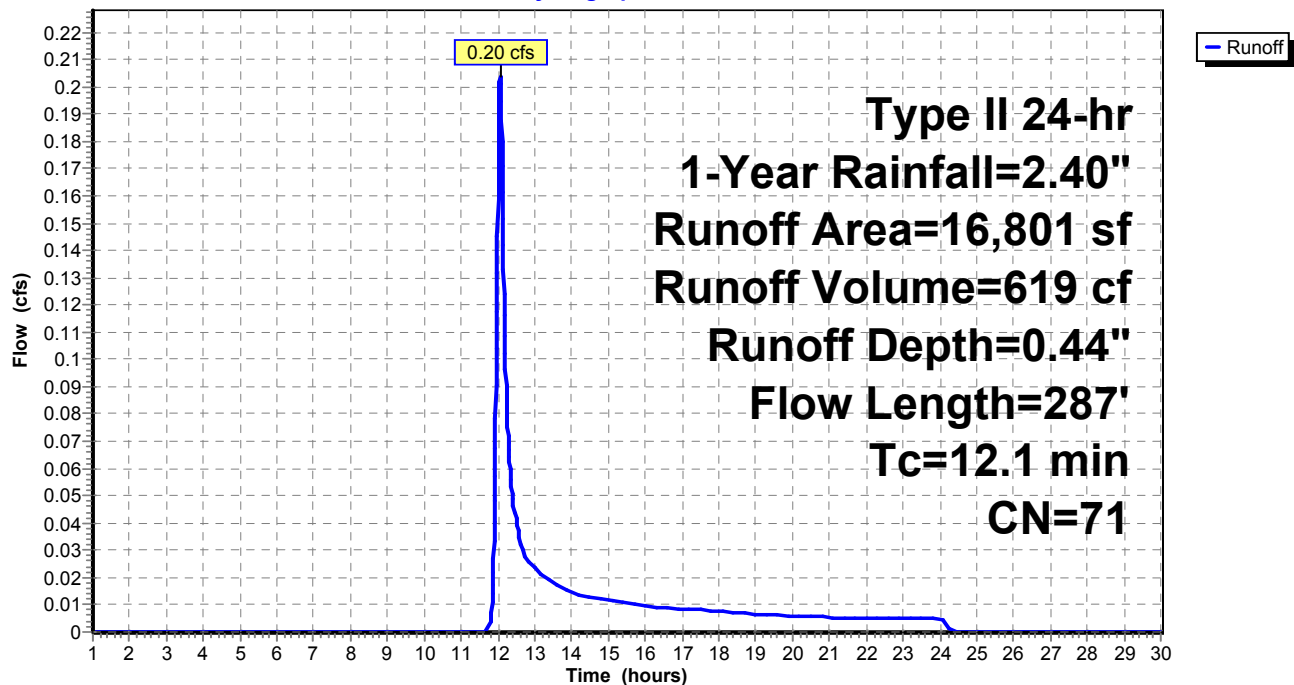

Summary for Subcatchment 14S: DA TO VCD

Runoff = 0.20 cfs @ 11.99 hrs, Volume= 433 cf, Depth= 0.51"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

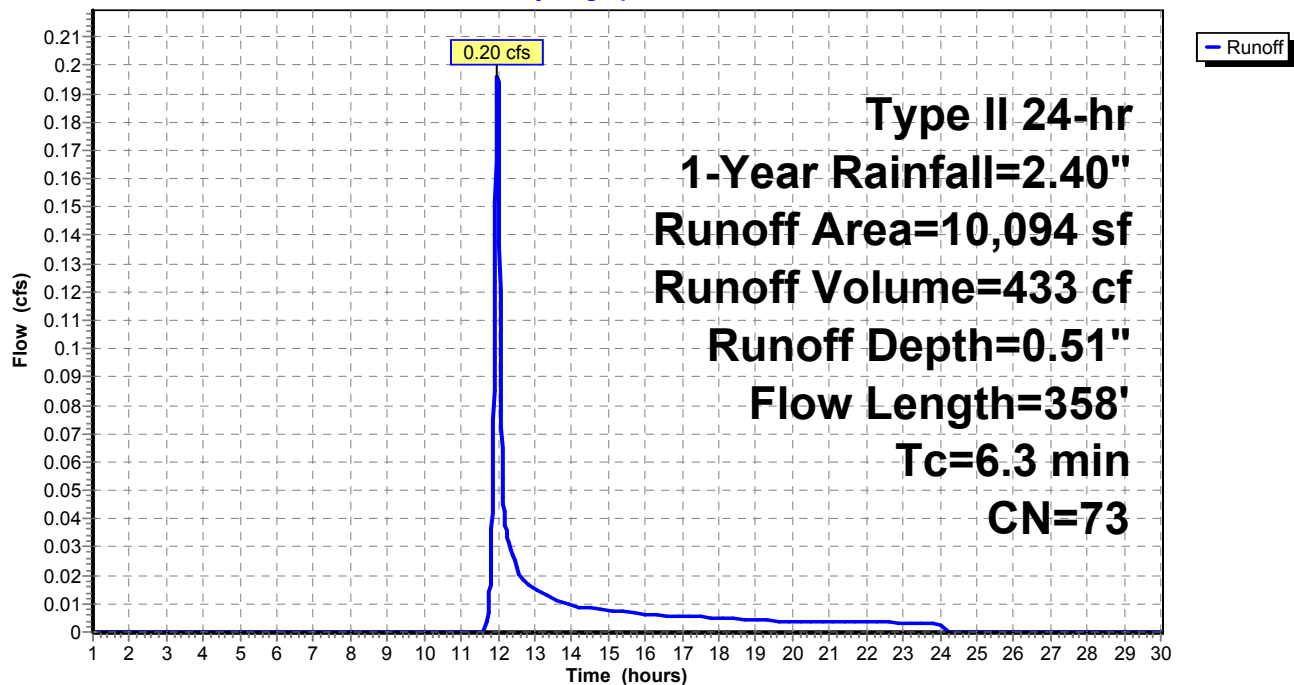

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.10 cfs @ 12.35 hrs, Volume= 575 cf, Depth= 0.44"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 1-Year Rainfall=2.40"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

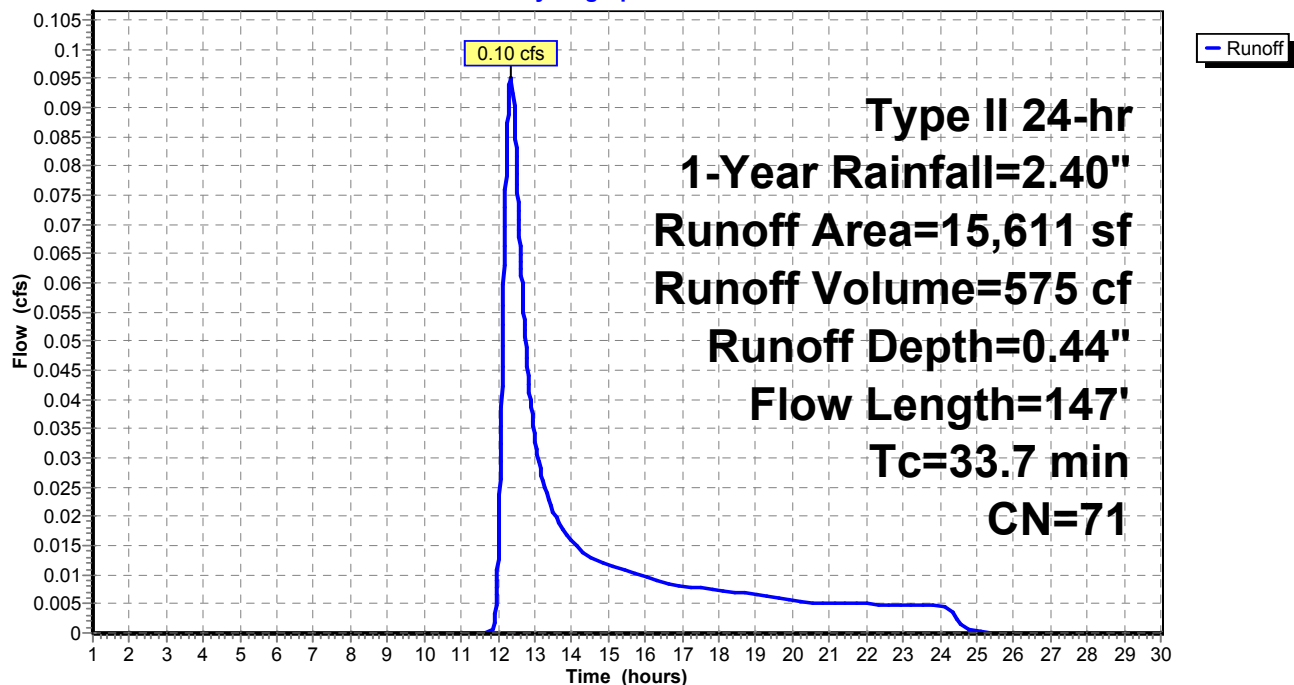

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 1.23" for 1-Year event
 Inflow = 0.40 cfs @ 12.01 hrs, Volume= 911 cf
 Outflow = 0.00 cfs @ 1.00 hrs, Volume= 0 cf, Atten= 100%, Lag= 0.0 min
 Primary = 0.00 cfs @ 1.00 hrs, Volume= 0 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.33' @ 24.53 hrs Surf.Area= 4,053 sf Storage= 911 cf

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no outflow)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.00 cfs @ 1.00 hrs HW=1,263.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

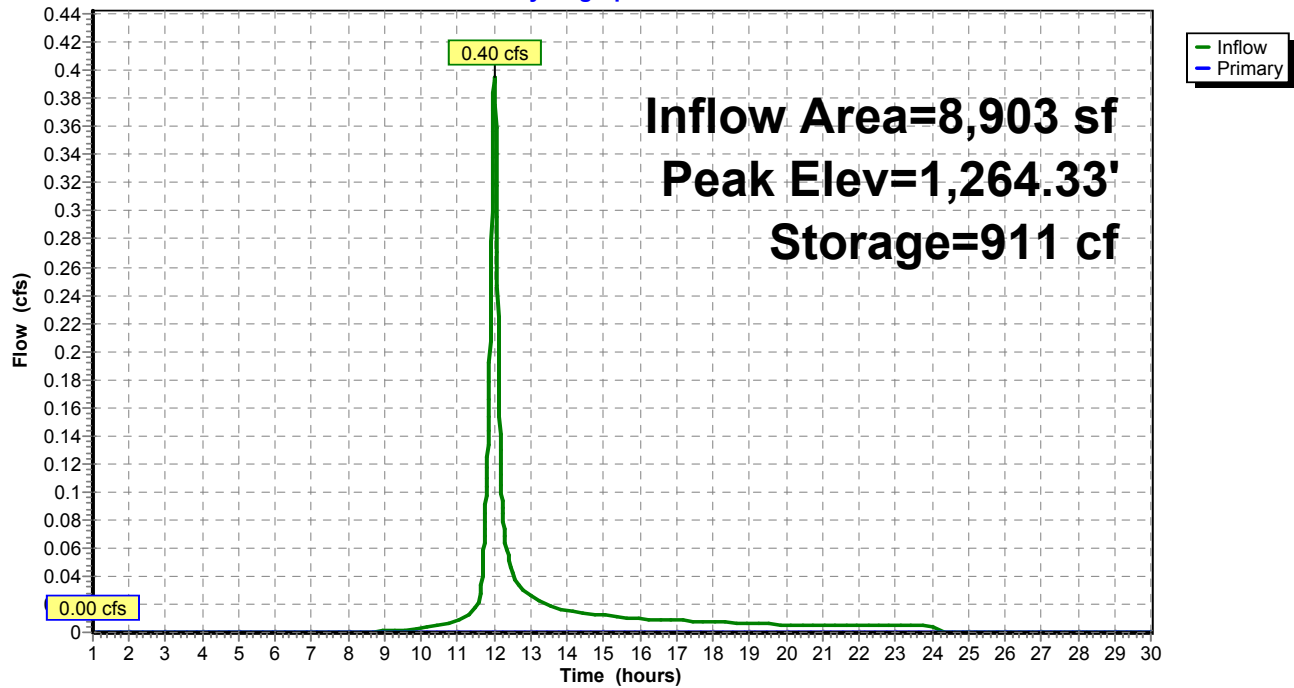Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 0.20" for 1-Year event
 Inflow = 0.20 cfs @ 11.99 hrs, Volume= 433 cf
 Outflow = 0.01 cfs @ 17.99 hrs, Volume= 83 cf, Atten= 97%, Lag= 360.2 min
 Primary = 0.01 cfs @ 17.99 hrs, Volume= 83 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.00' @ 17.99 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 534.1 min calculated for 83 cf (19% of inflow)
 Center-of-Mass det. time= 365.2 min (1,249.9 - 884.7)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.00 cfs @ 17.99 hrs HW=1,263.00' (Free Discharge)

↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.00 cfs @ 0.14 fps)

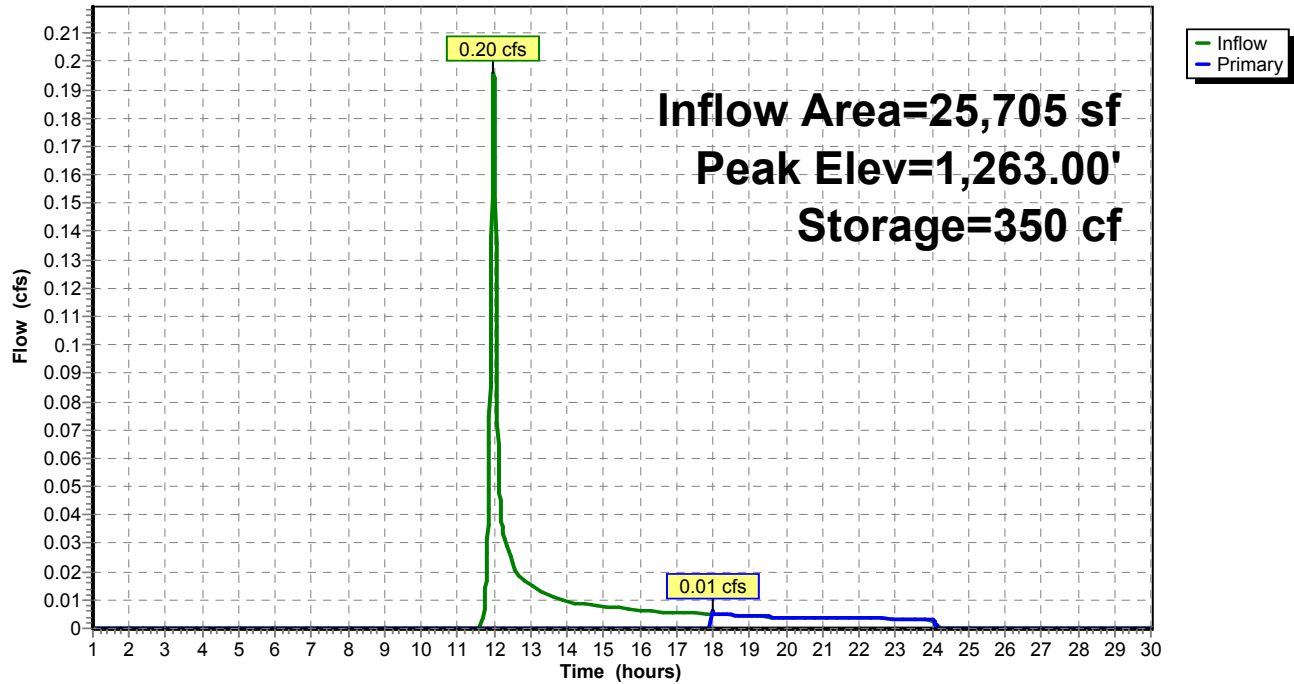Pond 9P: VCD**Hydrograph**

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 0.44" for 1-Year event
 Inflow = 0.10 cfs @ 12.35 hrs, Volume= 575 cf
 Outflow = 0.00 cfs @ 1.00 hrs, Volume= 0 cf, Atten= 100%, Lag= 0.0 min
 Primary = 0.00 cfs @ 1.00 hrs, Volume= 0 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,270.08' @ 25.92 hrs Surf.Area= 1,078 sf Storage= 575 cf

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no outflow)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices												
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir												
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	2.50	3.00
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68	2.72	2.81	2.92
				2.97	3.07	3.32									

Primary OutFlow Max=0.00 cfs @ 1.00 hrs HW=1,269.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

Pond 10P: INFILTRATION BERM

Hydrograph

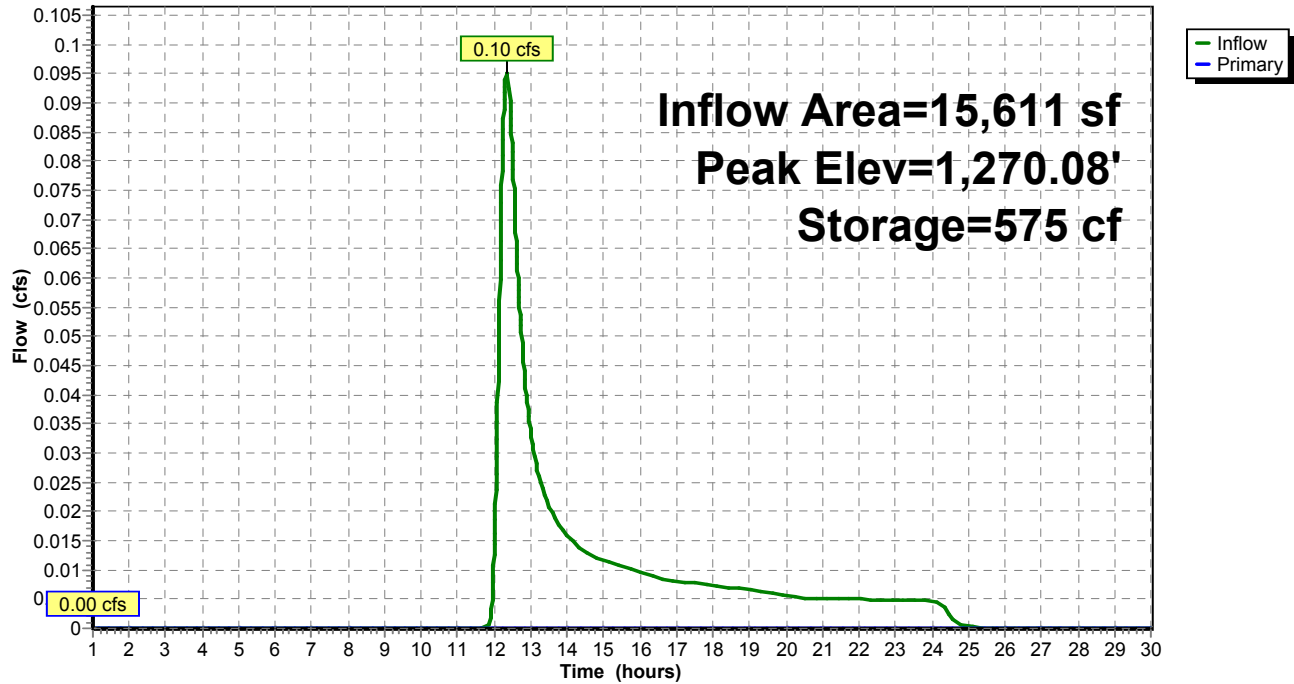

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 0.87" for 1-Year event
 Inflow = 0.15 cfs @ 11.93 hrs, Volume= 262 cf
 Outflow = 0.02 cfs @ 12.29 hrs, Volume= 137 cf, Atten= 89%, Lag= 21.4 min
 Primary = 0.02 cfs @ 12.29 hrs, Volume= 137 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.01' @ 12.29 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 256.3 min calculated for 137 cf (52% of inflow)
 Center-of-Mass det. time= 123.7 min (972.0 - 848.3)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.01 cfs @ 12.29 hrs HW=1,263.01' (Free Discharge)


↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.01 cfs @ 0.22 fps)

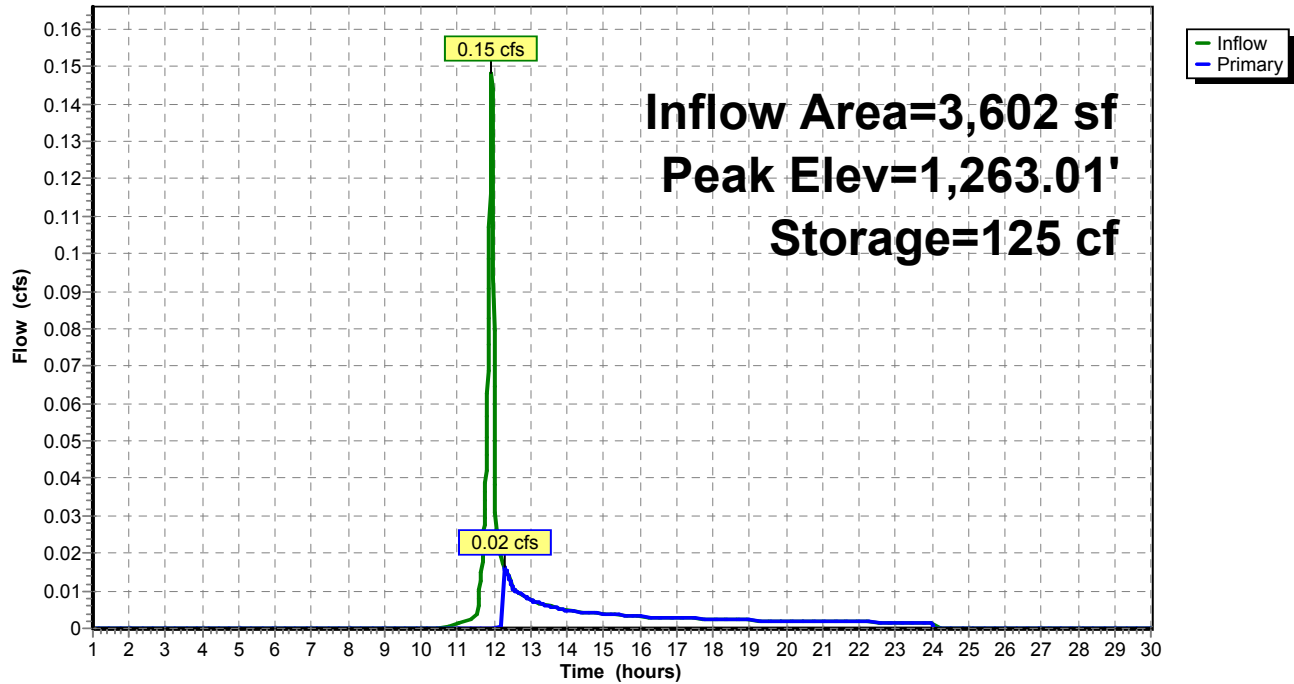Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 0.18" for 1-Year event
Inflow = 0.20 cfs @ 12.06 hrs, Volume= 838 cf
Primary = 0.20 cfs @ 12.06 hrs, Volume= 838 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

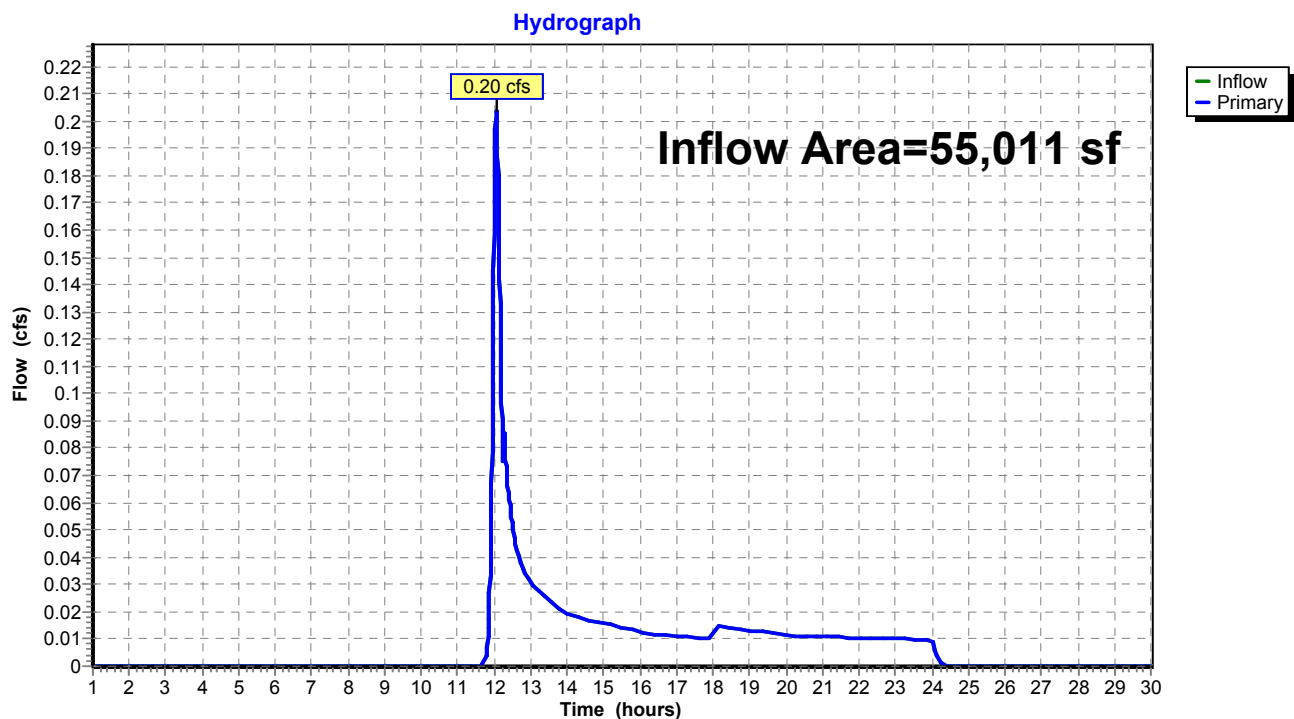Link 2L: Proposed Conditions

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD

Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=1.63"
Flow Length=145' Tc=9.4 min CN=87 Runoff=0.52 cfs 1,213 cf

Subcatchment10S: DA TO VCI

Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=1.22"
Flow Length=165' Tc=2.4 min CN=81 Runoff=0.21 cfs 367 cf

Subcatchment12S: OFFSITE DA

Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=0.69"
Flow Length=287' Tc=12.1 min CN=71 Runoff=0.35 cfs 969 cf

Subcatchment14S: DA TO VCD

Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=0.78"
Flow Length=358' Tc=6.3 min CN=73 Runoff=0.31 cfs 660 cf

Subcatchment15S: DA TO INFILTRATION

Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=0.69"
Flow Length=147' Tc=33.7 min CN=71 Runoff=0.17 cfs 901 cf

Pond 6P: MLV PAD

Peak Elev=1,264.50' Storage=1,202 cf Inflow=0.52 cfs 1,213 cf
Outflow=0.01 cfs 14 cf

Pond 9P: VCD

Peak Elev=1,263.01' Storage=350 cf Inflow=0.31 cfs 660 cf
Outflow=0.02 cfs 310 cf

Pond 10P: INFILTRATIONBERM

Peak Elev=1,270.34' Storage=901 cf Inflow=0.17 cfs 901 cf
Outflow=0.00 cfs 0 cf

Pond 100P: VCI

Peak Elev=1,263.06' Storage=125 cf Inflow=0.21 cfs 367 cf
Outflow=0.25 cfs 247 cf

Link 2L: Proposed Conditions

Inflow=0.45 cfs 1,539 cf
Primary=0.45 cfs 1,539 cf

Total Runoff Area = 55,011 sf Runoff Volume = 4,110 cf Average Runoff Depth = 0.90"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf

Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 0.52 cfs @ 12.01 hrs, Volume= 1,213 cf, Depth= 1.63"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

Subcatchment 5S: DA TO MLV PAD

Hydrograph

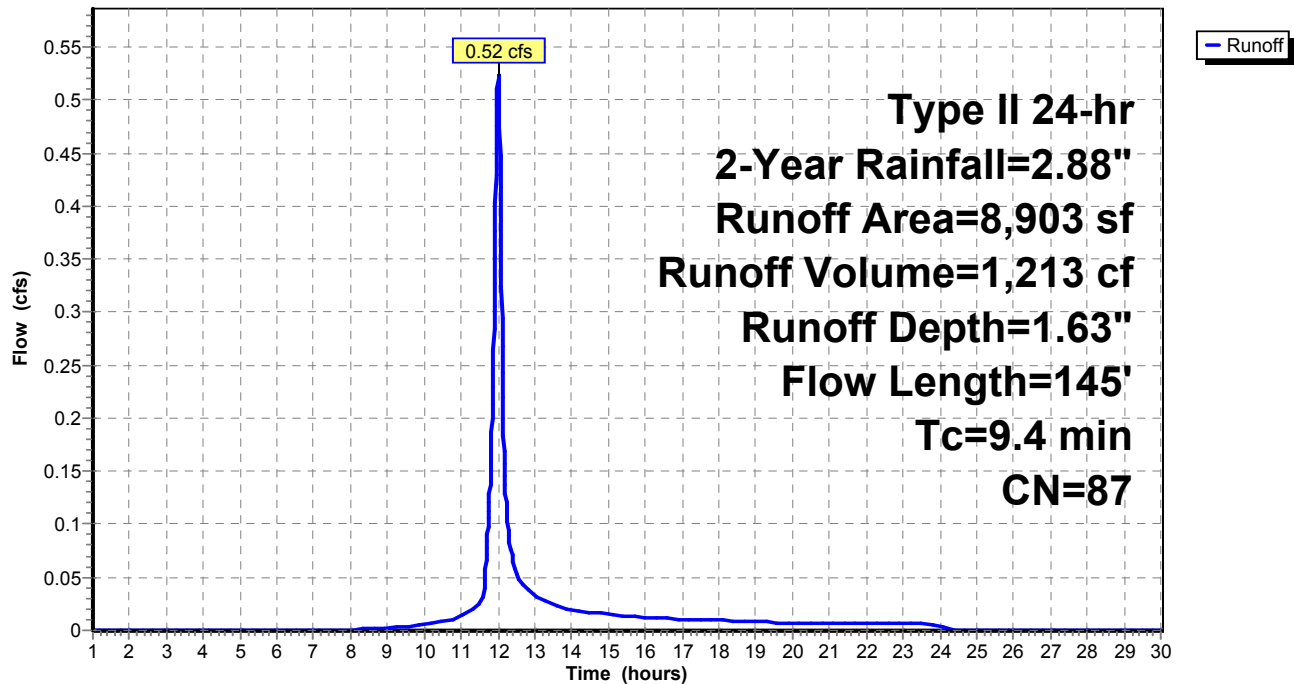

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.21 cfs @ 11.93 hrs, Volume= 367 cf, Depth= 1.22"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

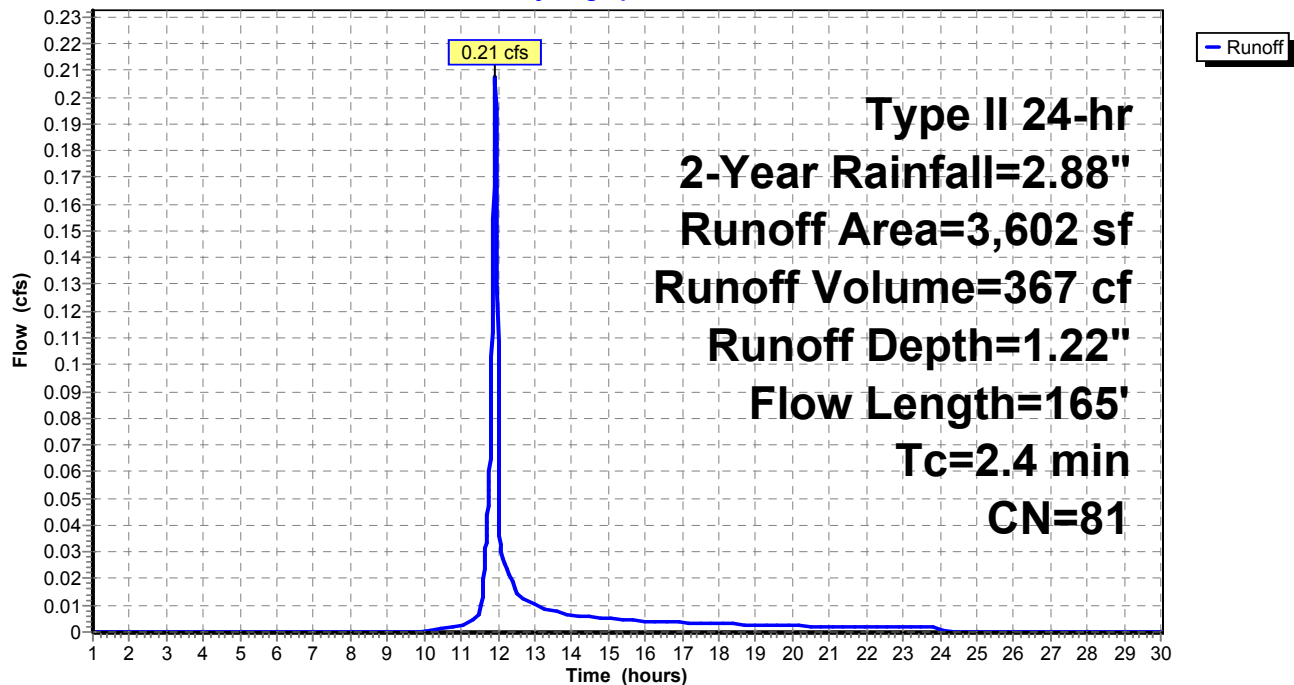

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 0.35 cfs @ 12.06 hrs, Volume= 969 cf, Depth= 0.69"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3 Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1 Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

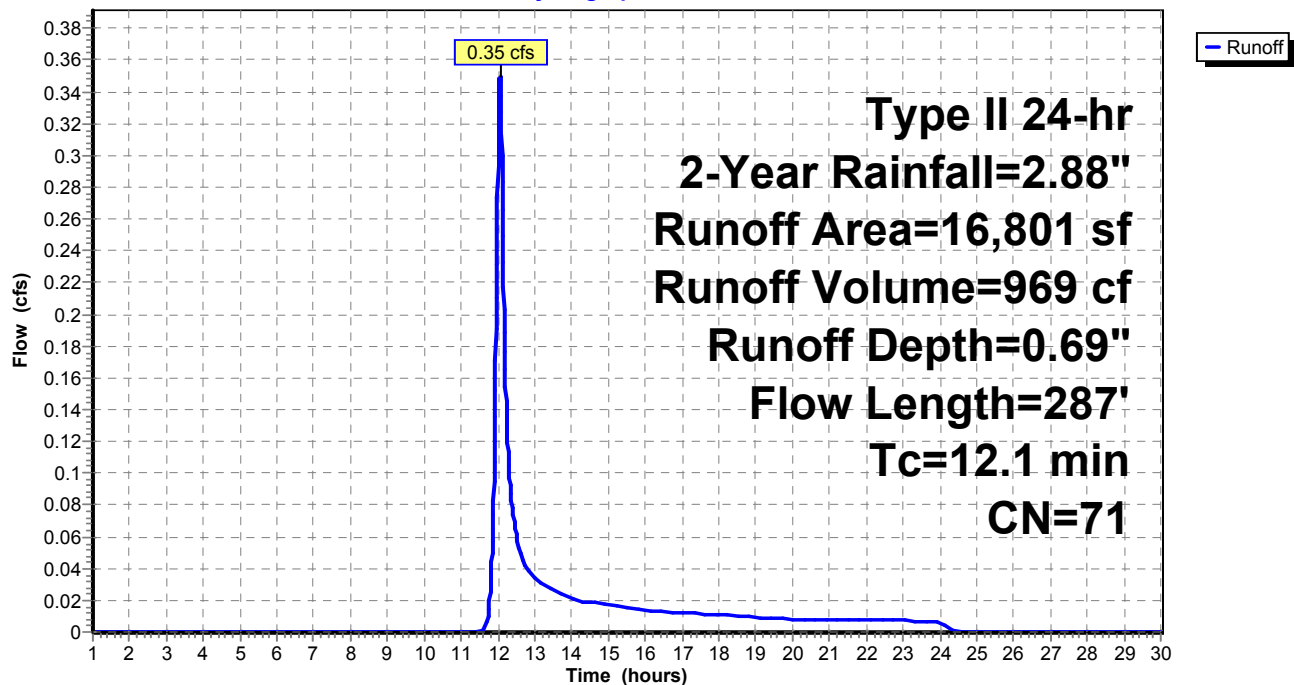

Summary for Subcatchment 14S: DA TO VCD

Runoff = 0.31 cfs @ 11.99 hrs, Volume= 660 cf, Depth= 0.78"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

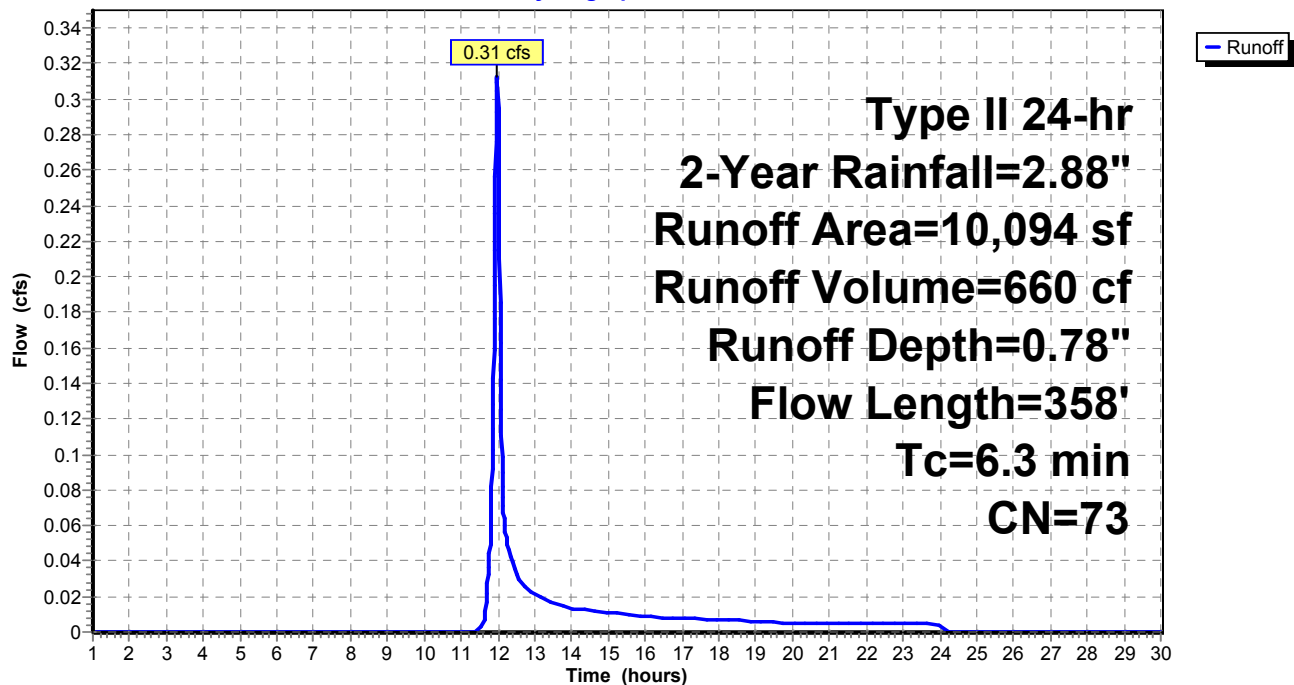

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.17 cfs @ 12.32 hrs, Volume= 901 cf, Depth= 0.69"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 2-Year Rainfall=2.88"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

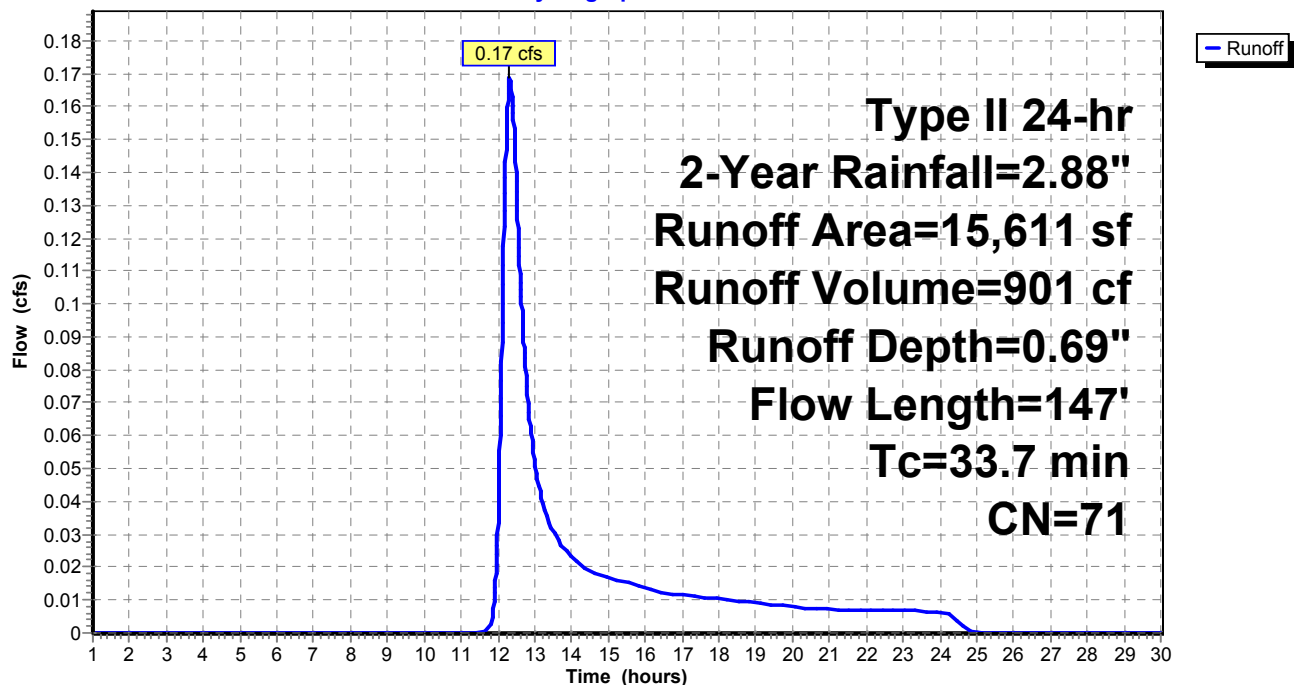

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 1.63" for 2-Year event
 Inflow = 0.52 cfs @ 12.01 hrs, Volume= 1,213 cf
 Outflow = 0.01 cfs @ 24.04 hrs, Volume= 14 cf, Atten= 99%, Lag= 721.9 min
 Primary = 0.01 cfs @ 24.04 hrs, Volume= 14 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.50' @ 24.04 hrs Surf.Area= 4,644 sf Storage= 1,202 cf

Plug-Flow detention time= 897.3 min calculated for 14 cf (1% of inflow)
 Center-of-Mass det. time= 614.5 min (1,438.0 - 823.4)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.00 cfs @ 24.04 hrs HW=1,264.50' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.00 cfs @ 0.10 fps)

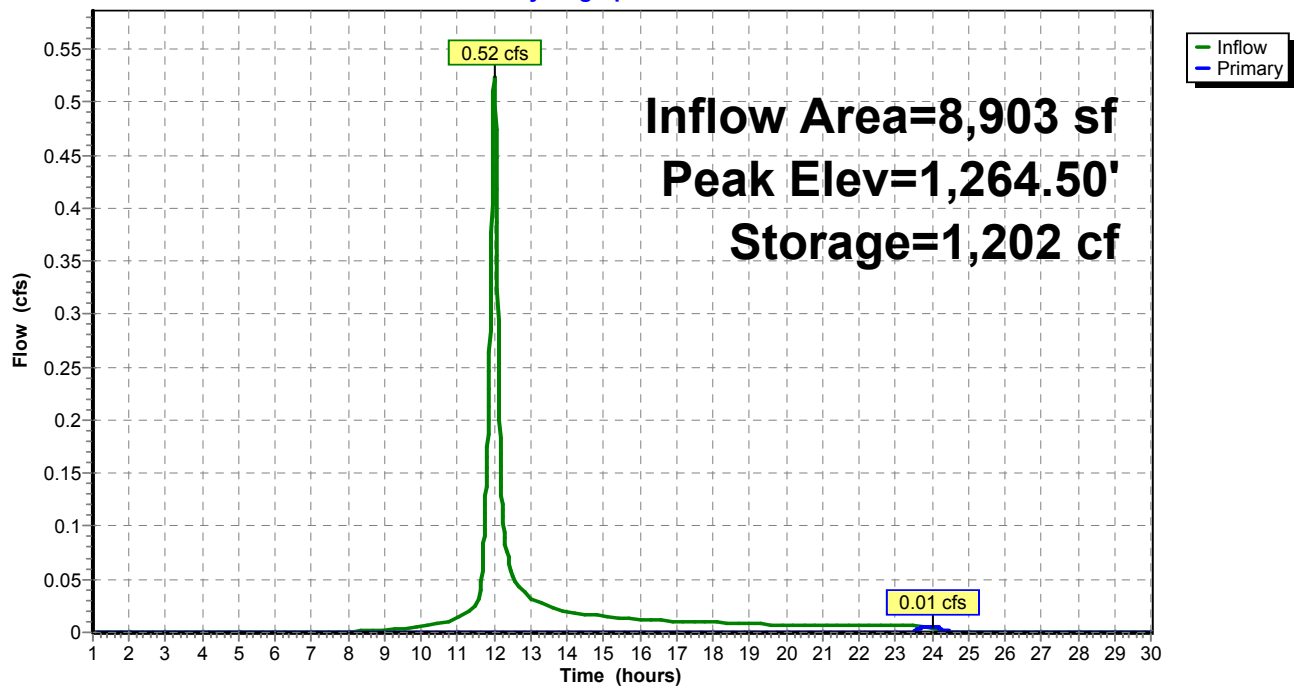Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 0.31" for 2-Year event
 Inflow = 0.31 cfs @ 11.99 hrs, Volume= 660 cf
 Outflow = 0.02 cfs @ 13.01 hrs, Volume= 310 cf, Atten= 93%, Lag= 61.4 min
 Primary = 0.02 cfs @ 13.01 hrs, Volume= 310 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.01' @ 13.01 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 308.5 min calculated for 310 cf (47% of inflow)
 Center-of-Mass det. time= 161.1 min (1,030.8 - 869.7)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.02 cfs @ 13.01 hrs HW=1,263.01' (Free Discharge)

↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.02 cfs @ 0.22 fps)

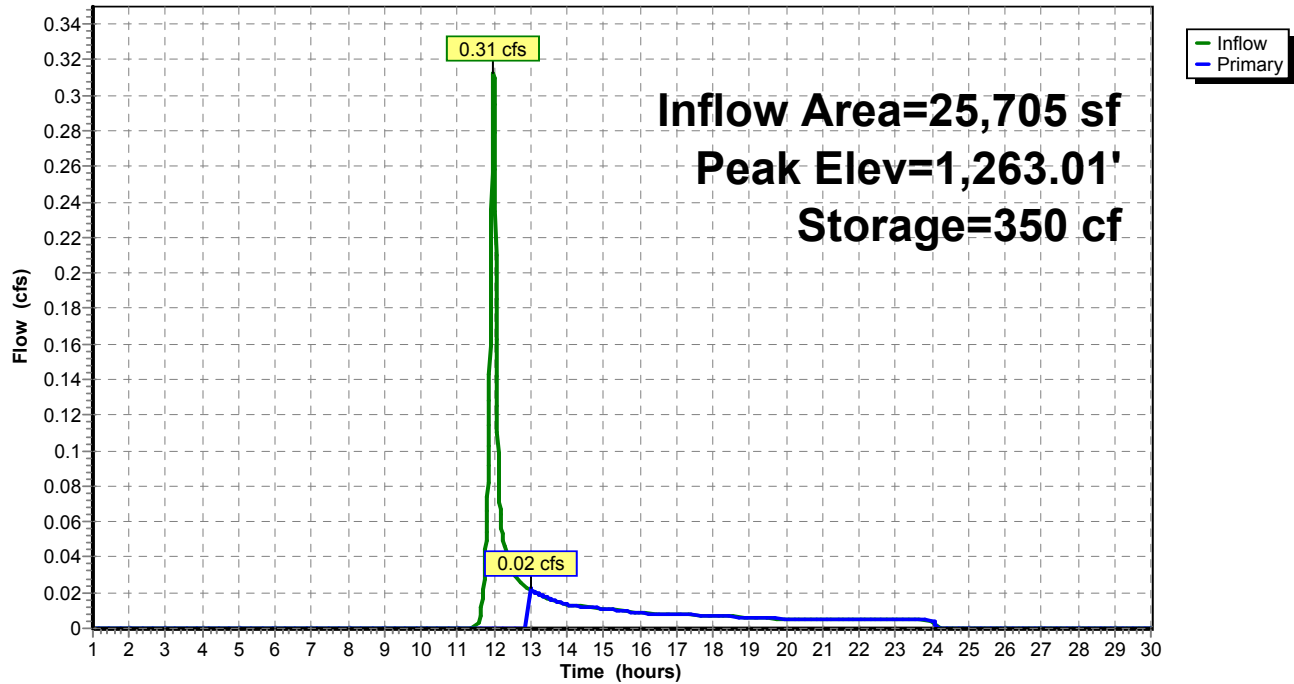Pond 9P: VCD**Hydrograph**

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 0.69" for 2-Year event
 Inflow = 0.17 cfs @ 12.32 hrs, Volume= 901 cf
 Outflow = 0.00 cfs @ 1.00 hrs, Volume= 0 cf, Atten= 100%, Lag= 0.0 min
 Primary = 0.00 cfs @ 1.00 hrs, Volume= 0 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,270.34' @ 25.92 hrs Surf.Area= 1,391 sf Storage= 901 cf

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no outflow)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices												
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir												
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	2.50	3.00
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68	2.72	2.81	2.92
				2.97	3.07	3.32									

Primary OutFlow Max=0.00 cfs @ 1.00 hrs HW=1,269.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

Pond 10P: INFILTRATION BERM

Hydrograph

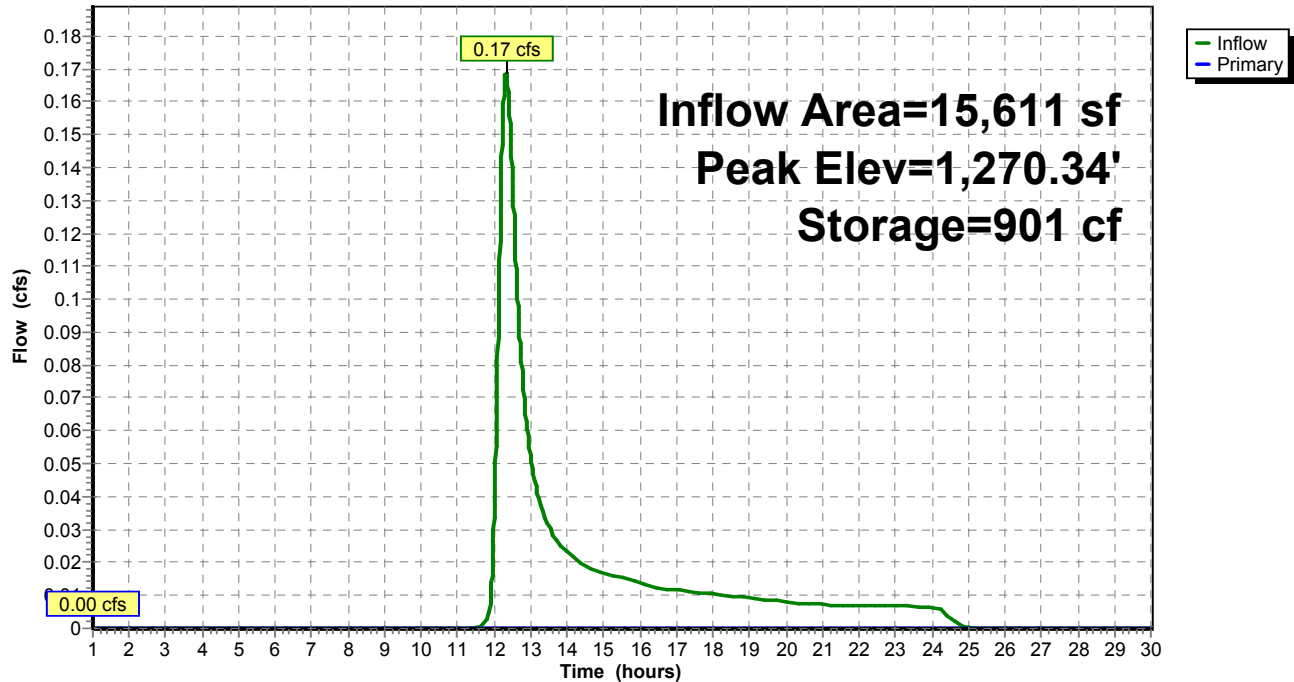

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 1.22" for 2-Year event
 Inflow = 0.21 cfs @ 11.93 hrs, Volume= 367 cf
 Outflow = 0.25 cfs @ 11.95 hrs, Volume= 247 cf, Atten= 0%, Lag= 1.3 min
 Primary = 0.25 cfs @ 11.95 hrs, Volume= 247 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.06' @ 11.95 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 177.4 min calculated for 247 cf (67% of inflow)
 Center-of-Mass det. time= 65.1 min (903.4 - 838.3)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.22 cfs @ 11.95 hrs HW=1,263.05' (Free Discharge)


↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.22 cfs @ 0.55 fps)

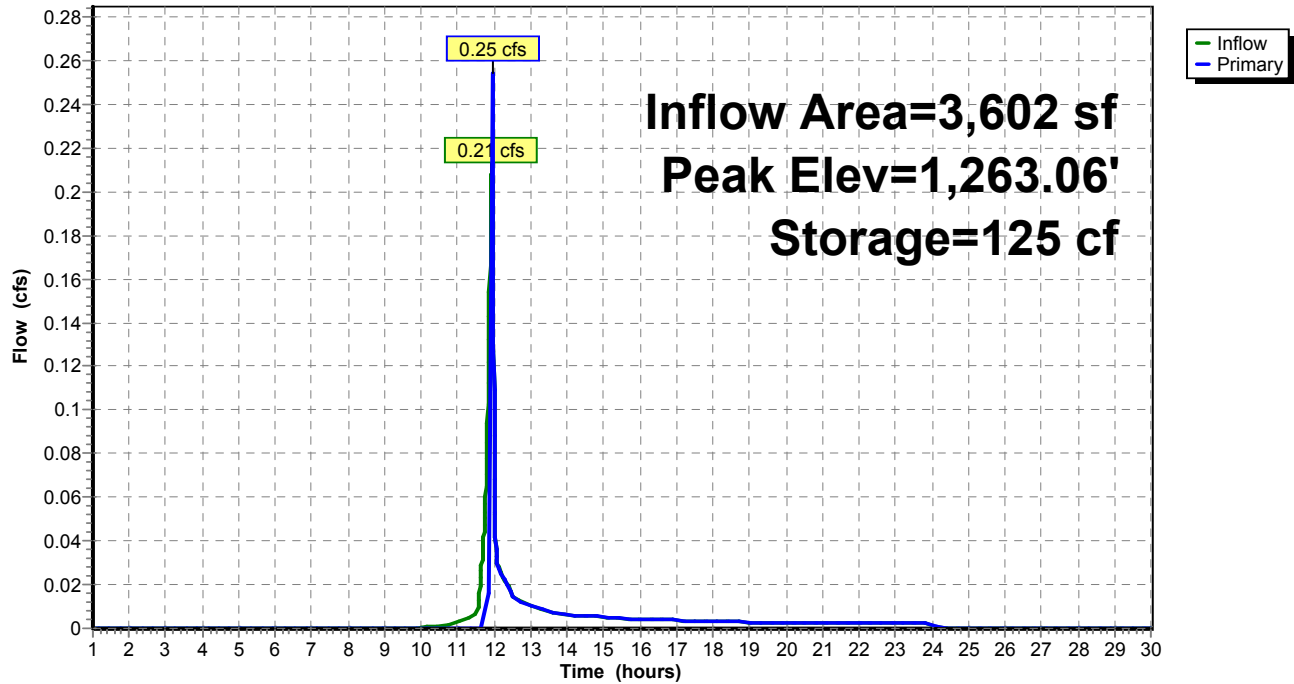Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 0.34" for 2-Year event
Inflow = 0.45 cfs @ 11.95 hrs, Volume= 1,539 cf
Primary = 0.45 cfs @ 11.95 hrs, Volume= 1,539 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

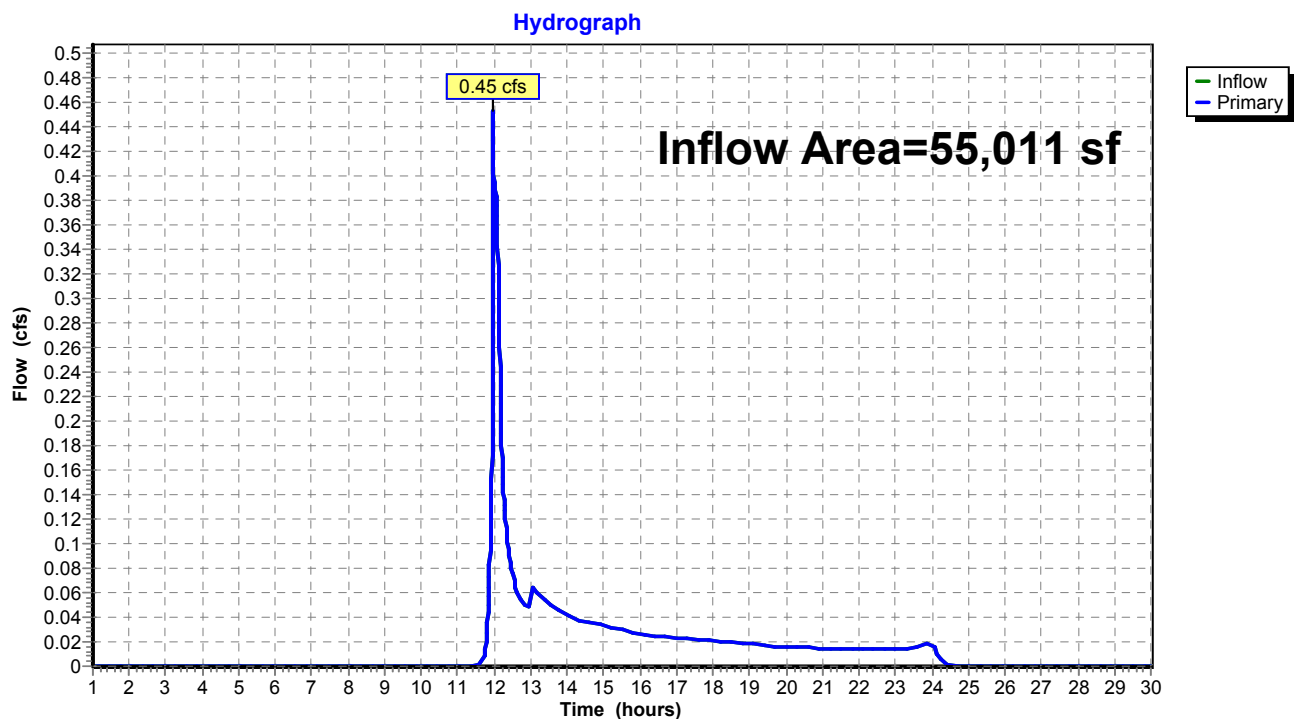Link 2L: Proposed Conditions

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
 Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
 Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=2.24"
 Flow Length=145' Tc=9.4 min CN=87 Runoff=0.71 cfs 1,659 cf

Subcatchment10S: DA TO VCI Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=1.76"
 Flow Length=165' Tc=2.4 min CN=81 Runoff=0.30 cfs 527 cf

Subcatchment12S: OFFSITE DA Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=1.10"
 Flow Length=287' Tc=12.1 min CN=71 Runoff=0.59 cfs 1,543 cf

Subcatchment14S: DA TO VCD Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=1.22"
 Flow Length=358' Tc=6.3 min CN=73 Runoff=0.50 cfs 1,026 cf

Subcatchment15S: DA TO INFILTRATION Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=1.10"
 Flow Length=147' Tc=33.7 min CN=71 Runoff=0.29 cfs 1,434 cf

Pond 6P: MLV PAD Peak Elev=1,264.51' Storage=1,212 cf Inflow=0.71 cfs 1,659 cf
 Outflow=0.02 cfs 460 cf

Pond 9P: VCD Peak Elev=1,263.06' Storage=350 cf Inflow=0.50 cfs 1,026 cf
 Outflow=0.37 cfs 673 cf

Pond 10P: INFILTRATIONBERM Peak Elev=1,270.67' Storage=1,434 cf Inflow=0.29 cfs 1,434 cf
 Outflow=0.00 cfs 0 cf

Pond 100P: VCI Peak Elev=1,263.06' Storage=125 cf Inflow=0.30 cfs 527 cf
 Outflow=0.30 cfs 398 cf

Link 2L: Proposed Conditions Inflow=1.00 cfs 3,073 cf
 Primary=1.00 cfs 3,073 cf

Total Runoff Area = 55,011 sf Runoff Volume = 6,190 cf Average Runoff Depth = 1.35"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf

Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 0.71 cfs @ 12.01 hrs, Volume= 1,659 cf, Depth= 2.24"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

Subcatchment 5S: DA TO MLV PAD

Hydrograph

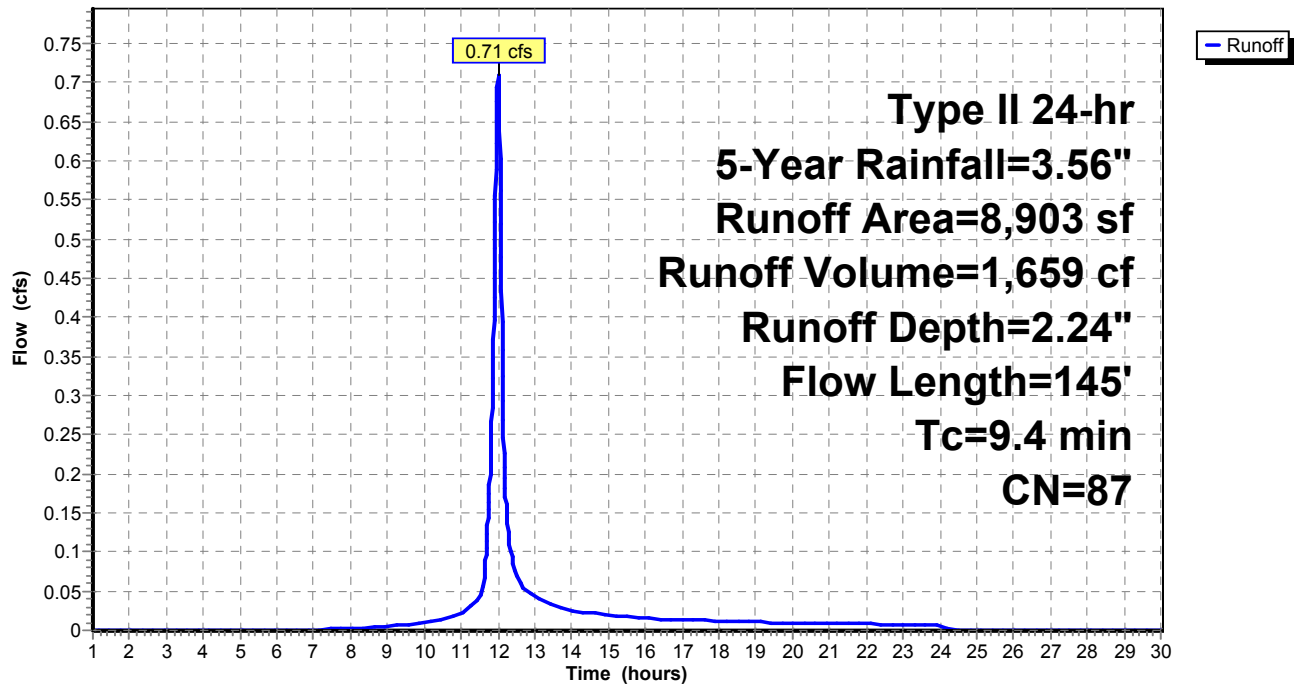

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.30 cfs @ 11.93 hrs, Volume= 527 cf, Depth= 1.76"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

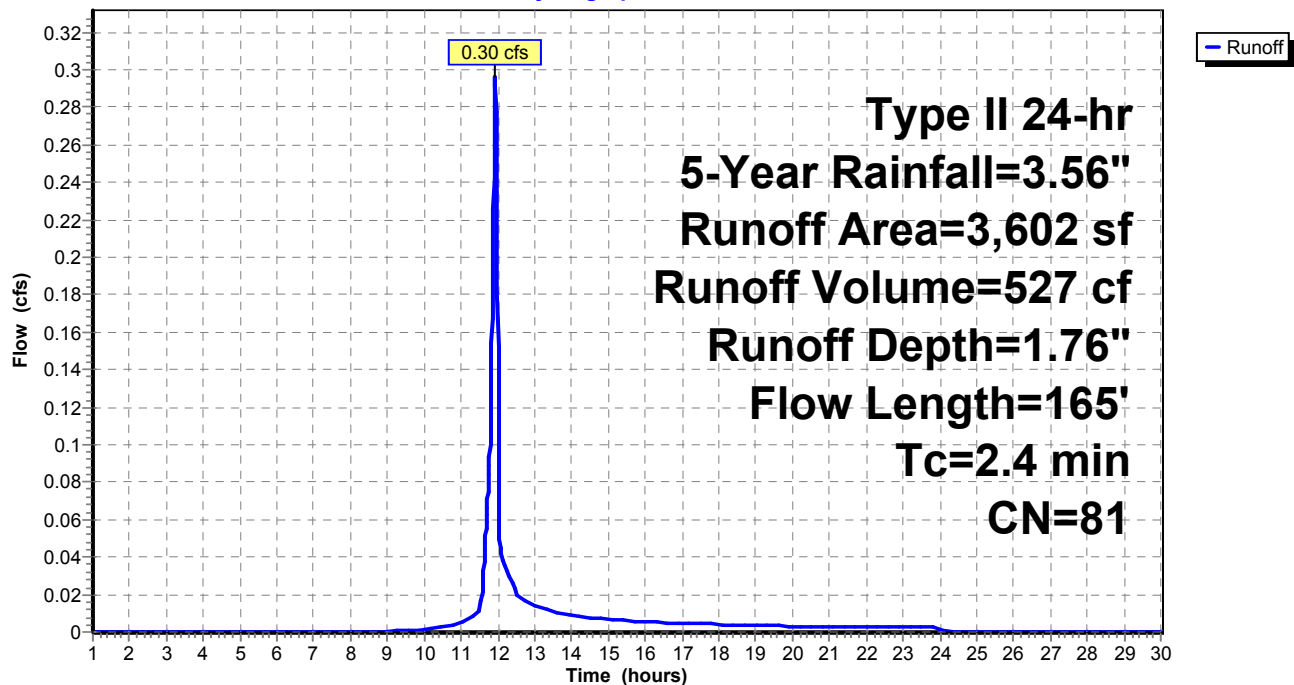

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 0.59 cfs @ 12.05 hrs, Volume= 1,543 cf, Depth= 1.10"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

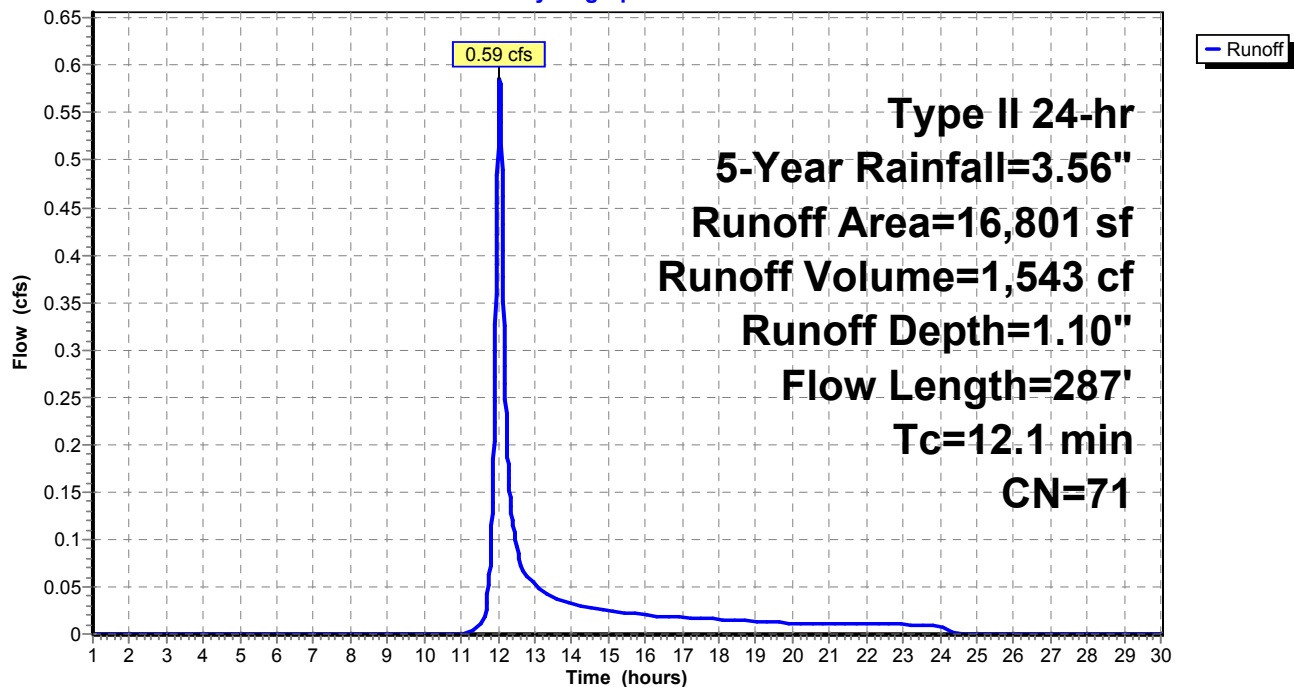

Summary for Subcatchment 14S: DA TO VCD

Runoff = 0.50 cfs @ 11.98 hrs, Volume= 1,026 cf, Depth= 1.22"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

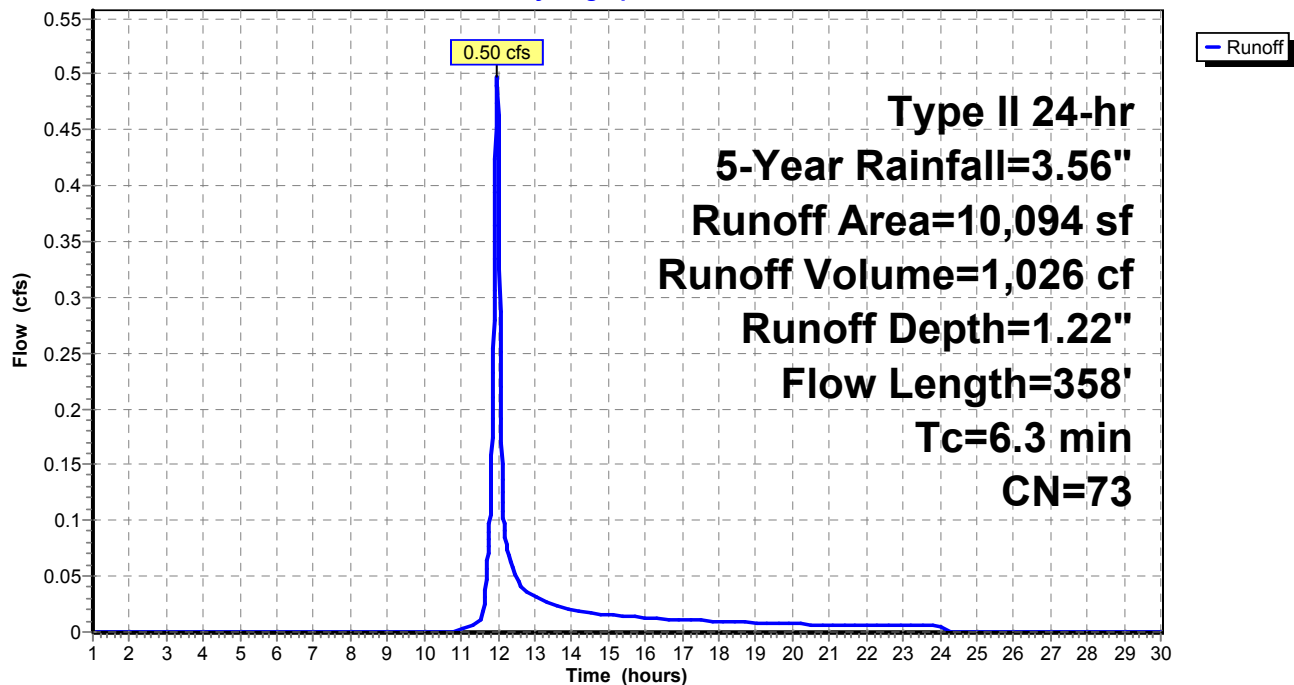

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.29 cfs @ 12.32 hrs, Volume= 1,434 cf, Depth= 1.10"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 5-Year Rainfall=3.56"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

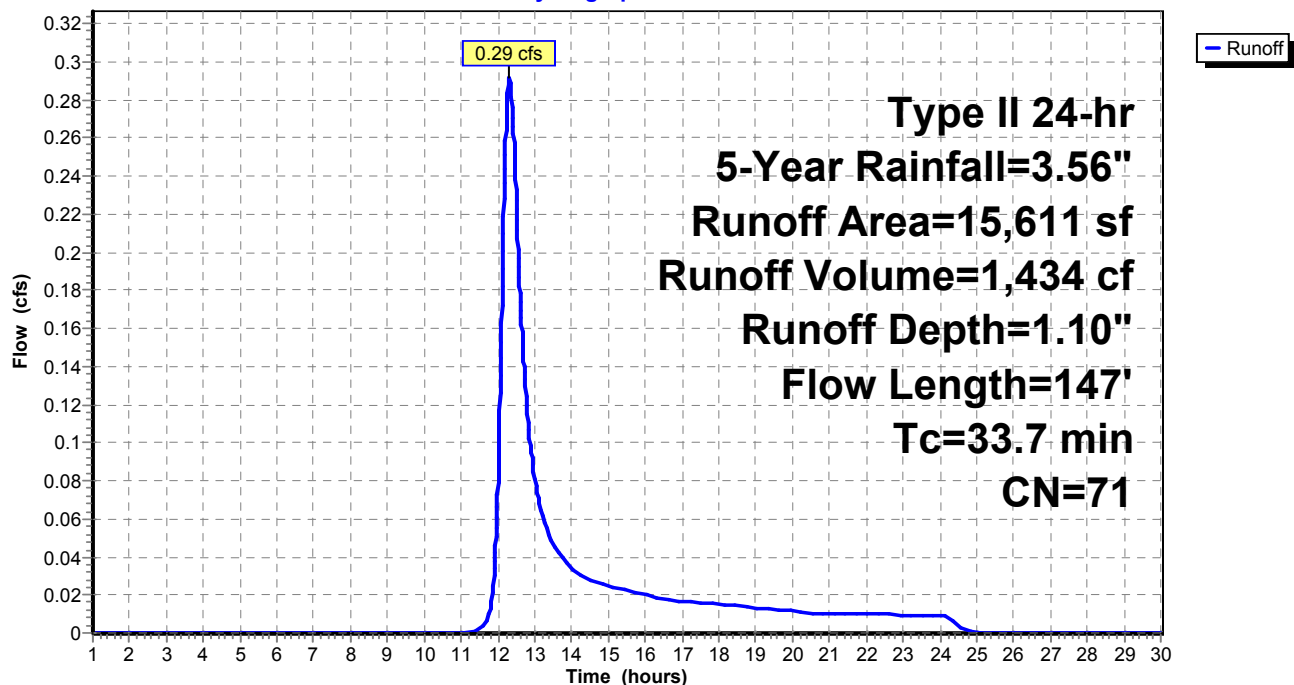

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 2.24" for 5-Year event
 Inflow = 0.71 cfs @ 12.01 hrs, Volume= 1,659 cf
 Outflow = 0.02 cfs @ 14.18 hrs, Volume= 460 cf, Atten= 97%, Lag= 130.2 min
 Primary = 0.02 cfs @ 14.18 hrs, Volume= 460 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.51' @ 14.18 hrs Surf.Area= 4,644 sf Storage= 1,212 cf

Plug-Flow detention time= 393.9 min calculated for 460 cf (28% of inflow)
 Center-of-Mass det. time= 260.9 min (1,075.4 - 814.5)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.01 cfs @ 14.18 hrs HW=1,264.51' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.01 cfs @ 0.20 fps)

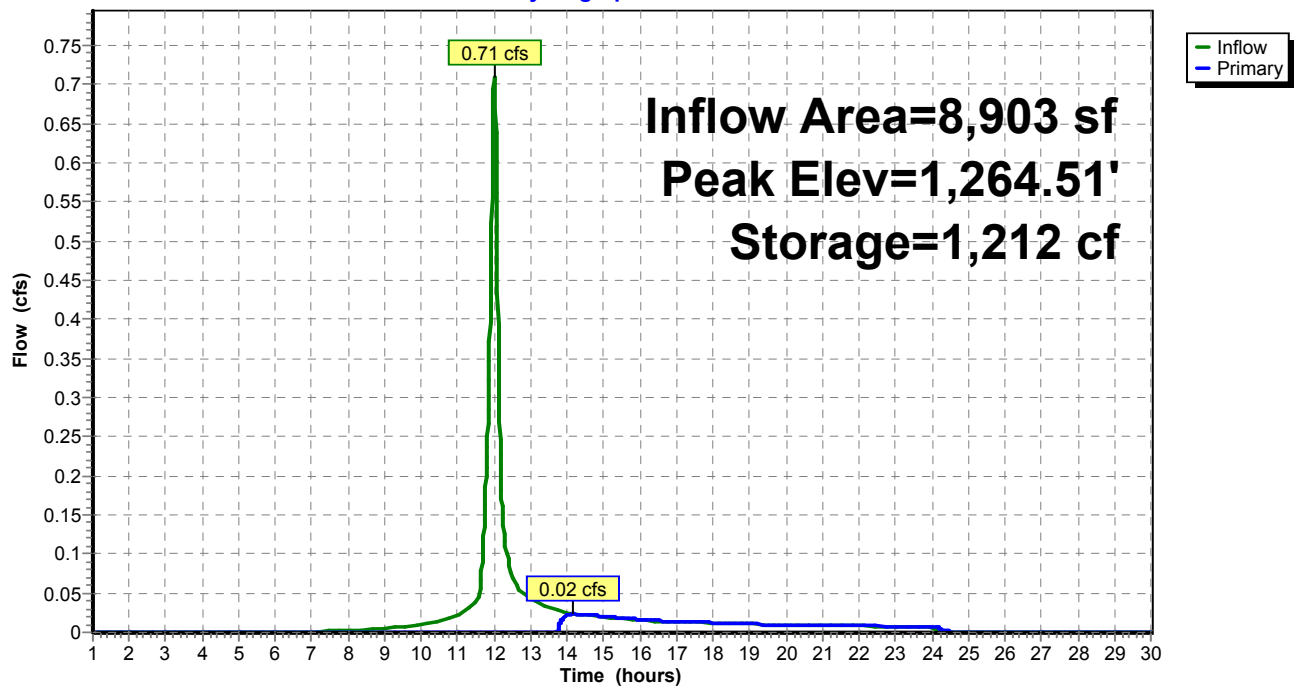Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 0.48" for 5-Year event
 Inflow = 0.50 cfs @ 11.98 hrs, Volume= 1,026 cf
 Outflow = 0.37 cfs @ 12.05 hrs, Volume= 673 cf, Atten= 26%, Lag= 4.3 min
 Primary = 0.37 cfs @ 12.05 hrs, Volume= 673 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.06' @ 12.05 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 194.6 min calculated for 673 cf (66% of inflow)
 Center-of-Mass det. time= 74.6 min (930.2 - 855.6)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.32 cfs @ 12.05 hrs HW=1,263.06' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.32 cfs @ 0.57 fps)

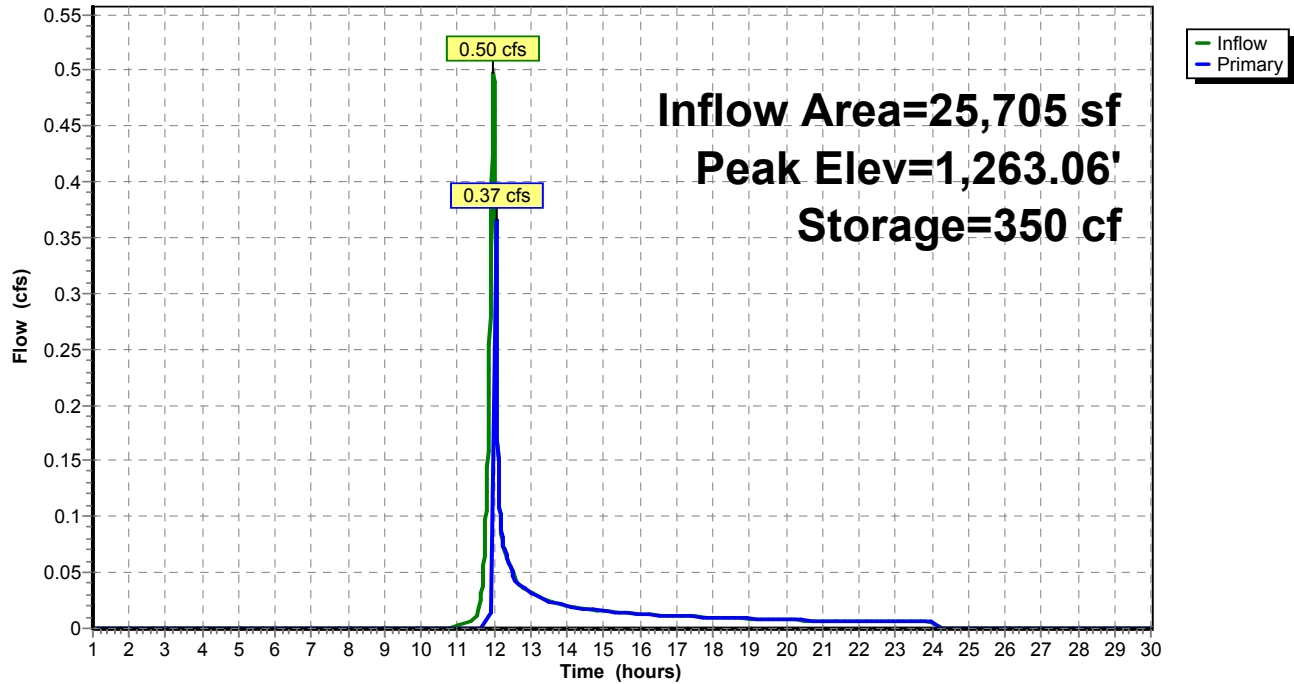Pond 9P: VCD**Hydrograph**

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 1.10" for 5-Year event
 Inflow = 0.29 cfs @ 12.32 hrs, Volume= 1,434 cf
 Outflow = 0.00 cfs @ 1.00 hrs, Volume= 0 cf, Atten= 100%, Lag= 0.0 min
 Primary = 0.00 cfs @ 1.00 hrs, Volume= 0 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,270.67' @ 25.92 hrs Surf.Area= 1,843 sf Storage= 1,434 cf

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no outflow)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices											
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir											
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	
				2.50	3.00	3.50	4.00	4.50						
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68		
				2.72	2.81	2.92	2.97	3.07	3.32					

Primary OutFlow Max=0.00 cfs @ 1.00 hrs HW=1,269.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

Pond 10P: INFILTRATION BERM

Hydrograph

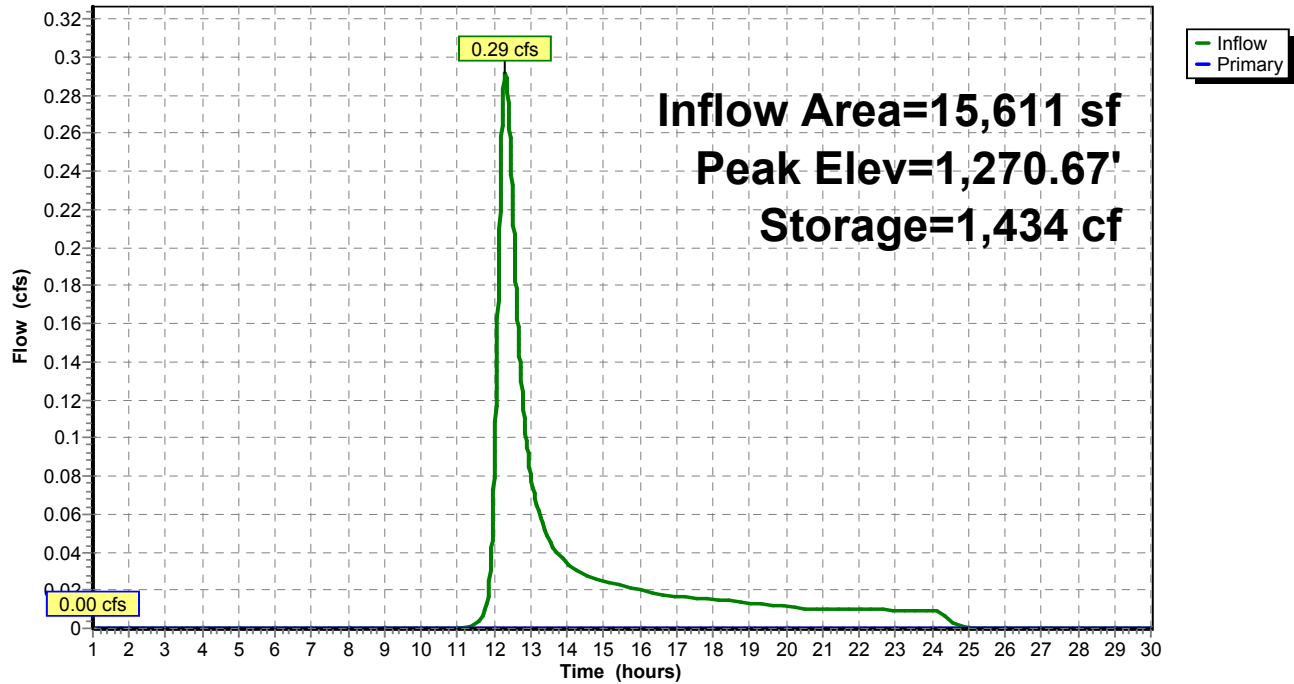

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 1.76" for 5-Year event
 Inflow = 0.30 cfs @ 11.93 hrs, Volume= 527 cf
 Outflow = 0.30 cfs @ 11.93 hrs, Volume= 398 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.30 cfs @ 11.93 hrs, Volume= 398 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.06' @ 11.93 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 138.8 min calculated for 398 cf (75% of inflow)
 Center-of-Mass det. time= 43.8 min (871.6 - 827.8)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.29 cfs @ 11.93 hrs HW=1,263.06' (Free Discharge)


↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.29 cfs @ 0.60 fps)

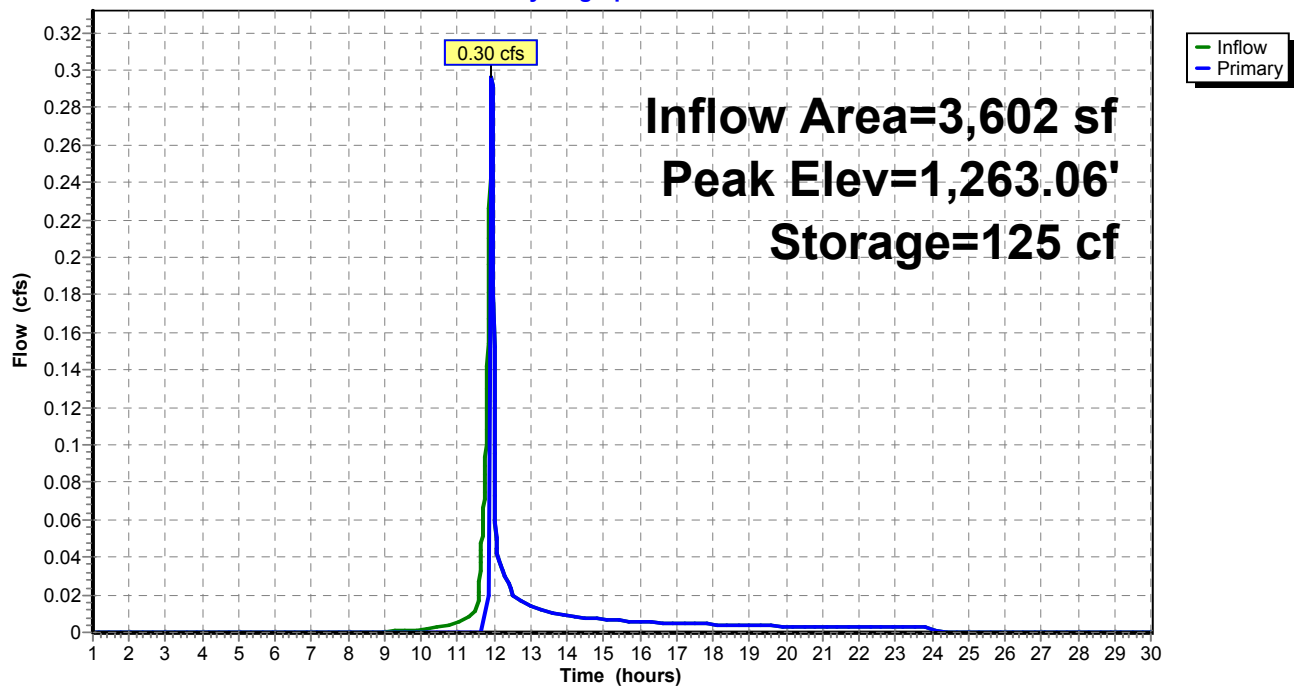Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 0.67" for 5-Year event
Inflow = 1.00 cfs @ 12.05 hrs, Volume= 3,073 cf
Primary = 1.00 cfs @ 12.05 hrs, Volume= 3,073 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

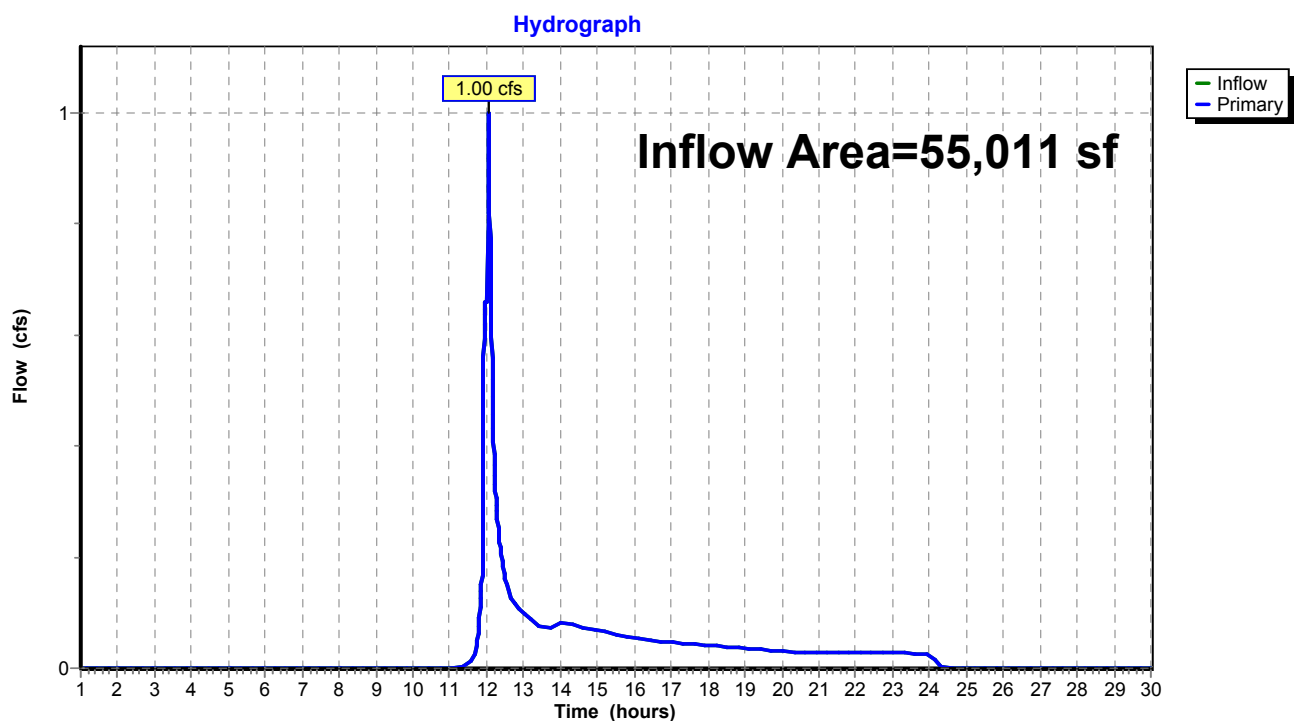Link 2L: Proposed Conditions

AR-LU-007-1

Prepared by Microsoft

HydroCAD® 10.00 s/n 01334 © 2013 HydroCAD Software Solutions LLC

Type II 24-hr 10-Year Rainfall=4.15"

Printed 10/3/2016

Page 52

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
 Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
 Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD

Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=2.77"
 Flow Length=145' Tc=9.4 min CN=87 Runoff=0.87 cfs 2,059 cf

Subcatchment10S: DA TO VCI

Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=2.25"
 Flow Length=165' Tc=2.4 min CN=81 Runoff=0.38 cfs 675 cf

Subcatchment12S: OFFSITE DA

Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=1.50"
 Flow Length=287' Tc=12.1 min CN=71 Runoff=0.81 cfs 2,097 cf

Subcatchment14S: DA TO VCD

Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=1.64"
 Flow Length=358' Tc=6.3 min CN=73 Runoff=0.67 cfs 1,376 cf

Subcatchment15S: DA TO INFILTRATION

Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=1.50"
 Flow Length=147' Tc=33.7 min CN=71 Runoff=0.41 cfs 1,948 cf

Pond 6P: MLV PAD

Peak Elev=1,264.52' Storage=1,241 cf Inflow=0.87 cfs 2,059 cf
 Outflow=0.08 cfs 859 cf

Pond 9P: VCD

Peak Elev=1,263.10' Storage=350 cf Inflow=0.67 cfs 1,376 cf
 Outflow=0.82 cfs 1,040 cf

Pond 10P: INFILTRATIONBERM

Peak Elev=1,270.93' Storage=1,948 cf Inflow=0.41 cfs 1,948 cf
 Outflow=0.00 cfs 0 cf

Pond 100P: VCI

Peak Elev=1,263.07' Storage=125 cf Inflow=0.38 cfs 675 cf
 Outflow=0.38 cfs 546 cf

Link 2L: Proposed Conditions

Inflow=1.72 cfs 4,543 cf
 Primary=1.72 cfs 4,543 cf

Total Runoff Area = 55,011 sf Runoff Volume = 8,155 cf Average Runoff Depth = 1.78"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf

Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 0.87 cfs @ 12.01 hrs, Volume= 2,059 cf, Depth= 2.77"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

Subcatchment 5S: DA TO MLV PAD

Hydrograph

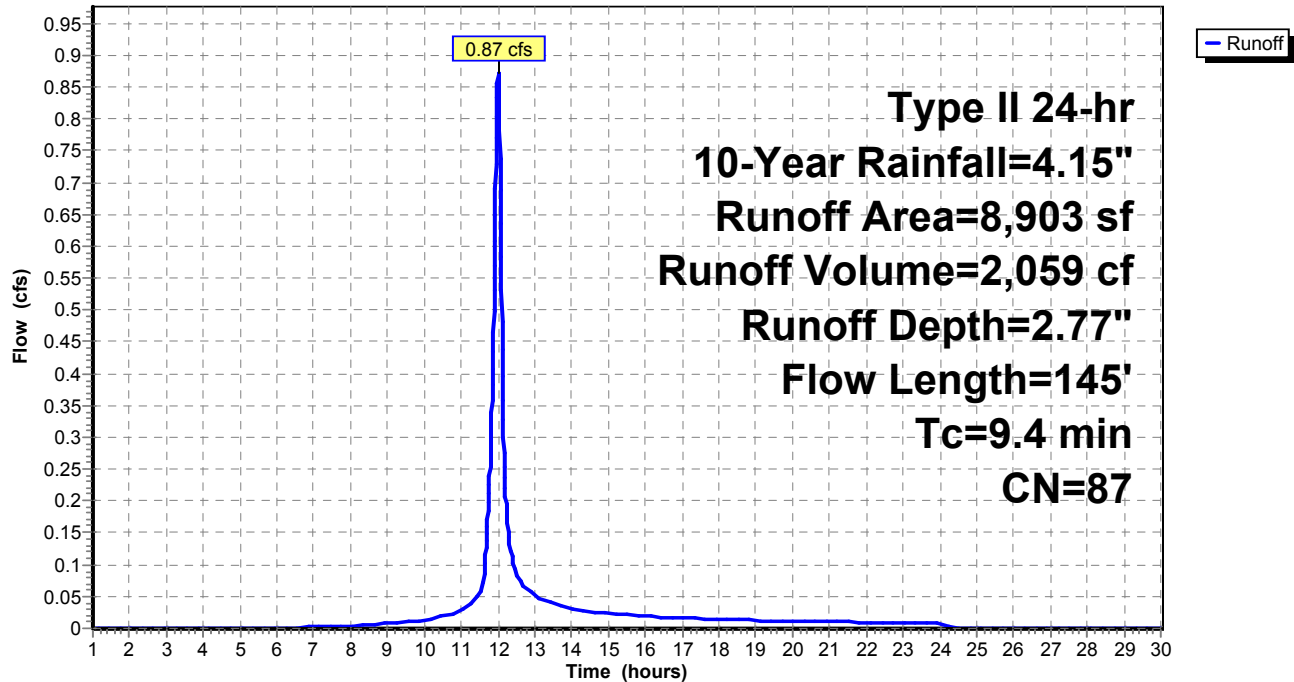


Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.38 cfs @ 11.93 hrs, Volume= 675 cf, Depth= 2.25"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

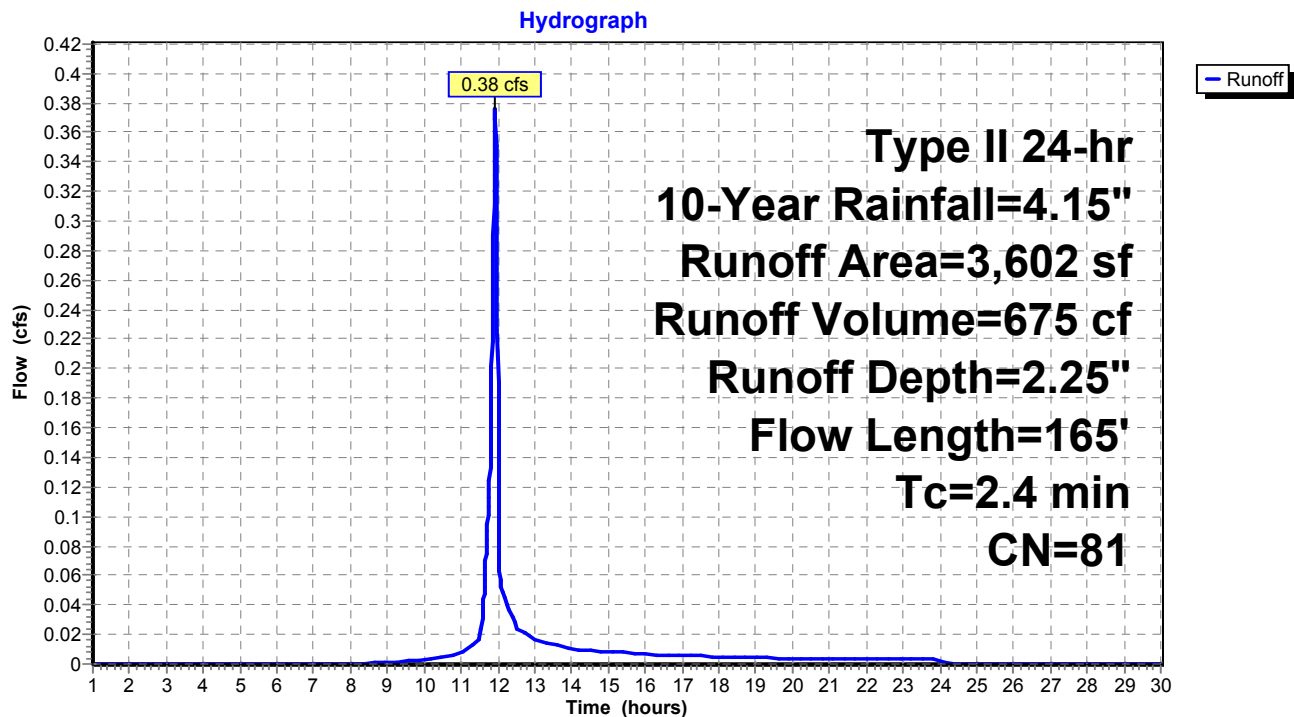Subcatchment 10S: DA TO VCI

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 0.81 cfs @ 12.05 hrs, Volume= 2,097 cf, Depth= 1.50"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

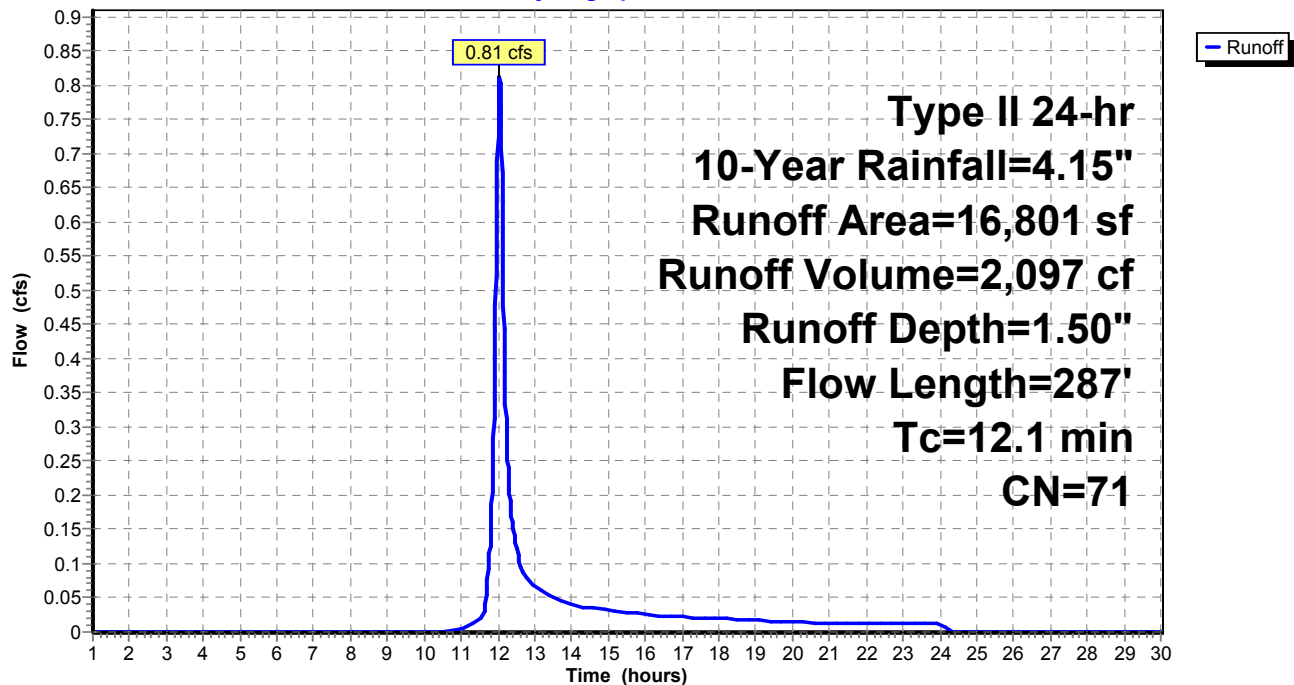


Summary for Subcatchment 14S: DA TO VCD

Runoff = 0.67 cfs @ 11.98 hrs, Volume= 1,376 cf, Depth= 1.64"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

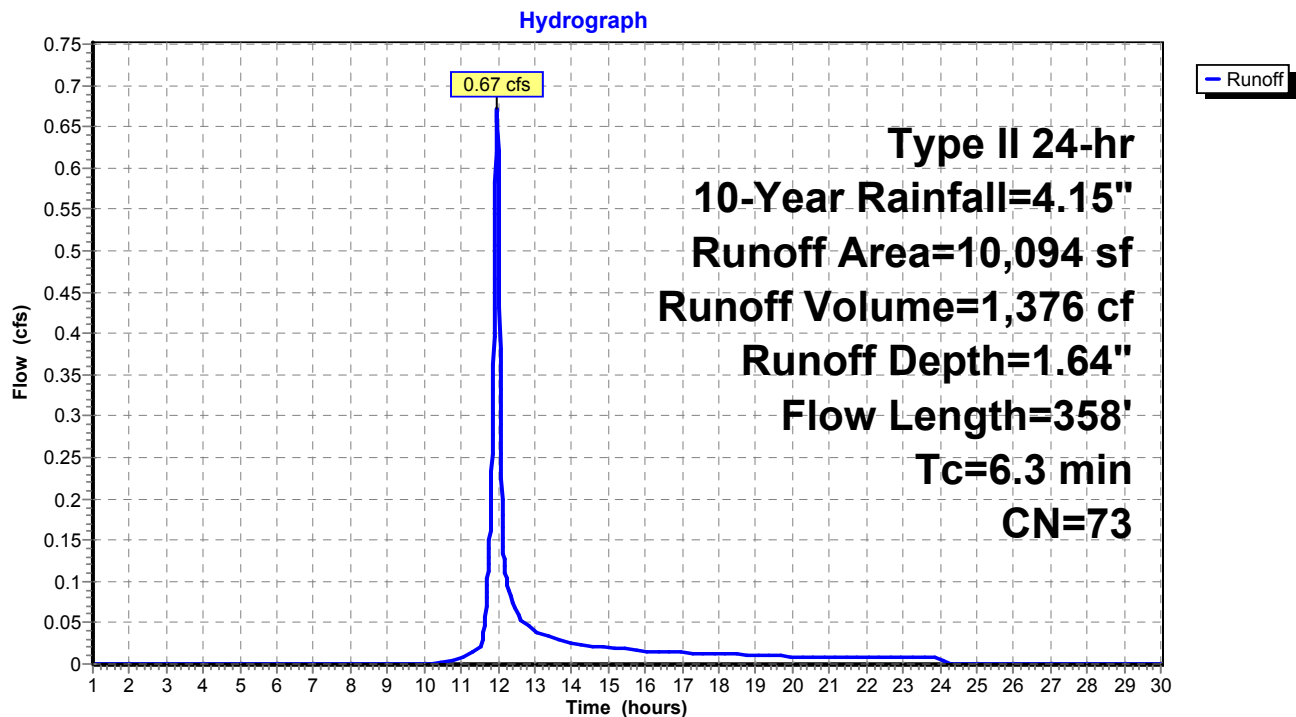Subcatchment 14S: DA TO VCD

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.41 cfs @ 12.32 hrs, Volume= 1,948 cf, Depth= 1.50"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 10-Year Rainfall=4.15"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

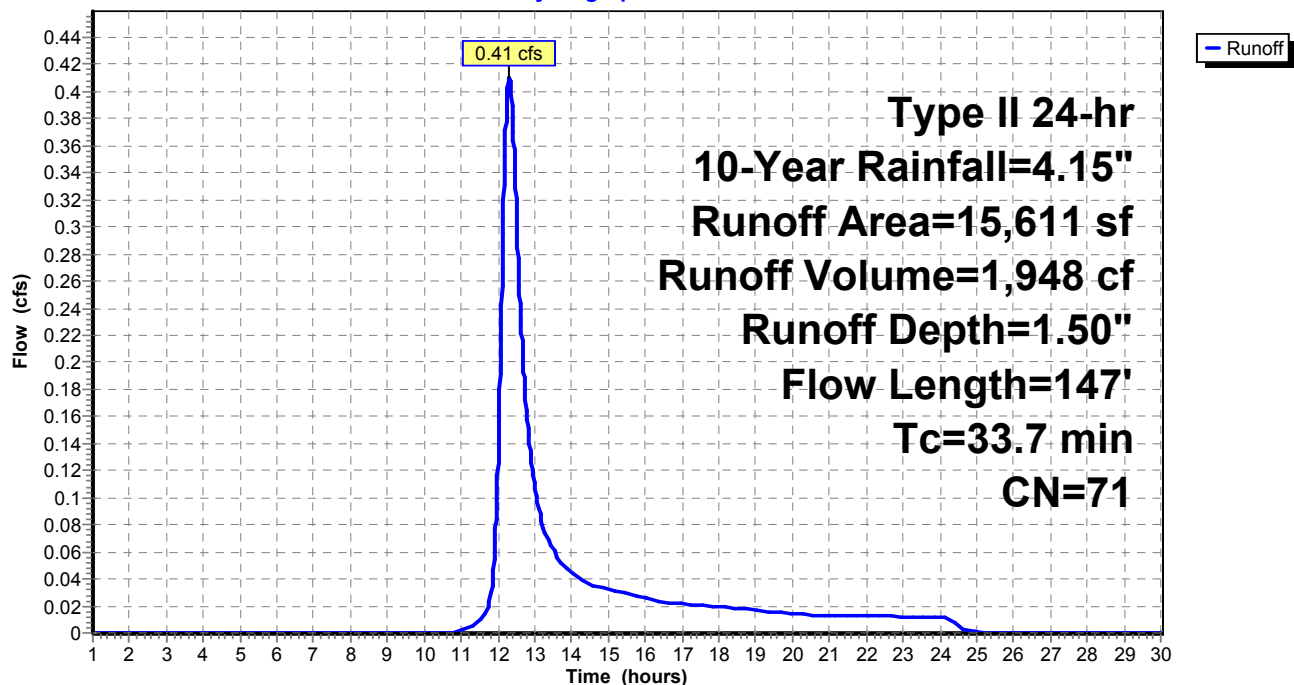

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 2.77" for 10-Year event
 Inflow = 0.87 cfs @ 12.01 hrs, Volume= 2,059 cf
 Outflow = 0.08 cfs @ 12.53 hrs, Volume= 859 cf, Atten= 90%, Lag= 31.3 min
 Primary = 0.08 cfs @ 12.53 hrs, Volume= 859 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.52' @ 12.53 hrs Surf.Area= 4,644 sf Storage= 1,241 cf

Plug-Flow detention time= 280.6 min calculated for 859 cf (42% of inflow)
 Center-of-Mass det. time= 160.7 min (969.1 - 808.4)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.08 cfs @ 12.53 hrs HW=1,264.52' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.08 cfs @ 0.37 fps)

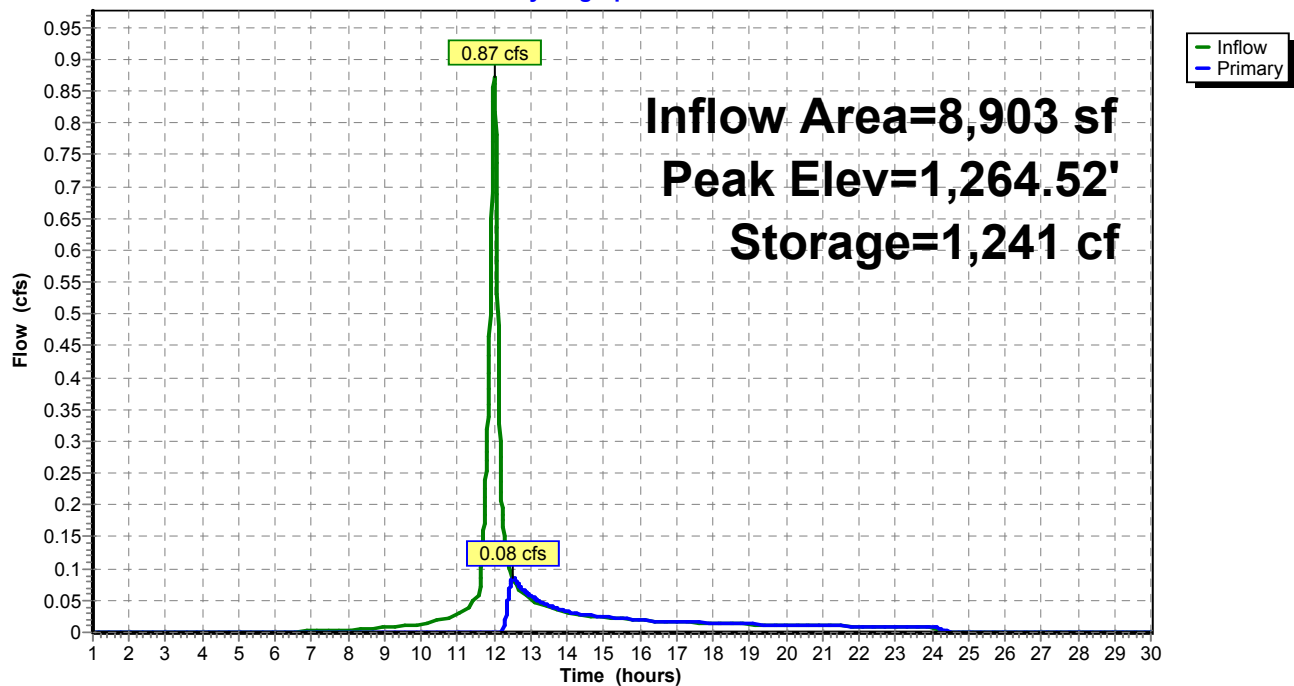Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 0.64" for 10-Year event
 Inflow = 0.67 cfs @ 11.98 hrs, Volume= 1,376 cf
 Outflow = 0.82 cfs @ 11.97 hrs, Volume= 1,040 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.82 cfs @ 11.97 hrs, Volume= 1,040 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.10' @ 11.97 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 142.9 min calculated for 1,040 cf (76% of inflow)
 Center-of-Mass det. time= 45.1 min (891.8 - 846.7)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.72 cfs @ 11.97 hrs HW=1,263.10' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.72 cfs @ 0.75 fps)

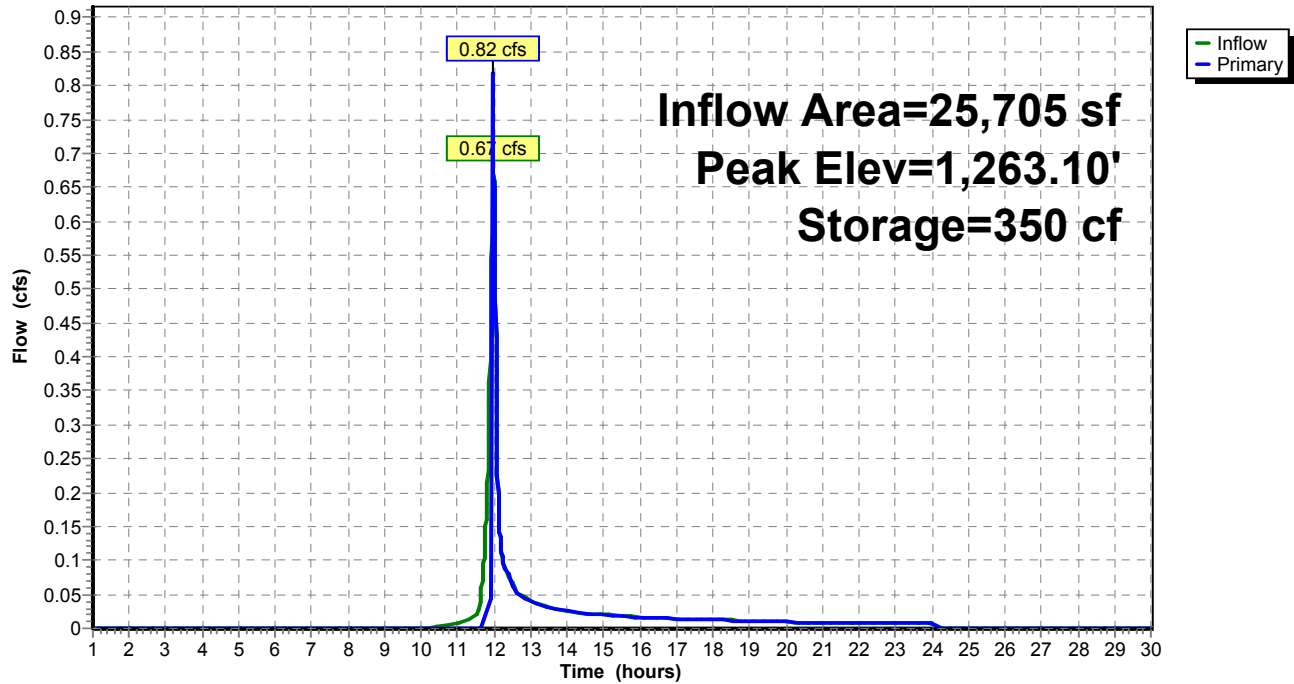Pond 9P: VCD**Hydrograph**

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 1.50" for 10-Year event
 Inflow = 0.41 cfs @ 12.32 hrs, Volume= 1,948 cf
 Outflow = 0.00 cfs @ 1.00 hrs, Volume= 0 cf, Atten= 100%, Lag= 0.0 min
 Primary = 0.00 cfs @ 1.00 hrs, Volume= 0 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,270.93' @ 25.92 hrs Surf.Area= 2,243 sf Storage= 1,948 cf

Plug-Flow detention time= (not calculated: initial storage exceeds outflow)
 Center-of-Mass det. time= (not calculated: no outflow)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices											
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir											
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	
				2.50	3.00	3.50	4.00	4.50						
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68		
				2.72	2.81	2.92	2.97	3.07	3.32					

Primary OutFlow Max=0.00 cfs @ 1.00 hrs HW=1,269.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Controls 0.00 cfs)

Pond 10P: INFILTRATION BERM

Hydrograph

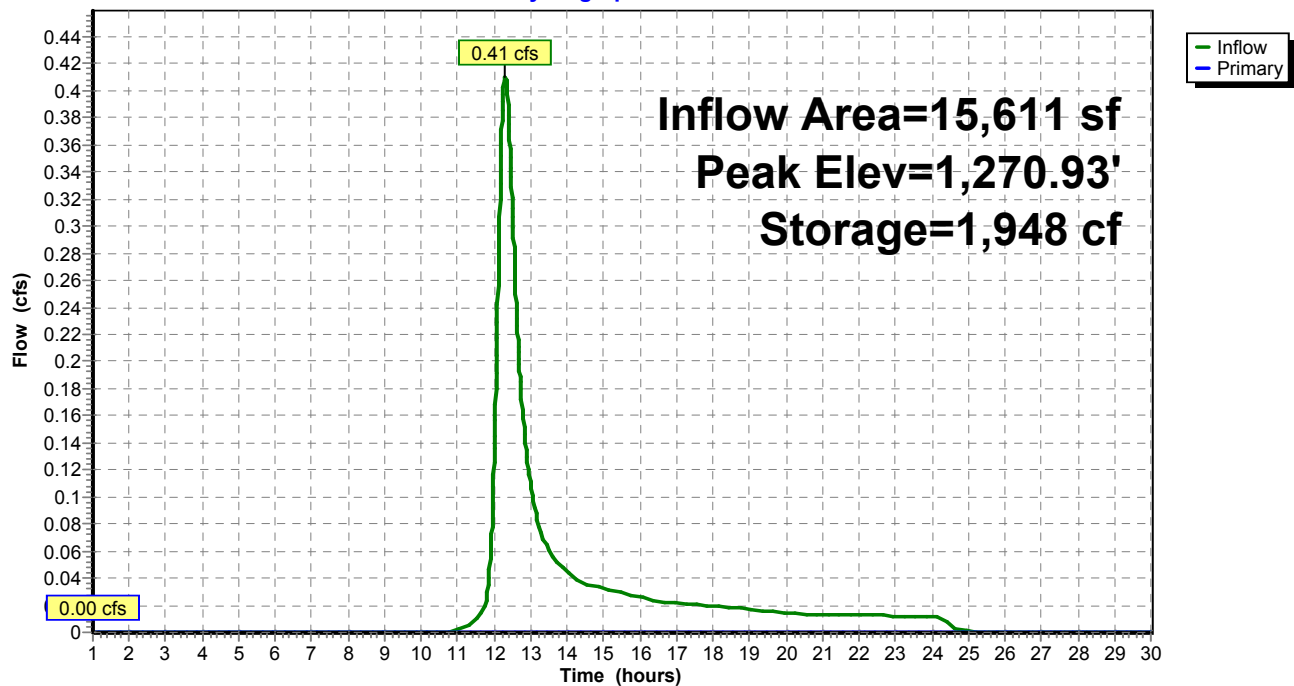

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 2.25" for 10-Year event
 Inflow = 0.38 cfs @ 11.93 hrs, Volume= 675 cf
 Outflow = 0.38 cfs @ 11.93 hrs, Volume= 546 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.38 cfs @ 11.93 hrs, Volume= 546 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.07' @ 11.93 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 114.2 min calculated for 546 cf (81% of inflow)
 Center-of-Mass det. time= 33.2 min (853.9 - 820.7)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.37 cfs @ 11.93 hrs HW=1,263.07' (Free Discharge)


↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.37 cfs @ 0.65 fps)

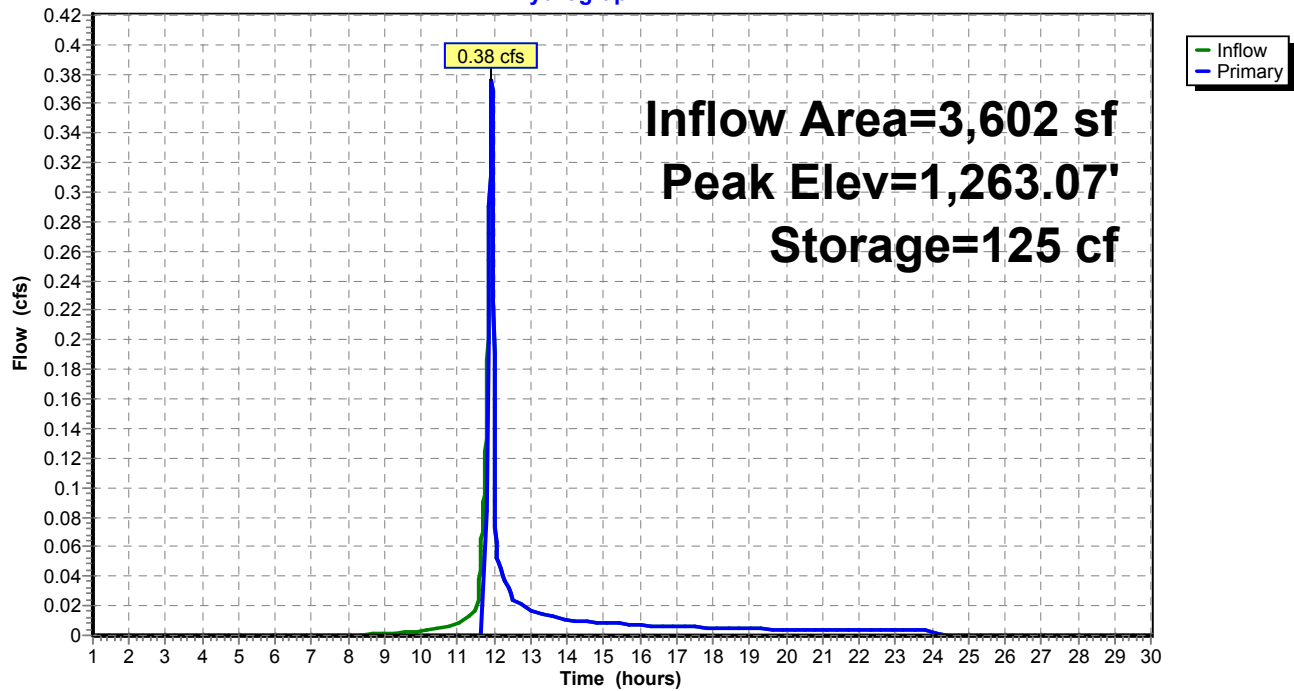Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 0.99" for 10-Year event
Inflow = 1.72 cfs @ 11.97 hrs, Volume= 4,543 cf
Primary = 1.72 cfs @ 11.97 hrs, Volume= 4,543 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

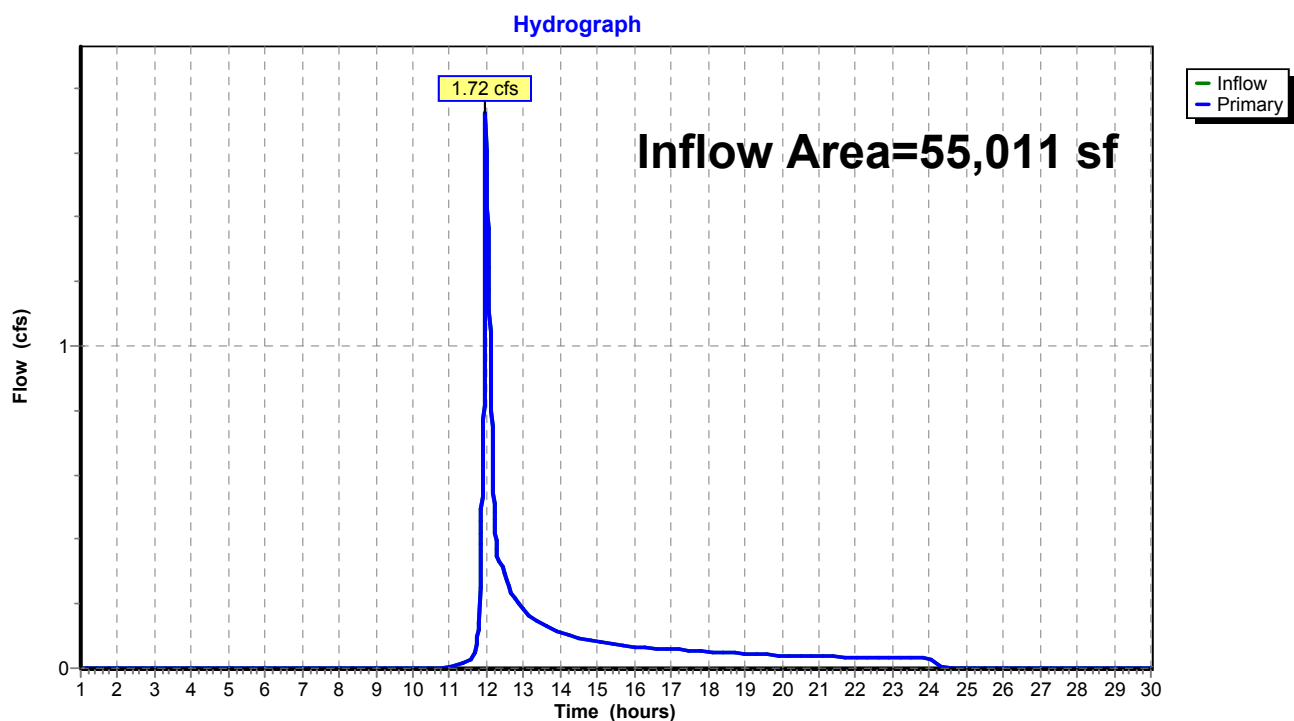Link 2L: Proposed Conditions

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
 Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
 Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD

Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=3.62"
 Flow Length=145' Tc=9.4 min CN=87 Runoff=1.12 cfs 2,689 cf

Subcatchment10S: DA TO VCI

Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=3.04"
 Flow Length=165' Tc=2.4 min CN=81 Runoff=0.50 cfs 912 cf

Subcatchment12S: OFFSITE DA

Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=2.16"
 Flow Length=287' Tc=12.1 min CN=71 Runoff=1.19 cfs 3,027 cf

Subcatchment14S: DA TO VCD

Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=2.33"
 Flow Length=358' Tc=6.3 min CN=73 Runoff=0.96 cfs 1,958 cf

Subcatchment15S: DA TO INFILTRATION

Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=2.16"
 Flow Length=147' Tc=33.7 min CN=71 Runoff=0.61 cfs 2,813 cf

Pond 6P: MLV PAD

Peak Elev=1,264.58' Storage=1,339 cf Inflow=1.12 cfs 2,689 cf
 Outflow=0.50 cfs 1,490 cf

Pond 9P: VCD

Peak Elev=1,263.12' Storage=350 cf Inflow=0.96 cfs 2,688 cf
 Outflow=0.96 cfs 2,337 cf

Pond 10P: INFILTRATIONBERM

Peak Elev=1,271.00' Storage=2,084 cf Inflow=0.61 cfs 2,813 cf
 Outflow=0.04 cfs 730 cf

Pond 100P: VCI

Peak Elev=1,263.09' Storage=125 cf Inflow=0.50 cfs 912 cf
 Outflow=0.50 cfs 792 cf

Link 2L: Proposed Conditions

Inflow=2.28 cfs 7,645 cf
 Primary=2.28 cfs 7,645 cf

Total Runoff Area = 55,011 sf Runoff Volume = 11,398 cf Average Runoff Depth = 2.49"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf


Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 1.12 cfs @ 12.01 hrs, Volume= 2,689 cf, Depth= 3.62"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

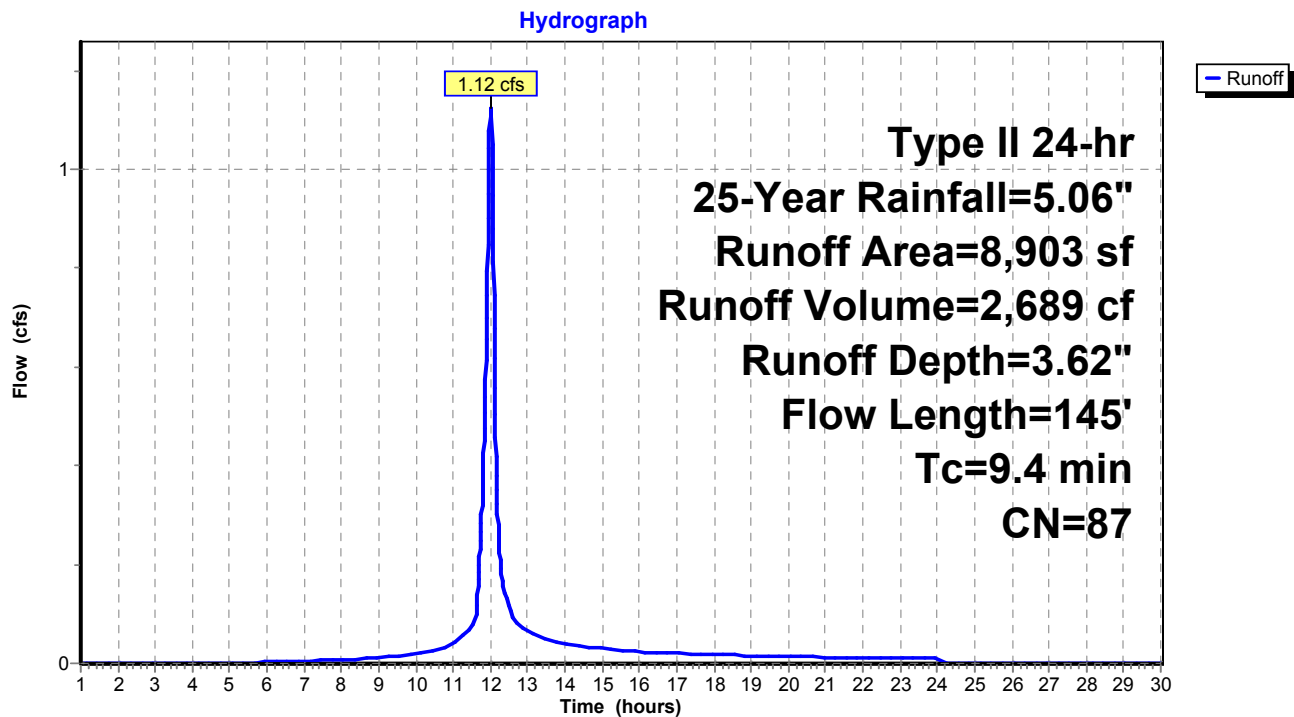Subcatchment 5S: DA TO MLV PAD

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.50 cfs @ 11.93 hrs, Volume= 912 cf, Depth= 3.04"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

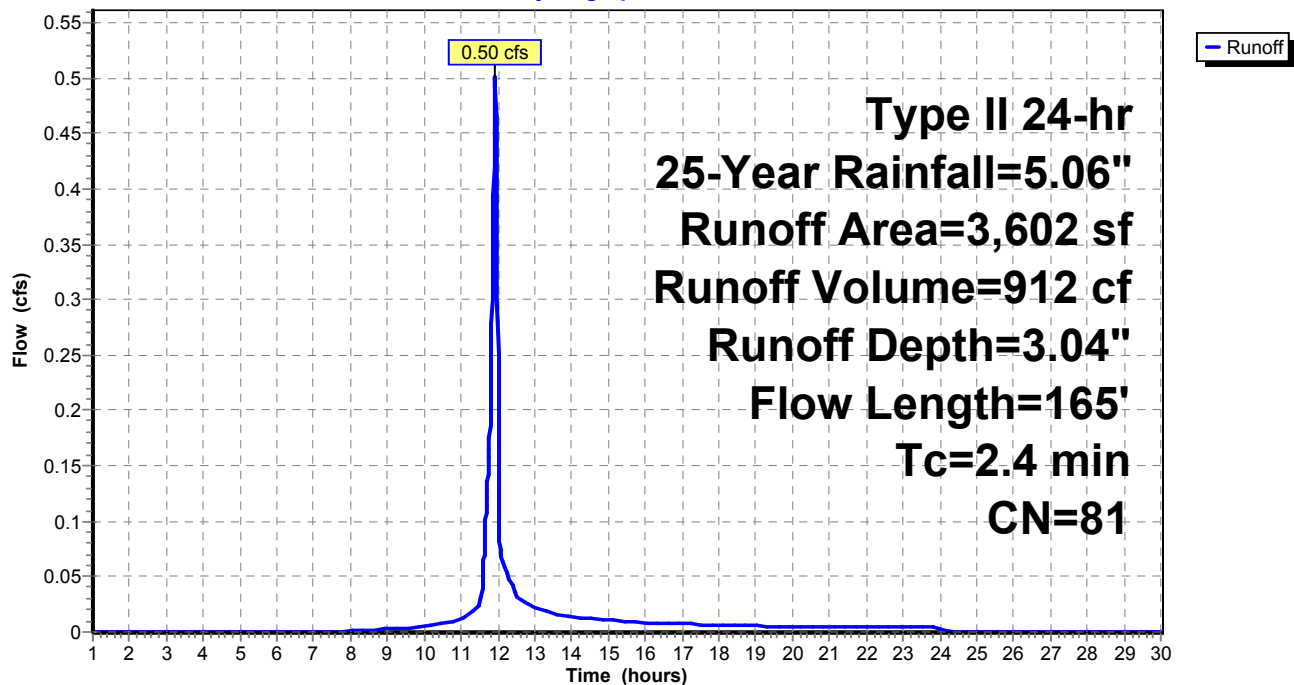

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 1.19 cfs @ 12.04 hrs, Volume= 3,027 cf, Depth= 2.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

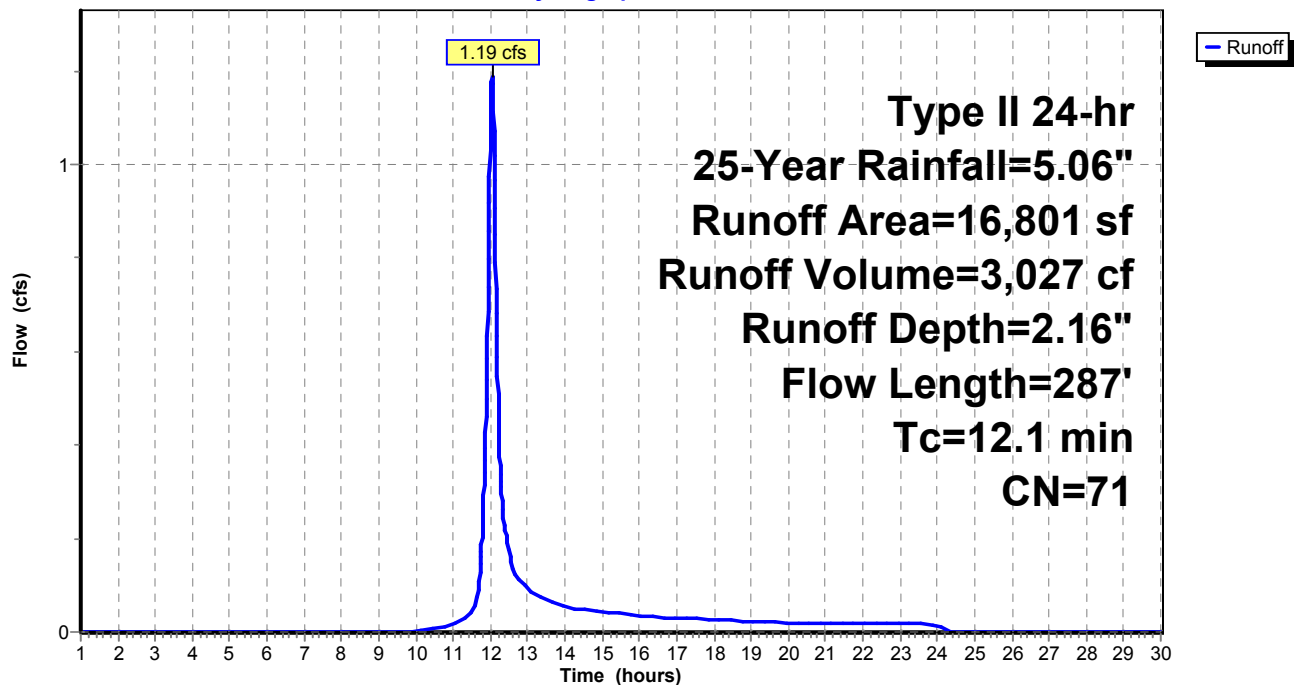

Summary for Subcatchment 14S: DA TO VCD

Runoff = 0.96 cfs @ 11.98 hrs, Volume= 1,958 cf, Depth= 2.33"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

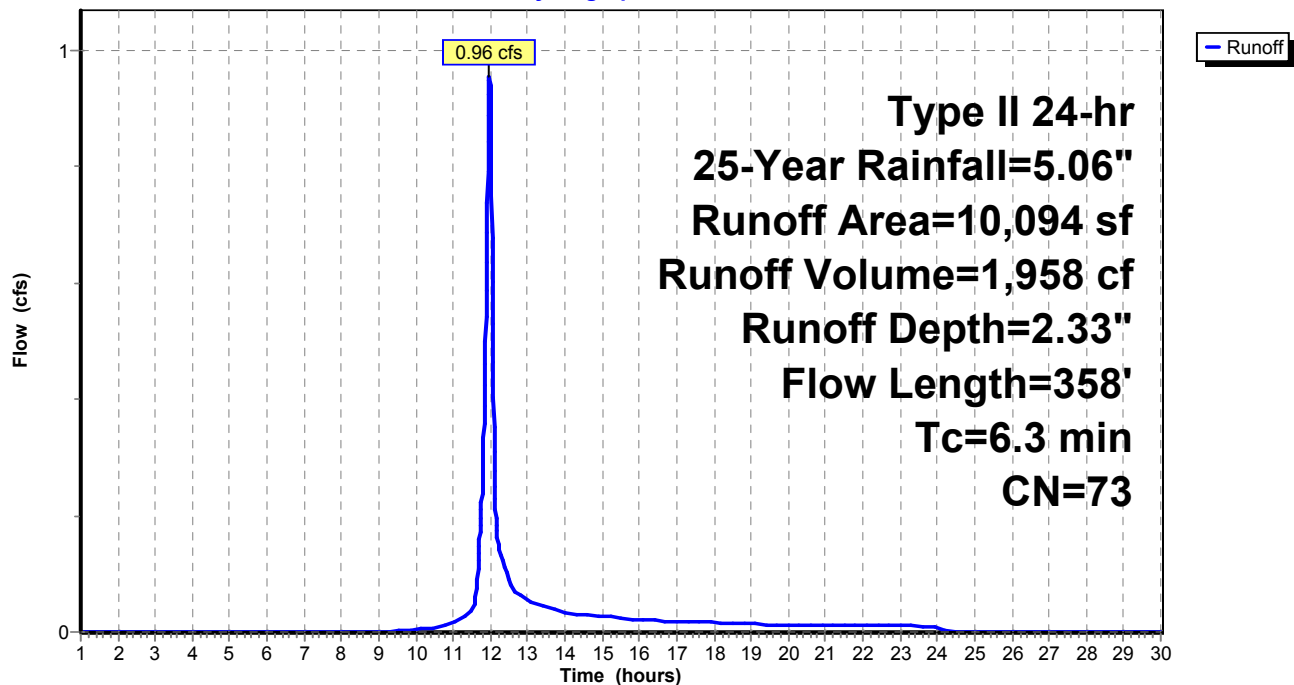

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.61 cfs @ 12.31 hrs, Volume= 2,813 cf, Depth= 2.16"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 25-Year Rainfall=5.06"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

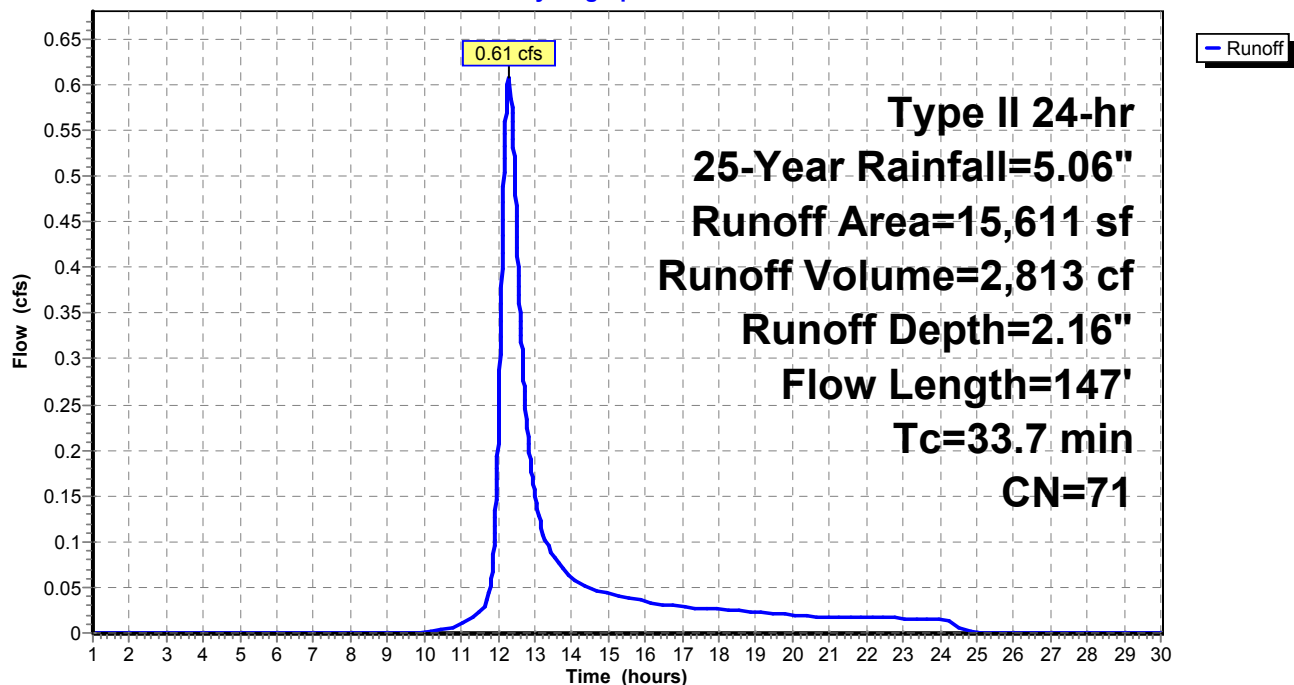

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 3.62" for 25-Year event
 Inflow = 1.12 cfs @ 12.01 hrs, Volume= 2,689 cf
 Outflow = 0.50 cfs @ 12.13 hrs, Volume= 1,490 cf, Atten= 55%, Lag= 7.5 min
 Primary = 0.50 cfs @ 12.13 hrs, Volume= 1,490 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.58' @ 12.13 hrs Surf.Area= 4,644 sf Storage= 1,339 cf

Plug-Flow detention time= 211.7 min calculated for 1,489 cf (55% of inflow)
 Center-of-Mass det. time= 102.5 min (903.3 - 800.8)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.50 cfs @ 12.13 hrs HW=1,264.57' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.50 cfs @ 0.67 fps)

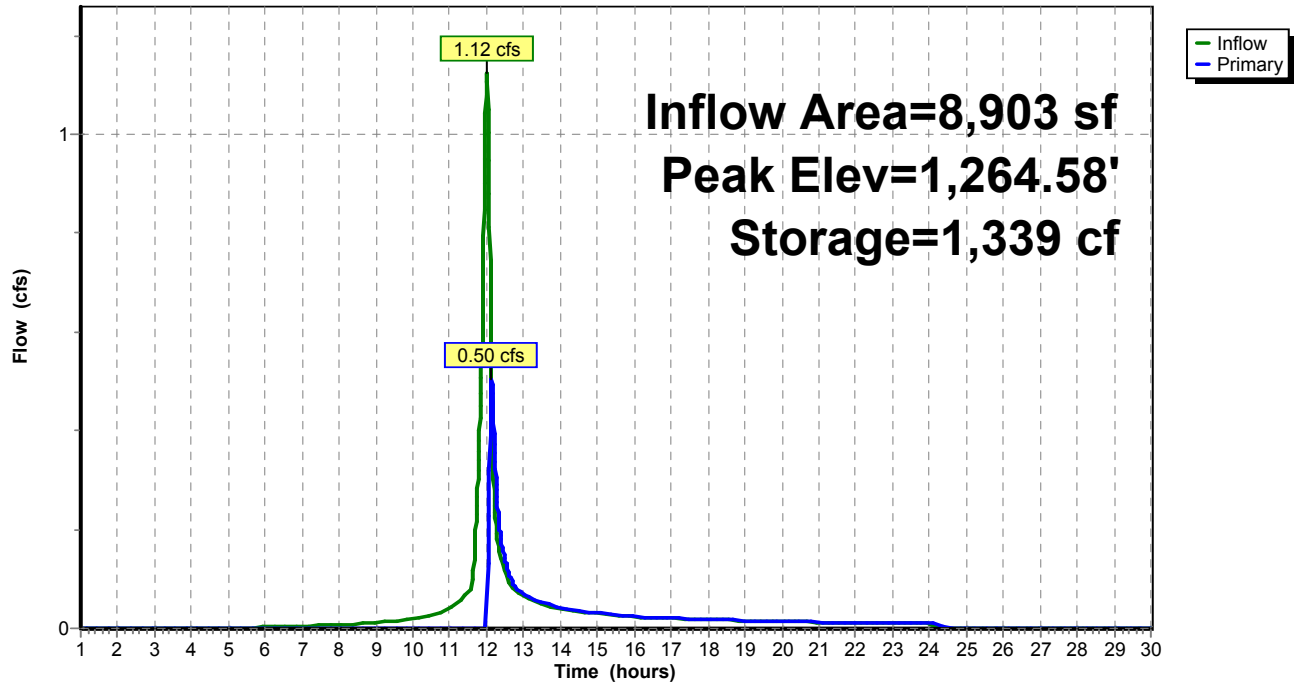Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 1.26" for 25-Year event
 Inflow = 0.96 cfs @ 11.98 hrs, Volume= 2,688 cf
 Outflow = 0.96 cfs @ 11.98 hrs, Volume= 2,337 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.96 cfs @ 11.98 hrs, Volume= 2,337 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.12' @ 11.98 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 98.8 min calculated for 2,337 cf (87% of inflow)
 Center-of-Mass det. time= 34.1 min (956.8 - 922.6)

Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351


Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.95 cfs @ 11.98 hrs HW=1,263.12' (Free Discharge)

↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.95 cfs @ 0.83 fps)

Pond 9P: VCD

Hydrograph

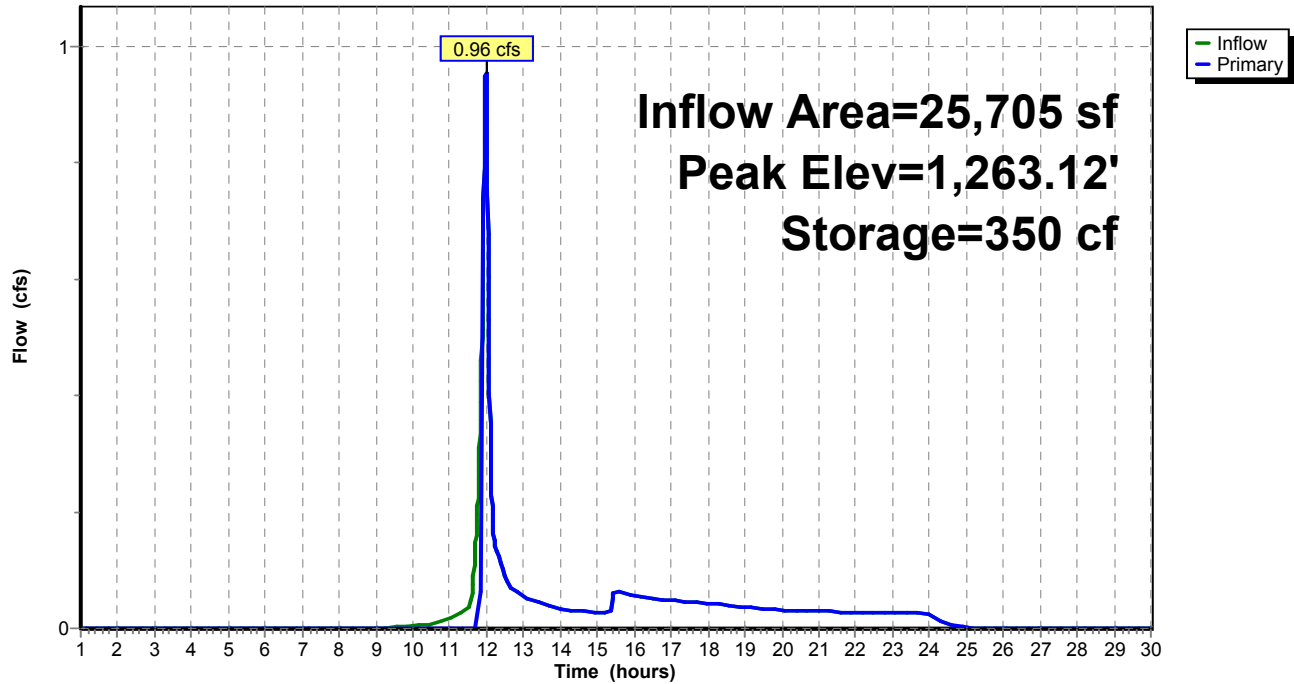

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 2.16" for 25-Year event
 Inflow = 0.61 cfs @ 12.31 hrs, Volume= 2,813 cf
 Outflow = 0.04 cfs @ 15.47 hrs, Volume= 730 cf, Atten= 94%, Lag= 189.9 min
 Primary = 0.04 cfs @ 15.47 hrs, Volume= 730 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,271.00' @ 15.47 hrs Surf.Area= 2,348 sf Storage= 2,084 cf

Plug-Flow detention time= 429.0 min calculated for 730 cf (26% of inflow)
 Center-of-Mass det. time= 286.8 min (1,153.7 - 866.8)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices															
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir															
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00					
				2.50	3.00	3.50	4.00	4.50										
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68						
				2.72	2.81	2.92	2.97	3.07	3.32									

Primary OutFlow Max=0.01 cfs @ 15.47 hrs HW=1,271.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.01 cfs @ 0.07 fps)

Pond 10P: INFILTRATION BERM

Hydrograph

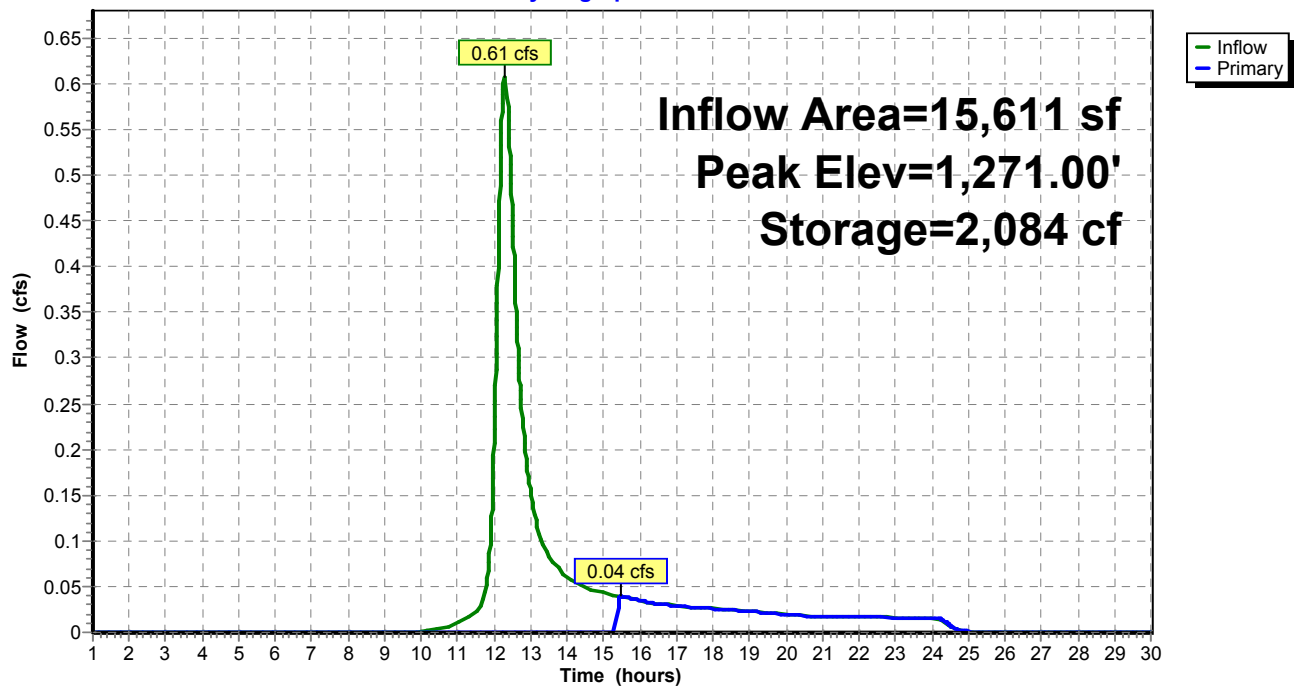

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 3.04" for 25-Year event
 Inflow = 0.50 cfs @ 11.93 hrs, Volume= 912 cf
 Outflow = 0.50 cfs @ 11.93 hrs, Volume= 792 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.50 cfs @ 11.93 hrs, Volume= 792 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.09' @ 11.93 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 87.4 min calculated for 791 cf (87% of inflow)
 Center-of-Mass det. time= 24.6 min (836.8 - 812.1)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.50 cfs @ 11.93 hrs HW=1,263.09' (Free Discharge)


↑1=**Broad-Crested Rectangular Weir**(Weir Controls 0.50 cfs @ 0.72 fps)

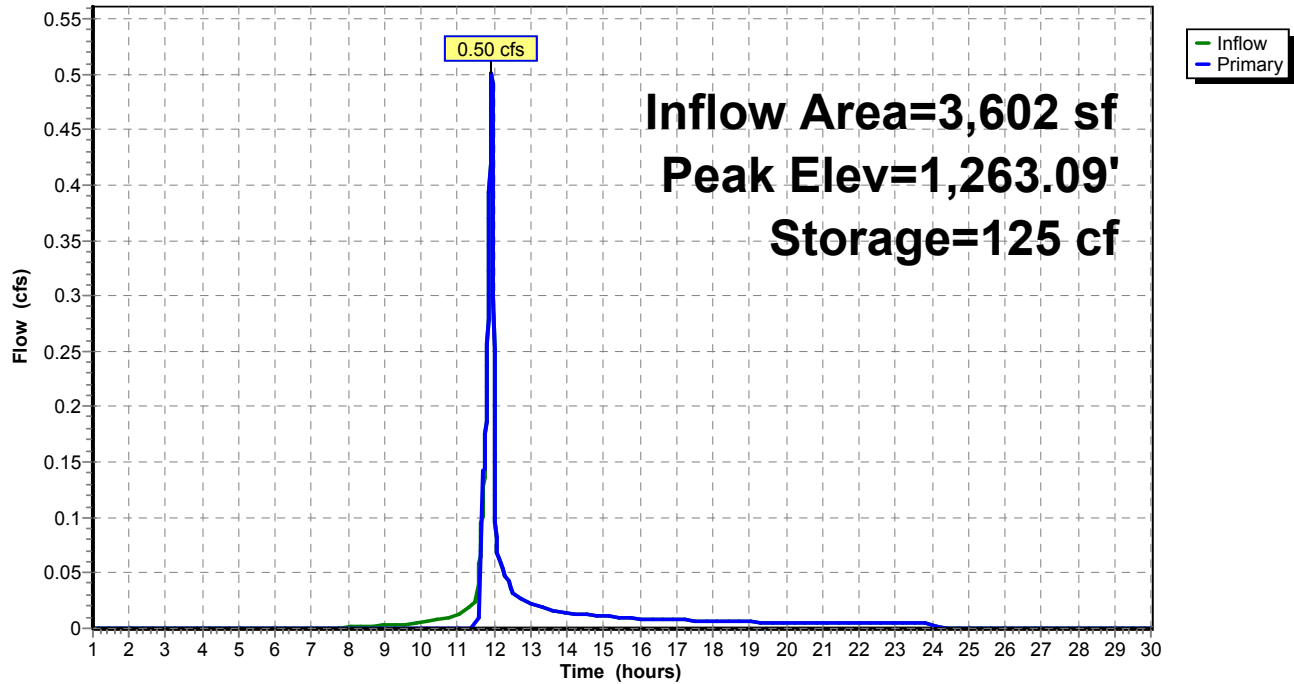Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 1.67" for 25-Year event
Inflow = 2.28 cfs @ 11.98 hrs, Volume= 7,645 cf
Primary = 2.28 cfs @ 11.98 hrs, Volume= 7,645 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

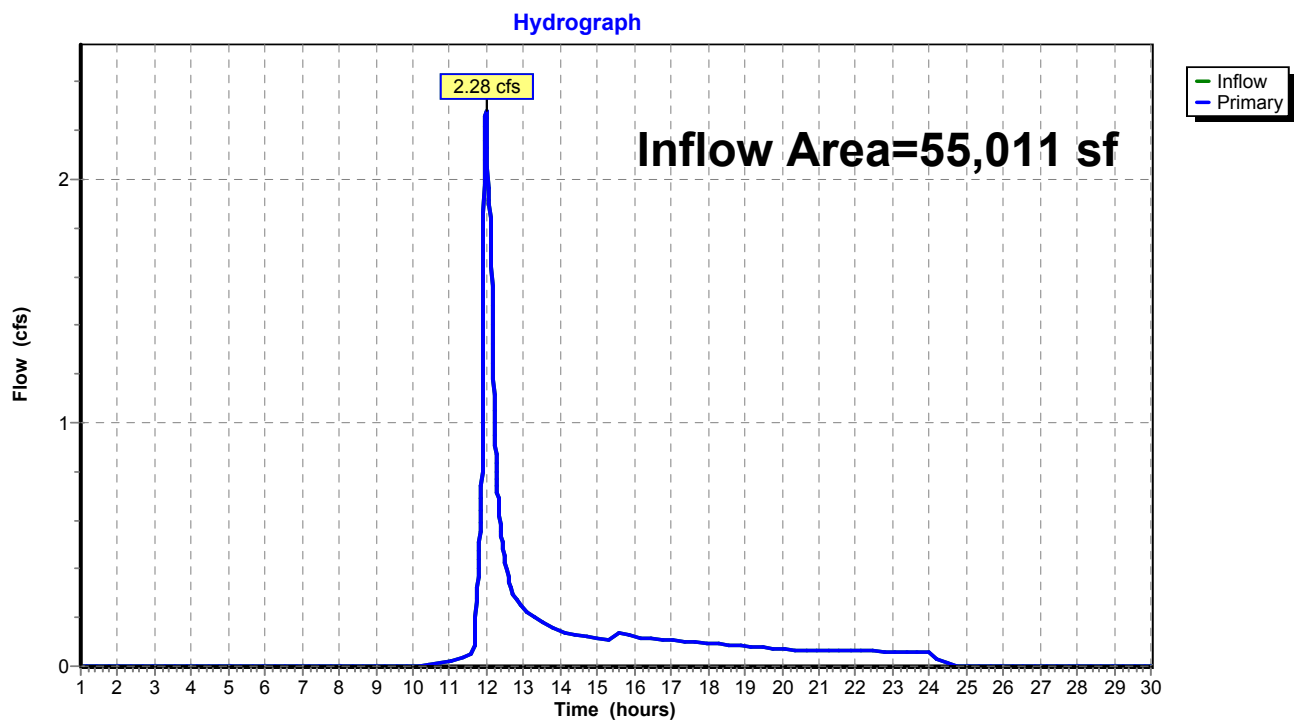Link 2L: Proposed Conditions

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
 Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
 Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD

Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=4.40"
 Flow Length=145' Tc=9.4 min CN=87 Runoff=1.35 cfs 3,266 cf

Subcatchment10S: DA TO VCI

Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=3.77"
 Flow Length=165' Tc=2.4 min CN=81 Runoff=0.62 cfs 1,133 cf

Subcatchment12S: OFFSITE DA

Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=2.80"
 Flow Length=287' Tc=12.1 min CN=71 Runoff=1.55 cfs 3,924 cf

Subcatchment14S: DA TO VCD

Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=2.99"
 Flow Length=358' Tc=6.3 min CN=73 Runoff=1.22 cfs 2,515 cf

Subcatchment15S: DA TO INFILTRATION

Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=2.80"
 Flow Length=147' Tc=33.7 min CN=71 Runoff=0.80 cfs 3,646 cf

Pond 6P: MLV PAD

Peak Elev=1,264.62' Storage=1,420 cf Inflow=1.35 cfs 3,266 cf
 Outflow=1.00 cfs 2,067 cf

Pond 9P: VCD

Peak Elev=1,263.14' Storage=350 cf Inflow=1.22 cfs 4,078 cf
 Outflow=1.22 cfs 3,730 cf

Pond 10P: INFILTRATIONBERM

Peak Elev=1,271.00' Storage=2,091 cf Inflow=0.80 cfs 3,646 cf
 Outflow=0.16 cfs 1,564 cf

Pond 100P: VCI

Peak Elev=1,263.10' Storage=125 cf Inflow=0.62 cfs 1,133 cf
 Outflow=0.62 cfs 1,008 cf

Link 2L: Proposed Conditions

Inflow=3.36 cfs 10,728 cf
 Primary=3.36 cfs 10,728 cf

Total Runoff Area = 55,011 sf Runoff Volume = 14,483 cf Average Runoff Depth = 3.16"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf

Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 1.35 cfs @ 12.01 hrs, Volume= 3,266 cf, Depth= 4.40"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

Subcatchment 5S: DA TO MLV PAD

Hydrograph

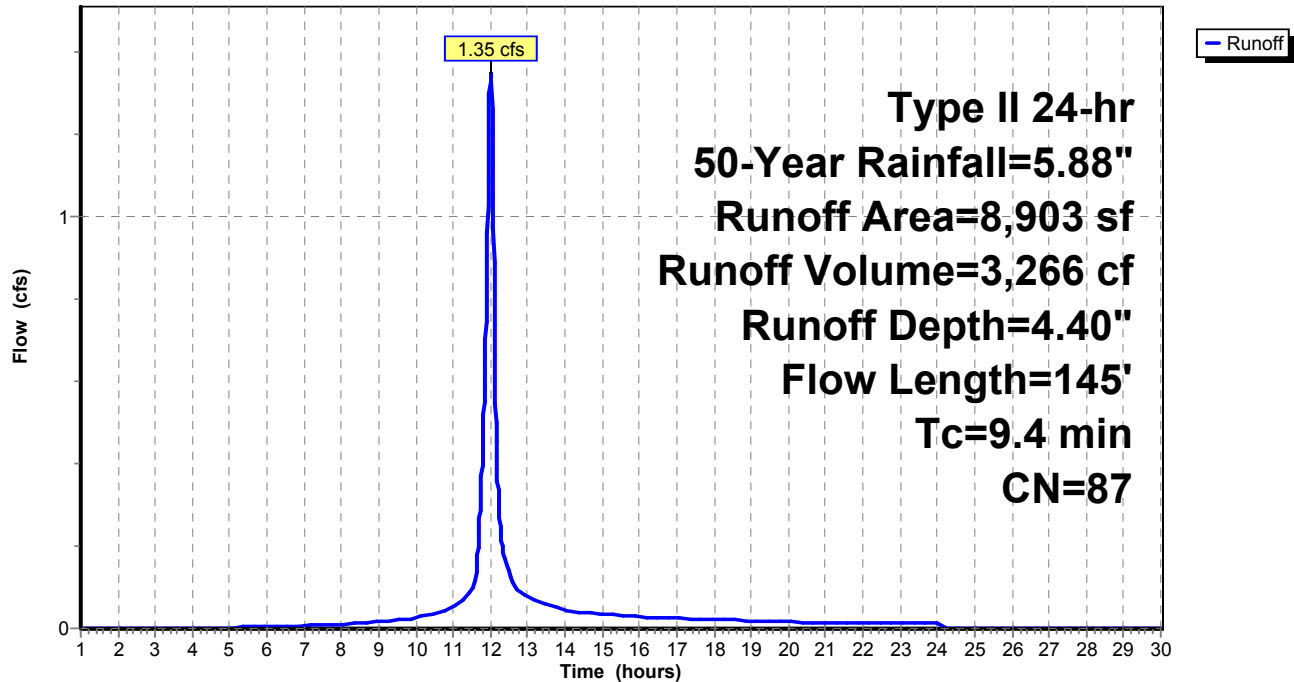

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.62 cfs @ 11.93 hrs, Volume= 1,133 cf, Depth= 3.77"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

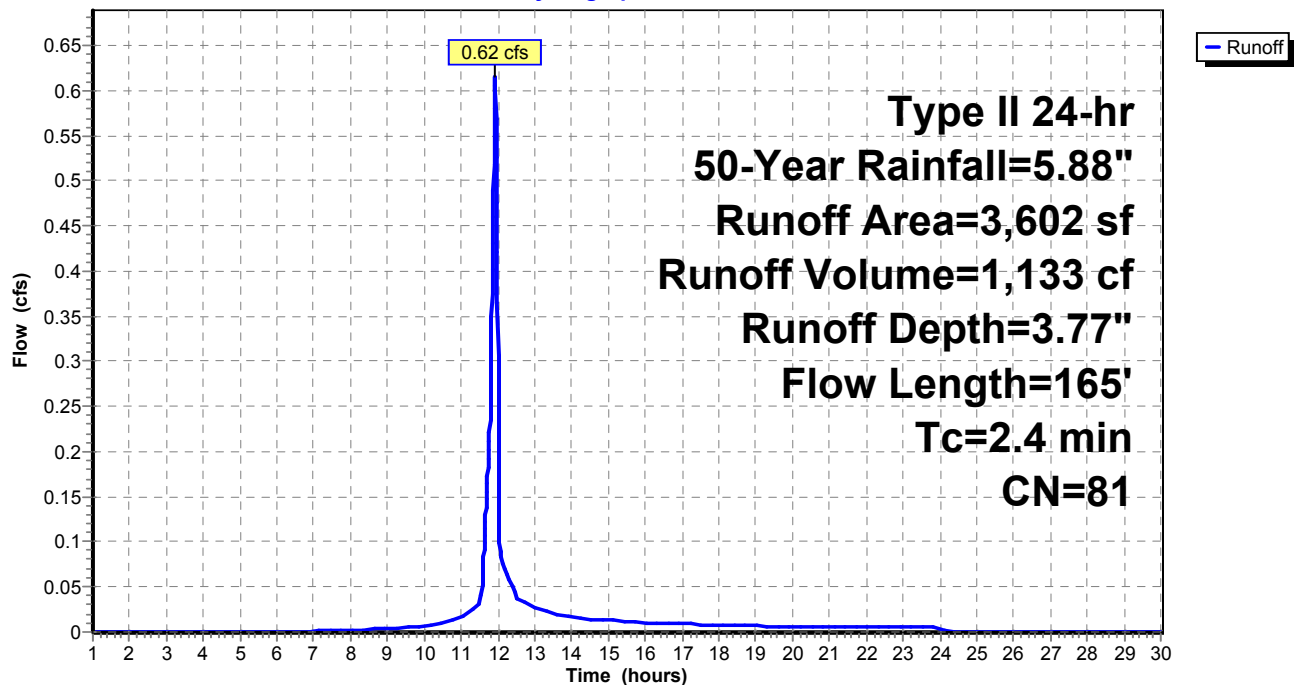

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 1.55 cfs @ 12.04 hrs, Volume= 3,924 cf, Depth= 2.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

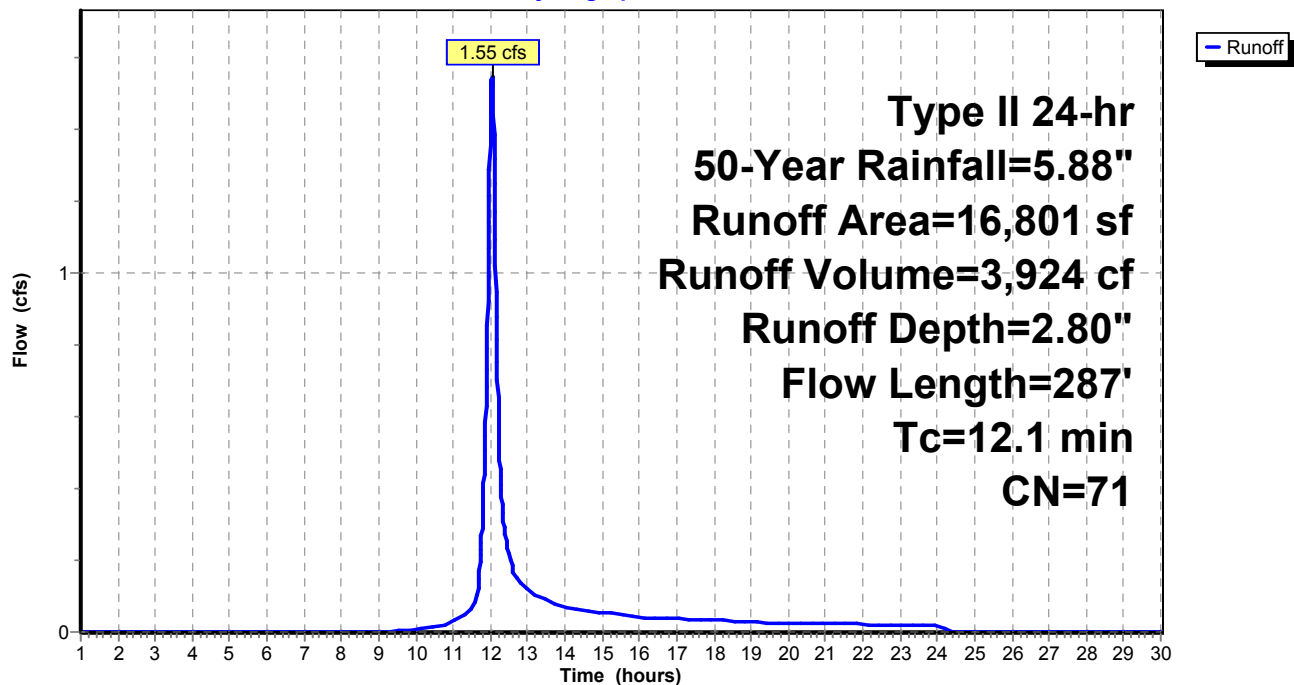

Summary for Subcatchment 14S: DA TO VCD

Runoff = 1.22 cfs @ 11.98 hrs, Volume= 2,515 cf, Depth= 2.99"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

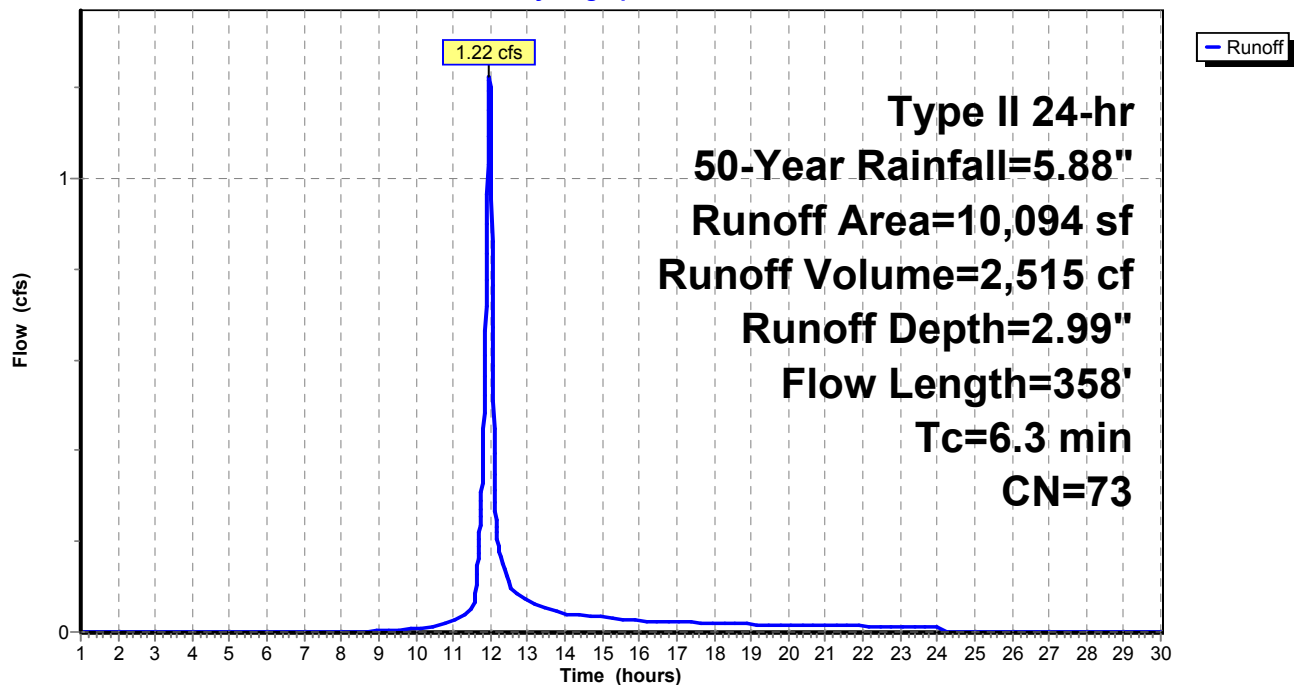

Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 0.80 cfs @ 12.29 hrs, Volume= 3,646 cf, Depth= 2.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 50-Year Rainfall=5.88"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

Subcatchment 15S: DA TO INFILTRATION BERM

Hydrograph

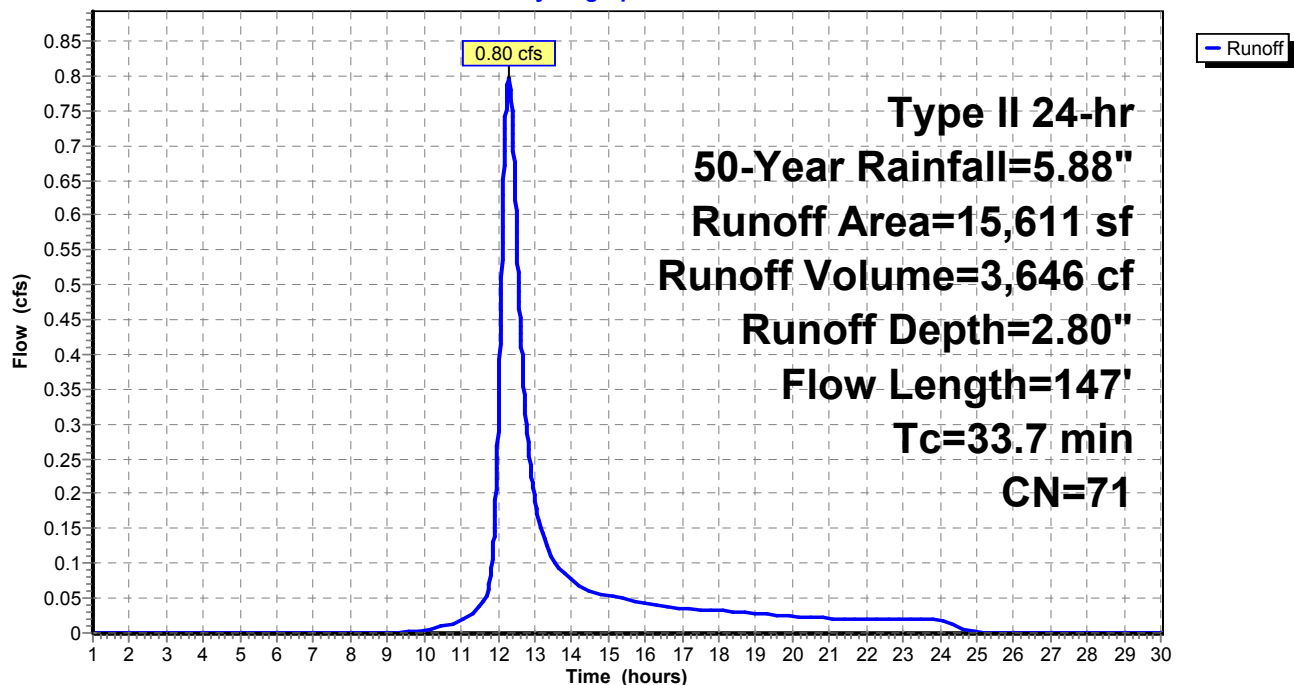

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 4.40" for 50-Year event
 Inflow = 1.35 cfs @ 12.01 hrs, Volume= 3,266 cf
 Outflow = 1.00 cfs @ 12.08 hrs, Volume= 2,067 cf, Atten= 26%, Lag= 4.3 min
 Primary = 1.00 cfs @ 12.08 hrs, Volume= 2,067 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.62' @ 12.08 hrs Surf.Area= 4,644 sf Storage= 1,420 cf

Plug-Flow detention time= 183.9 min calculated for 2,067 cf (63% of inflow)
 Center-of-Mass det. time= 81.0 min (876.4 - 795.3)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=1.00 cfs @ 12.08 hrs HW=1,264.62' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 1.00 cfs @ 0.84 fps)

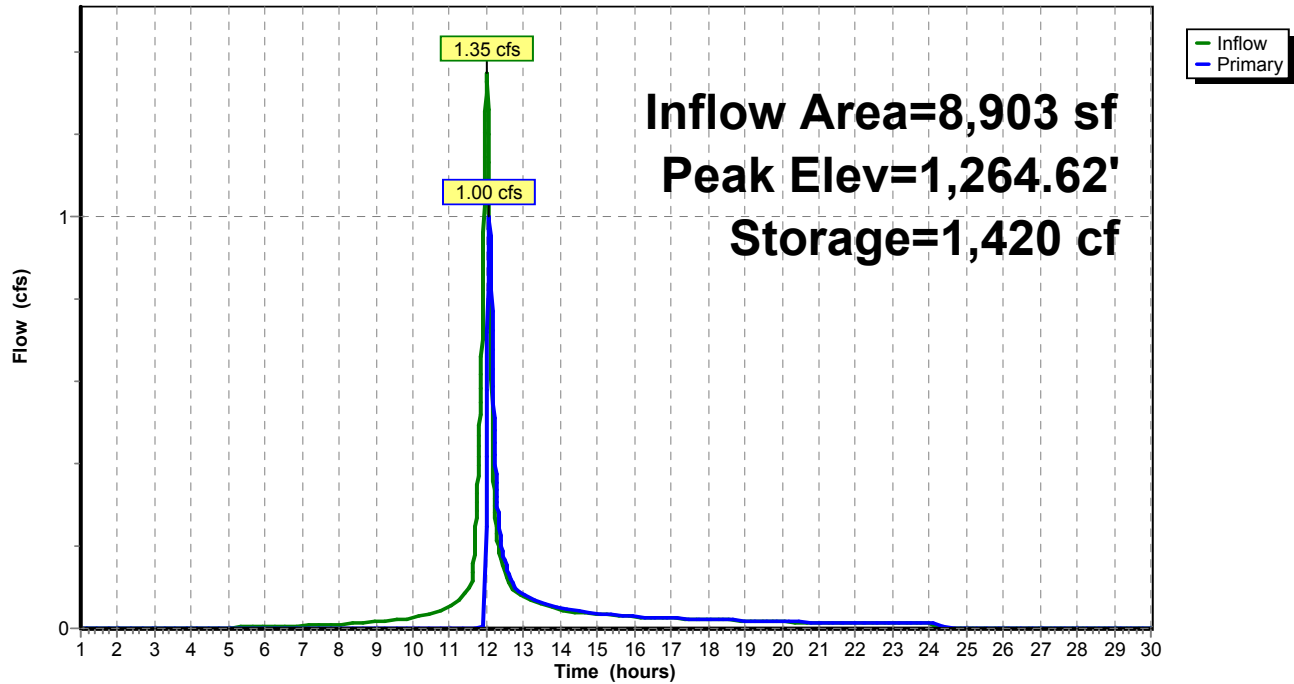Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 1.90" for 50-Year event
 Inflow = 1.22 cfs @ 11.98 hrs, Volume= 4,078 cf
 Outflow = 1.22 cfs @ 11.98 hrs, Volume= 3,730 cf, Atten= 0%, Lag= 0.0 min
 Primary = 1.22 cfs @ 11.98 hrs, Volume= 3,730 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.14' @ 11.98 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 64.5 min calculated for 3,729 cf (91% of inflow)
 Center-of-Mass det. time= 20.7 min (923.2 - 902.5)

Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351


Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=1.22 cfs @ 11.98 hrs HW=1,263.14' (Free Discharge)

↑1=**Broad-Crested Rectangular Weir**(Weir Controls 1.22 cfs @ 0.90 fps)

Pond 9P: VCD

Hydrograph

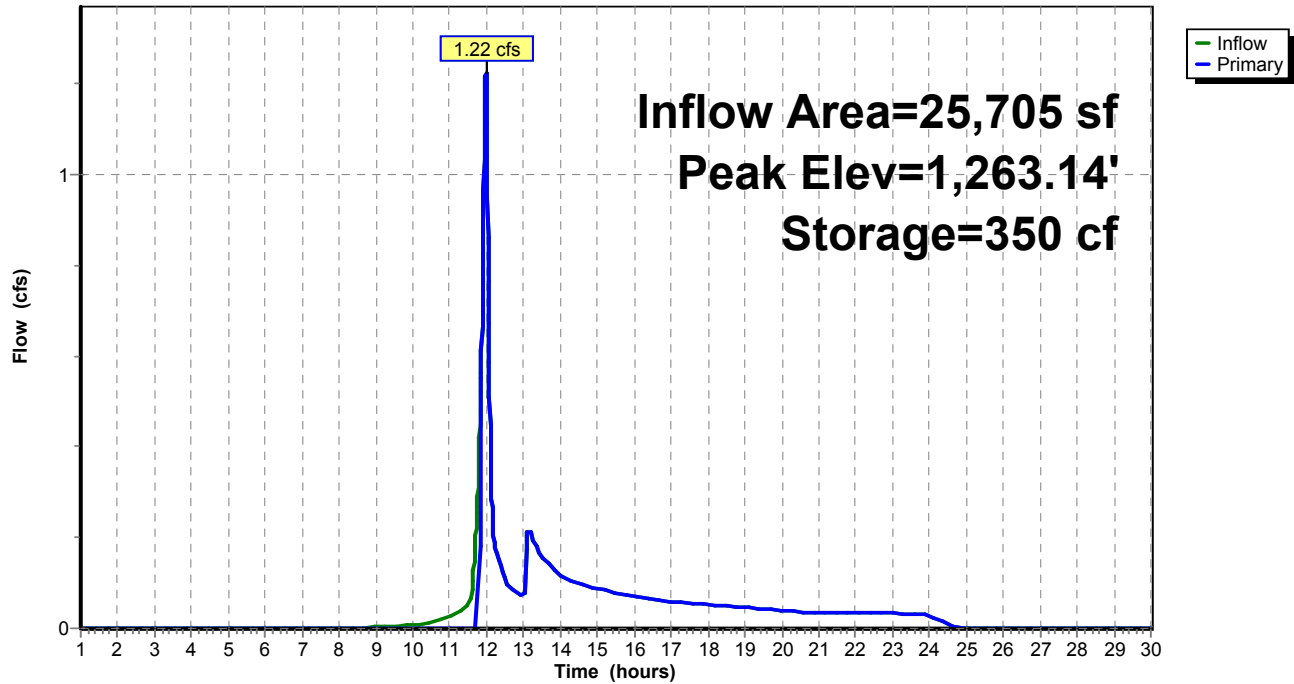

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 2.80" for 50-Year event
 Inflow = 0.80 cfs @ 12.29 hrs, Volume= 3,646 cf
 Outflow = 0.16 cfs @ 13.13 hrs, Volume= 1,564 cf, Atten= 80%, Lag= 50.0 min
 Primary = 0.16 cfs @ 13.13 hrs, Volume= 1,564 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,271.00' @ 13.13 hrs Surf.Area= 2,353 sf Storage= 2,091 cf

Plug-Flow detention time= 290.2 min calculated for 1,563 cf (43% of inflow)
 Center-of-Mass det. time= 161.1 min (1,020.4 - 859.3)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146


Device	Routing	Invert	Outlet Devices															
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir															
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00					
				2.50	3.00	3.50	4.00	4.50										
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68						
				2.72	2.81	2.92	2.97	3.07	3.32									

Primary OutFlow Max=0.06 cfs @ 13.13 hrs HW=1,271.00' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.06 cfs @ 0.14 fps)

Pond 10P: INFILTRATION BERM

Hydrograph

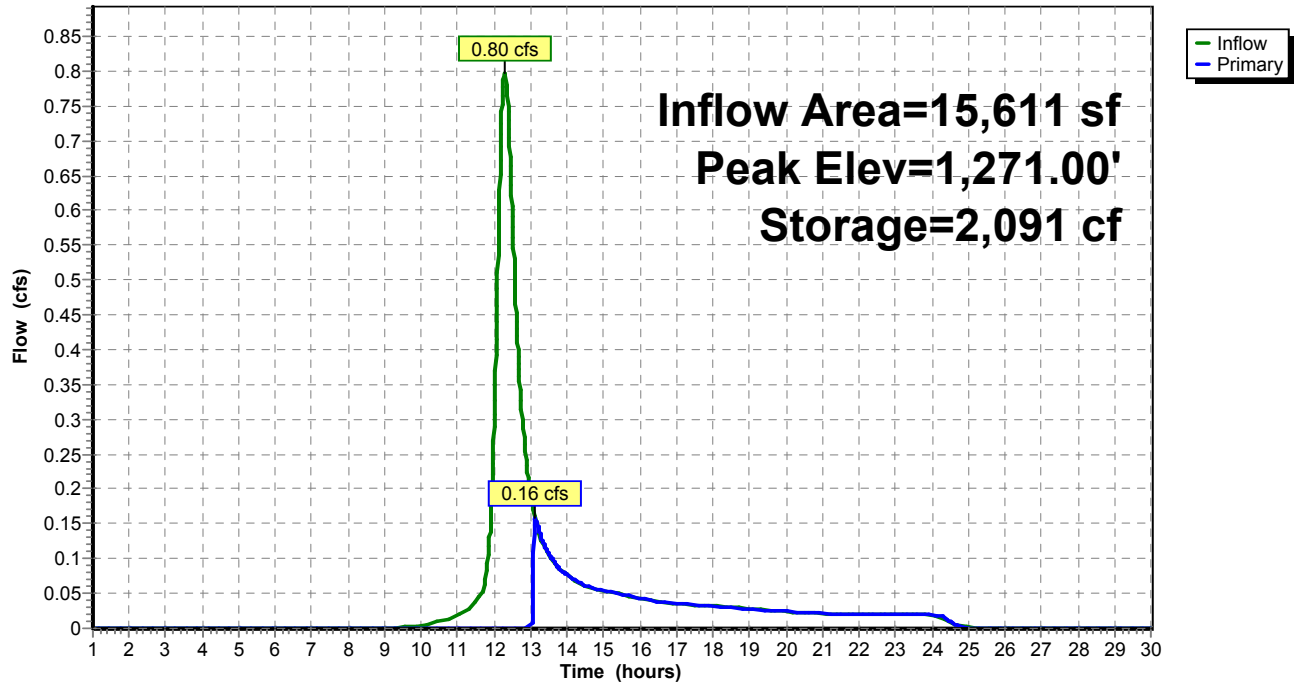

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 3.77" for 50-Year event
 Inflow = 0.62 cfs @ 11.93 hrs, Volume= 1,133 cf
 Outflow = 0.62 cfs @ 11.93 hrs, Volume= 1,008 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.62 cfs @ 11.93 hrs, Volume= 1,008 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.10' @ 11.93 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 77.8 min calculated for 1,008 cf (89% of inflow)
 Center-of-Mass det. time= 22.7 min (828.6 - 806.0)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.61 cfs @ 11.93 hrs HW=1,263.10' (Free Discharge)


↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.61 cfs @ 0.77 fps)

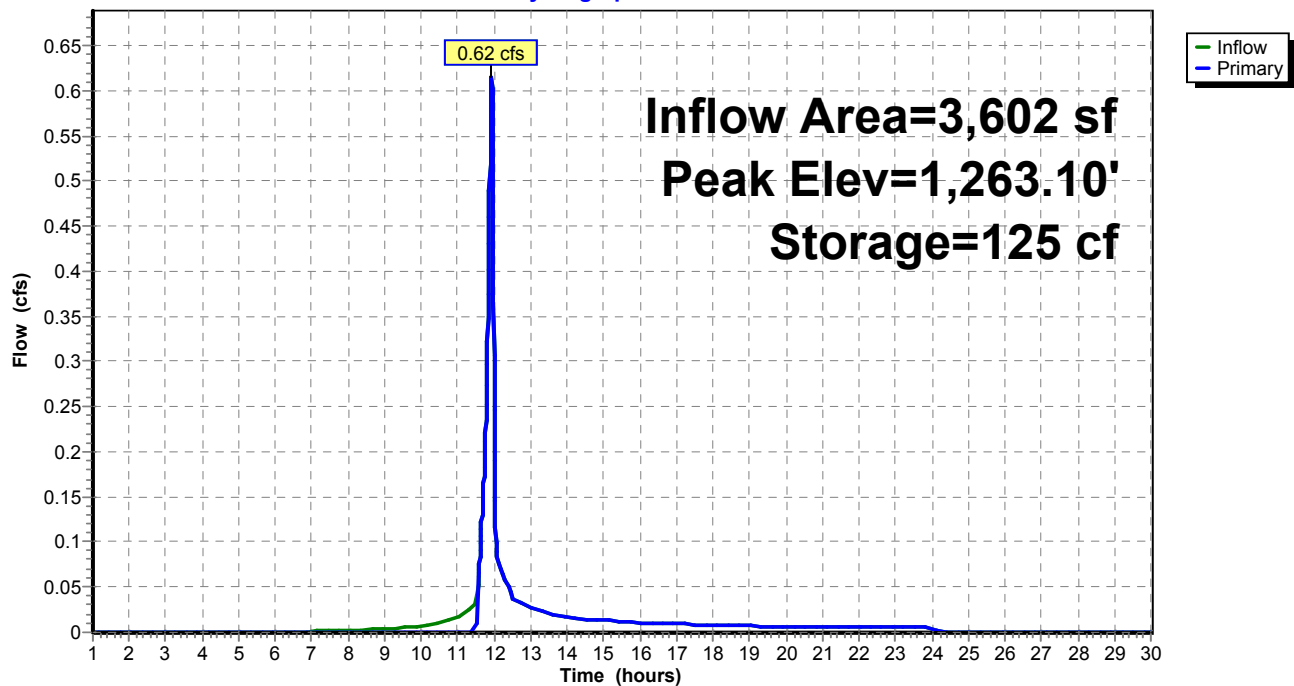Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 2.34" for 50-Year event
Inflow = 3.36 cfs @ 12.03 hrs, Volume= 10,728 cf
Primary = 3.36 cfs @ 12.03 hrs, Volume= 10,728 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

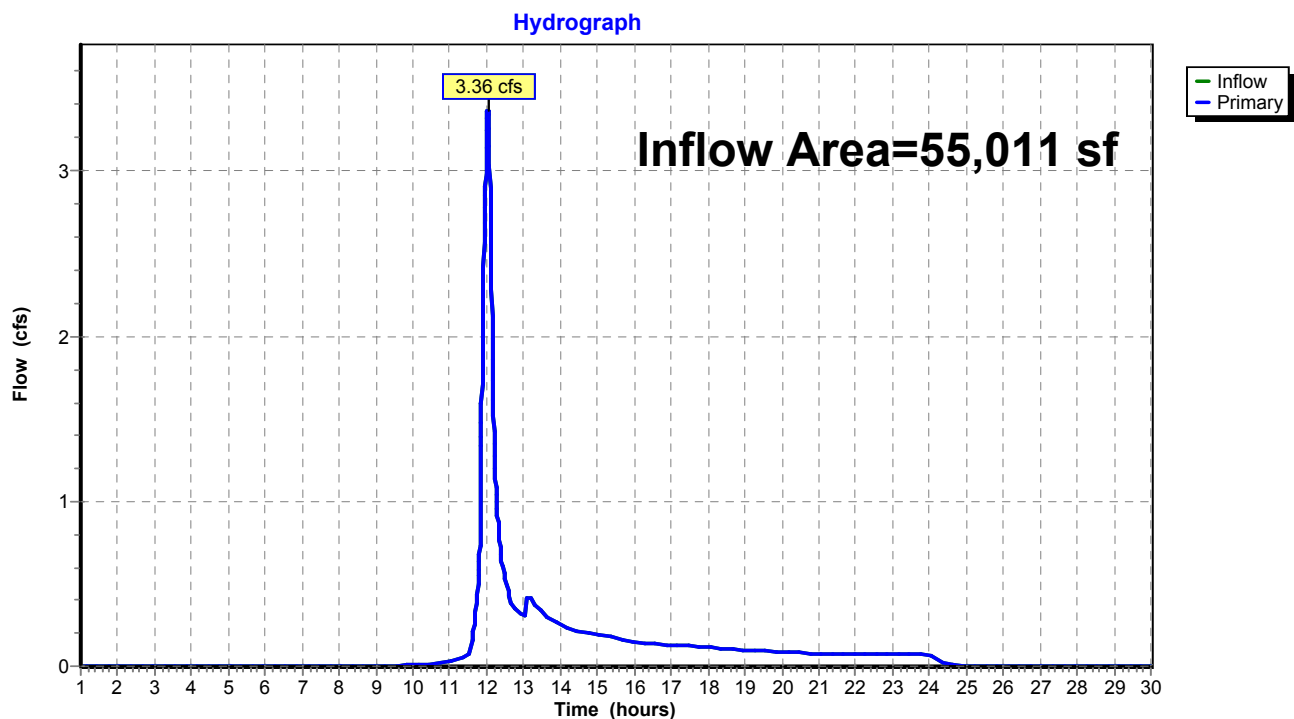Link 2L: Proposed Conditions

Time span=1.00-30.00 hrs, dt=0.01 hrs, 2901 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment5S: DA TO MLV PAD

Runoff Area=8,903 sf 57.90% Impervious Runoff Depth=5.32"
Flow Length=145' Tc=9.4 min CN=87 Runoff=1.62 cfs 3,951 cf

Subcatchment10S: DA TO VCI

Runoff Area=3,602 sf 12.88% Impervious Runoff Depth=4.66"
Flow Length=165' Tc=2.4 min CN=81 Runoff=0.75 cfs 1,398 cf

Subcatchment12S: OFFSITE DA

Runoff Area=16,801 sf 3.30% Impervious Runoff Depth=3.59"
Flow Length=287' Tc=12.1 min CN=71 Runoff=1.98 cfs 5,025 cf

Subcatchment14S: DA TO VCD

Runoff Area=10,094 sf 6.41% Impervious Runoff Depth=3.80"
Flow Length=358' Tc=6.3 min CN=73 Runoff=1.54 cfs 3,195 cf

Subcatchment15S: DA TO INFILTRATION

Runoff Area=15,611 sf 0.79% Impervious Runoff Depth=3.59"
Flow Length=147' Tc=33.7 min CN=71 Runoff=1.03 cfs 4,669 cf

Pond 6P: MLV PAD

Peak Elev=1,264.65' Storage=1,481 cf Inflow=1.62 cfs 3,951 cf
Outflow=1.45 cfs 2,751 cf

Pond 9P: VCD

Peak Elev=1,263.16' Storage=350 cf Inflow=1.54 cfs 5,782 cf
Outflow=1.54 cfs 5,436 cf

Pond 10P: INFILTRATIONBERM

Peak Elev=1,271.01' Storage=2,114 cf Inflow=1.03 cfs 4,669 cf
Outflow=0.55 cfs 2,588 cf

Pond 100P: VCI

Peak Elev=1,263.11' Storage=125 cf Inflow=0.75 cfs 1,398 cf
Outflow=0.75 cfs 1,273 cf

Link 2L: Proposed Conditions

Inflow=4.87 cfs 14,486 cf
Primary=4.87 cfs 14,486 cf

Total Runoff Area = 55,011 sf Runoff Volume = 18,237 cf Average Runoff Depth = 3.98"
87.38% Pervious = 48,067 sf 12.62% Impervious = 6,944 sf


Summary for Subcatchment 5S: DA TO MLV PAD

Runoff = 1.62 cfs @ 12.00 hrs, Volume= 3,951 cf, Depth= 5.32"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
152	89	Gravel roads, HSG C
* 5,040	98	Crushed Stone Pad, HSG C
* 115	98	Paved roads , HSG C
* 3,596	71	Meadow Fair, HSG C
0	70	Woods, Good, HSG C
8,903	87	Weighted Average
3,748		42.10% Pervious Area
5,155		57.90% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.2	11	0.0300	0.99		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
3.2	46	0.2000	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
5.3	43	0.0500	0.14		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.5	21	0.0100	0.70		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
0.2	24	0.0100	1.61		Shallow Concentrated Flow, SC2 Unpaved Kv= 16.1 fps
9.4	145	Total			

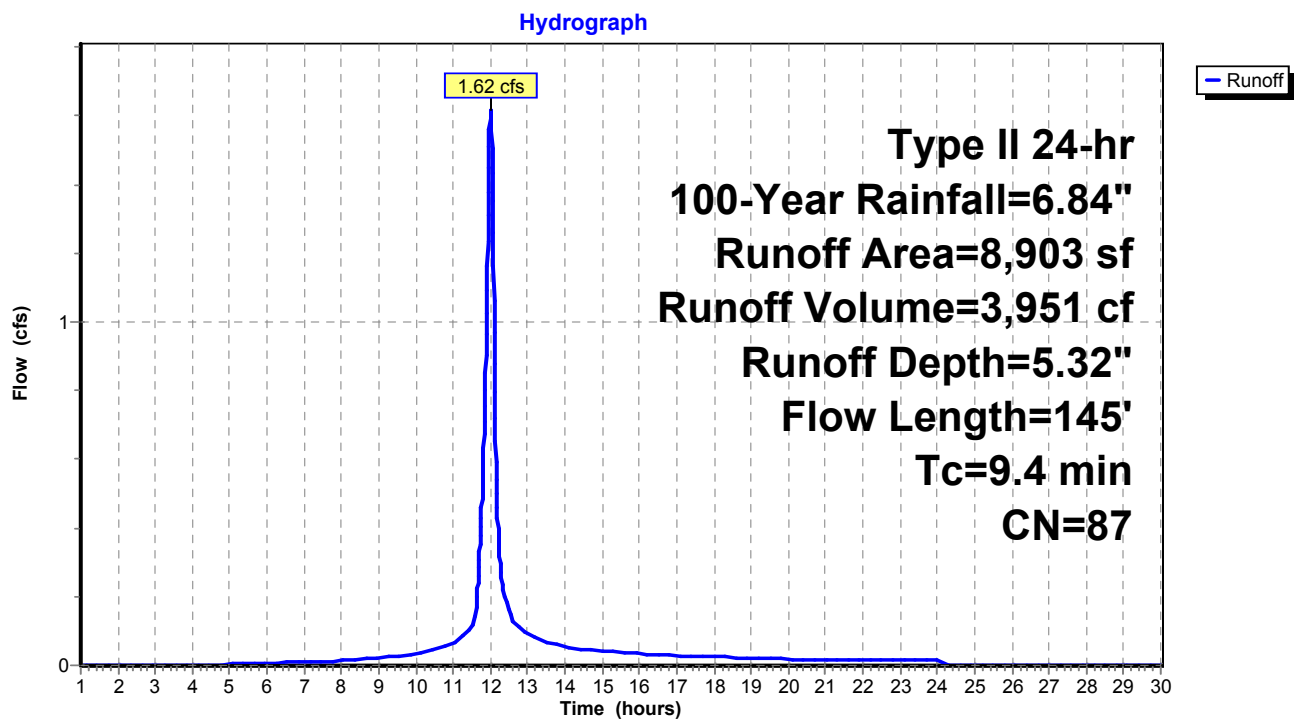Subcatchment 5S: DA TO MLV PAD

Summary for Subcatchment 10S: DA TO VCI

Runoff = 0.75 cfs @ 11.93 hrs, Volume= 1,398 cf, Depth= 4.66"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
* 464	98	Paved road, HSG C
1,267	89	Gravel roads, HSG C
* 1,871	71	Meadow Fair, HSG C
3,602	81	Weighted Average
3,138		87.12% Pervious Area
464		12.88% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.5	63	0.0800	2.09		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
0.3	20	0.0400	1.26		Sheet Flow, Smooth surfaces n= 0.011 P2= 2.92"
1.2	17	0.3300	0.24		Sheet Flow, Grass: Dense n= 0.240 P2= 2.92"
0.4	65	0.0400	3.00		Shallow Concentrated Flow, C1 Grassed Waterway Kv= 15.0 fps
2.4	165	Total			

Subcatchment 10S: DA TO VCI

Hydrograph

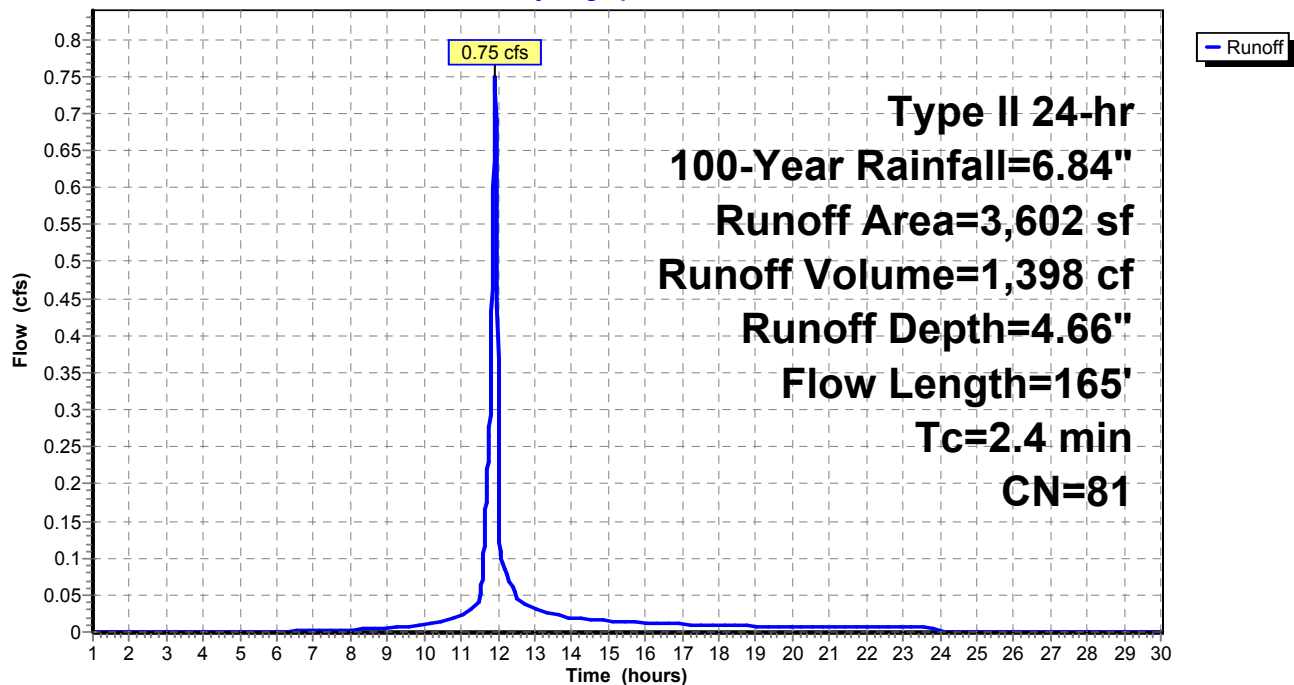

Summary for Subcatchment 12S: OFFSITE DA

Runoff = 1.98 cfs @ 12.04 hrs, Volume= 5,025 cf, Depth= 3.59"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
555	98	Paved parking, HSG C
11,291	70	Woods, Good, HSG C
4,955	71	Meadow, non-grazed, HSG C
16,801	71	Weighted Average
16,246		96.70% Pervious Area
555		3.30% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.6	61	0.0400	1.57		Sheet Flow, Sheet1
					Smooth surfaces n= 0.011 P2= 2.92"
0.9	8	0.1300	0.14		Sheet Flow, Sheet2
					Grass: Dense n= 0.240 P2= 2.92"
7.3	31	0.1300	0.07		Sheet Flow, Sheet3
					Woods: Dense underbrush n= 0.800 P2= 2.92"
3.3	187	0.0350	0.94		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
12.1	287	Total			

Subcatchment 12S: OFFSITE DA

Hydrograph

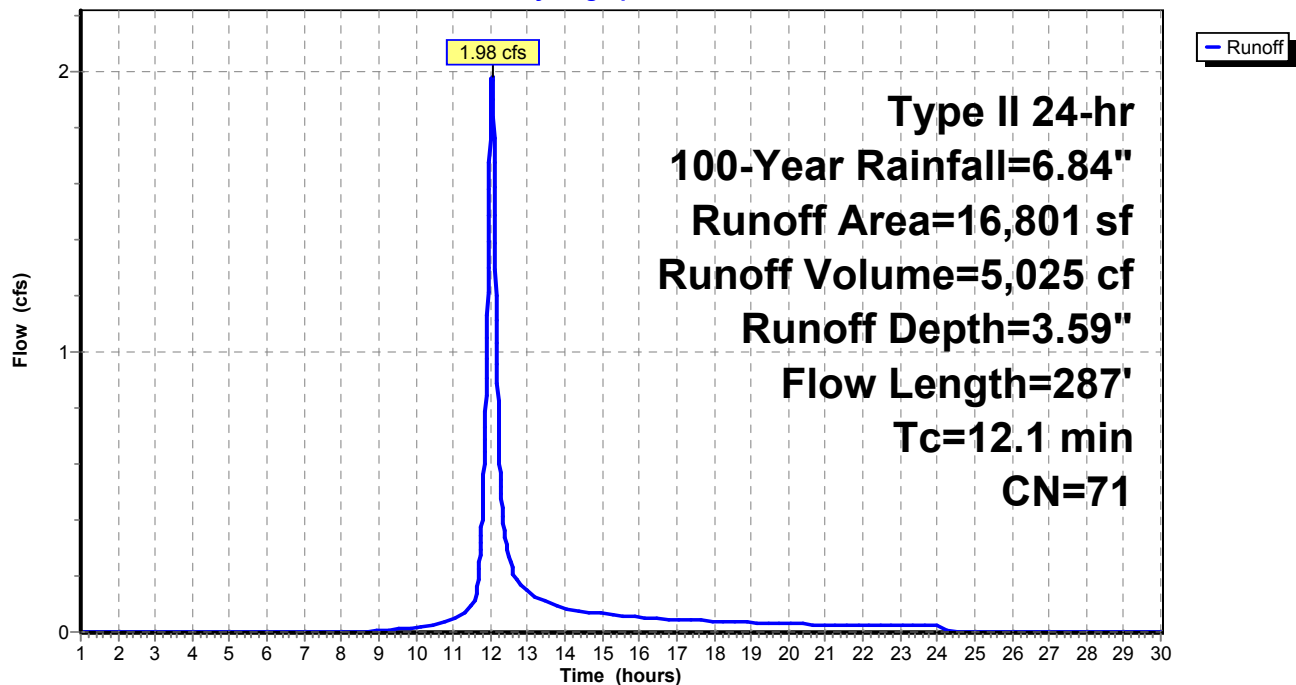

Summary for Subcatchment 14S: DA TO VCD

Runoff = 1.54 cfs @ 11.98 hrs, Volume= 3,195 cf, Depth= 3.80"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
647	98	Paved parking, HSG C
650	70	Woods, Good, HSG C
8,797	71	Meadow, non-grazed, HSG C
10,094	73	Weighted Average
9,447		93.59% Pervious Area
647		6.41% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
0.7	70	0.0400	1.61		Sheet Flow, Sheet1 Smooth surfaces n= 0.011 P2= 2.92"
2.7	30	0.1300	0.19		Sheet Flow, Sheet2 Grass: Dense n= 0.240 P2= 2.92"
0.1	9	0.1300	2.52		Shallow Concentrated Flow, SC1 Short Grass Pasture Kv= 7.0 fps
2.8	249	0.0100	1.50		Shallow Concentrated Flow, SC2 Grassed Waterway Kv= 15.0 fps
6.3	358	Total			

Subcatchment 14S: DA TO VCD

Hydrograph

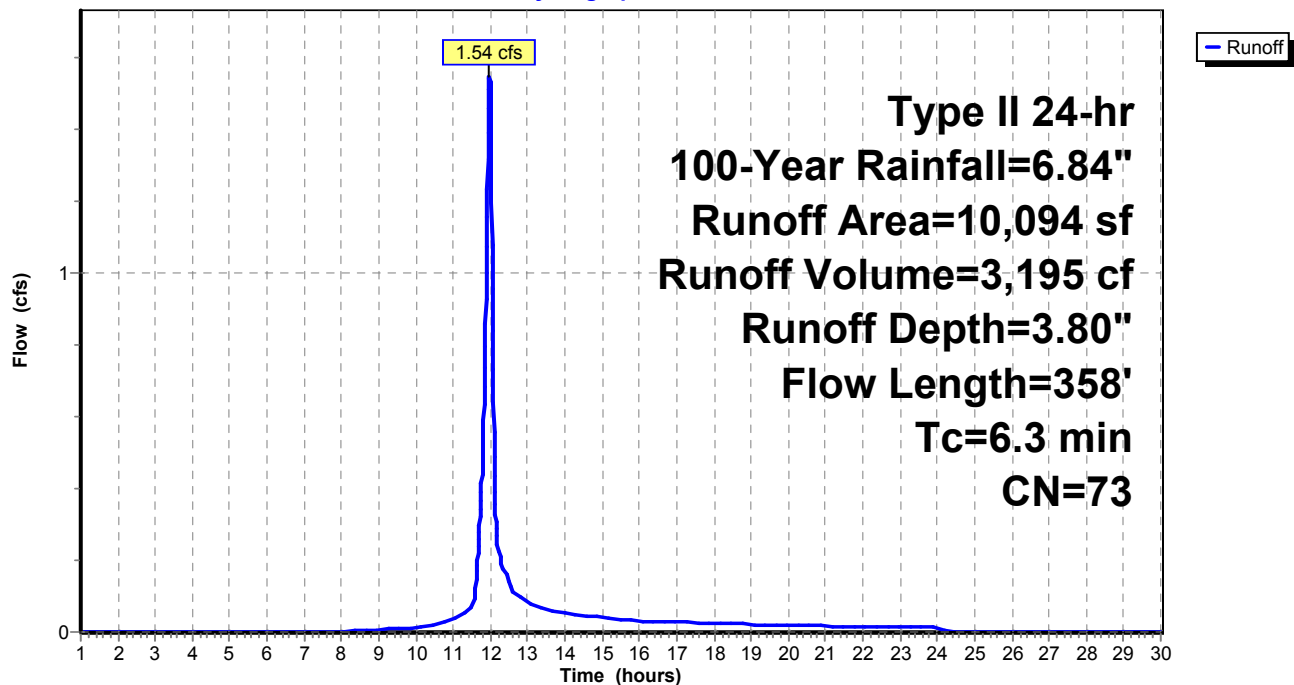


Summary for Subcatchment 15S: DA TO INFILTRATION BERM

Runoff = 1.03 cfs @ 12.29 hrs, Volume= 4,669 cf, Depth= 3.59"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs
Type II 24-hr 100-Year Rainfall=6.84"

Area (sf)	CN	Description
123	98	Paved parking, HSG C
10,225	70	Woods, Good, HSG C
5,263	71	Meadow, non-grazed, HSG C
15,611	71	Weighted Average
15,488		99.21% Pervious Area
123		0.79% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
33.3	100	0.0300	0.05		Sheet Flow, Sheet1
					Woods: Dense underbrush n= 0.800 P2= 2.92"
0.1	11	0.0700	1.32		Shallow Concentrated Flow, SC1
					Woodland Kv= 5.0 fps
0.3	36	0.0800	1.98		Shallow Concentrated Flow, SC2
					Short Grass Pasture Kv= 7.0 fps
33.7	147	Total			

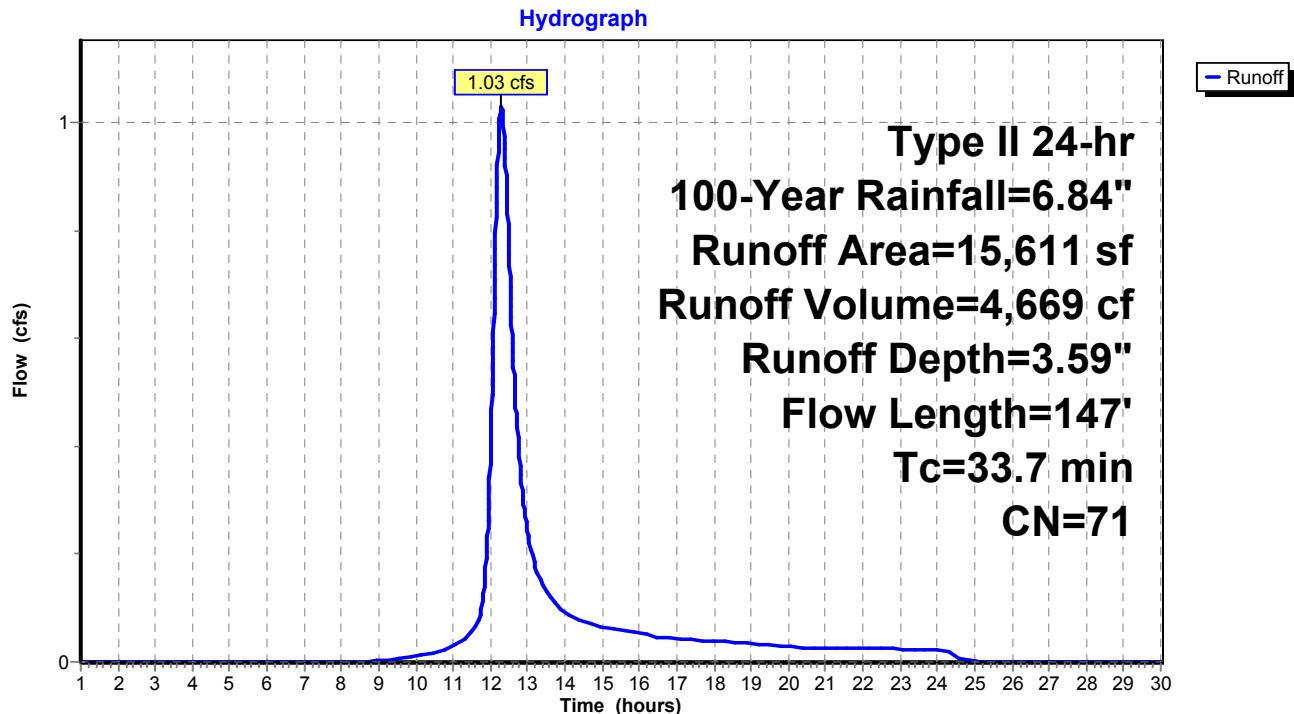Subcatchment 15S: DA TO INFILTRATION BERM

Summary for Pond 6P: MLV PAD

Inflow Area = 8,903 sf, 57.90% Impervious, Inflow Depth = 5.32" for 100-Year event
 Inflow = 1.62 cfs @ 12.00 hrs, Volume= 3,951 cf
 Outflow = 1.45 cfs @ 12.05 hrs, Volume= 2,751 cf, Atten= 10%, Lag= 2.6 min
 Primary = 1.45 cfs @ 12.05 hrs, Volume= 2,751 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 2
 Peak Elev= 1,264.65' @ 12.05 hrs Surf.Area= 4,644 sf Storage= 1,481 cf

Plug-Flow detention time= 164.4 min calculated for 2,751 cf (70% of inflow)
 Center-of-Mass det. time= 68.2 min (858.2 - 790.1)


Volume	Invert	Avail.Storage	Storage Description
#1	1,263.00'	2,128 cf	Custom Stage Data (Prismatic) Listed below (Recalc) 5,320 cf Overall x 40.0% Voids

Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
1,263.00	0	0	0
1,263.50	813	203	203
1,264.00	2,861	919	1,122
1,264.50	4,644	1,876	2,998
1,265.00	4,645	2,322	5,320

Device	Routing	Invert	Outlet Devices
#1	Primary	1,264.50'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=1.44 cfs @ 12.05 hrs HW=1,264.65' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 1.44 cfs @ 0.95 fps)

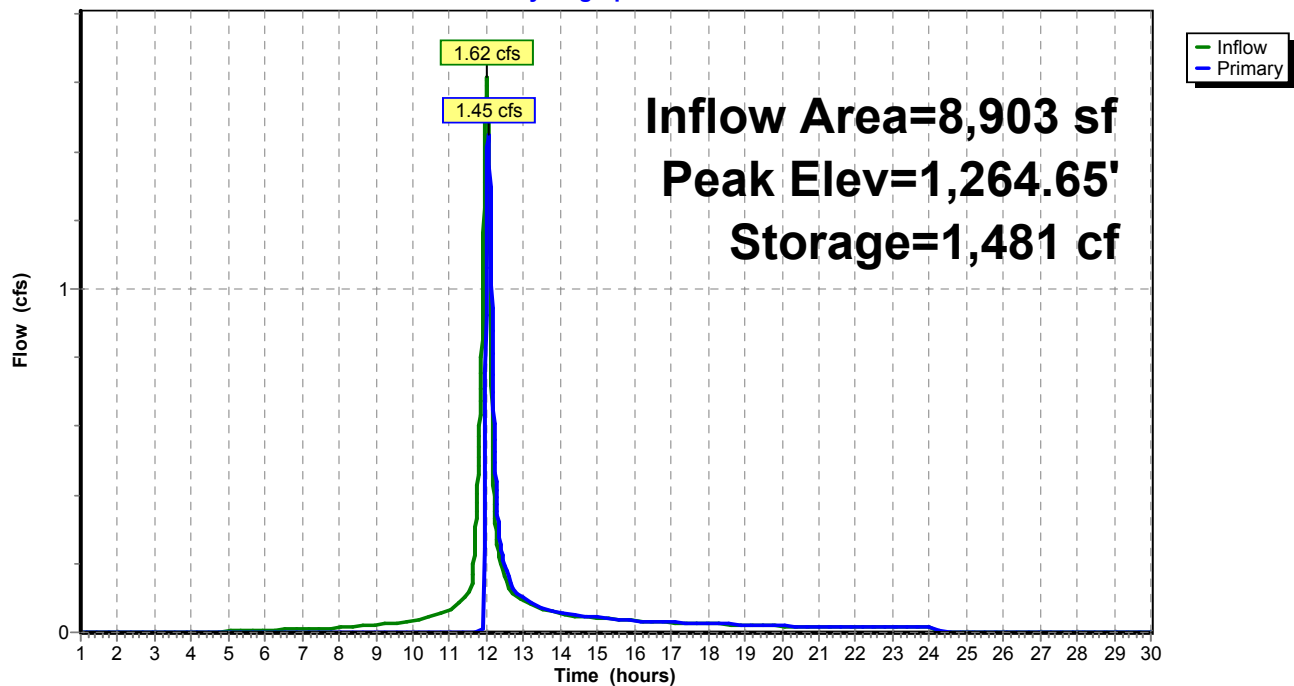Pond 6P: MLV PAD**Hydrograph**

Summary for Pond 9P: VCD

Inflow Area = 25,705 sf, 3.00% Impervious, Inflow Depth = 2.70" for 100-Year event
 Inflow = 1.54 cfs @ 11.98 hrs, Volume= 5,782 cf
 Outflow = 1.54 cfs @ 11.98 hrs, Volume= 5,436 cf, Atten= 0%, Lag= 0.0 min
 Primary = 1.54 cfs @ 11.98 hrs, Volume= 5,436 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 8
 Peak Elev= 1,263.16' @ 11.98 hrs Surf.Area= 0 sf Storage= 350 cf

Plug-Flow detention time= 46.4 min calculated for 5,436 cf (94% of inflow)
 Center-of-Mass det. time= 14.1 min (895.4 - 881.3)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	351 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	175
1,263.00	350
1,263.50	351

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	10.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=1.54 cfs @ 11.98 hrs HW=1,263.16' (Free Discharge)

↑1=**Broad-Crested Rectangular Weir**(Weir Controls 1.54 cfs @ 0.97 fps)

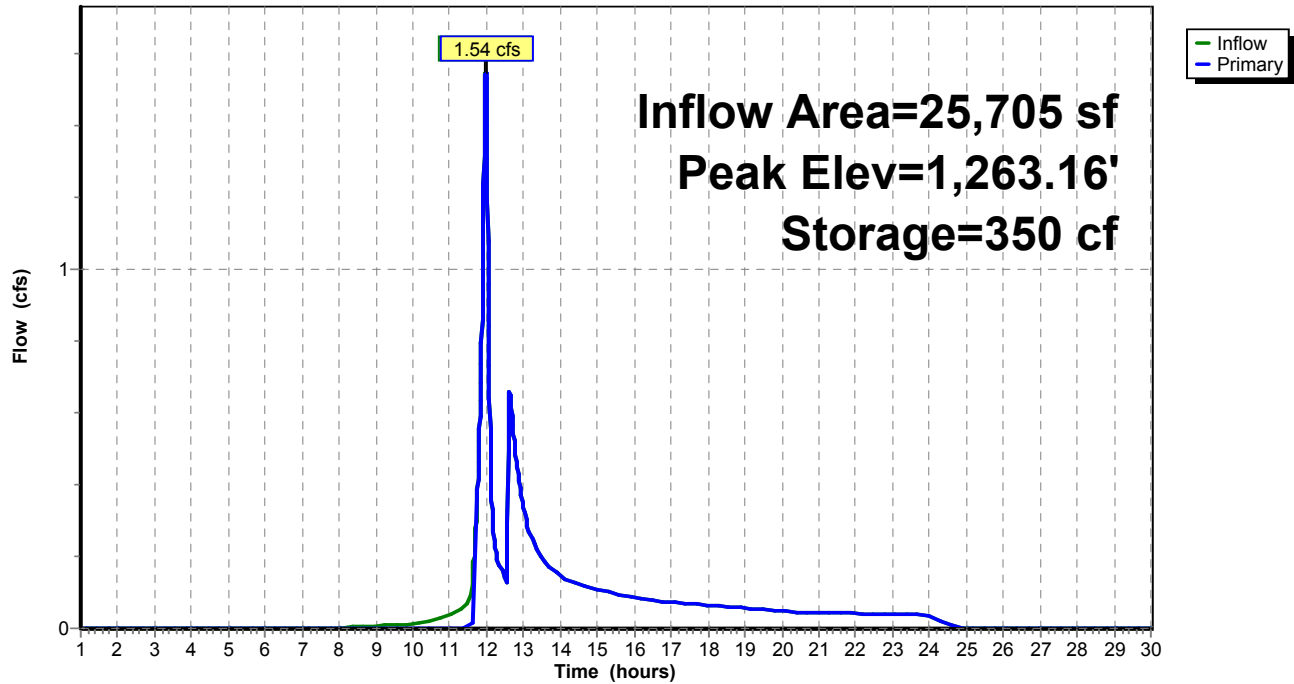Pond 9P: VCD**Hydrograph**

Summary for Pond 10P: INFILTRATION BERM

Inflow Area = 15,611 sf, 0.79% Impervious, Inflow Depth = 3.59" for 100-Year event
 Inflow = 1.03 cfs @ 12.29 hrs, Volume= 4,669 cf
 Outflow = 0.55 cfs @ 12.62 hrs, Volume= 2,588 cf, Atten= 47%, Lag= 19.9 min
 Primary = 0.55 cfs @ 12.62 hrs, Volume= 2,588 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,271.01' @ 12.62 hrs Surf.Area= 2,367 sf Storage= 2,114 cf


Plug-Flow detention time= 220.3 min calculated for 2,588 cf (55% of inflow)
 Center-of-Mass det. time= 101.9 min (954.1 - 852.2)

Volume	Invert	Avail.Storage	Storage Description		
#1	1,269.00'	3,471 cf	Custom Stage Data (Irregular) Listed below		
Elevation (feet)	Surf.Area (sq-ft)	Perim. (feet)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	Wet.Area (sq-ft)
1,269.00	94	74.7	0	0	94
1,269.50	443	134.5	124	124	1,091
1,270.00	977	192.5	346	470	2,602
1,270.50	1,587	229.6	635	1,105	3,853
1,271.00	2,347	279.8	977	2,082	5,892
1,271.50	3,234	306.5	1,389	3,471	7,146

Device	Routing	Invert	Outlet Devices											
#1	Primary	1,271.00'	125.0' long x 3.0' breadth Broad-Crested Rectangular Weir											
			Head (feet)	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00	
				2.50	3.00	3.50	4.00	4.50						
			Coef. (English)	2.44	2.58	2.68	2.67	2.65	2.64	2.64	2.68	2.68		
				2.72	2.81	2.92	2.97	3.07	3.32					

Primary OutFlow Max=0.37 cfs @ 12.62 hrs HW=1,271.01' (Free Discharge)

↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.37 cfs @ 0.26 fps)

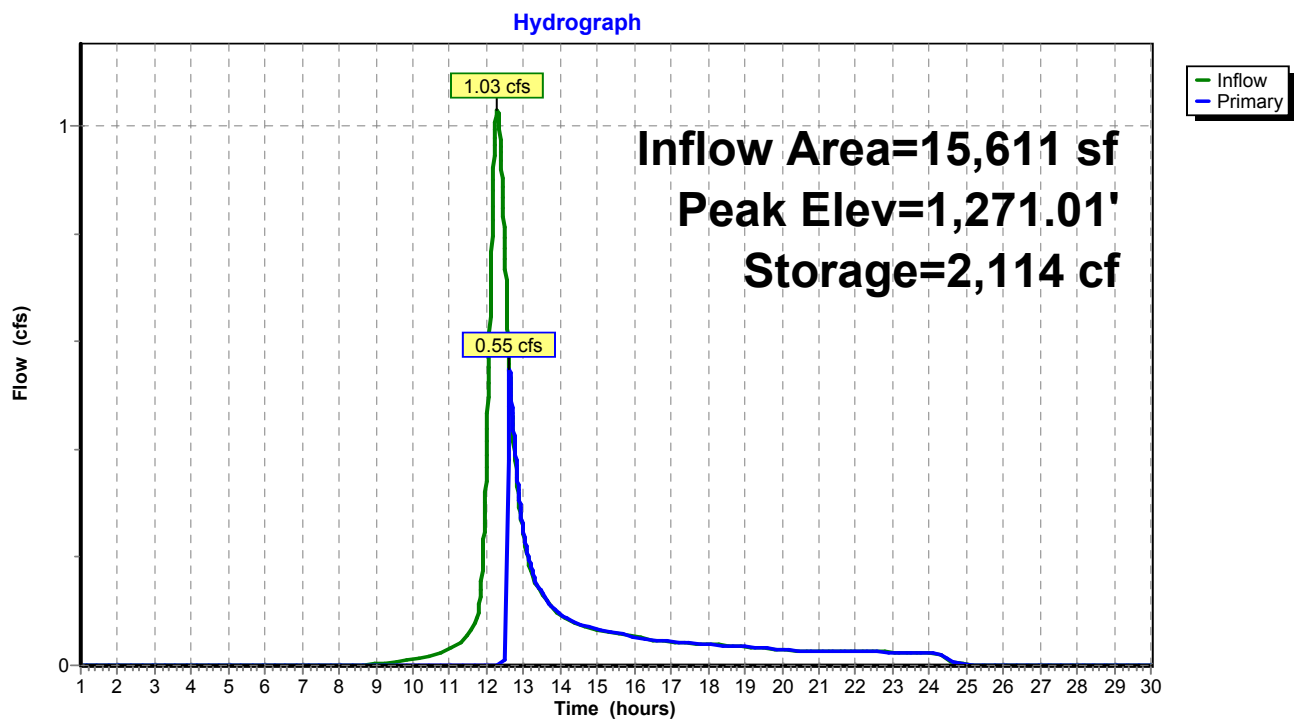Pond 10P: INFILTRATION BERM

Summary for Pond 100P: VCI

Inflow Area = 3,602 sf, 12.88% Impervious, Inflow Depth = 4.66" for 100-Year event
 Inflow = 0.75 cfs @ 11.93 hrs, Volume= 1,398 cf
 Outflow = 0.75 cfs @ 11.93 hrs, Volume= 1,273 cf, Atten= 0%, Lag= 0.0 min
 Primary = 0.75 cfs @ 11.93 hrs, Volume= 1,273 cf

Routing by Stor-Ind method, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs / 6
 Peak Elev= 1,263.11' @ 11.93 hrs Surf.Area= 0 sf Storage= 125 cf

Plug-Flow detention time= 67.5 min calculated for 1,273 cf (91% of inflow)
 Center-of-Mass det. time= 20.8 min (820.8 - 800.0)


Volume	Invert	Avail.Storage	Storage Description
#1	1,262.00'	126 cf	Custom Stage Data Listed below

Elevation (feet)	Cum.Store (cubic-feet)
1,262.00	0
1,262.50	63
1,263.00	125
1,263.50	126

Device	Routing	Invert	Outlet Devices
#1	Primary	1,263.00'	8.0' long x 3.0' breadth Broad-Crested Rectangular Weir Head (feet) 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.50 3.00 3.50 4.00 4.50 Coef. (English) 2.44 2.58 2.68 2.67 2.65 2.64 2.64 2.68 2.68 2.72 2.81 2.92 2.97 3.07 3.32

Primary OutFlow Max=0.75 cfs @ 11.93 hrs HW=1,263.11' (Free Discharge)


↑ **1=Broad-Crested Rectangular Weir** (Weir Controls 0.75 cfs @ 0.82 fps)

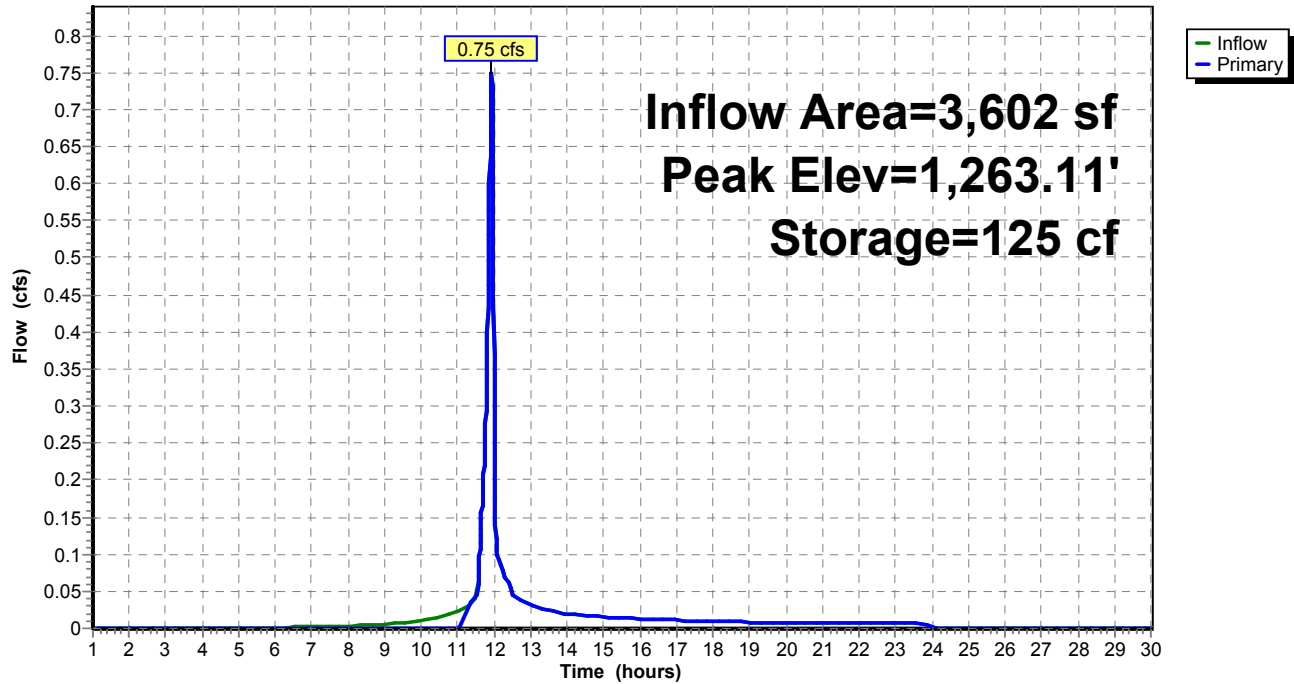Pond 100P: VCI**Hydrograph**

Summary for Link 2L: Proposed Conditions

Inflow Area = 55,011 sf, 12.62% Impervious, Inflow Depth = 3.16" for 100-Year event
Inflow = 4.87 cfs @ 12.01 hrs, Volume= 14,486 cf
Primary = 4.87 cfs @ 12.01 hrs, Volume= 14,486 cf, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 1.00-30.00 hrs, dt= 0.01 hrs

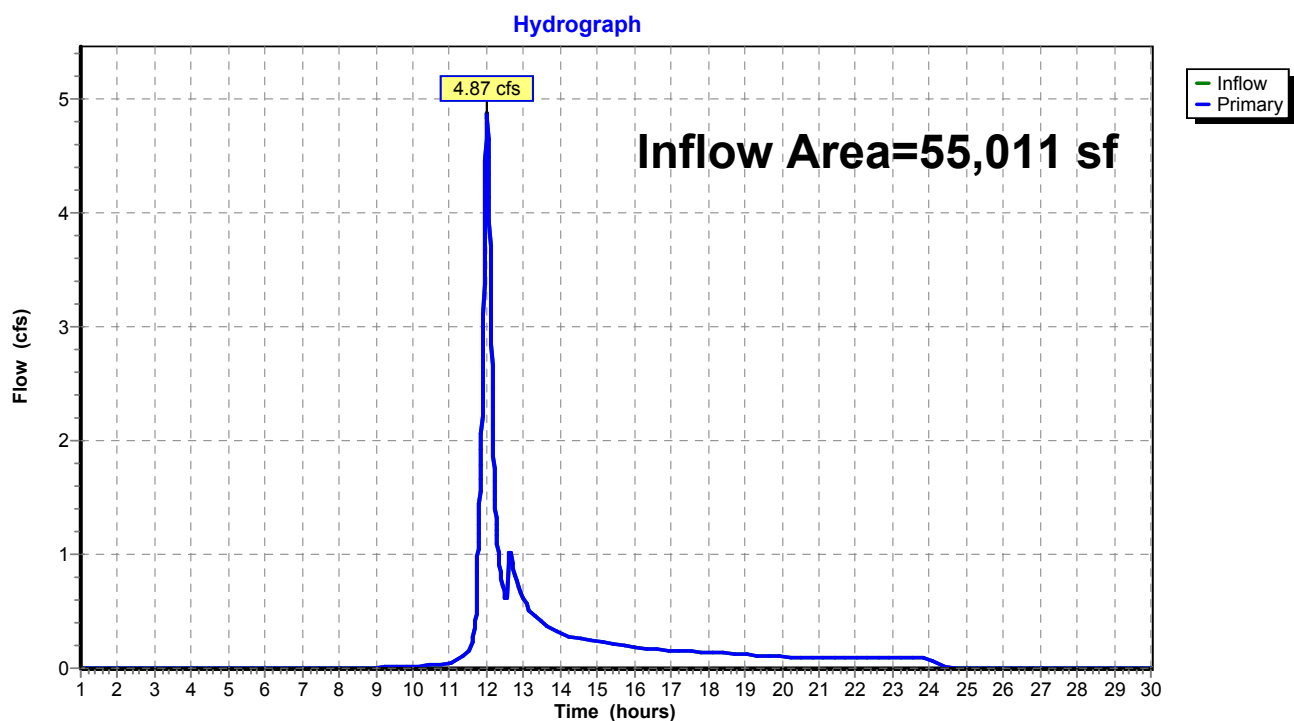Link 2L: Proposed Conditions

G.5 Conveyance Calculations

- a. E&S Worksheet 11
- b. NAG Swale Lining Analysis
- c. Figure 9.3-Riprap Apron Design

E&S WORKSHEET # 11
Channel Design Data

PROJECT NAME: Atlantic Sunrise

LOCATION: AR-LU-007.1 Vegetated Channel for Infiltration (VCI)

PREPARED BY: JMS **REVISED BY: JMS**

DATE: 9/28/15

REV 09/19/16

CHECKED BY: BJP **CHECKED BY: SMK**

DATE: 9/28/15

REV 09/19/16

CHANNEL OR CHANNEL SECTION	AR-LU-007.1 VCI	AR-LU-007.1 VCI
TEMPORARY OR PERMANENT? (T OR P)	P	P
DESIGN STORM (2, 5, OR 10 YR)	10	10
ACRES (AC)	0.08	0.08
MULTIPLIER ¹ (1.6, 2.25, or 2.75) ¹	N/A	N/A
Qr (REQUIRED CAPACITY) (CFS)	0.38	0.38
Q (CALCULATED AT FLOW DEPTH d) (CFS)	0.40	0.38
PROTECTIVE LINING ²	SC250	SC250 REINFORCED VEGETATION
n (MANNING'S COEFFICIENT) ²	0.04	0.25
Va (ALLOWABLE VELOCITY) (FPS)	N/A	N/A
V (CALCULATED AT FLOW DEPTH d) (FPS)	1.55	0.44
τa (MAX ALLOWABLE SHEAR STRESS) (LB/FT ²)	2.50	8.00
τd (CALC'D SHEAR STRESS AT FLOW DEPTH d) (LB/FT ²)	0.27	0.75
CHANNEL BOTTOM WIDTH (FT)	2	2
CHANNEL SIDE SLOPES (H:V)	3	3
D (TOTAL DEPTH) (FT)	1.5	1.5
CHANNEL TOP WIDTH @ D (FT)	11	11
d (CALCULATED FLOW DEPTH) (FT)	0.11	0.30
CHANNEL TOP WIDTH @ FLOW DEPTH d (FT)	2.66	3.80
BOTTOM WIDTH: FLOW DEPTH RATIO (12:1 MAX)	18.18	6.67
d50 STONE SIZE (IN)	N/A	N/A
A (CROSS-SECTIONAL AREA) (SQ. FT.)	0.26	0.87
R (HYDRAULIC RADIUS)	0.10	0.22
S (BED SLOPE) ³ (FT/FT)	0.04	0.04
Sc (CRITICAL SLOPE) (FT/FT)	0.052	1.539
.7Sc (FT/FT)	0.036	1.077
1.3Sc (FT/FT)	0.067	2.000
STABLE FLOW? (Y/N)	N	Y
FREEBOARD BASED ON UNSTABLE FLOW (FT)	0.01	0.0
FREEBOARD BASED ON STABLE FLOW (FT)	0.50	0.5
MINIMUM REQUIRED FREEBOARD ⁴ (FT)	0.50	0.5
DESIGN METHOD FOR PROTECTIVE LINING ⁵		
PERMISSIBLE VELOCITY (V) OR SHEAR STRESS (S)	S	S

EQUIVALENT PIPE CALCULATION:

Q n s (ft/ft) D (ft.) D (in) Round up to:
0.40 0.013 0.04 0.338 4.059 **12" pipe**

$$D = ((Q*n)/(S^{1/2}*Pi*0.1478))^{3/8}$$

Pipe Equivalence Calculation for Sizing Rip Rap Apron:

Use Manning's Equation

$$Q = (1.49/n)*A*(R^{2/3})*(S^{1/2})$$

Q = Flow Rate from Worksheet 11 (cfs)

n = Manning's Constant for Smooth Plastic Pipe = 0.013 (unitless)

A = Area of Pipe (ft) = 0.25 * Pi * D²

D = Diameter of Pipe (ft)

R = Hydraulic Radius = A / P = (0.25 * Pi * D²) / (Pi * D) = 0.25 * D

P = Perimeter of Pipe (ft) = Pi * D

S = Slope of channel from Worksheet 11 (ft/ft)

Solve Manning's Equation for Diameter of Pipe:

$$Q = (1.49/n)*A*(R^{2/3})*(S^{1/2})$$

$$Q = (1.49/n)*(0.25*Pi*D^2)*((0.25*D)^{2/3})*(S^{1/2})$$

$$Q*n*/(1.49*S^{1/2}) = (0.25*Pi*D^2)*((0.25*D)^{2/3})$$

$$Q*n*/(1.49*S^{1/2}*0.25*(0.25^{2/3})) = (Pi*D^2)*(D^{2/3})$$

$$Q*n*/(S^{1/2}*Pi*0.1478) = (D^2)*(D^{2/3})$$

$$Q*n*/(S^{1/2}*Pi*0.1478) = (D^8/3)$$

$$(Q*n*/(S^{1/2}*Pi*0.1478))^{3/8} = D$$

Multiply by 12 to convert feet to inches:

$$D = ((Q*n)/(S^{1/2}*Pi*0.1478))^{3/8} * 12$$

1. Use 1.6 for Temporary Channels; 2.25 for Temporary Channels in Special Protection (HQ or EV) Watersheds; 2.75 for Permanent Channels. For Rational Method, enter "N/A" and attach E&S Worksheets 9 and 10. For TR-55 enter "N/A" and attach appropriate Worksheets.

2. Adjust "n" value for changes in channel liner and flow depth. For vegetated channels, provide data for manufactured linings without vegetation and with vegetation in separate columns.

3. Slopes may not be averaged.

4. Minimum Freeboard is 0.5 ft. or 1/4 Total Channel Depth, whichever is greater

5. Permissible velocity lining design method is not acceptable for channels with a bed slope of 10% or greater. Shear stress lining design method is required for channels with a bed slope of 10% or greater. Shear stress lining design method may be used for any channel bed slope.

E&S WORKSHEET # 11
Channel Design Data

PROJECT NAME: Atlantic Sunrise

LOCATION: AR-LU-007.1 Vegetated Channel for Diversion Purposes (VCD)

PREPARED BY: JMS **REVISED BY: JMS**

DATE: 9/28/15

REV 09/19/16

CHECKED BY: BJP **CHECKED BY: SK**

DATE: 9/28/15

REV 09/19/16

CHANNEL OR CHANNEL SECTION	AR-LU-007.1 VCD	AR-LU-007.1 VCD
TEMPORARY OR PERMANENT? (T OR P)	P	P
DESIGN STORM (2, 5, OR 10 YR)	10	10
ACRES (AC)	0.23	0.23
MULTIPLIER ¹ (1.6, 2.25, or 2.75) ¹	N/A	N/A
Qr (REQUIRED CAPACITY) (CFS)	0.67	0.67
Q (CALCULATED AT FLOW DEPTH d) (CFS)	0.67	0.68
PROTECTIVE LINING ²	SC250	SC250 REINFORCED VEGETATION
n (MANNING'S COEFFICIENT) ²	0.04	0.25
Va (ALLOWABLE VELOCITY) (FPS)	N/A	N/A
V (CALCULATED AT FLOW DEPTH d) (FPS)	1.15	0.31
τa (MAX ALLOWABLE SHEAR STRESS) (LB/FT ²)	2.50	8.00
τd (CALC'D SHEAR STRESS AT FLOW DEPTH d) (LB/FT ²)	0.14	0.36
CHANNEL BOTTOM WIDTH (FT)	2	2
CHANNEL SIDE SLOPES (H:V)	3	3
D (TOTAL DEPTH) (FT)	1.5	1.5
CHANNEL TOP WIDTH @ D (FT)	11	11
d (CALCULATED FLOW DEPTH) (FT)	0.22	0.58
CHANNEL TOP WIDTH @ FLOW DEPTH d (FT)	3.32	5.48
BOTTOM WIDTH: FLOW DEPTH RATIO (12:1 MAX)	9.09	3.45
d50 STONE SIZE (IN)	N/A	N/A
A (CROSS-SECTIONAL AREA) (SQ. FT.)	0.59	2.17
R (HYDRAULIC RADIUS)	0.17	0.38
S (BED SLOPE) ³ (FT/FT)	0.01	0.01
Sc (CRITICAL SLOPE) (FT/FT)	0.043	1.296
.7Sc (FT/FT)	0.030	0.908
1.3Sc (FT/FT)	0.056	1.685
STABLE FLOW? (Y/N)	Y	Y
FREEBOARD BASED ON UNSTABLE FLOW (FT)	0.02	0.0
FREEBOARD BASED ON STABLE FLOW (FT)	0.50	0.5
MINIMUM REQUIRED FREEBOARD ⁴ (FT)	0.50	0.5
DESIGN METHOD FOR PROTECTIVE LINING ⁵		
PERMISSIBLE VELOCITY (V) OR SHEAR STRESS (S)	S	S

EQUIVALENT PIPE CALCULATION:

Q n s (ft/ft) D (ft.) D (in) Round up to:
0.68 0.013 0.01 0.537 6.442 **12" pipe**

$$D = ((Q*n)/(S^{1/2}*Pi*0.1478))^{3/8}$$

Pipe Equivalence Calculation for Sizing Rip Rap Apron:

Use Manning's Equation

$$Q = (1.49/n)*A*(R^{2/3})*(S^{1/2})$$

Q = Flow Rate from Worksheet 11 (cfs)

n = Manning's Constant for Smooth Plastic Pipe = 0.013 (unitless)

A = Area of Pipe (ft) = 0.25 * Pi * D²

D = Diameter of Pipe (ft)

R = Hydraulic Radius = A / P = (0.25 * Pi * D²) / (Pi * D) = 0.25 * D

P = Perimeter of Pipe (ft) = Pi * D

S = Slope of channel from Worksheet 11 (ft/ft)

Solve Manning's Equation for Diameter of Pipe:

$$Q = (1.49/n)*A*(R^{2/3})*(S^{1/2})$$

$$Q = (1.49/n)*(0.25*Pi*D^2)*((0.25*D)^{2/3})*(S^{1/2})$$

$$Q*n*/(1.49*S^{1/2}) = (0.25*Pi*D^2)*((0.25*D)^{2/3})$$

$$Q*n*/(1.49*S^{1/2}*0.25*(0.25^{2/3})) = (Pi*D^2)*(D^{2/3})$$

$$Q*n*/(S^{1/2}*Pi*0.1478) = (D^2)*(D^{2/3})$$

$$Q*n*/(S^{1/2}*Pi*0.1478) = (D^8/3)$$

$$(Q*n*/(S^{1/2}*Pi*0.1478))^{3/8} = D$$

Multiply by 12 to convert feet to inches:

$$D = ((Q*n)/(S^{1/2}*Pi*0.1478))^{3/8} * 12$$

1. Use 1.6 for Temporary Channels; 2.25 for Temporary Channels in Special Protection (HQ or EV) Watersheds; 2.75 for Permanent Channels. For Rational Method, enter "N/A" and attach E&S Worksheets 9 and 10. For TR-55 enter "N/A" and attach appropriate Worksheets.

2. Adjust "n" value for changes in channel liner and flow depth. For vegetated channels, provide data for manufactured linings without vegetation and with vegetation in separate columns.

3. Slopes may not be averaged.

4. Minimum Freeboard is 0.5 ft. or 1/4 Total Channel Depth, whichever is greater

5. Permissible velocity lining design method is not acceptable for channels with a bed slope of 10% or greater. Shear stress lining design method is required for channels with a bed slope of 10% or greater. Shear stress lining design method may be used for any channel bed slope.



Tensar International Corporation
 5401 St. Wendel-Cynthiana Road
 Poseyville, Indiana 47633
 Tel. 800.772.2040
 Fax 812.867.0247
 www.nagreen.com

**Erosion Control Materials Design Software
 Version 5.0**

**Project Name: ASR Access Roads
 Project Number: 63544
 Channel Name: AR-LU-007.1 VCI**

Discharge	0.38
Peak Flow Period	24
Channel Slope	0.04
Channel Bottom Width	2
Left Side Slope	3
Right Side Slope	3
Low Flow Liner	
Retardance Class	C
Vegetation Type	Mix (Sod & Bunch)
Vegetation Density	Good 75-95%
Soil Type	Silt Loam

SC250 - Class C - Mix (Sod & Bunch) - Good 75-95%

Phase	Reach	Discharge	Velocity	Normal Depth	Mannings N	Permissible Shear Stress	Calculated Shear Stress	Safety Factor	Remarks	Staple Pattern
SC250 Unvegetated	Straight	0.38 cfs	1.53 ft/s	0.11 ft	0.04	2.5 lbs/ft ²	0.27 lbs/ft ²	9.33	STABLE	E
SC250 Reinforced Vegetation	Straight	0.38 cfs	0.44 ft/s	0.3 ft	0.25	8 lbs/ft ²	0.75 lbs/ft ²	10.69	STABLE	E
Underlying Substrate	Straight	0.38 cfs	0.44 ft/s	0.3 ft	--	0.8 lbs/ft ²	0.005 lbs/ft ²	167.26	STABLE	--



Tensar International Corporation
 5401 St. Wendel-Cynthiana Road
 Poseyville, Indiana 47633
 Tel. 800.772.2040
 Fax 812.867.0247
 www.nagreen.com

**Erosion Control Materials Design Software
 Version 5.0**


**Project Name: ASR Access Roads
 Project Number: 63544
 Channel Name: AR-LU-007.1 VCD**

Discharge	0.67
Peak Flow Period	24
Channel Slope	0.01
Channel Bottom Width	2
Left Side Slope	3
Right Side Slope	3
Low Flow Liner	
Retardance Class	C
Vegetation Type	Mix (Sod & Bunch)
Vegetation Density	Good 75-95%
Soil Type	Silt Loam

SC250 - Class C - Mix (Sod & Bunch) - Good 75-95%

Phase	Reach	Discharge	Velocity	Normal Depth	Mannings N	Permissible Shear Stress	Calculated Shear Stress	Safety Factor	Remarks	Staple Pattern
SC250 Unvegetated	Straight	0.67 cfs	1.15 ft/s	0.22 ft	0.04	2.5 lbs/ft ²	0.14 lbs/ft ²	18.26	STABLE	E
SC250 Reinforced Vegetation	Straight	0.67 cfs	0.31 ft/s	0.58 ft	0.25	8 lbs/ft ²	0.36 lbs/ft ²	22.25	STABLE	E
Underlying Substrate	Straight	0.67 cfs	0.31 ft/s	0.58 ft	--	0.8 lbs/ft ²	0.002 lbs/ft ²	375.35	STABLE	--


FIGURE 9.3
Riprap Apron Design, Minimum Tailwater Condition

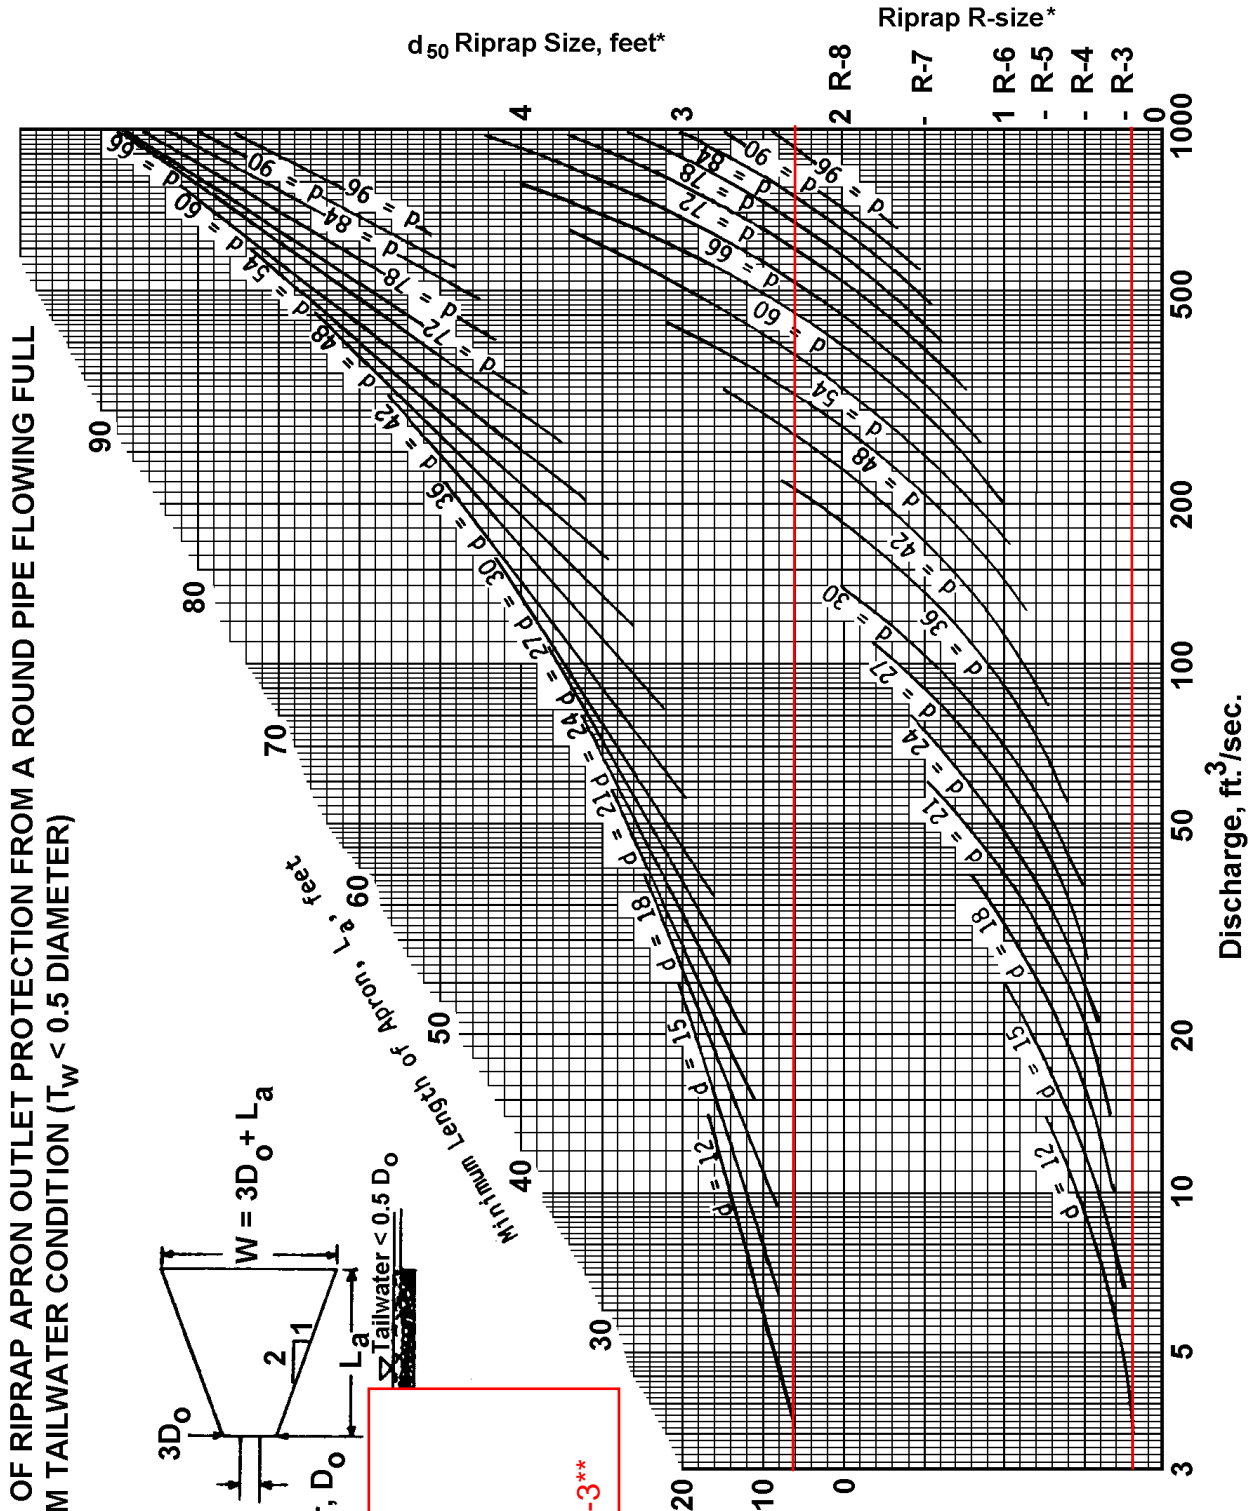

* For discharge velocities exceeding Maximum Allowable for Riprap indicated, increase d₅₀ stone size and/or provide velocity reduction device.
**DIMENSIONS BASED ON MINIMUM SIZING CRITERIA FROM CHART

PAR-LU-007.1 VCD
Q(10)=0.68 cfs, 12" pipe

FIGURE 9.3
Riprap Apron Design, Minimum Tailwater Condition

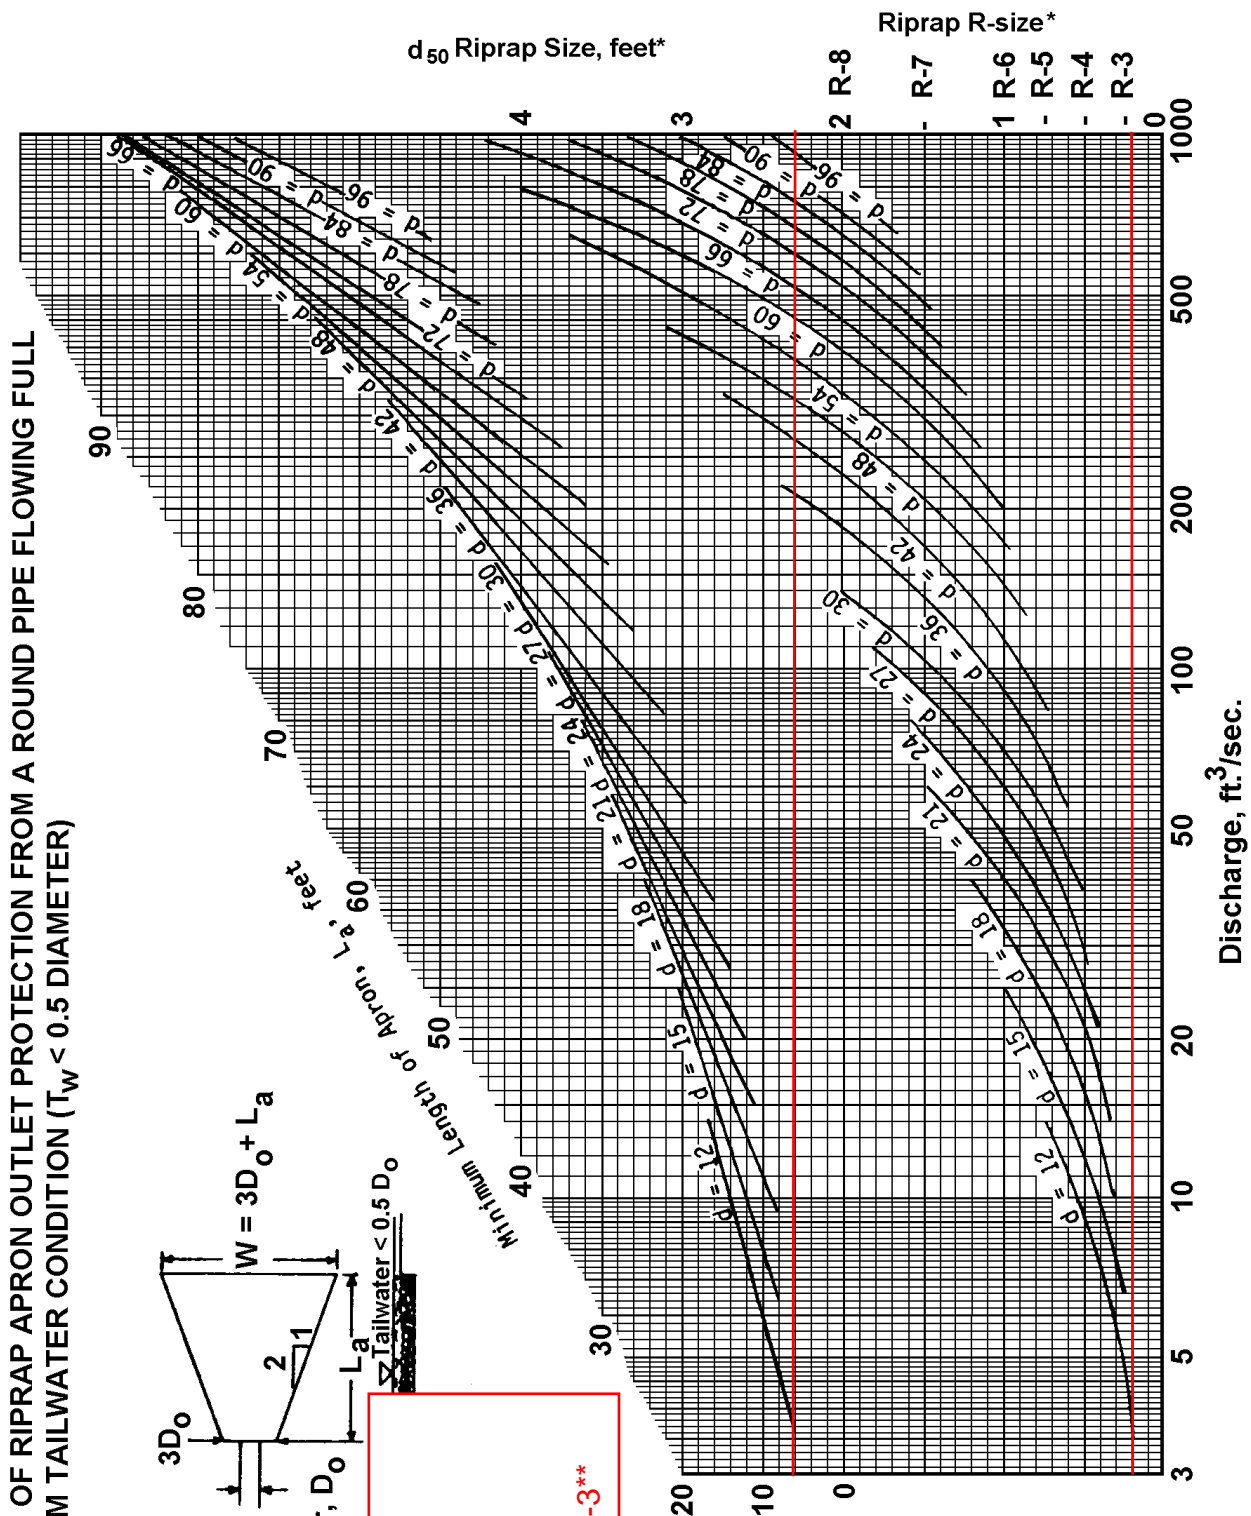

G.6 PCSM BMP Calculations

- a. Check Dam Volume Calculations

**ATLANTIC SUNRISE NATURAL GAS PIPELINE PROJECT
(ACCESS ROAD) VEGETATED CHANNEL CHECKDAM VOLUME
PAR LU-007.1-Vegetated Channel for Infiltration**

8/8/2016

TOTAL REACH VOLUME = 125 CF

Width (W_B): 2 FT.

Depth (H): 1 FT.

VEGETATED CHANNEL PAR-LU-007.1

ROAD STA 1+34 to 2+84

Input data

S = 0.040 ft/ft

H = 1 ft

W_B = 2

z_1 = 3

z_2 = 3

Output data

L_{storage} = 25 ft

W_T = 8 ft

$W_T + W_B$ = 10 ft

V = 63 cf

L_{spacing} = 30 ft

No. of Check Dams = 2

Subreach Volume = 125 CF

Infiltration(Q_i)

Infiltration Depth = 12 in

Field Q_i = 4.59 in/hr

Factor of Safety = 2.0

Reduced Q_i = 2.3 in/hr

Dewatering Time = 5.23 hr

Less than 72 hours? YES

**ATLANTIC SUNRISE NATURAL GAS PIPELINE PROJECT
(ACCESS ROAD) VEGETATED CHANNEL CHECKDAM VOLUME
PAR LU-007.1-Vegetated Channel for Diversion**

8/8/2016

TOTAL REACH VOLUME = 250 CF Width (W_B): 2 FT. Depth (H): 1 FT.

VEGETATED CHANNEL PAR-LU-007.1

ROAD STA 0+00 to 1+75

Input data

S = 0.010 ft/ft
H = 1 ft
 W_B = 2
 z_1 = 3
 z_2 = 3

Output data


L_{storage} = 100 ft
 W_T = 8 ft
 $W_T + W_B$ = 10 ft
V = 250 cf
 L_{spacing} = 105 ft
No. of Check Dams = 1
Subreach Volume = 250 CF

Infiltration(Q_i)

Infiltration Depth = 12 in
Field Q_i = 4.59 in/hr
Factor of Safety = 2.0
Reduced Q_i = 2.30 in/hr
Dewatering Time = 5.23 hr
Less than 72 hours? YES

EARTHEN CHECK DAM INFILTRATION VOLUME AND SPACING

Per the Pennsylvania Stormwater BMP Manual (pg 94), the minimum spacing (L_{spacing}) of check dams is determined by the length of the storage volume (L_{storage}) and the length to the check dam center line. The length of the storage volume is calculated by dividing the height of the rock filter (D_s) by the slope of the channel (S_s):

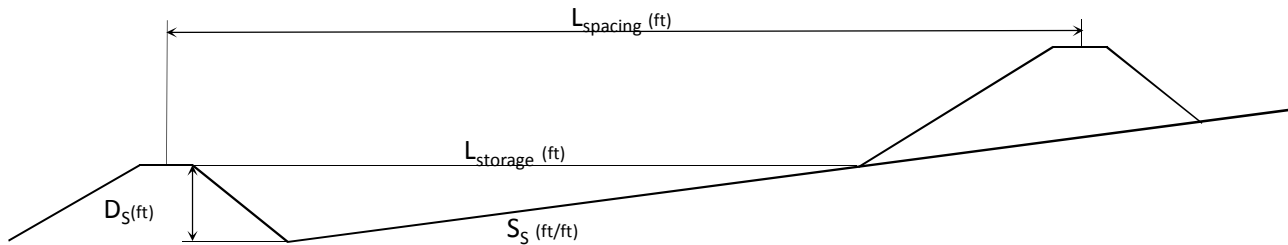

$$L_{\text{storage}} = D_s / S_s$$

Where: L_{storage} = Storage Length

S_s = Channel slope

D_s = Height of the check dam

$$L_{\text{spacing}} = L_{\text{storage}} + [(D_s + 1) / (-S_s + 0.5)]$$


Where: L_{spacing} = Check Dam Spacing

L_{storage} = Storage Length

S_s = Channel slope

D_s = Height of the check dam

The volume of runoff that will be stored upstream of a check dam is dependent on the height of the check dam, the slope of the upstream channel and the dimensions of the upstream channel. The storage volume (V_s) can be calculated with:



$$V_s = 0.25 \times L_{\text{storage}} \times D_s \times (W_T + W_B)$$

Where:

L_{storage} = Storage Length

D_s = Height of check dam

W_T = check dam top width

W_B = check dam bottom width

The check dam top width (W_T) is given by:

$$W_T = W_B + z_1 + z_2$$

Where: W_B = check dam bottom width

z_1 = side slope


z_2 = side slope

G.7 Water Quality Worksheets

- a. Flow Chart A – Stormwater Calculation Process
- b. Worksheet 1. General Site Information
- c. Worksheet 2. Sensitive Natural Resources
- d. Worksheet 3. Nonstructural BMP Credits
- e. Flow Chart B – Control Guideline 1 Process
- f. Worksheet 4. Change in Runoff Volume for 2-Yr Storm Event
- g. Worksheet 5. Structural BMP Volume Credits
- h. Worksheet 10. Water Quality Compliance for Nitrate

FLOW CHART A

Stormwater Calculation Process

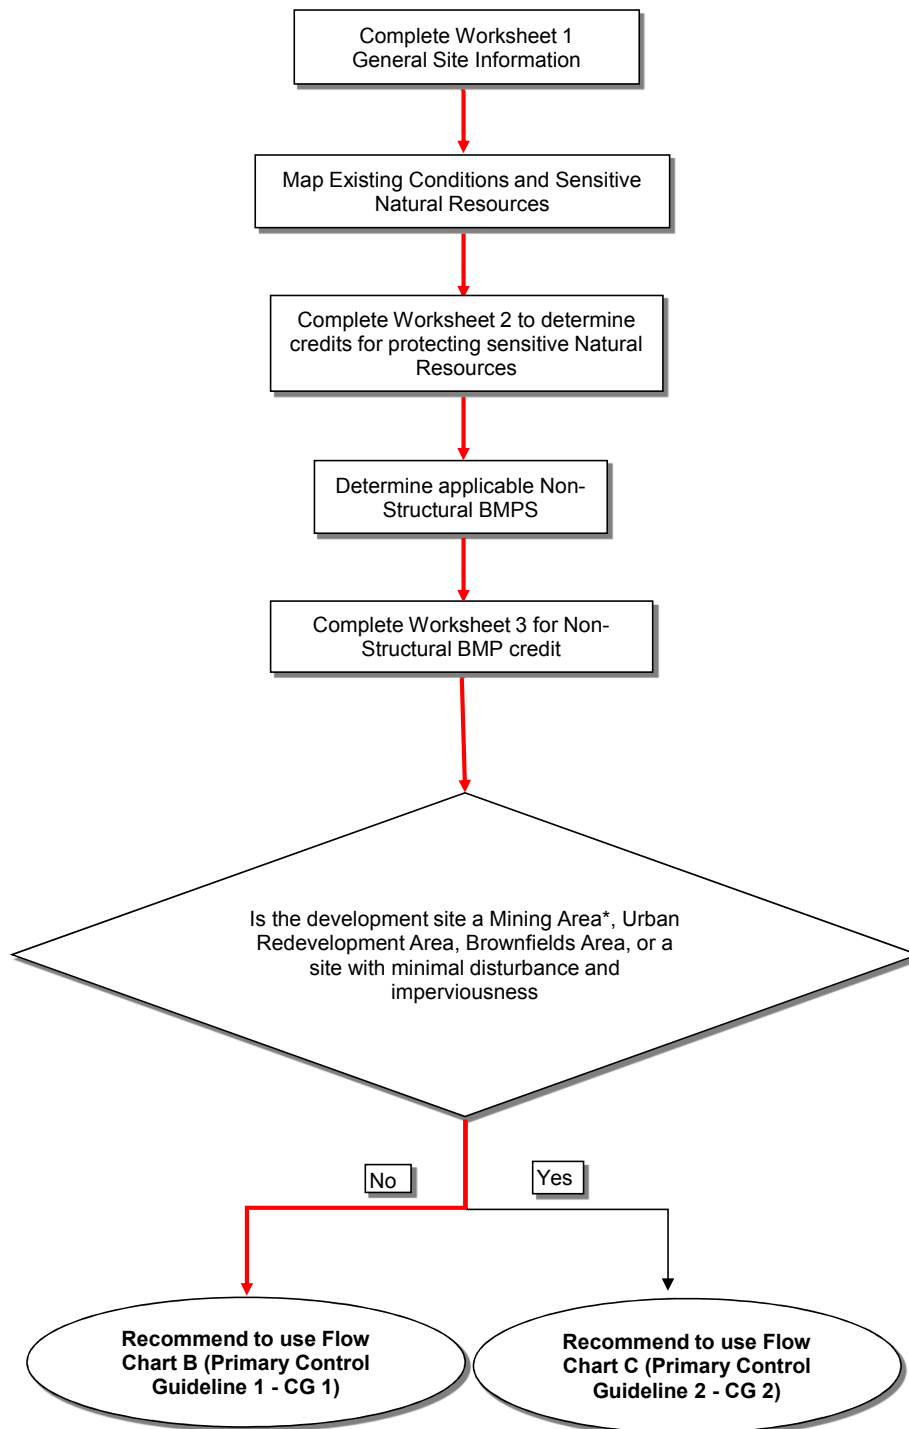

Worksheet 1. General Site Information

INSTRUCTIONS: Fill out Worksheet 1 for each watershed

Date: 28-Feb-16

Project Name: Atlantic Sunrise Pipeline AR-LU-007.1

Municipality: Fairmount Township

County: Luzerne

Total Area (acres): 0.75

Major River Basin: Susquehanna River

<http://www.dep.state.pa.us/dep/depupdate/watermgt/wc/default.htm#newtopics>

Watershed: Fishing Creek

Sub-Basin: Upper Central Susquehanna River

Nearest Surface Water(s) to Receive Runoff: UNT to Maple Run

Chapter 93 - Designated Water Use: HQ-CWF,MF

<http://www.pacode.com/secure/data/025/chapter93/chap93toc.html>

Impaired according to Chapter 303(d) List? Yes ☐

<http://www.dep.state.pa.us/dep/deputate/watermgt/wqp/wqstandards/303d-Report.htm> No ☒

List Causes of Impairment:

Is project subject to, or part of:

Municipal Separate Storm Sewer System (MS4) Requirements? Yes ☐

[http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterM](http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterManagement/GeneralPermits/default.htm) No ☒

[anagement/GeneralPermits/default.htm](http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterManagement/GeneralPermits/default.htm)

Existing or planned drinking water supply? Yes ☐

No ☒

If yes, distance from proposed discharge (miles):

Approved Act 167 Plan? Yes ☒

[http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterManagem](http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterManagement/Approved_1.html) No ☐

[ent/Approved_1.html](http://www.dep.state.pa.us/dep/deputate/watermgt/wc/Subjects/StormwaterManagement/Approved_1.html)

Existing River Conservation Plan? Yes ☐

<http://www.dcnr.state.pa.us/brc/rivers/riversconservation/planningprojects/> No ☒

Worksheet 2. Sensitive Natural Resources

INSTRUCTIONS:

1. Provide Sensitive Resources Map according to non-structural BMP 5.4.1 in Chapter 5. This map should identify wetlands, woodlands, natural drainage ways, steep slopes, and other sensitive natural areas.

*Note: Sensitive areas are shown on the Soil Erosion Control Plans.

2. Summarize the existing extent of each sensitive resource in the Existing Sensitive Resources Table (below, using Acres). If none present, insert 0.

3. Summarize Total Protected Area as defined under BMPs in Chapter 5.

4. Do not count any area twice. For example, an area that is both a floodplain and a wetland may only be considered once.

EXISTING NATURAL SENSITIVE RESOURCE	MAPPED? yes/no/n/a	TOTAL AREA (Ac.)	PROTECTED AREA (Ac.)
Waterbodies	N/A		
Floodplains	N/A		
Riparian Areas	N/A		
Wetlands	N/A		
Woodlands		0.42	0.00
Natural Drainage Ways	N/A		
Steep Slopes, 15% - 25%	N/A		
Steep Slopes, over 25%	N/A		
Other:	N/A		
Other:	N/A		
TOTAL EXISTING:		0.42	0.00

Worksheet 3. Nonstructural BMP Credits

PROTECTED AREA

1.1 Area of Protected Sensitive/Special Value Features (see WS 2) - Ac.

1.2 Area of Riparian Forest Buffer Protection - Ac.

3.1 Area of Minimum Disturbance/Reduced Grading - Ac.

TOTAL - Ac.

Site Area	minus	Protected Area	=	Stormwater Management Area
0.75	-	0.00	=	0.75
		<small>This is the area that requires stormwater management</small>		

VOLUME CREDITS

3.1 Minimum Soil Compaction

Lawn ft² x 1/4" x 1/12 = - ft³

Meadow ft² x 1/3" x 1/12 = - ft³

3.3 Protect Existing Trees

For Trees within 100 feet of impervious area:

Tree Canopy ft² x 1/2" x 1/12 = -

For Trees within 20 feet of impervious area:

Tree Canopy ft² x 1" x 1/12 = -

5.1 Disconnect Roof Leaders to Vegetated Areas

For Runoff directed to areas protected under 5.8.1 and 5.8.2

Roof Area ft² x 1/3" x 1/12 = -

For all other disconnected roof areas

Roof Area ft² x 1/4" x 1/12 = -

5.2 Disconnect Non-Roof Impervious to Vegetated Areas

For Runoff directed to areas protected under 5.8.1 and 5.8.2

Impervious Area ft² x 1/3" x 1/12 = -

For all other disconnected non-roof areas


Impervious Area ft² x 1/4" x 1/12 = -

TOTAL NON-STRUCTURAL VOLUME CREDIT* - ft³

* For use on Worksheet 5

FLOW CHART B

Control Guideline 1 Process

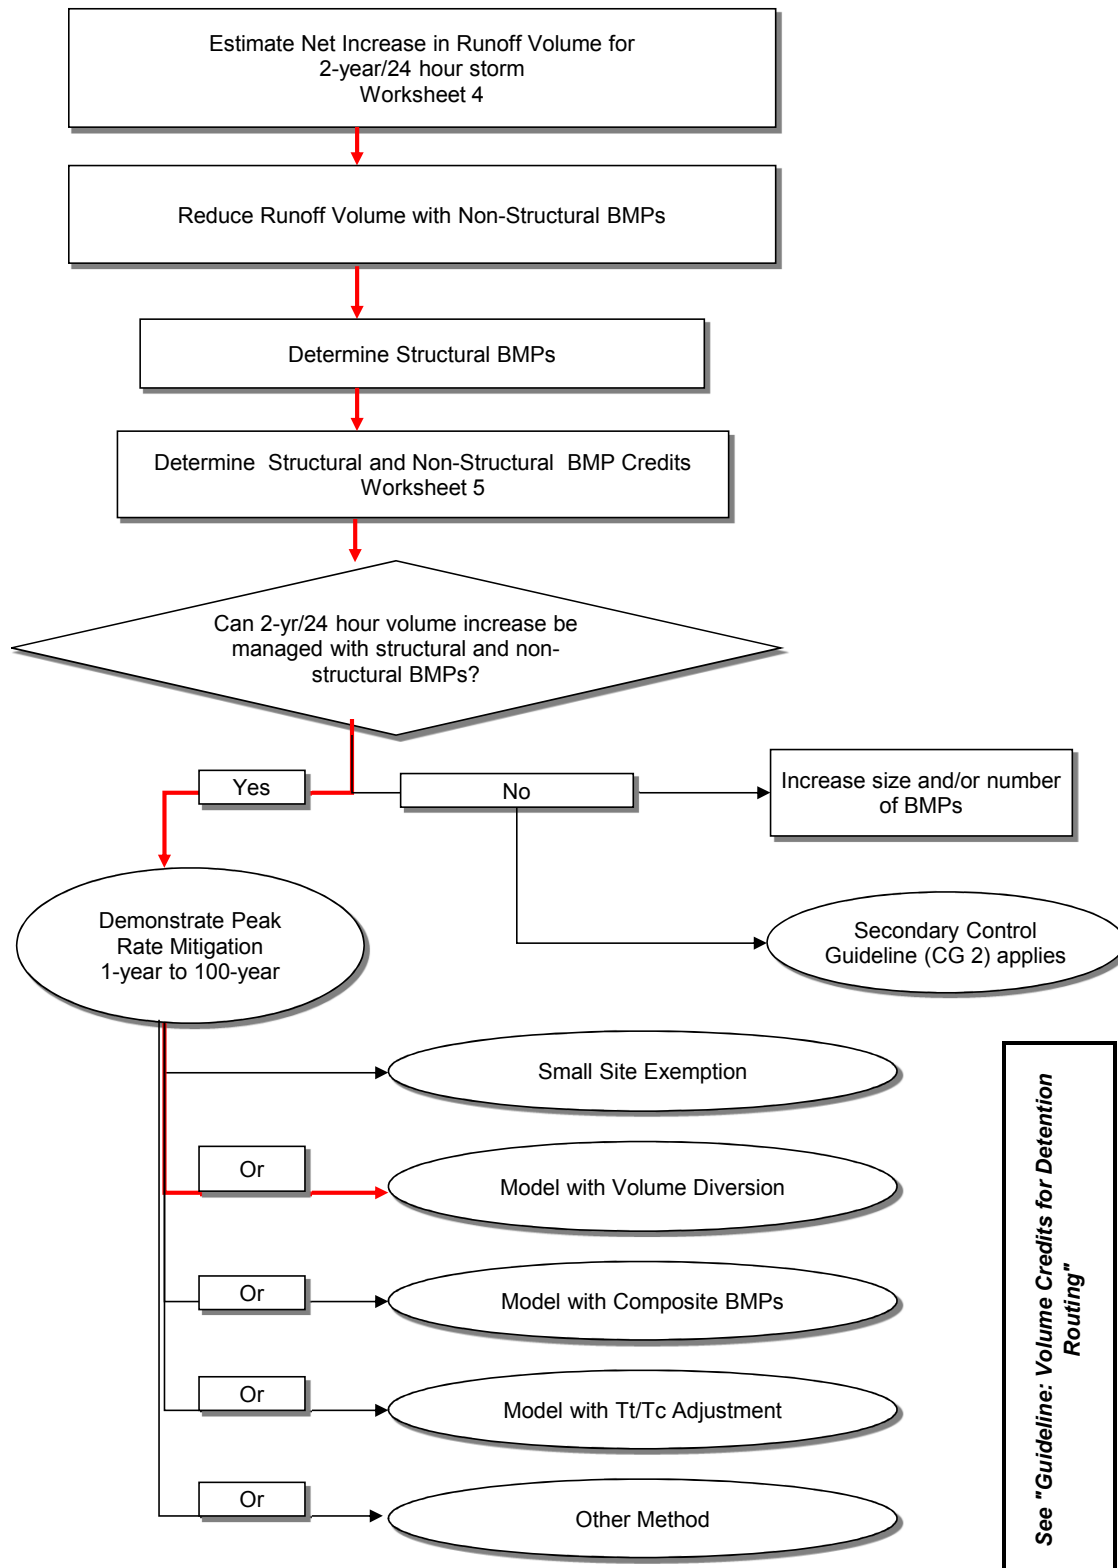

WORKSHEET 4 . CHANGE IN RUNOFF VOLUME FOR 2-YR STORM EVENT**PROJECT:** Atlantic Sunrise Pipeline AR-LU-007.1**2-Year Rainfall:** 2.88 in

Total Site Area:	<u>0.75</u>	acres
Protected Site Area:	<u>0</u>	acres
Managed Area	<u>0.75</u>	acres

Existing Conditions:

Cover Type	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff ¹ (in)	Runoff Volume ² (ft ³)
Meadow	C	14,336	0.329	71	4.08	0.82	0.69	827
Woods	C	18,220	0.418	70	4.29	0.86	0.65	985
Impervious ³	C	0	0.000	98	0.20	0.04	2.65	-
"Meadow" ³	C	0	0.000	71	4.08	0.82	0.69	-
TOTAL:		32,556	0.747					1,812

Developed Conditions:

Cover Type	Soil Type	Area (sf)	Area (ac)	CN	S	Ia (0.2*S)	Q Runoff ¹ (in)	Runoff Volume ² (ft ³)
Meadow	C	26,097	0.599	71	4.08	0.82	0.69	1,506
Gravel Rd	C	1,419	0.033	89	1.24	0.25	1.79	212
Stone	C	5,040	0.116	98	0.20	0.04	2.65	1,112
Woods	C	0	0.000	70	4.29	0.86	0.65	-
Impervious	C	0	0.000	98	0.20	0.04	2.65	-
TOTAL:		32,556	0.747					2,830

2-Year Volume Increase (ft³)	1,018
--	--------------

2-Year Volume Increase = Developed Conditions Runoff Volume - Existing Conditions Runoff Volume

- Runoff (in) = $Q = (P - 0.2S)^2 / (P + 0.8S)$ where
P = 2-Year Rainfall (in)
S = $(1000 / CN) - 10$
- Runoff Volume (CF) = $Q \times \text{Area} \times 1/12$
Q = Runoff (in)
Area = Land use area (sq. ft.)

Note: Runoff Volume must be calculated for EACH land use type/condition and HSGI.
The use of a weighted CN value for volume calculations is not acceptable.

3. Twenty (20) percent of existing impervious area, when present, shall be considered meadow (good condition) in the model for existing conditions for redevelopment per Volume Control Guideline 1. (For Existing Condition: Impervious Area + "Meadow" = Total Impervious Area)

WORKSHEET 5. STRUCTURAL BMP VOLUME CREDITS

PROJECT: Atlantic Sunrise Pipeline AR-LU-007.1

SUB-BASIN: Upper Central Susquehanna River

Required Control Volume (ft³) - from Worksheet 4: 1,018
 Non-structural Volume Credit (ft³) - from Worksheet 3: - 0

Structural Volume Reqmt (ft³) 1,018
 (Required Control Volume minus Non-structural Credit)

Proposed BMP	Area (ft ²)	Volume Reduction Permanently Removed (ft ³)
6.4.1 Porous Pavement		
6.4.2 Infiltration Basin		
6.4.3 Infiltration Bed		
6.4.4 Infiltration Trench		
6.4.5 Rain Garden/Bioretenion		
6.4.6 Dry Well / Seepage Pit		
6.4.7 Constructed Filter		
6.4.8 Vegetated Swale		
6.4.9 Vegetated Filter Strip		
6.4.10 Berm		
6.5.1 Vegetated Roof		
6.5.2 Capture and Re-use		
6.6.1 Constructed Wetlands		
6.6.2 Wet Pond / Retention Basin		
6.6.3 Dry Extended Detention Basin		
6.6.4 Water Quality Filters		
6.7.1 Riparian Buffer Restoration		
6.7.2 Landscape Restoration / Reforestation		
6.7.3 Soil Amendment		
6.8.1 Level Spreader		
6.8.2 Special Storage Areas		
Other Check dams in Vegetated Channels		125
Storage in 24" stone MLV pad		2,128

Total Structural Volume (ft³): 2,253
 Structural Volume Requirement (ft³): 1,018
 DIFFERENCE 1,235

MLV Pad Infiltration Calculations Summary		
Average Measured Infiltration Rate for MLV Pad	4.59	in/hr
Factor of Safety	2.00	
Design Infiltration Rate	2.30	in/hr
Dewatering Time for top 6 inches of MLV Pad	2.61	hours
Depth of AASHTO #57 Section of MLV Pad	18	inches
Dewatering Time for AASHTO #57 Section of MLV Pad	7.84	hours
Total Dewatering Time for MLV Pad	10.46	hours

Check Dam Infiltration Calculations Summary		
Average Measured Infiltration Rate for Channel	4.59	in/hr
Factor of Safety	2.00	
Design Infiltration Rate	2.30	in/hr
Height of Check Dam	12	inches
Dewatering Time for Detained Water in Channel	5.23	hours

*A factor of safety of 2 is the minimal safety factor for design purposes per pager 19 of 21 of "Protocol 1, Site Evaluation and Soil Infiltration Testing, included as Appendix C of the Pennsylvania Stormwater BMP Manual.

WORKSHEET 10. WATER QUALITY COMPLIANCE FOR NITRATE

Does the site design incorporate the following BMPs to address nitrate pollution? A summary "yes" rating is achieved if at least 2 Primary BMPs for nitrate are provided across the site or 4 secondary BMPs for nitrate are provided across the site (or the

PRIMARY BMPs FOR NITRATE:

	YES	NO
NS BMP 5.4.2 - Protect / Conserve / Enhance Riparian Buffers	<input type="checkbox"/>	<input checked="" type="checkbox"/>
NS BMP 5.5.4 - Cluster Uses at Each Site	<input type="checkbox"/>	<input checked="" type="checkbox"/>
NS BMP 5.6.1 - Minimize Total Disturbed Area	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.3 - Re-Vegetate / Re-Forest Disturbed Areas (Native	<input checked="" type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.9.1 - Street Sweeping / Vacuuming	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input checked="" type="checkbox"/>

SECONDARY BMPs FOR NITRATE:

NS BMP 5.4.1 - Protect Sensitive / Special Value Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.4.3 - Protect / Utilize Natural Drainage Features	<input type="checkbox"/>	<input type="checkbox"/>
NS BMP 5.6.2 - Minimize Soil Compaction	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.5 - Rain Garden / Bioretention	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.8 - Vegetated Swale	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.4.9 - Vegetated Filter Strip	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.6.1 - Constructed Wetland	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.1 - Riparian Buffer Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.2 - Landscape Restoration	<input type="checkbox"/>	<input type="checkbox"/>
Structural BMP 6.7.3 - Soils Amendment/Restoration	<input type="checkbox"/>	<input type="checkbox"/>

G.8 Infiltration Information

- a. Field Observation Report



Field Observation Report

Project Number: 14C4909 - A

Project Name: Atlantic Sunrise Project – **AR-LU-007.1**

Date of Field Visit: October 16, 2015

Weather Conditions: Sunny and Cloudy Temperature: Approx 50-60°F

Prepared By: Krystal Bealing, APSS and Joseph Kempf

Copies of Report Have Been Sent To: ☒ Client ☐ Contractor ☐ Other

Client:
Transcontinental Gas Pipe Line
Company, LLC
2800 Post Oak Blvd
Houston, TX 77251

Contractor:
BL Companies
4242 Carlisle Pike, Suite 260
Camp Hill, PA 17011

Three soil pits were excavated by backhoe and described by an Associate Professional Soil Scientist (APSS) to varying depths utilizing the U.S. Department of Agriculture Natural Resources Conservation Service (USDA-NRCS) *Field Book for Describing and Sampling Soils, Version 3.0* and *Keys to Soil Taxonomy, Twelfth Edition, 2014*. According to the Web Soil Survey, soils within the area of the pits are described by the USDA-NRCS as Lackawanna very stony silt loam, 3-8% slopes.

Test Pit #1, located at N41° 17' 18.20", W76° 16' 57.18", was observed to have two horizons, with a fragipan observed at 30 inches.

Test Pit #2, located at N41° 17' 18.02", W76° 16' 57.94", was observed to have three horizons, with a restrictive soil horizon due to bedrock components observed at 53 inches.

Test Pit #3, located at N41° 17' 17.86", W76° 16' 57.46", was observed to have four horizons, with a fragipan observed at 35 inches.

Additionally, infiltration tests using the double ring infiltrometer method were conducted at each pit location, at depths ranging from 6 inches below surface to 29 inches below surface. The elevations of the proposed improvements and the existing ground are provided on the infiltration testing location map. If the difference between the existing and proposed elevations is greater


Field Observation Report

than zero, infiltration was performed at the existing elevation. If the difference between the existing and proposed elevation is between 0 and -5.00 feet, infiltration was conducted at the proposed elevation, or at two feet above the observed limiting layer, whichever was more shallow. If the difference between the existing and proposed elevations is greater than -5.00, infiltration was placed at 5 feet (60 inches) below the existing elevation to adhere to Occupational Safety and Health Administration (OSHA) standards for trenching and excavation safety.

Infiltration testing was conducted within a level testing area at all test pit locations using the double ring infiltrometer method. An infiltrometer containing a 12-inch outer ring and a 6-inch inner ring was driven into the soil a minimum of two inches. Both rings were filled with water to the rim at 30 minute intervals for one hour. If the drop in water level, measured within the center ring, during the last 30 minutes of the presoak is 2 inches or more, measurements are taken in 10-minute intervals. If the water level drop is less than 2 inches, measurements are taken in 30-minute intervals. After each measurement, the rings were refilled to the rim. Each measurement was taken at a fixed reference point. Measurements were taken until the rate of drop stabilized, or eight measurements were taken. A stabilized rate of drop is considered a difference of 0.25-inch or less between the highest and lowest measurements of four consecutive readings. An average of the stabilized rate (i.e., the last four measurements) or the average of eight total measurements if the rate of drop did not stabilize, expressed in inches per hour, represents the infiltration rate. Testing was completed at 6 inches below the surface at Test Pit #1, at 29 inches below the surface at Test Pit #2, and at 11 inches below the surface at Test Pit #3.

The infiltration rate at Test Pit #1 was observed to be 9.563 inches per hour.
The infiltration rate at Test Pit #2 was observed to be 4.500 inches per hour.
The infiltration rate at Test Pit #3 was observed to be 4.688 inches per hour.

The soil profile descriptions, infiltration worksheet, photographs, infiltration testing location map, and USDA-NRCS Soil Survey information are attached.

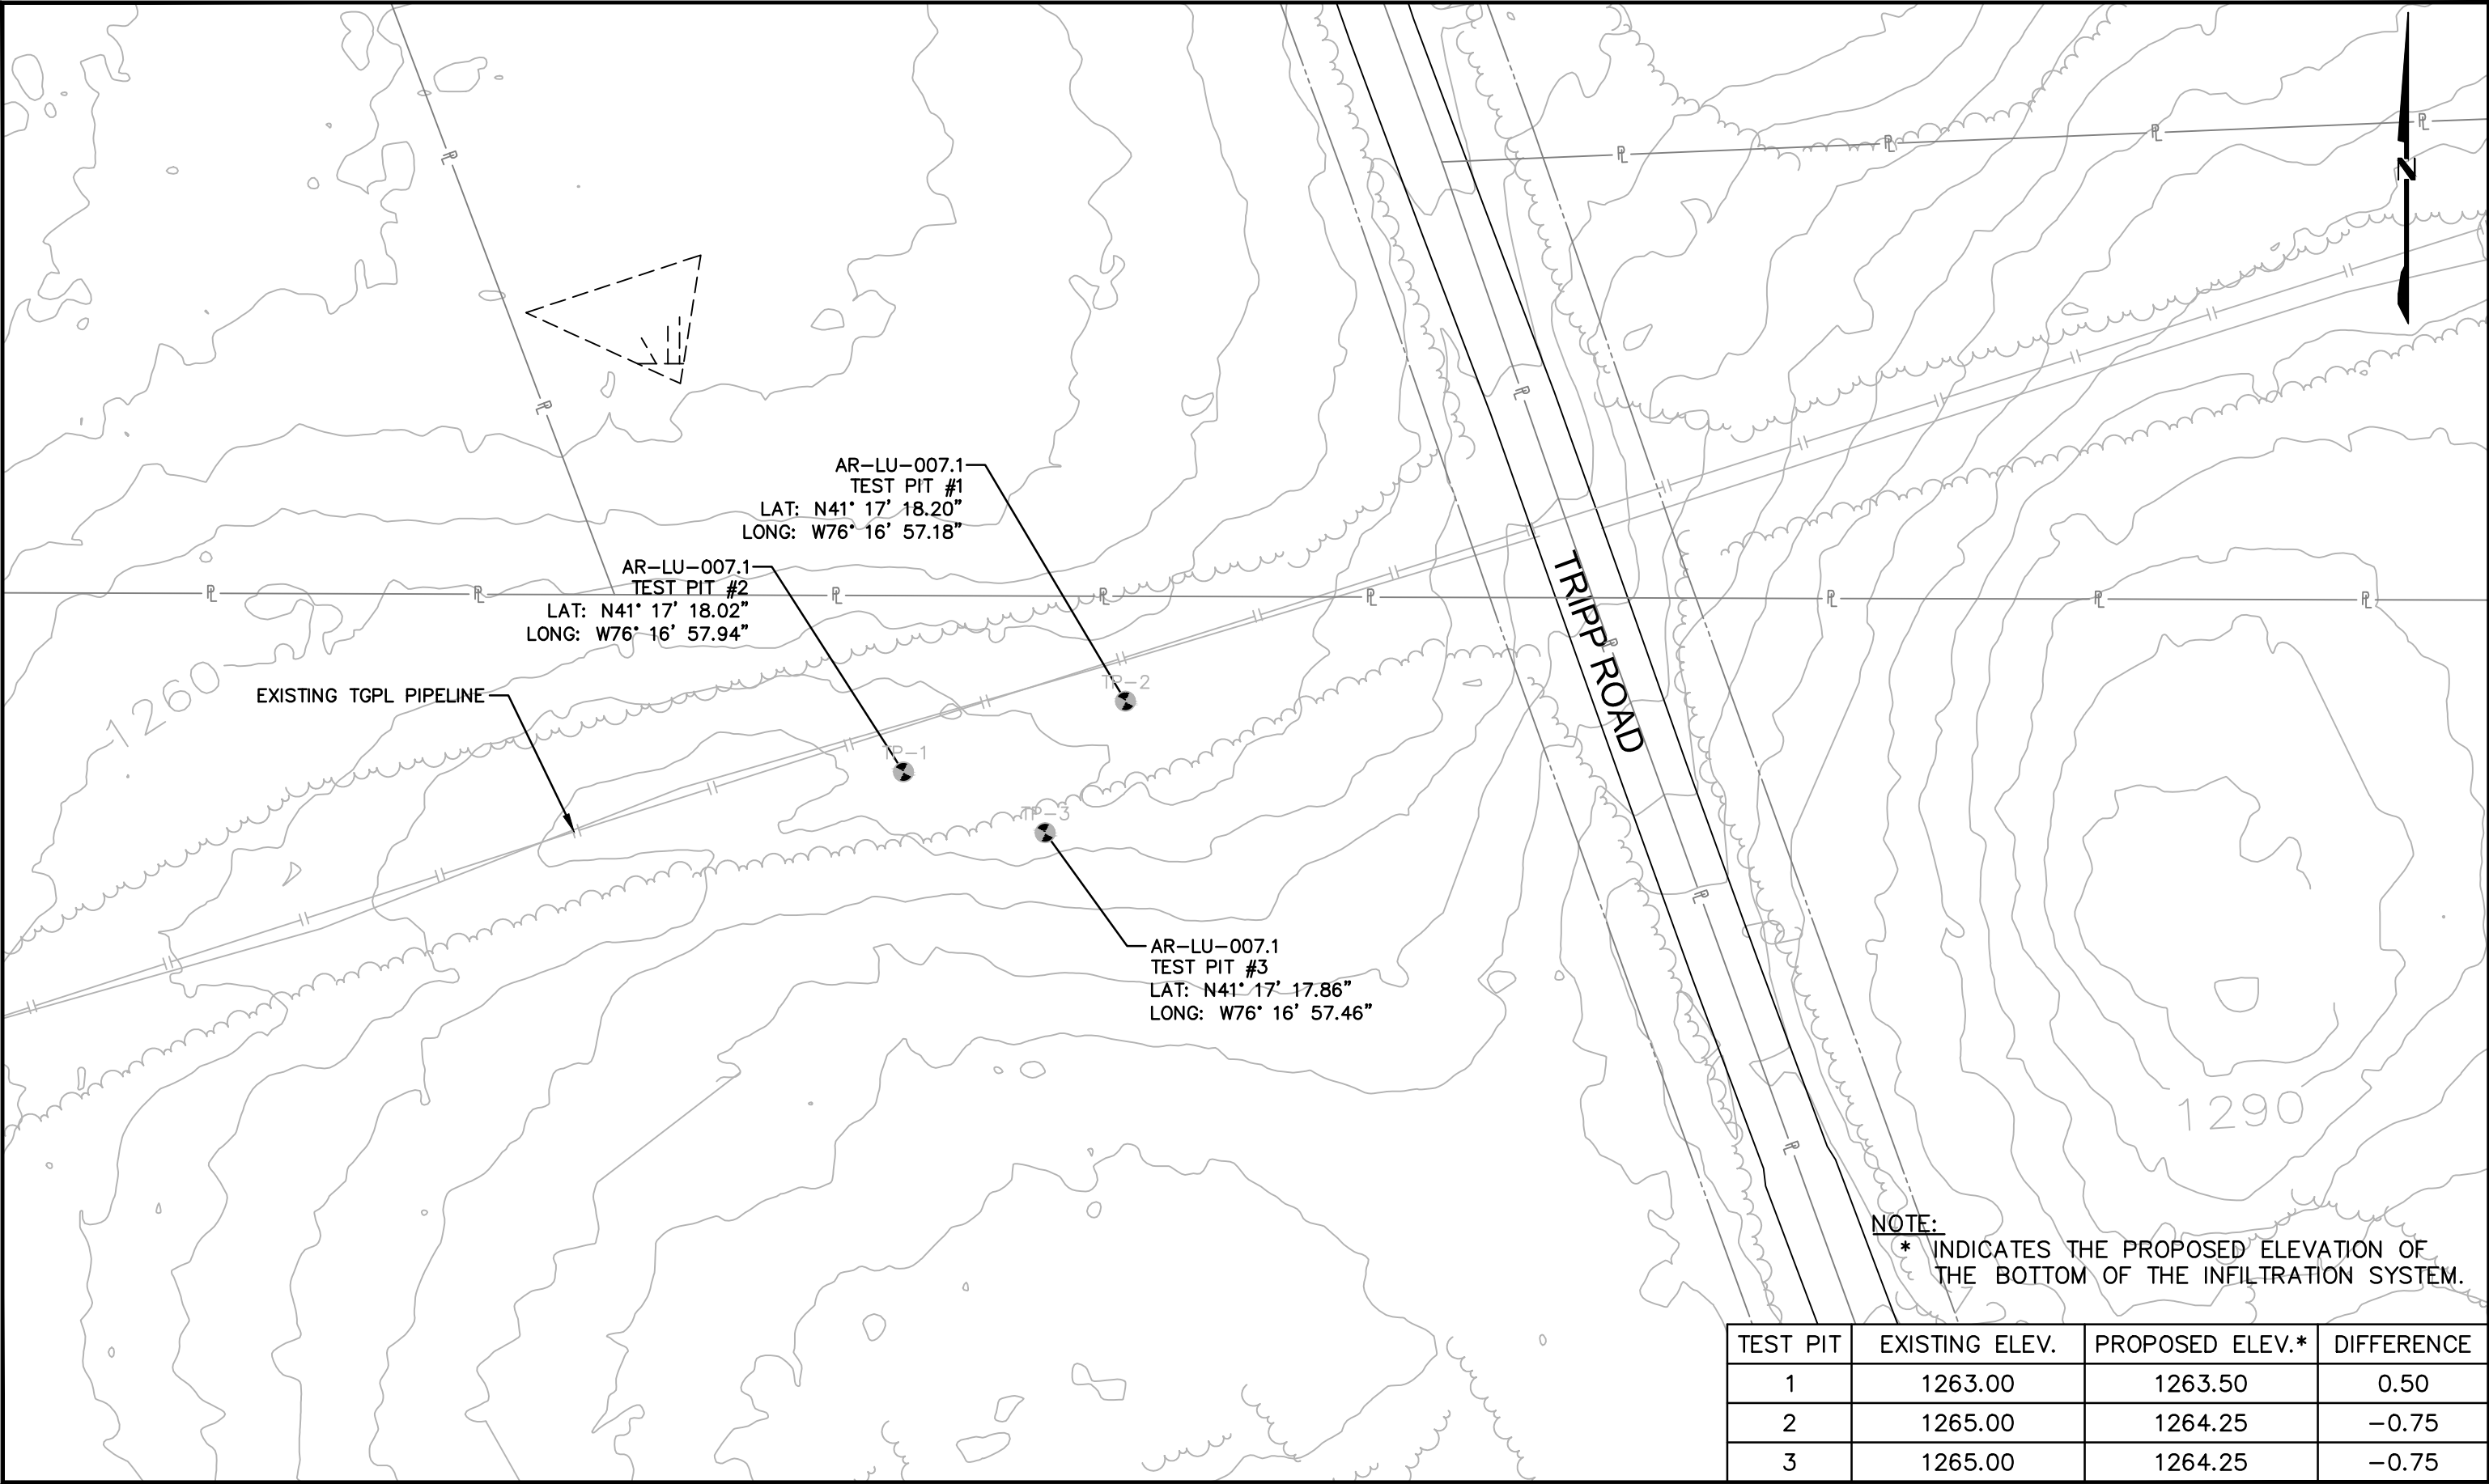


NOTE:
* INDICATES THE PROPOSED ELEVATION OF THE BOTTOM OF THE INFILTRATION SYSTEM.

TEST PIT	EXISTING ELEV.	PROPOSED ELEV.*	DIFFERENCE
1	1263.00	1263.50	0.50
2	1265.00	1264.25	-0.75
3	1265.00	1264.25	-0.75

LANDOWNER: KARNS

**AR-LU-007.1 INFILTRATION
TESTING LOCATIONS**

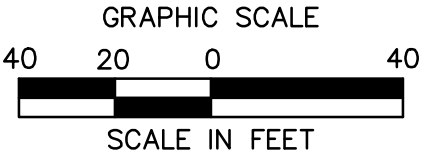

Soil Profile Log

Project	14C4909-A Atlantic Sunrise Project -AR-LU-007.1
Test Pit #	1
Name	Joe Kempf and Krystal Bealing, APSS
Date	October 16, 2015
Weather	50-60°F; Sunny and Cloudy
Equipment	Mini Excavator

Elevation	1263 AMSL
Soil Type	Lackawanna very stony silt loam, 3-8% slopes
Geology	Catskill Formation
Landscape Position/Slope	Sideslope 0-5%
Land Use	Wooded
Additional Comments	

Horizon	Upper Boundary (inches)	Lower Boundary (inches)	Soil Textural Class	Type, Size, Coarse Fragments, etc.	Soil Matrix Color	Color Patterns	Pores, Roots, Structure	Depth to Bedrock	Depth to Water	Comments
A	0	30	SiL	15-35% Channery	10YR 6/4	-	Roots present; Weak, Subangular Blocky	-	-	Very Friable
Bx	30	60+	SiL	35-60% Channery	10YR 6/3	5% 10YR 5/6	Massive	-	-	Friable Limiting Layer - Fragipan

Note: Unless stated otherwise, horizon strike and dip was not observed to have a significant impact on water flow within the profile.

Soil Profile Log

Project

14C4909-A Atlantic Sunrise Project -AR-LU-007.1

Test Pit #

2

Name

Joe Kempf and Krystal Bealing, APSS

Date

October 16, 2015

Weather

50-60°F; Sunny and Cloudy

Equipment

Mini Excavator

Elevation

1265 AMSL

Soil Type

Lackawanna very stony silt loam, 3-8% slopes

Geology

Catskill Formation

Landscape Position/Slope

Sideslope 0-5%

Land Use

Wooded

Additional Comments

Horizon	Upper Boundary (inches)	Lower Boundary (inches)	Soil Textural Class	Type, Size, Coarse Fragments, etc.	Soil Matrix Color	Color Patterns	Pores, Roots, Structure	Depth to Bedrock	Depth to Water	Comments
A	0	11	SiL	15-35% Channery	10YR 3/3	-	Roots present; Weak, Subangular Blocky	-	-	Very Friable
Bw	11	53	SiL	35-60% Channery	7.5YR 2/2	-	Weak, Subangular Blocky	-	-	Very Friable
Cr	53	60+	SiL	60-90% Channery	10YR 6/3	-	Massive	-	-	Friable Limiting Layer - Restrictive Soil Horizon due to bedrock components

Note: Unless stated otherwise, horizon strike and dip was not observed to have a significant impact on water flow within the profile.

Soil Profile Log

Project

14C4909-A Atlantic Sunrise Project -AR-LU-007.1

Test Pit #

3

Name

Joe Kempf and Krystal Bealing, APSS

Date

October 16, 2015

Weather

50-60°F; Sunny and Cloudy

Equipment

Mini Excavator

Elevation

1265 AMSL

Soil Type

Lackawanna very stony silt loam, 3-8% slopes

Geology

Catskill Formation

Landscape Position/Slope

Sideslope 0-5%

Land Use

Wooded

Additional Comments

Horizon	Upper Boundary (inches)	Lower Boundary (inches)	Soil Textural Class	Type, Size, Coarse Fragments, etc.	Soil Matrix Color	Color Patterns	Pores, Roots, Structure	Depth to Bedrock	Depth to Water	Comments
A	0	11	SiL	-	10YR 3/2	-	Roots present; Weak, Subangular Blocky	-	-	Very Friable
Bw1	11	23	SiL	-	10YR 5/6	-	Weak, Subangular Blocky	-	-	Very Friable
Bw2	23	35	SiL	15-35% Channery	10YR 5/6	-	Moderate, Subangular Blocky	-	-	Friable
Bx	35	60+	SiL	35-60% Channery	10YR 6/2	3% 10YR 4/6	Massive	-	-	Friable Limiting Layer - Fragipan

Note: Unless stated otherwise, horizon strike and dip was not observed to have a significant impact on water flow within the profile.



View of Pit #1.



View of Pit #2.



View of Pit #3.

Luzerne County, Pennsylvania

LcB—Lackawanna very stony silt loam, 3 to 8 percent slopes

Map Unit Setting

National map unit symbol: 9ygp

Elevation: 1,100 to 1,800 feet

Mean annual precipitation: 32 to 50 inches

Mean annual air temperature: 45 to 50 degrees F

Frost-free period: 110 to 165 days

Farmland classification: Not prime farmland

Map Unit Composition

Lackawanna and similar soils: 90 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Lackawanna

Setting

Landform: Hillslopes, ridges

Landform position (two-dimensional): Backslope, summit

Landform position (three-dimensional): Mountaintop, side slope

Down-slope shape: Linear

Across-slope shape: Linear

Parent material: Reddish ablation till derived from sandstone and siltstone

Typical profile

A - 0 to 8 inches: channery silt loam

Bw - 8 to 25 inches: channery loam

Bx - 25 to 60 inches: channery silt loam

Properties and qualities

Slope: 3 to 8 percent

Percent of area covered with surface fragments: 3.0 percent

Depth to restrictive feature: 21 to 36 inches to fragipan

Natural drainage class: Well drained

Runoff class: High

Capacity of the most limiting layer to transmit water (Ksat):

Moderately low to moderately high (0.06 to 0.20 in/hr)

Depth to water table: About 21 to 35 inches

Frequency of flooding: None

Frequency of ponding: None

Available water storage in profile: Low (about 3.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 6s

Hydrologic Soil Group: C

Data Source Information

Soil Survey Area: Luzerne County, Pennsylvania
Survey Area Data: Version 6, Sep 19, 2014

G.9 Off-Site Discharge Analysis

a. Adequacy of Off-Site Discharge

ACCESS ROAD: AR-LU-007.1 - Adequacy of Off-Site Discharge

AR-LU-007.1 is a proposed permanent access road (PAR) located in Fairmount Township, Luzerne County, Pennsylvania. The intent of this PAR is to provide permanent maintenance and operational access to the proposed Main Line Valve 02 (CN-MLV-02) located on the proposed 30" Central Penn Line North Pipeline. The PAR is approximately 100 feet long over relatively hilly terrain. The PAR begins at Tripp Road and terminates at the MLV site at approximate milepost 6.7. The PAR will be entirely located within the pipeline permanent right of way.

The PAR will have a width of 14 feet and a cross slope of 2% that will direct runoff in a northerly direction to the vegetated channel for infiltration (VCI) with check dams. A vegetated channel for diversion purposes (VCD) with check dams will be constructed on the south side of the proposed road and MLV pad to capture and divert uphill runoff. A small portion of runoff from the disturbed site will be directed to the proposed MLV site. The MLV site will be constructed with a 6-inch thick layer of AASHTO #8 stone on top of nonwoven geotextile and an 18-inch thick layer of AASHTO #57 stone. These proposed improvements have been designed to have no anticipated impacts or changes to downhill properties as a result of constructing the MLV site.

The PAR and MLV site have been designed to match or reduce peak stormwater runoff from the design areas to an off-site discharge point. (See the enclosed Pre and Post Drainage Area Maps and calculations in Appendix G.3 and G.4 for details.) The reduced peak runoff for all storm events is summarized in the Pre-vs. Post- Construction Peak Rate of Flow Summary for The Study Point table below. The reduction was achieved by promoting infiltration through retention storage in the VCD, VCI, and MLV pad. Retaining and infiltrating runoff decreases the rate of stormwater runoff as well as recharging the groundwater.

Pre- vs. Post-Construction Peak Rate of Flow Summary for The Study Point			
Stormwater discharge rate for the design frequency storm (cfs)	Pre-construction	Post-construction	Net Change
1) 1-Year/24-Hour	0.70	0.20	(0.50)
2) 2-Year/24-Hour	1.20	0.45	(0.75)
3) 5-Year/24-Hour	2.01	1.00	(1.01)
4) 10-Year/24-Hour	2.79	1.72	(1.07)
5) 25-Year/24-Hour	4.07	2.28	(1.79)
6) 50-Year/24-Hour	5.29	3.36	(1.93)
7) 100-Year/24-Hour	6.76	4.87	(1.89)

The VCD is proposed to the South of the MLV site and PAR. This VCD is 4-feet wide, 1-foot deep, and conveys flows from the abutting existing woodlands around the back side of the MLV site. The VCD is equipped with multiple check dams to slow down flow and create small retention areas throughout the channel to promote infiltration. These

measures allow for stormwater to pond during storm events and infiltrate into the ground, which reduces flows.

The VCI is located on the North side of the MLV site and PAR. The VCI has a 2-foot wide bottom and varying depths throughout the channel. The VCI collects runoff from the PAR and the MLV site and conveys the flows to existing woodlands. The VCI is equipped with multiple check dams to slow down flow and creates small retention areas throughout the channel to promote infiltration. A riprap apron is proposed at the end of the channel dissipate energy.



The final measure used to ensure reduced peak stormwater runoff is the MLV pad itself. The pad is a gravel area constructed of a top layer of 6" of AASHTO #8 aggregate, on a non-woven geotextile fabric, and a bottom layer of 18" AASHTO #57 stone. This 18-inch-deep area will detain and infiltrate the foot print of the MLV pad, plus a small area around the pad to the East.

After being conveyed through one of these three stormwater PSCM BMP's above, the runoff flows northwest, until they converge to the existing woodlands. At this point the runoff follows pre-construction conditions, ultimately outletting into Beaver Pond (WB-T02-15020), approximately 1290 feet west of the MLV Site. The picture to the left shows the existing ground cover at the discharge point.

The flow path from the MLV site crosses the following soil types:

- LcB – Lackawanna channery silt loam, 3 to 8 percent slopes, extremely stony.
- MsB – Morris channery silt loam, 0 to 8 percent slopes, extremely stony
- WmB – Wellsboro channery silt loam, 3 to 8 percent slopes, extremely stony.

The PADEP E&S Manual defines erosion resistant soils as soils having an erodibility "K" factor less than or equal to 0.37. The K factor for the soil types, according to the National Resources Conservation Service (NRCS) website

<http://websoilsurvey.nrcs.usda.gov/app/WebSoilSurvey.aspx>, crossed by the flow path are summarized below:

- LcB – No value specified by NRCS
- MsB – No value specified by NRCS
- WmB – No value specified by NRCS

All soils crossed by the flow path are considered erosion resistant soils.

In addition to the stormwater flow reduction and soil data above, the VCI, VCD and MLV pad has reduced the proposed stormwater velocity as it leaves the design points. The

velocities at these points are such that they are slower than 1 fps, as summarized in the Stormwater Velocity Rate Summary table below. Based on Table G.1 in the PADEP E&S Manual, “Allowable Velocities for Downslope covers for Channeled Flows” (shown below), the maximum allowable velocity for grass is 4 fps. The velocity of the runoff from the proposed improvements is less than the maximum allowable velocity.

Stormwater Velocity Rate Summary			
Design Frequency Storm	MLV Pad Velocity (fps)	VCI Velocity (fps)	VCD Velocity (fps)
1) 1-Year/24-Hour	0.00	0.22	0.14
2) 2-Year/24-Hour	0.10	0.55	0.22
3) 5-Year/24-Hour	0.20	0.60	0.57
4) 10-Year/24-Hour	0.37	0.65	0.75
5) 25-Year/24-Hour	0.67	0.72	0.83
6) 50-Year/24-Hour	0.84	0.77	0.90
7) 100-Year/24-Hour	0.95	0.82	0.97

Table G.1. Allowable Velocities for Downslope Covers for Channeled Flows

Ground Cover	Allowable Velocity
Grass*	4 fps
Gravel	5 fps
Mulch	1-2 fps

* See E&S Manual for more information on permissible velocities for grass and other cover types. Allowable velocities for grass can vary from 2.5 fps to as much as 8 fps. 4 fps has been selected as a conservative figure for design purposes.

(Table from the 2012 PADEP E&S Manual)

In conclusion, based on the designed measures discussed above, and the soil and velocity data provided for this MLV site and access road, there are no anticipated impacts or changes to downhill properties as a result of construction the MLV site.

Down Slope Property Owners:

- Carol J. Bonham (PA-LU-013.000)
- Michael D. Karns & Jennifer Karns (PA-LU-012.000)
- Unknown Property Owner (PA-LU-010.000)
- Unknown Property Owner (PA-LU-011.000)

G.10 Storage Volume Analysis

a. Storage Volume Analysis

ACCESS ROAD: LU-007.1 – Storage Volume Analysis

Stormwater detention is provided behind the check dams in the vegetated channel and in the void space between the AASHTO #57 stone layer at the MLV pad. The void space between the 6" AASHTO #8 stone at the surface of the pad is excluded from the detention, or storage volume, calculations. The required storage volume is calculated through an iterative process of increasing the storage volume in the HydroCAD model until the post-construction stormwater runoff rate is less than or equal to the pre-construction runoff rate.

Vegetated channel storage is created by installing check dams along the channel. The "Earthen Check Dam Infiltration Volume and Spacing" exhibit provided in Appendix G.6 describes how the storage volume behind each check dam is calculated. The number of check dams required is dependent on the channel cross-sectional dimensions, slope of channel, and required storage volume.

The void space between the AASHTO #57 stone provides the storage volume for the MLV pad. The void space between the 6" AASHTO #8 stone at the surface of the pad is excluded from the volume calculations.

The storage volume of the MLV pad is dependent on the slope of the MLV pad. If the pad were graded at 0% in all directions, the storage volume would simply be the area of the pad multiplied by the depth. However, due to site topography, a 0% grade would result in large quantities of earth movement, fill at the infiltration interface, or cut too close to the ground water table. Instead, the pad was designed to minimize these impacts by mimicking the existing grade. An actual storage volume was calculated based on the elevation of the low point of the pad (minus the 6" AASHTO #8 cover), since that is the highest runoff could be stored without overtopping the AASHTO #57 stone. Two scenarios apply to all of the main line valve pads on the project: low side pads and low corner pads. Since many of the volumes can only be obtained using calculus to determine the total storage the water surface elevation and base of the pad, AutoCAD Civil 3D was used to determine the storage volumes. To determine volumes in Civil 3D, surfaces representing the bottom of the pad and water surface elevation were built and combined into a volumetric surface; an earthwork analysis was run on the volumetric surface to determine the total volume between the two. The volume of low side pads can be checked using simple volumetric formulas for triangular (steeper grades, shallower pads) or trapezoidal (more gradual grades, deeper pads) prisms, with the cross sectional wetted area multiplied by the length of the low side of the pad. AR-LU-007.1 is a low-corner pad. Finally, the calculated storage volume was reduced by 60% to determine the available storage volume with 40% voids.

The detained stormwater will infiltrate the ground. The dewatering time for the stormwater detained behind the check dams is provided with the check dam volume calculations in Appendix G.6. The dewatering time for the stormwater detained in the void space of the MLV pad rock is provided at the bottom of Worksheet #5 included in Appendix G.7.

