

Application Type Renewal
Wastewater Type Sewage
Facility Type SRSTP

**NPDES PERMIT FACT SHEET
INDIVIDUAL SFTF/SRSTP**

Application No. PA0083992
APS ID 333113
Authorization ID 1274212

Applicant, Facility and Project Information

Applicant Name	<u>Dolores J Carrigan</u>	Facility Name	<u>Carrigan Residence</u>
Applicant Address	<u>112 Pond View Lane</u> <u>Clearville, PA 15535-8418</u>	Facility Address	<u>112 Pond View Lane</u> <u>Clearville, PA 15535-8418</u>
Applicant Contact	<u>Dolores Carrigan</u>	Facility Contact	<u>Dolores Carrigan</u>
Applicant Phone	<u>(814) 784-3012</u>	Facility Phone	<u>(814) 784-3012</u>
Client ID	<u>145950</u>	Site ID	<u>128</u>
SIC Code	<u>6514</u>	Municipality	<u>Southampton Township</u>
SIC Description	<u>Fin, Ins & Real Est - Dwelling Operators, Except Apartments</u>	County	<u>Bedford</u>
Date Application Received	<u>May 1, 2019</u>	WQM Required	<u></u>
Date Application Accepted	<u>May 28, 2019</u>	WQM App. No.	<u></u>
Project Description	<u>This is an application for NPDES renewal.</u>		

Summary of Review

Approve	Deny	Signatures	Date
X		Nicholas Hong, P.E. / Environmental Engineering Specialist	January 30, 2020
		Daniel W. Martin, P.E. / Environmental Engineer Manager	
		Maria Bebenek, P.E. / Environmental Program Manager	

Summary of Review

The application submitted by the applicant requests a NPDES renewal permit for the Carrigan residence located at 112 Pond View Lane, Clearville, PA 15535 in Bedford County, municipality of Southampton Township. The existing permit became effective on November 1, 2014 and expired on October 31, 2019. The application for renewal was received by DEP Southcentral Regional Office (SCRO) on May 1, 2019.

The purpose of this Fact Sheet is to present the basis of information used for establishing the proposed NPDES permit effluent limitations. The Fact Sheet includes a description of the facility, a description of the facility's receiving waters, a description of the facility's receiving waters attainment/non-attainment assessment status, and a description of any changes to the proposed monitoring/sampling frequency. Section 6 provides the justification for the proposed NPDES effluent limits derived from technology based effluent limits (TBEL), water quality based effluent limits (WQBEL), total maximum daily loading (TMDL), antidegradation, anti-backsliding, and/or whole effluent toxicity (WET). A brief summary of the outlined descriptions has been included in the Summary of Review section.

The subject facility is a 0.0004 MGD (400 GPD) treatment facility. The NPDES application has been processed as a Small Flow Treatment Facility due to the type of sewage and the design flow rate for the facility. The applicant disclosed the Act 14 requirement to Bedford County Commissioner and Southampton Township and the notice was received by the parties on April 24, 2019. A planning approval letter was not necessary as the facility is neither new or expanding.

Utilizing the DEP's web-based Emap-PA information system, the receiving waters has been determined to be the Tributary 61631 to Sweet Root Creek. The sequence of receiving streams that the Tributary 61631 to Sweet Root Creek discharges into are the Sweet Root Creek, Town Creek, and the Potomac River which eventually drains into the Chesapeake Bay. The subject site is not subject to the Chesapeake Bay implementation requirements. The receiving water has protected water usage for cold water fishes (CWF) and migratory fishes (MF). No Class A Wild Trout fisheries are impacted by this discharge. The presence of high quality and/or exceptional value surface waters triggers the need for an additional evaluation of anti-degradation requirements.

Tributary 61631 to Sweet Root Creek is a Category 2 stream listed in the 2018 Integrated List of All Waters (formerly 303d Listed Streams). This stream is an attaining stream that supports aquatic life. The receiving waters is not subject to a total maximum daily load (TMDL) plan to improve water quality in the subject facility's watershed.

The existing permit and proposed permit differ as follows:

- The monitoring frequency for TRC has changed to 1x/mo.

The proposed permit will expire five (5) years from the effective date.

Based on the review in this report, it is recommended that the permit be drafted. DEP will publish notice of the receipt of the NPDES permit application and a tentative decision to issue the individual NPDES permit in the *Pennsylvania Bulletin* in accordance with 25 Pa. Code § 92a.82. Upon publication in the *Pennsylvania Bulletin*, DEP will accept written comments from interested persons for a 30-day period (which may be extended for one additional 15-day period at DEP's discretion), which will be considered in making a final decision on the application. Any person may request or petition for a public hearing with respect to the application. A public hearing may be held if DEP determines that there is significant public interest in holding a hearing. If a hearing is held, notice of the hearing will be published in the *Pennsylvania Bulletin* at least 30 days prior to the hearing and in at least one newspaper of general circulation within the geographical area of the discharge.

Any additional information or public review of documents associated with the discharge or facility may be available at PA DEP Southcentral Regional Office (SCRO), 909 Elmerton Avenue, Harrisburg, PA 17110. To make an appointment for file review, contact the SCRO File Review Coordinator at 717.705.4700.

1.0 Applicant

1.1 General Information

This fact sheet summarizes PA Department of Environmental Protection's review for the NPDES renewal for the following subject facility.

Facility Name: Carrigan Residence
NPDES Permit # PA0083992
Physical Address: 112 Pond View Lane
Clearville, PA 15535
Mailing Address: 112 Pond View Lane
Clearville, PA 15535
Contact: Dolores Carrigan
Homeowner
Consultant: There was not a consultant utilized for this NPDES renewal.

1.2 Permit History

Permit submittal included the following information.

- NPDES Application

2.0 Treatment Facility Summary

2.1.1 Site location

The physical address for the facility is 112 Pond View Lane, Clearville, PA 15535. A topographical and an aerial photograph of the facility are depicted as Figure 1 and Figure 2.

Figure 1: Topographical map of the subject facility


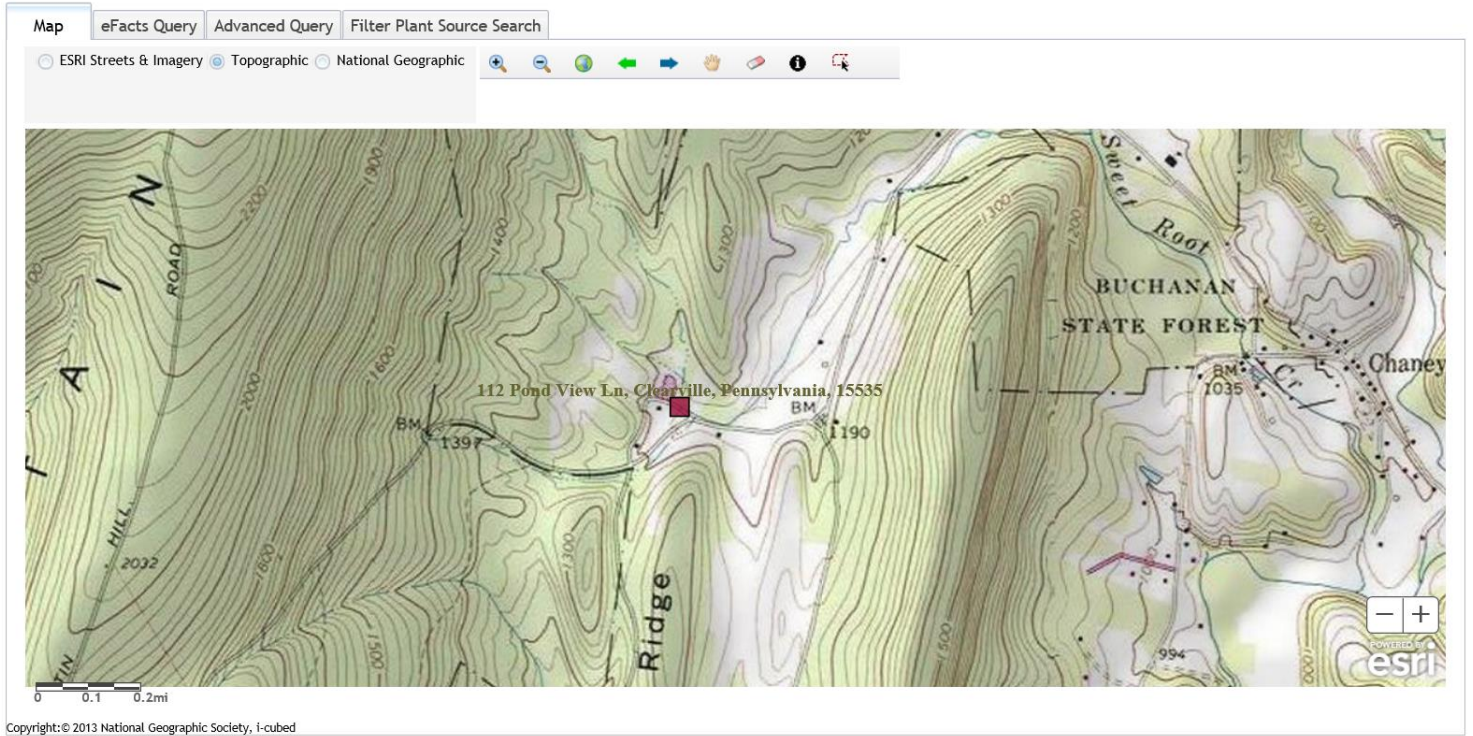


Figure 2: Aerial Photograph of the subject facility

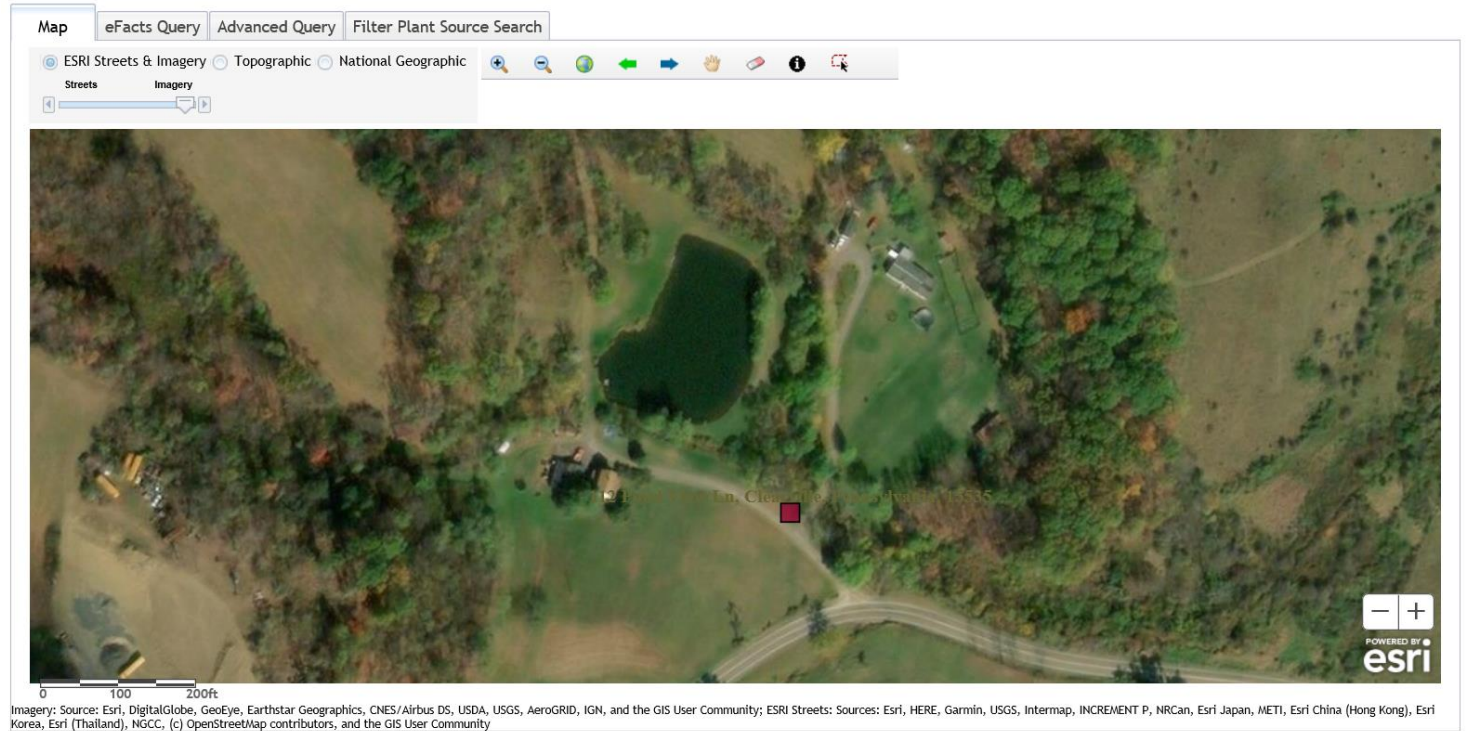

2.2 Description of Wastewater Treatment Process

The subject facility is a 0.0004 MGD (400 GPD) design flow facility. The subject facility treats wastewater using a septic tank(s), a subsurface sand filter, and a chlorine contact tank prior to discharge through the outfall. The facility is being evaluated for flow, TRC, CBOD, TSS, and fecal coliform. The existing permits limits for the facility is summarized in Section 2.4.

The treatment process is summarized in the table.

Treatment Facility Summary				
Treatment Facility Name: Sfs Dolores J Carrigan				
Waste Type	Degree of Treatment	Process Type	Disinfection	Avg Annual Flow (MGD)
Sewage	Secondary	Activated Sludge	Hypochlorite	0.0004
Hydraulic Capacity (MGD)	Organic Capacity (lbs/day)	Load Status	Biosolids Treatment	Biosolids Use/Disposal
0.004		Not Overloaded		Combination of methods

2.3 Facility Outfall Information

The facility has the following outfall information for wastewater.

Outfall No.	<u>001</u>	Design Flow (MGD)	<u>.0004</u>
Latitude	<u>39° 49' 25.00"</u>	Longitude	<u>-78° 30' 34.00"</u>
Wastewater Description: <u>Sewage Effluent</u>			

2.3.1 Operational Considerations- Chemical Additives

Chemical additives are chemical products introduced into a waste stream that is used for cleaning, disinfecting, or maintenance and which may be detected in effluent discharged to waters of the Commonwealth. Chemicals excluded are those used for neutralization of waste streams, the production of goods, and treatment of wastewater.

The subject facility utilizes the following chemicals as part of their treatment process.

- Chlorine tablets for disinfection

2.4 Existing NPDES Permits Limits

The existing NPDES permit limits are summarized in the table.

PART A - EFFLUENT LIMITATIONS, MONITORING, RECORDKEEPING AND REPORTING REQUIREMENTS

I. A. For Outfall 001, Latitude 39° 49' 25.00", Longitude 78° 30' 34.00", River Mile Index _____, Stream Code _____
 Receiving Waters: Unnamed Tributary to Sweet Root Creek
 Type of Effluent: _____

1. The permittee is authorized to discharge during the period from Permit Effective Date through Permit Expiration Date.
2. Based on the anticipated wastewater characteristics and flows described in the permit application and its supporting documents and/or amendments, the following effluent limitations and monitoring requirements apply (see also Additional Requirements and Footnotes).

Parameter	Effluent Limitations						Monitoring Requirements	
	Mass Units (lbs/day) ⁽¹⁾		Concentrations (mg/L)				Minimum ⁽²⁾ Measurement Frequency	Required Sample Type
	Average Monthly		Minimum	Average Monthly		Instant. Maximum		
Flow (MGD)	Report	XXX	XXX	XXX	XXX	XXX	1/year	Estimate
Total Residual Chlorine	XXX	XXX	XXX	Report	XXX	XXX	1/quarter	Grab
CBOD5	XXX	XXX	XXX	10	XXX	20	1/year	Grab
Total Suspended Solids	XXX	XXX	XXX	10	XXX	20	1/year	Grab
Fecal Coliform (CFU/100 ml)	XXX	XXX	XXX	200 Geo Mean	XXX	XXX	1/year	Grab

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location(s):

at Outfall 001

3.0 Facility NPDES Compliance History

3.1 Summary of Inspections

A summary of the most recent inspections during the existing permit review cycle is as follows.

The DEP inspector noted the following during the inspection.

05/15/2019: During the inspection, the homeowner had lab results for the past 5 years. The facility was advised to continue submitting AMR by June 30 of each year. TRC levels are elevated. The facility attributes this due to partial clogging in the chlorinator causing water to flow over multiple tablets or from performing chlorinator maintenance before sampling. The field TRC measured was 0.04 mg/l.

3.2 Summary of DMR Data

The availability of sampling data from 2014 to January 2020 is absent. DEP files did not contain AMR for those years. Other DEP tracking sheets indicate that an AMR was submitted for 2019.

Future renewals will require sampling data for the NPDES to be renewed.

3.3 Non-Compliance

3.3.1 Non-Compliance- NPDES Effluent

A summary of the non-compliance to the permit limits for the existing permit cycle is as follows.

The facility had TRC results between 6.6 mg/l to 15.5 mg/l throughout the first 6 months of 2015.

Optimum TRC should be range between 0.3 mg/l to 0.5 mg/l.

3.3.2 Non-Compliance- Enforcement Actions

A summary of the non-compliance enforcement actions for the current permit cycle is as follows:

For the time period beginning on November 1, 2014 and ending on January 26, 2020, the facility had the following enforcement actions.

- No enforcement actions were taken.

3.4 Summary of Biosolids Disposal

A summary of the biosolids disposed of from the facility is as follows.

- Biosolids were pumped from the septic tank by Lang Septic Service on June 13, 2018.

3.5 Open Violations

No open violations existed as of January 2020

4.0 Receiving Waters and Water Supply Information Detail Summary

4.1 Receiving Waters

The receiving waters has been determined to be the Tributary 61631 to Sweet Root Creek. The sequence of receiving streams that the Tributary 61631 to Sweet Root Creek discharges into are the Sweet Root Creek, Town Creek, and the Potomac River which eventually drains into the Chesapeake Bay.

4.2 Public Water Supply (PWS) Intake

The closest PWS to the subject facility is the Hancock treatment facility located at Hancock, Maryland on the Potomac River. Based upon the distance and the flow rate of the facility, the PWS should not be impacted.

4.3 Class A Wild Trout Streams

Class A Wild Trout Streams are waters that support a population of naturally produced trout of sufficient size and abundance to support long-term and rewarding sport fishery. DEP classifies these waters as high-quality coldwater fisheries.

The information obtained from EMAP suggests that no Class A Wild Trout Fishery will be impacted by this discharge.

4.4 2018 Integrated List of All Waters (303d Listed Streams):

Section 303(d) of the Clean Water Act requires States to list all impaired surface waters not supporting uses even after appropriate and required water pollution control technologies have been applied. The 303(d) list includes the reason for impairment which may be one or more point sources (i.e. industrial or sewage discharges) or non-point sources (i.e. abandoned mine lands or agricultural runoff and the pollutant causing the impairment such as metals, pH, mercury or siltation).

States or the U.S. Environmental Protection Agency (EPA) must determine the conditions that would return the water to a condition that meets water quality standards. As a follow-up to listing, the state or EPA must develop a Total Maximum Daily Load (TMDL) for each waterbody on the list. A TMDL identifies allowable pollutant loads to a waterbody from both point and non-point sources that will prevent a violation of water quality standards. A TMDL also includes a margin of safety to ensure protection of the water.

The water quality status of Pennsylvania's waters uses a five-part categorization (lists) of waters per their attainment use status. The categories represent varying levels of attainment, ranging from Category 1, where all designated water uses are met to Category 5 where impairment by pollutants requires a TMDL for water quality protection.

The receiving waters is listed in the 2018 Pennsylvania Integrated Water Quality Monitoring and Assessment Report as a Category 2 waterbody. The surface waters is an attaining stream that supports aquatic life. The designated use has been classified as protected waters for cold water fishes (CWF) and migratory fishes (MF).

4.5 Low Flow Stream Conditions

Water quality modeling estimates are based upon conservative data inputs. The data are typically estimated using either a stream gauge or through USGS web based StreamStats program. The NPDES effluent limits are based upon the combined flows from both the stream and the facility discharge.

A conservative approach to estimate the impact of the facility discharge using values which minimize the total combined volume of the stream and the facility discharge. The volumetric flow rate for the stream is based upon the seven-day, 10-year low flow (Q710) which is the lowest estimated flow rate of the stream during a 7 consecutive day period that occurs once in 10 year time period. The facility discharge is based upon a known design capacity of the subject facility.

The Q710 and low flow yield were estimated using StreamStats.

The Q710 is 0.0148 ft³/s and the low flow yield is 0.0217 ft³/s/mi².

4.6 Summary of Discharge, Receiving Waters and Water Supply Information

Outfall No. 001 Design Flow (MGD) .0004
 Latitude 39° 49' 24.93" Longitude -78° 30' 33.85"
 Quad Name _____ Quad Code _____
 Wastewater Description: Sewage Effluent

Receiving Waters Unnamed Tributary to Sweet Root Creek (HQ-CWF) Stream Code 61631
 NHD Com ID 36405794 RMI 1.09
 Drainage Area 0.68 Yield (cfs/mi²) 0.0217
 Q₇₋₁₀ Flow (cfs) 0.0148 Q₇₋₁₀ Basis StreamStats
 Elevation (ft) 1175 Slope (ft/ft) _____

Watershed No. 13A Chapter 93 Class. High Quality Waters - Cold Water Fishes, Migratory Fishes
 Existing Use Same as Chapter 93 Existing Use Qualifier _____
 Exceptions to Use _____ Exceptions to Criteria _____

Assessment Status Attaining Use(s) supports aquatic life.
 Cause(s) of Impairment Not applicable.
 Source(s) of Impairment Not applicable.
 TMDL Status Not applicable. Name _____

Background/Ambient Data Data Source
 pH (SU) Not appl. _____
 Temperature (°F) Not appl. _____
 Hardness (mg/L) Not appl. _____
 Other: _____

Nearest Downstream Public Water Supply Intake Hancock treatment plant at Hancock, MD
 PWS Waters Potomac River Flow at Intake (cfs) _____
 PWS RMI _____ Distance from Outfall (mi) _____

5.0: Overview of Presiding Water Quality Standards

5.1 General

There are at least six (6) different policies which determines the effluent performance limits for the NPDES permit. The policies are technology based effluent limits (TBEL), water quality based effluent limits (WQBEL), antidegradation, total maximum daily loading (TMDL), anti-backsliding, and whole effluent toxicity (WET) The effluent performance limitations enforced are the selected permit limits that is most protective to the designated use of the receiving waters. An overview of each of the policies that are applicable to the subject facility has been presented in Section 6.

5.2.1 Technology-Based Limitations

TBEL treatment requirements under section 301(b) of the Act represent the minimum level of control that must be imposed in a permit issued under section 402 of the Act (40 CFR 125.3). Small flow treatment facilities are confined to permit limitations promulgated by the Small Flow Treatment Facilities Manual (Document # 36-0300-002) and the SOP- New and Reissuance Small Flow Treatment Facility Individual NPDES Permit Application (Revised January 13, 2015).

The permit limitations and monitoring requirements are summarized in the table.

Parameter	Avg Mo	IMAX	Sample Type	Frequency: SRSTPs
Flow (GPD)	Report	XXX	Estimate	1/year
BOD5 (mg/l)	10	20	Grab	1/year
TSS (mg/l)	10	20	Grab	1/year
TRC (mg/l)	Report for SRSTPs		Grab	1/month
Fecal Coliform (No/100 ml)	200 Geometric Mean		Grab	1/year

5.3 Water Quality-Based Limitations

WQBEL are based on the need to attain or maintain the water quality criteria and to assure protection of designated and existing uses (PA Code 25, Chapter 92a.2). The subject facility that is typically enforced is the more stringent limit of either the TBEL or the WQBEL.

Determination of WQBEL is calculated by spreadsheet analysis or by a computer modeling program developed by DEP. DEP permit engineers utilize the following computing programs for WQBEL permit limitations: (1) MS Excel worksheet for Total Residual Chlorine (TRC); (2) WQM 7.0 for Windows Wasteload Allocation Program for Dissolved Oxygen and Ammonia Nitrogen Version 1.0 (WQM Model) and (3) PENTOXSD for Windows 2.0 (PENTOXSD) for Toxics pollutants.

5.3.1 Water Quality Modeling 7.0

The facility is not subject to WQM.

5.3.2 PENTOXSD Modeling

The facility is not subject to PENTOXSD.

5.3.3 Whole Effluent Toxicity (WET)

The facility is not subject to WET.

5.4 Total Maximum Daily Loading (TMDL)

5.4.1 TMDL

The goal of the Clean Water Act (CWA), which governs water pollution, is to ensure that all of the Nation's waters are clean and healthy enough to support aquatic life and recreation. To achieve this goal, the CWA created programs designed to regulate and reduce the amount of pollution entering United States waters. Section 303(d) of the CWA requires states to assess their waterbodies to identify those not meeting water quality standards. If a waterbody is not meeting standards, it is listed as impaired and reported to the U.S. Environmental Protection Agency. The state then develops a plan to clean up the impaired waterbody. This plan includes the development of a Total Maximum Daily Load (TMDL) for the pollutant(s) that were found to be the cause of the water quality violations. A Total Maximum Daily Load (tmdl) calculates the maximum amount of a specific pollutant that a waterbody can receive and still meet water quality standards.

Pennsylvania has committed to restoring all impaired waters by developing TMDLs and TMDL alternatives for all impaired waterbodies. The TMDL serves as the starting point or planning tool for restoring water quality.

5.4.1.1 Local TMDL

The subject facility does not discharge into a local TMDL.

5.4.1.2 Chesapeake Bay TMDL Requirement

The Chesapeake Bay Watershed is a large ecosystem that encompasses approximately 64,000 square miles in Maryland, Delaware, Virginia, West Virginia, Pennsylvania, New York and the District of Columbia. An ecosystem is composed of interrelated parts that interact with each other to form a whole. All of the plants and animals in an ecosystem depend on each other in some way. Every living thing needs a healthy ecosystem to survive. Human activities affect the Chesapeake Bay ecosystem by adding pollution, using resources and changing the character of the land.

Most of the Chesapeake Bay and many of its tidal tributaries have been listed as impaired under Section 303(d) of the federal Water Pollution Control Act ("Clean Water Act"), 33 U.S.C. § 1313(d). While the Chesapeake Bay is outside the boundaries of Pennsylvania, more than half of the State lies within the watershed. Two major rivers in Pennsylvania are part of the Chesapeake Bay Watershed. They are (a) the Susquehanna River and (b) the Potomac River. These two rivers total 40 percent of the entire Chesapeake Bay watershed.

The overall management approach needed for reducing nitrogen, phosphorus and sediment are provided in the Bay TMDL document and the Phase I and II WIPs which is described in the Bay TMDL document and Executive Order 13508.

The Bay TMDL is a comprehensive pollution reduction effort in the Chesapeake Bay watershed identifying the necessary pollution reductions of nitrogen, phosphorus and sediment across the seven Bay watershed jurisdictions of Delaware, Maryland, New York, Pennsylvania, Virginia, West Virginia and the District of Columbia to meet applicable water quality standards in the Bay and its tidal waters.

The Watershed Implementation Plans (WIPs) provides objectives for how the jurisdictions in partnership with federal and local governments will achieve the Bay TMDL's nutrient and sediment allocations. The jurisdictions have developed or will develop WIPs over three Phases.

Phase I and Phase II WIPs were developed and submitted to EPA in 2010 and 2012 for objectives to be implemented by 2017 and 2025 to achieve applicable water quality standards. The Phase II WIPs build on the initial Phase I WIPs platform by providing more specific local actions. In 2018, Phase III WIPs will be developed to include further actions for jurisdictions to implement between 2018 and 2025.

Section 7 of the Phase II WIP describes Pennsylvania's strategy for reducing nutrients to the Chesapeake Bay from wastewater facilities. The supplement to Section 7 of the Phase II WIP provides an update on Chesapeake Bay TMDL implementation activities for point sources and DEP's current implementation strategy for wastewater. The supplement is updated periodically to reflect changes due to PA DEP's permit actions as well as changes to strategies in managing the wastewater sector's allocated loads under the TMDL. The latest revision of the supplement was October 14, 2016.

The Chesapeake Bay TMDL (Appendix Q) categorizes point sources into four sectors

:

Carrigan Residence

- Sector A- significant sewage dischargers;
- Sector B- significant industrial waste (IW) dischargers;
- Sector C- non-significant dischargers (both sewage and IW facilities); and
- Sector D- combined sewer overflows (CSOs).

All sectors contain a listing of individual facilities with NPDES permits that were believed to be discharging at the time the TMDL was published (2010). All sectors with the exception of the non-significant dischargers have individual wasteload allocations (WLAs) for TN and TP assigned to specific facilities. Non-significant dischargers have a bulk or aggregate allocation for TN and TP based on the facilities in that sector that were believed to be discharging at that time and their estimated nutrient loads.

Based upon the supplement the subject facility has been categorized as a Sector C discharger. The supplement defines Sector C as a sewage facility is considered non-significant dischargers if it is a Phase 4 facility or Phase 5 facility having a specified flow rate (i.e. Phase 4 facility ≥ 0.2 MGD and < 0.4 MGD, Phase 5 facility > 0.002 MGD and < 0.2 MGD), a small flow/single residence sewage treatment facilities (≤ 0.002 MGD), or a non-significant IW facilities. These facilities may be covered by statewide general permits or may have individual NPDES permits.

Currently, there are approximately 1,000 Phase 4 and 5 sewage facilities and approximately 740 small flow sewage treatment facilities covered by the general permit. There are also approximately 600 non-significant IW facilities.

Due to the low flow rate generated by the facility, this facility is not subject to Sector C monitoring requirements.

5.5 Anti-Degradation Requirement

Chapter 93.4a of the PA regulations requires that surface water of the Commonwealth of Pennsylvania may not be degraded below levels that protect the existing uses. The regulations specifically state that *Existing instream water uses and the level of water quality necessary to protect the existing uses shall be maintained and protected*. Antidegradation requirements are implemented through DEP's guidance manual entitled Water Quality Antidegradation Implementation Guidance (Document #391-0300-02).

The policy requires DEP to protect the existing uses of all surface waters and the existing quality of High Quality (HQ) and Exceptional Value (EV) Waters. Existing uses are protected when DEP makes a final decision on any permit or approval for an activity that may affect a protected use. Existing uses are protected based upon DEP's evaluation of the best available information (which satisfies DEP protocols and Quality Assurance/Quality Control (QA/QC) procedures) that indicates the protected use of the waterbody.

For a new, additional, or increased point source discharge to an HQ or EV water, the person proposing the discharge is required to utilize a nondischarge alternative that is cost-effective and environmentally sound when compared with the cost of the proposed discharge. If a nondischarge alternative is not cost-effective and environmentally sound, the person must use the best available combination of treatment, pollution prevention, and wastewater reuse technologies and assure that any discharge is nondegrading. In the case of HQ waters, DEP may find that after satisfaction of intergovernmental coordination and public participation requirements lower water quality is necessary to accommodate important economic or social development in the area in which the waters are located. In addition, DEP will assure that cost-effective and reasonable best management practices for nonpoint source control in HQ and EV waters are achieved.

The subject facility's discharge will be to a special protection waters and the permit conditions are imposed to protect existing instream water quality and uses. The facility had a Part 2 WQM permit (Permit # 0589406) issued on April 30, 1990. The facility predates the classification for the receiving waters. Neither HQ waters or EV waters is impacted by this discharge.

5.6 Anti-Backsliding

Anti-backsliding is a federal regulation which prohibits a permit from being renewed, reissued, or modified containing effluent limitations which are less stringent than the comparable effluent limitations in the previous permit (40 CFR 122.1.1 and 40 CFR 122.1.2). A review of the existing permit limitations with the proposed permit limitations confirm that the facility is consistent with anti-backsliding requirements. The facility has proposed effluent limitations that are as stringent as the existing permit.

6.0 NPDES Parameter Details

The basis for the proposed sampling and their monitoring frequency that will appear in the permit for each individual parameter are itemized in this Section. The final limits are the more stringent of technology based effluent treatment (TBEL) requirements, water quality based (WQBEL) limits, TMDL, antidegradation, anti-degradation, or WET.

The reader will find in this section:

- a) a justification of recommended permit monitoring requirements and limitations for each parameter in the proposed NPDES permit;
- b) a summary of changes from the existing NPDES permit to the proposed permit; and
- c) a summary of the proposed NPDES effluent limits.

6.1 Recommended Monitoring Requirements and Effluent Limitations

A summary of the recommended monitoring requirements and effluent limitations are itemized in the tables. The table is categorized by Conventional Pollutants and Disinfection.

Summary of Proposed NPDES Parameter Details for Conventional Pollutants and Disinfection			
Carrigan Residence, PA0083992			
Parameter	Permit Limitation Required by ¹ :	Recommendation	
CBOD	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP)
		Effluent Limit:	Effluent limits shall not exceed 10 mg/l as an average monthly (SOP)
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
TSS	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP).
		Effluent Limit:	Effluent limits shall not exceed 10 mg/l as an average monthly (SOP)
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
TRC	TBEL	Monitoring:	The monitoring frequency shall be on a 1x/mo basis as a grab sample (SOP)
		Effluent Limit:	A performance effluent limit is not required. However, the optimum TRC is 0.3 mg/l to 0.5 mg/l.
		Rationale:	Chlorine in both combined (chloramine) and free form is extremely toxic to freshwater fish and other forms of aquatic life (Implementation Guidance Total Residual Chlorine 1). The TRC effluent limitations to be imposed on a discharger shall be the more stringent of either the WQBEL or TBEL requirements and shall be expressed in the NPDES permit as an average monthly and instantaneous maximum effluent concentration (Implementation Guidance Total Residual Chlorine 4).
Fecal Coliform	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP).
		Effluent Limit:	Effluent limits shall not exceed 200 MPN as a geometric mean (SOP).
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
Notes:			
1 The NPDES permit was limited by (a) anti-Backsliding, (b) Anti-Degradation, (c) SOP, (d) TBEL, (e) TMDL, (f) WQBEL, or (g) WET			
2 Monitoring frequency based on flow rate of 0.0004 MGD.			
3 SOP, New and Reissuance Small Flow Treatment Facility Individual NPDES Permit Applications, Revised January 13, 2015			
4 Water Quality Antidegradation Implementaton Guidance (Document # 391-0300-002)			
5 Phase 2 Watershed Implementation Plan Wastewater Supplement, Revised September 6, 2017			

6.2 Summary of Changes From Existing Permit to Proposed Permit

A summary of how the proposed NPDES permit differs from the existing NPDES permit is summarized as follows.

- The monitoring frequency for TRC has changed to 1x/mo.

6.3.1 Summary of Proposed NPDES Effluent Limits

The limitations and monitoring requirements specified below are proposed for the draft permit, and reflect the most stringent limitations amongst technology, water quality and BPJ. Instantaneous Maximum (IMAX) limits are determined using multipliers of 2 (conventional pollutants) or 2.5 (toxic pollutants). Sample frequencies and types are derived from the "NPDES Permit Writer's Manual" (362-0400-001), SOPs and/or BPJ.

The proposed NPDES effluent limitations are summarized in the table below.

PART A - EFFLUENT LIMITATIONS, MONITORING, RECORDKEEPING AND REPORTING REQUIREMENTS

I. A. For Outfall 001, Latitude 39° 49' 25.00", Longitude 78° 30' 34.00", River Mile Index 1.09, Stream Code 61631

Receiving Waters: Unnamed Tributary to Sweet Root Creek (HQ-CWF)

Type of Effluent: Sewage Effluent

1. The permittee is authorized to discharge during the period from **Permit Effective Date** through **Permit Expiration Date**.
2. Based on the anticipated wastewater characteristics and flows described in the permit application and its supporting documents and/or amendments, the following effluent limitations and monitoring requirements apply (see also Additional Requirements and Footnotes).

Parameter	Effluent Limitations						Monitoring Requirements	
	Mass Units (lbs/day) ⁽¹⁾		Concentrations (mg/L)				Minimum ⁽²⁾ Measurement Frequency	Required Sample Type
	Average Monthly	Average Weekly	Minimum	Annual Average	Maximum	Instant. Maximum		
Flow (MGD)	Report Annl Avg	XXX	XXX	XXX	XXX	XXX	1/year	Estimate
TRC	XXX	XXX	XXX	Report	XXX	XXX	1/month	Grab
CBOD5	XXX	XXX	XXX	10.0	XXX	20.0	1/year	Grab
TSS	XXX	XXX	XXX	10.0	XXX	20.0	1/year	Grab
Fecal Coliform (No./100 ml)	XXX	XXX	XXX	200	XXX	XXX	1/year	Grab

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location(s):

at Outfall 001

6.3.2 Summary of Proposed Permit Part C Conditions

The subject facility has the following Part C conditions.

- Small flow treatment facility maintenance.