



COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION AIR QUALITY PROGRAM

TITLE V/STATE OPERATING PERMIT

Issue Date: December 17, 2020 Effective Date: January 1, 2021

Expiration Date: December 31, 2025

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable applicable requirements unless otherwise designated as "State-Only" or "non-applicable" requirements.

TITLE V Permit No: 28-05004

Federal Tax Id - Plant Code: 23-2955767-1

Owner Information

	CWIOT INCINICACIO
Name: GROVE US LLC	
Mailing Address: PO BOX 21	
1565 BUCHANAN TRL E	
SHADY GROVE, PA 17256-0021	
	Plant Information
Plant: GROVE US LLC/SHADY GROVE PLT	
Location: 28 Franklin County	28905 Antrim Township
SIC Code: 3531 Manufacturing - Construction Machi	nery
	Responsible Official
Name: LES MIDDLETON	
Title: VP OF OPERATIONS	
Phone: (717) 597 - 8121	
F	Permit Contact Person
Name: CHUCK CARBAUGH	
Title: EH&S MGR	
Phone: (717) 593 - 5388	
[Signature]	

WILLIAM R. WEAVER, SOUTHCENTRAL REGION AIR PROGRAM MANAGER



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents Site Inventory List

Section B. General Title V Requirements

#001	Definitions

- #002 Prohibition of Air Pollution
- #003 Property Rights
- #004 Permit Expiration
- #005 Permit Renewal
- #006 Transfer of Ownership or Operational Control
- #007 Inspection and Entry
- #008 Compliance Requirements
- #009 Need to Halt or Reduce Activity Not a Defense
- #010 Duty to Provide Information
- #011 Reopening and Revising the Title V Permit for Cause
- #012 Reopening a Title V Permit for Cause by EPA
- #013 Operating Permit Application Review by the EPA
- #014 Significant Operating Permit Modifications
- #015 Minor Operating Permit Modifications
- #016 Administrative Operating Permit Amendments
- #017 Severability Clause
- #018 Fee Payment
- #019 Authorization for De Minimis Emission Increases
- #020 Reactivation of Sources
- #021 Circumvention
- #022 Submissions
- #023 Sampling, Testing and Monitoring Procedures
- #024 Recordkeeping Requirements
- #025 Reporting Requirements
- #026 Compliance Certification
- #027 Operational Flexibility
- #028 Risk Management
- #029 Approved Economic Incentives and Emission Trading Programs
- #030 Permit Shield
- #031 Reporting
- #032 Report Format

Section C. Site Level Title V Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification C-IX: Compliance Schedule

Section D. Source Level Title V Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements







SECTION A. Table of Contents

D-VI: Work Practice Standards D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

E-I: Restrictions

E-II: Testing RequirementsE-III: Monitoring RequirementsE-IV: Recordkeeping RequirementsE-V: Reporting Requirements

E-VI: Work Practice Standards E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

F-I: Restrictions

F-II: Testing Requirements
F-III: Monitoring Requirements
F-IV: Recordkeeping Requirements
F-V: Reporting Requirements
F-VI: Work Practice Standards
F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous

Page 3







SECTION A. Site Inventory List

Document Document Capacity/Throughput FuelMaterial	SECTION	JN A. Site inventory List			
003 SPACE HEATERS 30,000.000 CF/HR Natural Gas	Source I	D Source Name	Capacity/	Throughput	Fuel/Material
111	002	DRYING OVENS (8)	8.000	MCF/HR	Natural Gas
112 W. PAINT BOOTH SUB ASSBLY (BLDG 20) 20.000 Lbs/HR VOC 113 W. PAINT BOOTH-PAINT SHOP (BLDG 16) 101.400 Lbs/HR VOC 114 E. PAINT BOOTH-PAINT SHOP (BLDG 16) 33.300 Lbs/HR VOC 115-1 FINAL3 PRIME BOOTH 25.000 Lbs/HR VOC 115-2 FINAL3 TOPCOATBOOTH 25.000 Lbs/HR VOC 117 PAINT BOOTH-FINAL 4 BLDG 14.000 Lbs/HR VOC 117 PAINT BOOTH-FINAL 4 BLDG 14.000 Lbs/HR VOC 119 A E. PAINT BOOTH-FINAL 1 BLDG 30.000 Lbs/HR VOC 121 N. PAINT BOOTH-PINAL 1 BLDG 30.000 Lbs/HR VOC 122 GASOLINE STORAGE TANK 20.000.000 Gal/HR GASOLINE 123 R&D SPRAYBOOTH 100.000 Lbs/HR VOC 124 CRAWLER STRUCTURES PRIME BOOTH 8.000 Lbs/HR VOC 124-2 CRAWLER STRUCTURES PRIME BOOTH 8.000 Lbs/HR VOC 124-2 CRAWLER STRUCTURES TOPCOAT BOOTH 8.000 Lbs/HR VOC 130 SUBPART 42 EMERGENCY GENERATORS 311 SUBPART 44 EMERGENCY GENERATORS 312 SUBPART 44 EMERGENCY GENERATORS 313 SUBPART 44 EMERGENCY GENERATORS 314 SUBPART 64 AL EMERGENCY GENERATOR 40.000 Lbs/HR VOC 40.	003	SPACE HEATERS	30,000.000	CF/HR	Natural Gas
113	111	E. PAINT BOOTH-SUB ASSBLY (BLDG 20)	40.000	Lbs/HR	VOC
114	112	W. PAINT BOOTH SUB ASSBLY (BLDG 20)	20.000	Lbs/HR	VOC
115-1	113	W. PAINT BOOTH-PAINT SHOP (BLDG 16)	101.400	Lbs/HR	VOC
115-2	114	E. PAINT BOOTH-PAINT SHOP (BLDG 16)	33.300	Lbs/HR	VOC
117	115-1	FINAL 3 PRIME BOOTH	25.000	Lbs/HR	VOC
119A	115-2	FINAL 3 TOPCOAT BOOTH	25.000	Lbs/HR	VOC
121	117	PAINT BOOTH-FINAL 4 BLDG	14.000	Lbs/HR	VOC
122 GASOLINE STORAGE TANK 20,000.000 Gal/HR GASOLINE 123 R&D SPRAY BOOTH 100.000 Lbs/HR 124-11 CRAWLER STRUCTURES PRIME BOOTH 8,000 Lbs/HR VOC 124-22 CRAWLER STRUCTURES TOPCOAT BOOTH 8,000 Lbs/HR VOC 130 SUBPART 42 EMERGENCY GENERATORS 131 SUBPART 41 EMERGENCY GENERATORS 132 SUBPART 41 EMERGENCY GENERATOR 199 CLEAN UP SOLVENTS 60,000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1,000 Lbs/HR VOC C111 DRY FILTER C112 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C115-3 DRY FILTER C119 DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTER C124-2 DRY FILTER C124-2 DRY ING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E-BOOTH SUB ASSBLY S113 STACK-W-BOOTH PAINT SHOP	119A	E. PAINT BOOTH-FINAL 1 BLDG	30.000	Lbs/HR	VOC
123	121	N. PAINT BOOTH-PAINT SHOP (BLDG 16)	200.000	Lbs/HR	VOC
124-1 CRAWLER STRUCTURES PRIME BOOTH 8.000 Lbs/HR VOC 124-2 CRAWLER STRUCTURES TOPCOAT BOOTH 8.000 Lbs/HR VOC 130 SUBPART 4Z EMERGENCY GENERATORS 131 SUBPART 4J EMERGENCY GENERATORS 132 SUBPART 4J EMERGENCY GENERATOR 60.000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES 60.000 Lbs/HR VOC C111 DRY FILTER VOC C C111 DRY FILTER C C C112 DRY FILTER C C C113 DRY FILTER C C C114-0 DRY FILTER C C C115-1 DRY FILTER C C C115-2 DRY FILTER C C C119A DRY FILTER C C C121-1 DRY FILTER C C C124-1 DRY FILTER C C C124-2 DRY FILTERS C C FM001 NATURAL GAS PIPELINE S C	122	GASOLINE STORAGE TANK	20,000.000	Gal/HR	GASOLINE
124-2 CRAWLER STRUCTURES TOPCOAT BOOTH 8.000 Lbs/HR VOC 130 SUBPART 4Z EMERGENCY GENERATORS 131 SUBPART 4J EMERGENCY GENERATORS 132 SUBPART 4J EMERGENCY GENERATOR 60.000 Lbs/HR CLEANUP SOLVENT 199 CLEAN UP SOLVENTS 60.000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C C C C112 DRY FILTER C Lbs/HR VOC C C C C C C C C C C C C C C C C Lbs/HR VOC C	123	R&D SPRAY BOOTH	100.000	Lbs/HR	
130 SUBPART 4Z EMERGENCY GENERATORS 131 SUBPART 4I EMERGENCY GENERATORS 132 SUBPART 4J EMERGENCY GENERATOR 199 CLEAN UP SOLVENTS 60.000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C119A DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C124-1 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTER C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E-BOOTH SUB ASSBLY S112 STACK-W-BOOTH PAINT SHOP	124-1	CRAWLER STRUCTURES PRIME BOOTH	8.000	Lbs/HR	VOC
131 SUBPART 4I EMERGENCY GENERATOR 132 SUBPART 4J EMERGENCY GENERATOR 199 CLEAN UP SOLVENTS 60.000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C D C D C D C D	124-2	CRAWLER STRUCTURES TOPCOAT BOOTH	8.000	Lbs/HR	VOC
132 SUBPART 4J EMERGENCY GENERATOR 199 CLEAN UP SOLVENTS 60.000 Lbs/HR CLEANUP SOLVENT 200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119 DRY FILTER C121 DRY FILTER C121 DRY FILTER C123 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	130	SUBPART 4Z EMERGENCY GENERATORS			
199 CLEAN UP SOLVENTS 200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E-BOOTH SUB ASSBLY S112 STACK-W-BOOTH PAINT SHOP	131	SUBPART 4I EMERGENCY GENERATORS			
200 MACT SUBPART 6X ACTIVITIES DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRY FILTER C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C121 DRY FILTER C124-1 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	132	SUBPART 4J EMERGENCY GENERATOR			
DEGR DEGREASERS 1.000 Lbs/HR VOC C111 DRYFILTER C112 DRYFILTER C113 DRYFILTER C114 DRYFILTER C114 DRYFILTER C115-1 DRYFILTER C115-2 DRYFILTER C117 DRYFILTER C119A DRYFILTER C119A DRYFILTER C121 DRYFILTER C124-1 DRYFILTERS C124-1 DRYFILTERS C124-2 DRYFILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-B.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP STACK-W.BOOTH PAINT SHOP	199	CLEAN UP SOLVENTS	60.000	Lbs/HR	CLEANUP SOLVENT
C111 DRY FILTER C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C123 DRY FILTER C124-1 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	200	MACT SUBPART 6X ACTIVITIES			
C112 DRY FILTER C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C123 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	DEGR	DEGREASERS	1.000	Lbs/HR	VOC
C113 DRY FILTER C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C124-1 DRY FILTER C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C111	DRYFILTER			
C114 DRY FILTER C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C121 DRY FILTER C122 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C112	DRYFILTER			
C115-1 DRY FILTER C115-2 DRY FILTER C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C123 DRY FILTER C124-1 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C113	DRYFILTER			
C115-2 DRYFILTER C117 DRYFILTER C119A DRYFILTER C121 DRYFILTER C123 DRYFILTER C124-1 DRYFILTERS C124-2 DRYFILTERS C124-2 DRYFILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C114	DRYFILTER			
C117 DRY FILTER C119A DRY FILTER C121 DRY FILTER C123 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C115-1	DRYFILTER			
C119A DRY FILTER C121 DRY FILTER C123 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C115-2	DRYFILTER			
C121 DRY FILTER C123 DRY FILTER C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	C117	DRYFILTER			
C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH PAINT SHOP	C119A	DRYFILTER			
C124-1 DRY FILTERS C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	C121	DRYFILTER			
C124-2 DRY FILTERS FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	C123	DRYFILTER			
FM001 NATURAL GAS PIPELINE S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	C124-1	DRYFILTERS			
S002 DRYING OVENS STACKS S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	C124-2	DRYFILTERS			
S003 SPACE HEATERS EXHAUSTS S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	FM001	NATURAL GAS PIPELINE			
S111 STACK-E.BOOTH SUB ASSBLY S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	S002	DRYING OVENS STACKS			
S112 STACK-W.BOOTH SUB ASSBLY S113 STACK-W.BOOTH PAINT SHOP	S003	SPACE HEATERS EXHAUSTS			
S113 STACK-W.BOOTH PAINT SHOP	S111	STACK-E.BOOTH SUB ASSBLY			
	S112	STACK-W.BOOTH SUB ASSBLY			
S114 STACK-E. BOOTH PAINT SHOP	S113	STACK-W.BOOTH PAINT SHOP			
	S114	STACK-E. BOOTH PAINT SHOP			






SECTION A. Site Inventory List

28-05004


Source II	O Source Name	Capacity/Throughput	Fuel/Material
S115-1	STACK-FINAL 3 PRIME BOOTH		
S115-2	STACK-FINAL 3 TOPCOAT BOOTH		
S117	STACK-FINAL 4 BLDG BOOTH		
S119A	STACK-FINAL 1 EAST BOOTH		
S121	STACK-N. BOOTH-PAINT SHOP		
S123	STACK-R&D BOOTH		
S124-1	STACKS - CRAWLER PRIME BOOTH		
S124-2	STACKS - CRAWLER TOPCOAT BOOTH		
S130	4Z GENERATOR EMISSIONS		
S131	4I GENERATOR EMISSIONS		
S132	4J GENERATOR EMISSIONS		
S199	CLEANUP SOLVENT EMISSIONS		
Z122	GAS TANK LOSSES		
Z200	SOURCE ID 200 FUGITIVE EMISSIONS		
ZDEGR	DEGREASER EMISSIONS		

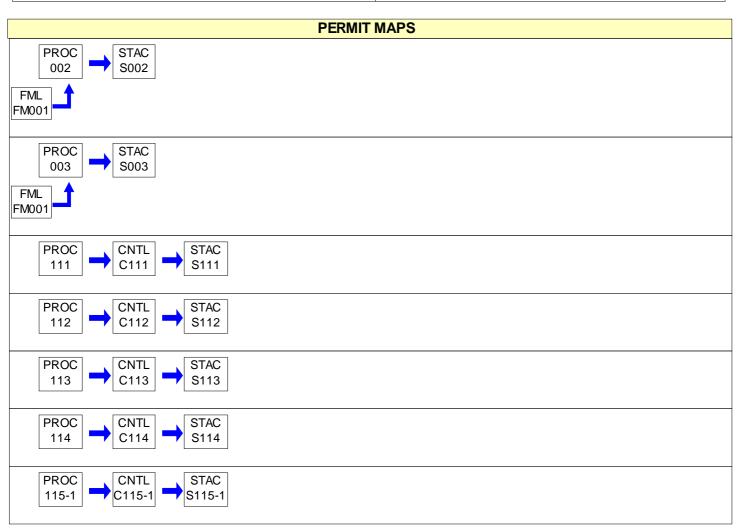



28-05004



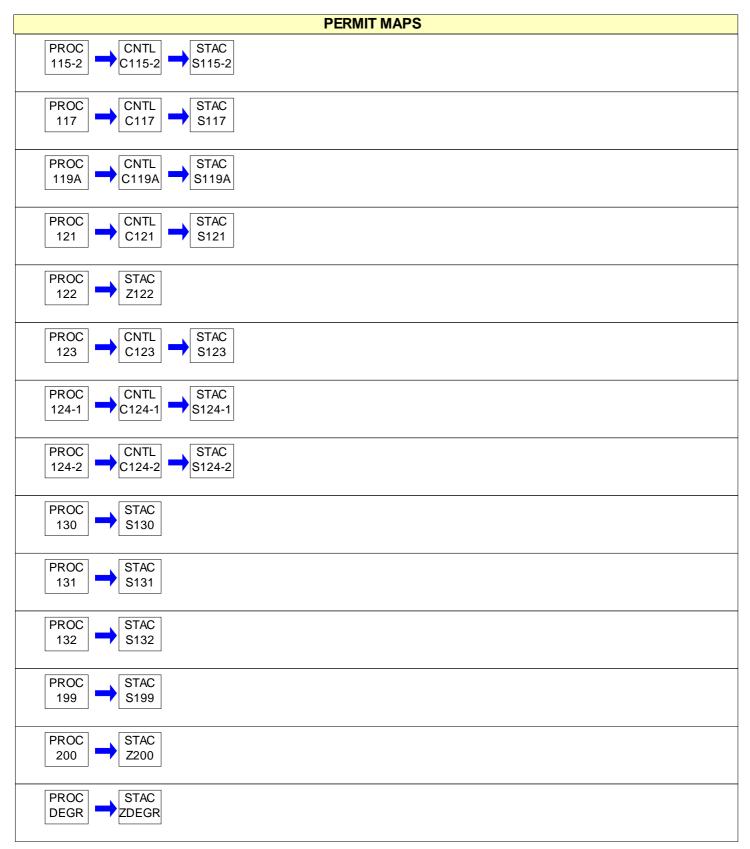







#001 [25 Pa. Code § 121.1]

Definitions

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 121.7]

Prohibition of Air Pollution

No person may permit air pollution as that term is defined in the act.

#003 [25 Pa. Code § 127.512(c)(4)]

Property Rights

This permit does not convey property rights of any sort, or any exclusive privileges.

#004 [25 Pa. Code § 127.446(a) and (c)]

Permit Expiration

This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit. The terms and conditions of the expired permit shall automatically continue pending issuance of a new Title V permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.

#005 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446(e) & 127.503]

Permit Renewal

- (a) An application for the renewal of the Title V permit shall be submitted to the Department at least six (6) months, and not more than 18 months, before the expiration date of this permit. The renewal application is timely if a complete application is submitted to the Department's Regional Air Manager within the timeframe specified in this permit condition.
- (b) The application for permit renewal shall include the current permit number, the appropriate permit renewal fee, a description of any permit revisions and off-permit changes that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term.
- (c) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413. The application for renewal of the Title V permit shall also include submission of compliance review forms which have been used by the permittee to update information submitted in accordance with either 25 Pa. Code § 127.412(b) or § 127.412(j).
- (d) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information during the permit renewal process. The permittee shall also promptly provide additional information as necessary to address any requirements that become applicable to the source after the date a complete renewal application was submitted but prior to release of a draft permit.

#006 [25 Pa. Code §§ 127.450(a)(4) & 127.464(a)]

Transfer of Ownership or Operational Control

- (a) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership or operational control of the source shall be treated as an administrative amendment if:
 - (1) The Department determines that no other change in the permit is necessary;
- (2) A written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee; and,
- (3) A compliance review form has been submitted to the Department and the permit transfer has been approved by the Department.

DEP Auth ID: 1319398 Page 7







(b) In accordance with 25 Pa. Code § 127.464(a), this permit may not be transferred to another person except in cases of transfer-of-ownership which are documented and approved to the satisfaction of the Department.

#007 [25 Pa. Code § 127.513, 35 P.S. § 4008 and § 114 of the CAA]

Inspection and Entry

- (a) Upon presentation of credentials and other documents as may be required by law for inspection and entry purposes, the permittee shall allow the Department of Environmental Protection or authorized representatives of the Department to perform the following:
- (1) Enter at reasonable times upon the permittee's premises where a Title V source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
 - (2) Have access to and copy or remove, at reasonable times, records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.
- (b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act.
- (c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#008 [25 Pa. Code §§ 127.25, 127.444, & 127.512(c)(1)]

Compliance Requirements

- (a) The permittee shall comply with the conditions of this permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one (1) or more of the following:
 - (1) Enforcement action
 - (2) Permit termination, revocation and reissuance or modification
 - (3) Denial of a permit renewal application
- (b) A person may not cause or permit the operation of a source, which is subject to 25 Pa. Code Article III, unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued to the source are operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.
- (c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this Title V permit.

#009 [25 Pa. Code § 127.512(c)(2)]

Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#010 [25 Pa. Code §§ 127.411(d) & 127.512(c)(5)]

Duty to Provide Information

(a) The permittee shall furnish to the Department, within a reasonable time, information that the Department may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or





to determine compliance with the permit.

(b) Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to keep by this permit, or for information claimed to be confidential, the permittee may furnish such records directly to the Administrator of EPA along with a claim of confidentiality.

#011 [25 Pa. Code §§ 127.463, 127.512(c)(3) & 127.542]

Reopening and Revising the Title V Permit for Cause

- (a) This Title V permit may be modified, revoked, reopened and reissued or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay a permit condition.
- (b) This permit may be reopened, revised and reissued prior to expiration of the permit under one or more of the following circumstances:
- (1) Additional applicable requirements under the Clean Air Act or the Air Pollution Control Act become applicable to a Title V facility with a remaining permit term of three (3) or more years prior to the expiration date of this permit. The Department will revise the permit as expeditiously as practicable but not later than 18 months after promulgation of the applicable standards or regulations. No such revision is required if the effective date of the requirement is later than the expiration date of this permit, unless the original permit or its terms and conditions has been extended.
- (2) Additional requirements, including excess emissions requirements, become applicable to an affected source under the acid rain program. Upon approval by the Administrator of EPA, excess emissions offset plans for an affected source shall be incorporated into the permit.
- (3) The Department or the EPA determines that this permit contains a material mistake or inaccurate statements were made in establishing the emissions standards or other terms or conditions of this permit.
- (4) The Department or the Administrator of EPA determines that the permit must be revised or revoked to assure compliance with the applicable requirements.
- (c) Proceedings to revise this permit shall follow the same procedures which apply to initial permit issuance and shall affect only those parts of this permit for which cause to revise exists. The revision shall be made as expeditiously as practicable.
- (d) Regardless of whether a revision is made in accordance with (b)(1) above, the permittee shall meet the applicable standards or regulations promulgated under the Clean Air Act within the time frame required by standards or regulations.

#012 [25 Pa. Code § 127.543]

Reopening a Title V Permit for Cause by EPA

As required by the Clean Air Act and regulations adopted thereunder, this permit may be modified, reopened and reissued, revoked or terminated for cause by EPA in accordance with procedures specified in 25 Pa. Code § 127.543.

#013 [25 Pa. Code § 127.522(a)]

Operating Permit Application Review by the EPA

The applicant may be required by the Department to provide a copy of the permit application, including the compliance plan, directly to the Administrator of the EPA. Copies of title V permit applications to EPA, pursuant to 25 PA Code §127.522(a), shall be submitted, if required, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#014 [25 Pa. Code § 127.541]

Significant Operating Permit Modifications

When permit modifications during the term of this permit do not qualify as minor permit modifications or administrative amendments, the permittee shall submit an application for significant Title V permit modifications in accordance with





25 Pa. Code § 127.541. Notifications to EPA, pursuant to 25 PA Code §127.522(a), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#015 [25 Pa. Code §§ 121.1 & 127.462]

Minor Operating Permit Modifications

The permittee may make minor operating permit modifications (as defined in 25 Pa. Code §121.1), on an expedited basis, in accordance with 25 Pa. Code §127.462 (relating to minor operating permit modifications). Notifications to EPA, pursuant to 25 PA Code §127.462(c), if required, shall be submitted, to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

#016 [25 Pa. Code § 127.450]

Administrative Operating Permit Amendments

(a) The permittee may request administrative operating permit amendments, as defined in 25 Pa. Code §127.450(a). Copies of request for administrative permit amendment to EPA, pursuant to 25 PA Code §127.450(c)(1), if required, shall be submitted to the following EPA e-mail box:

R3_Air_Apps_and_Notices@epa.gov

Please place the following in the subject line: TV [permit number], [Facility Name].

(b) Upon final action by the Department granting a request for an administrative operating permit amendment covered under §127.450(a)(5), the permit shield provisions in 25 Pa. Code § 127.516 (relating to permit shield) shall apply to administrative permit amendments incorporated in this Title V Permit in accordance with §127.450(c), unless precluded by the Clean Air Act or the regulations thereunder.

#017 [25 Pa. Code § 127.512(b)]

Severability Clause

The provisions of this permit are severable, and if any provision of this permit is determined by the Environmental Hearing Board or a court of competent jurisdiction, or US EPA to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#018 [25 Pa. Code §§ 127.704, 127.705 & 127.707]

Fee Payment

- (a) The permittee shall pay fees to the Department in accordance with the applicable fee schedules in 25 Pa. Code Chapter 127, Subchapter I (relating to plan approval and operating permit fees).
- (b) Emission Fees. The permittee shall, on or before September 1st of each year, pay applicable annual Title V emission fees for emissions occurring in the previous calendar year as specified in 25 Pa. Code § 127.705. The permittee is not required to pay an emission fee for emissions of more than 4,000 tons of each regulated pollutant emitted from the facility.
- (c) As used in this permit condition, the term "regulated pollutant" is defined as a VOC, each pollutant regulated under Sections 111 and 112 of the Clean Air Act and each pollutant for which a National Ambient Air Quality Standard has been promulgated, except that carbon monoxide is excluded.
- (d) Late Payment. Late payment of emission fees will subject the permittee to the penalties prescribed in 25 Pa. Code § 127.707 and may result in the suspension or termination of the Title V permit. The permittee shall pay a penalty of fifty percent (50%) of the fee amount, plus interest on the fee amount computed in accordance with 26 U.S.C.A. § 6621(a)(2) from the date the emission fee should have been paid in accordance with the time frame specified in 25 Pa. Code § 127.705(c).



28-05004

- (e) The permittee shall pay an annual operating permit administration fee according to the fee schedule established in 25 Pa. Code § 127.704(c) if the facility, identified in Subparagraph (iv) of the definition of the term "Title V facility" in 25 Pa. Code § 121.1, is subject to Title V after the EPA Administrator completes a rulemaking requiring regulation of those sources under Title V of the Clean Air Act.
- (f) This permit condition does not apply to a Title V facility which qualifies for exemption from emission fees under 35 P.S. § 4006.3(f).

#019 [25 Pa. Code §§ 127.14(b) & 127.449]

Authorization for De Minimis Emission Increases

- (a) This permit authorizes de minimis emission increases from a new or existing source in accordance with 25 Pa. Code §§ 127.14 and 127.449 without the need for a plan approval or prior issuance of a permit modification. The permittee shall provide the Department with seven (7) days prior written notice before commencing any de minimis emissions increase that would result from either: (1) a physical change of minor significance under § 127.14(c)(1); or (2) the construction, installation, modification or reactivation of an air contamination source. The written notice shall:
 - (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

The Department may disapprove or condition de minimis emission increases at any time.

- (b) Except as provided below in (c) and (d) of this permit condition, the permittee is authorized during the term of this permit to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:
- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NOx from a single source during the term of the permit and 5 tons of NOx at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.
- (4) Six-tenths of a ton of PM10 from a single source during the term of the permit and 3.0 tons of PM10 at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.
- (5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act or 25 Pa. Code Article III.
- (c) In accordance with § 127.14, the permittee may install the following minor sources without the need for a plan approval:
- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility, liquefied petroleum gas or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code § 123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.



- (5) Laboratory equipment used exclusively for chemical or physical analysis.
- (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (d) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (b)(4) and (5) of this permit condition.
- (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
- (3) Violate any applicable requirement of the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (4) Changes which are modifications under any provision of Title I of the Clean Air Act and emission increases which would exceed the allowable emissions level (expressed as a rate of emissions or in terms of total emissions) under the Title V permit.
- (e) Unless precluded by the Clean Air Act or the regulations thereunder, the permit shield described in 25 Pa. Code § 127.516 (relating to permit shield) shall extend to the changes made under 25 Pa. Code § 127.449 (relating to de minimis emission increases).
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases allowed under this permit, 25 Pa. Code § 127.449, or sources and physical changes meeting the requirements of 25 Pa. Code § 127.14, the permittee is prohibited from making physical changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#020 [25 Pa. Code §§ 127.11a & 127.215]

Reactivation of Sources

- (a) The permittee may reactivate a source at the facility that has been out of operation or production for at least one year, but less than or equal to five (5) years, if the source is reactivated in accordance with the requirements of 25 Pa. Code §§ 127.11a and 127.215. The reactivated source will not be considered a new source.
- (b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#021 [25 Pa. Code §§ 121.9 & 127.216]

Circumvention

- (a) The owner of this Title V facility, or any other person, may not circumvent the new source review requirements of 25 Pa. Code Chapter 127, Subchapter E by causing or allowing a pattern of ownership or development, including the phasing, staging, delaying or engaging in incremental construction, over a geographic area of a facility which, except for the pattern of ownership or development, would otherwise require a permit or submission of a plan approval application.
- (b) No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of this permit, the Air Pollution Control Act or the regulations promulgated thereunder, except that with prior approval of the Department,





the device or technique may be used for control of malodors.

#022 [25 Pa. Code §§ 127.402(d) & 127.513(1)]

Submissions

(a) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager

PA Department of Environmental Protection

(At the address given on the permit transmittal letter, or otherwise notified)

(b) Any report or notification for the EPA Administrator or EPA Region III should be addressed to:

Enforcement & Compliance Assurance Division Air, RCRA and Toxics Branch Air Section 1650 Arch Street, 3ED21 Philadelphia, PA 19103

The Title V compliance certification shall be emailed to EPA at R3_APD_Permits@epa.gov.

(c) An application, form, report or compliance certification submitted pursuant to this permit condition shall contain certification by a responsible official as to truth, accuracy, and completeness as required under 25 Pa. Code § 127.402(d). Unless otherwise required by the Clean Air Act or regulations adopted thereunder, this certification and any other certification required pursuant to this permit shall state that, based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate and complete.

#023 [25 Pa. Code §§ 127.441(c) & 127.463(e); Chapter 139; & 114(a)(3), 504(b) of the CAA]

Sampling, Testing and Monitoring Procedures

- (a) The permittee shall perform the emissions monitoring and analysis procedures or test methods for applicable requirements of this Title V permit. In addition to the sampling, testing and monitoring procedures specified in this permit, the Permittee shall comply with any additional applicable requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.
- (b) The sampling, testing and monitoring required under the applicable requirements of this permit, shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139 unless alternative methodology is required by the Clean Air Act (including §§ 114(a)(3) and 504(b)) and regulations adopted thereunder.

#024 [25 Pa. Code §§ 127.511 & Chapter 135]

Recordkeeping Requirements

- (a) The permittee shall maintain and make available, upon request by the Department, records of required monitoring information that include the following:
 - (1) The date, place (as defined in the permit) and time of sampling or measurements.
 - (2) The dates the analyses were performed.
 - (3) The company or entity that performed the analyses.
 - (4) The analytical techniques or methods used.
 - (5) The results of the analyses.
 - (6) The operating conditions as existing at the time of sampling or measurement.
- (b) The permittee shall retain records of the required monitoring data and supporting information for at least five (5) years from the date of the monitoring sample, measurement, report or application. Supporting information includes the

DEP Auth ID: 1319398 Page 13







calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions. If direct recordkeeping is not possible or practical, sufficient records shall be kept to provide the needed information by indirect means.

#025 [25 Pa. Code §§ 127.411(d), 127.442, 127.463(e) & 127.511(c)]

Reporting Requirements

- (a) The permittee shall comply with the reporting requirements for the applicable requirements specified in this Title V permit. In addition to the reporting requirements specified herein, the permittee shall comply with any additional applicable reporting requirements promulgated under the Clean Air Act after permit issuance regardless of whether the permit is revised.
- (b) Pursuant to 25 Pa. Code § 127.511(c), the permittee shall submit reports of required monitoring at least every six (6) months unless otherwise specified in this permit. Instances of deviations (as defined in 25 Pa. Code § 121.1) from permit requirements shall be clearly identified in the reports. The reporting of deviations shall include the probable cause of the deviations and corrective actions or preventative measures taken, except that sources with continuous emission monitoring systems shall report according to the protocol established and approved by the Department for the source. The required reports shall be certified by a responsible official.
- (c) Every report submitted to the Department under this permit condition shall comply with the submission procedures specified in Section B, Condition #022(c) of this permit.
- (d) Any records, reports or information obtained by the Department or referred to in a public hearing shall be made available to the public by the Department except for such records, reports or information for which the permittee has shown cause that the documents should be considered confidential and protected from disclosure to the public under Section 4013.2 of the Air Pollution Control Act and consistent with Sections 112(d) and 114(c) of the Clean Air Act and 25 Pa. Code § 127.411(d). The permittee may not request a claim of confidentiality for any emissions data generated for the Title V facility.

#026 [25 Pa. Code § 127.513]

Compliance Certification

- (a) One year after the date of issuance of the Title V permit, and each year thereafter, unless specified elsewhere in the permit, the permittee shall submit to the Department and EPA Region III a certificate of compliance with the terms and conditions in this permit, for the previous year, including the emission limitations, standards or work practices. This certification shall include:
- (1) The identification of each term or condition of the permit that is the basis of the certification.
- (2) The compliance status.
- (3) The methods used for determining the compliance status of the source, currently and over the reporting period.
- (4) Whether compliance was continuous or intermittent.
- (b) The compliance certification shall be postmarked or hand-delivered no later than thirty days after each anniversary of the date of issuance of this Title V Operating Permit, or on the submittal date specified elsewhere in the permit, to the Department in accordance with the submission requirements specified in Section B, Condition #022 of this permit. The Title V compliance certification shall be emailed to EPA at R3_APD_Permits@epa.gov.

#027 [25 Pa. Code § 127.3]

Operational Flexibility

The permittee is authorized to make changes within the Title V facility in accordance with the following provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements of Section 502(b)(10) of the Clean Air Act and Section 6.1(i) of the Air Pollution Control Act:



28-05004

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)
- (6) Section 127.462 (relating to minor operating permit amendments)
- (7) Subchapter H (relating to general plan approvals and operating permits)

#028 [25 Pa. Code §§ 127.441(d), 127.512(i) and 40 CFR Part 68]

Risk Management

- (a) If required by Section 112(r) of the Clean Air Act, the permittee shall develop and implement an accidental release program consistent with requirements of the Clean Air Act, 40 CFR Part 68 (relating to chemical accident prevention provisions) and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act (P.L. 106-40).
- (b) The permittee shall prepare and implement a Risk Management Plan (RMP) which meets the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68 and the Federal Chemical Safety Information, Site Security and Fuels Regulatory Relief Act when a regulated substance listed in 40 CFR § 68.130 is present in a process in more than the listed threshold quantity at the Title V facility. The permittee shall submit the RMP to the federal Environmental Protection Agency according to the following schedule and requirements:
- (1) The permittee shall submit the first RMP to a central point specified by EPA no later than the latest of the following:
- (i) Three years after the date on which a regulated substance is first listed under § 68.130; or,
- (ii) The date on which a regulated substance is first present above a threshold quantity in a process.
- (2) The permittee shall submit any additional relevant information requested by the Department or EPA concerning the RMP and shall make subsequent submissions of RMPs in accordance with 40 CFR § 68.190.
- (3) The permittee shall certify that the RMP is accurate and complete in accordance with the requirements of 40 CFR Part 68, including a checklist addressing the required elements of a complete RMP.
- (c) As used in this permit condition, the term "process" shall be as defined in 40 CFR § 68.3. The term "process" means any activity involving a regulated substance including any use, storage, manufacturing, handling, or on-site movement of such substances or any combination of these activities. For purposes of this definition, any group of vessels that are interconnected, or separate vessels that are located such that a regulated substance could be involved in a potential release, shall be considered a single process.
- (d) If the Title V facility is subject to 40 CFR Part 68, as part of the certification required under this permit, the permittee shall:
- (1) Submit a compliance schedule for satisfying the requirements of 40 CFR Part 68 by the date specified in 40 CFR § 68.10(a); or,
- (2) Certify that the Title V facility is in compliance with all requirements of 40 CFR Part 68 including the registration and submission of the RMP.
- (e) If the Title V facility is subject to 40 CFR Part 68, the permittee shall maintain records supporting the implementation of an accidental release program for five (5) years in accordance with 40 CFR § 68.200.
- (f) When the Title V facility is subject to the accidental release program requirements of Section 112(r) of the Clean Air Act and 40 CFR Part 68, appropriate enforcement action will be taken by the Department if:
- (1) The permittee fails to register and submit the RMP or a revised plan pursuant to 40 CFR Part 68.

DEP Auth ID: 1319398 Page 15





(2) The permittee fails to submit a compliance schedule or include a statement in the compliance certification required under Section B, Condition #026 of this permit that the Title V facility is in compliance with the requirements of Section 112(r) of the Clean Air Act, 40 CFR Part 68, and 25 Pa. Code § 127.512(i).

#029 [25 Pa. Code § 127.512(e)]

28-05004

Approved Economic Incentives and Emission Trading Programs

No permit revision shall be required under approved economic incentives, marketable permits, emissions trading and other similar programs or processes for changes that are provided for in this Title V permit.

[25 Pa. Code §§ 127.516, 127.450(d), 127.449(f) & 127.462(q)] #030

Permit Shield

- (a) The permittee's compliance with the conditions of this permit shall be deemed in compliance with applicable requirements (as defined in 25 Pa. Code § 121.1) as of the date of permit issuance if either of the following applies:
 - (1) The applicable requirements are included and are specifically identified in this permit.
- (2) The Department specifically identifies in the permit other requirements that are not applicable to the permitted facility or source.
- (b) Nothing in 25 Pa. Code § 127.516 or the Title V permit shall alter or affect the following:
- (1) The provisions of Section 303 of the Clean Air Act, including the authority of the Administrator of the EPA provided thereunder.
 - (2) The liability of the permittee for a violation of an applicable requirement prior to the time of permit issuance.
 - (3) The applicable requirements of the acid rain program, consistent with Section 408(a) of the Clean Air Act.
 - (4) The ability of the EPA to obtain information from the permittee under Section 114 of the Clean Air Act.
- (c) Unless precluded by the Clean Air Act or regulations thereunder, final action by the Department incorporating a significant permit modification in this Title V Permit shall be covered by the permit shield at the time that the permit containing the significant modification is issued.

#031 [25 Pa. Code §135.3]

Reporting

- (a) The permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.
- (b) A source owner or operator may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#032 [25 Pa. Code §135.4]

Report Format

Emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

DEP Auth ID: 1319398 Page 16





SECTION C. **Site Level Requirements**

I. RESTRICTIONS.

Emission Restriction(s).

28-05004

001 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

No person shall permit the emission into the outdoor atmosphere of any fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of buildings or structures.
- (b) Grading, paying and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of materials.
- (f) Open burning operations.
- (g) Sources and classes of sources other than those identified above, for which the operator has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
- 1) the emissions are of minor significance with respect to causing air pollution;
- 2) the emissions are not preventing or interfering with the attainment or maintenance of any ambient air standard.

002 [25 Pa. Code §123.2]

Fugitive particulate matter

No person shall permit the emission of particulate matter into the outdoor atmosphere from a source specified in Section C, Condition 001 if the emissions are visible at the point the emissions pass outside the person's property.

003 [25 Pa. Code §123.31]

Limitations

No person shall permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the property of the person on whose land the source is being operated.

004 [25 Pa. Code §123.41]

Limitations

The permittee may not permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (1) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any 1 hour.
- (2) Equal to or greater than 60 % at any time.

005 [25 Pa. Code §123.42]

Exceptions

The emission limitations of Section 123.41 shall not apply when:

- (1) The presence of uncombined water is the only reason for failure of the emission to meet the limitation;
- (2) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions:
- (3) The emission results from sources specified in Site Level Requirements Condition 001 (relating to prohibition of



SECTION C. Site Level Requirements

certain fugitive emissions).

006 [25 Pa. Code §129.14]

Open burning operations

- (a) No person shall conduct the open burning of material in an area outside of the established air basins in a manner that:
- (1) The emissions are visible, at any time, at the point such emissions pass outside the property of the person on whose land the open burning is being conducted.
- (2) Malodorous air emissions from the open burning are detectable outside the property of the person on whose land the open burning is being conducted.
- (3) The emissions interfere with the reasonable enjoyment of life and property.
- (4) The emissions cause damage to vegetation or property.
- (5) The emissions are or may be deleterious to human or animal health.
- (b) The above requirements do not apply when the open burning results from:
- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set solely for recreational or ceremonial purposes.
- (5) A fire set solely for cooking food.

II. TESTING REQUIREMENTS.

007 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

The Department reserves the right to require exhaust stack testing of the sources and control devices referenced in this operating permit as necessary during the permit term to verify emissions for purposes including emission fees, mafunctions or permit condition violations.

008 [25 Pa. Code §139.1]

Sampling facilities.

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such sources. In the request, the Department will set forth the time period in which the facilities shall be provided, as well as the specifications for the facilities.

III. MONITORING REQUIREMENTS.

009 [25 Pa. Code §123.43]

Measuring techniques

Visible air contaminants (referenced in Conditions Nos. 004, 005 and 010) may be measured using either of the following:

- (1) A device approved by the Department and maintained to provide accurate opacity measurements.
- (2) Observers, trained and certified in EPA Method 9, to measure plume opacity with the naked eye or with the aid of any

DEP Auth ID: 1319398 Page 18



SECTION C. Site Level Requirements

devices approved by the Department.

010 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall conduct a weekly inspection around the plant periphery during daylight hours when the plant is in production to detect visible stack emissions, visible emissions leaving the premises and odorous air emissions leaving the premises as follows:

- (a) Stack emissions in excess of the limits stated in Section C, Condition 004. Stack emissions may be measured according to the methods specified in 25 Pa. Code Section 123.43, or alternatively, plant personnel who observe such emissions may report the incidence of visible emissions to the designated company representative who shall make arrangements for a certified observer to verify the visible emissions.
- (b) The presence of visible emissions beyond the plant boundaries as stated in Section C, Condition 002.
- (c) The presence of odorous air emissions beyond the plant boundaries as stated in Section C, Condition 003.

011 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

- (a) The permittee shall monitor and record the pressure drop across each fabric filter or other particulate matter control device listed in Section A. At a minimum, these readings shall be taken once per week while the sources and control devices are in operation. These recordings shall be maintained on-site for the most recent five-year period.
- (b) The Department's field operations representative and company personnel shall decide the appropriate range of pressure drops for each of the facility's particulate matter control devices as per the manufacturer's recommendations.

IV. RECORDKEEPING REQUIREMENTS.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from 25 Pa. Code Section 127.511]

The permittee shall maintain records of each weekly inspection conducted in accordance with Section C, Condition 010. At a minimum, these records shall include the following information:

- (1) The name of the company representative conducting each inspection.
- (2) The date and time of each inspection.
- (3) The wind direction during each inspection.
- (4) A description of the emissions and/or malodors observed and the actions taken to mitigate them.

The permittee shall maintain these records for a minimum of five years and shall make them available to Department representatives upon request.

013 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

The permittee shall maintain detailed records of all maintenance performed on the air emissions control systems for the most recent five-year period.

014 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

All records required by this operating permit and subsequent renewals shall be maintained for the most recent five-year period and made available to Department representatives upon request.



SECTION C. Site Level Requirements

V. REPORTING REQUIREMENTS.

015 [25 Pa. Code §127.512]

Operating permit terms and conditions.

The permittee shall report malfunctions which occur at the facility to the Department. A malfunction is any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner that may result in an increase in air emissions above minor significance. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:

- (a) Malfunctions which pose an imminent danger to public health, safety, welfare and the environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two hours after discovery of the incident. Telephone reports can be made to the Air Quality Program at (717) 705-4886 during normal business hours, or to the Department's Emergency Hotline 866-825-0208 at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx.
 - (1) The notice shall describe the:
 - (i) name and location of the facility;
 - (ii) nature and cause of the malfunction or breakdown;
 - (iii) time when the malfunction or breakdown was first observed;
 - (iv) expected duration of excess emissions; and
 - (v) estimated rate of emissions.
 - (2) The owner or operator shall notify the Department immediately when corrective measures have been accomplished.
- (3) The permittee shall submit a written report of instances of such malfunctions to the department, in writing, within three (3) days of the of the telephone report.
- (4) The owner or operator shall submit reports on the operation and maintenance of the source to the Regional Air Program Manager at such intervals and in such form and detail as may be required by the Department. Information required in the reports may include, but is not limited to, process weight rates, firing rates, hours of operation, and maintenance schedules.
- (b) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirements of (a) above, shall be reported to the Department, in writing, within five (5) days of discovery of the malfunction.
- (c) Malfunctions shall be reported to the Department at the following address:

PADEP Air Quality District Supervisor 909 Elmerton Ave. Harrisburg, PA 17110


VI. WORK PRACTICE REQUIREMENTS.

016 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall take all reasonable actions to prevent particulate matter from the sources identified in Site Level Requirements Condition 001 (a) through (e) from becoming airborne. The actions shall include, but are not limited to, the following:

- (1) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads or the clearing of land.
- (2) Application of asphalt, oil, water or suitable chemicals on dirt roads, materials stockpiles and other surfaces which may give rise to airborne dusts.





SECTION C. **Site Level Requirements**

- (3) Paving and maintenance of roadways.
- (4) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

VII. ADDITIONAL REQUIREMENTS.

017 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Operation of any air emissions source is contingent upon proper operation of its associated emissions control system. unless otherwise approved by the Department.

[25 Pa. Code §127.444] # 018

Compliance requirements.

All air pollution sources and air pollution control devices referenced in this permit shall be operated and maintained in accordance with the manufacturer's general recommendations and good air pollution control practices.

019 [25 Pa. Code §127.511]

Monitoring and related recordkeeping and reporting requirements.

Per Site Level Category VIII 'COMPLIANCE CERTIFICATION' below, forward the annual compliance certification report electronically to EPA, in lieu of the hard copy version, to the following email address: 'R3_APD_Permits@epa.gov'

VIII. COMPLIANCE CERTIFICATION.

The permittee shall submit within thirty days of 01/01/2021 a certificate of compliance with all permit terms and conditions set forth in this Title V permit as required under condition #026 of section B of this permit, and annually thereafter.

Page 21

COMPLIANCE SCHEDULE.

No compliance milestones exist.








Source ID: 002 Source Name: DRYING OVENS (8)

> Source Capacity/Throughput: 8.000 MCF/HR Natural Gas



RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

Particulate matter emissions from the individual Source ID 002 drying ovens shall not exceed 0.04 grain per dry standard cubic foot of effluent gas.

002 [25 Pa. Code §123.21]

General

Sulfur oxides emissions, expressed as sulfur dioxide, from the individual Source ID 002 drying ovens shall not exceed a concentration of 500 parts per million, by volume, dry basis, in the effluent gas from each unit.

Fuel Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate the Source 002 drying ovens on commercial natural gas.

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.


No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).



VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

ADDITIONAL REQUIREMENTS. VII.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

*** Permit Shield in Effect. ***

DEP Auth ID: 1319398 Page 23




28-05004



SECTION D. Source Level Requirements

Source ID: 003 Source Name: SPACE HEATERS

Source Capacity/Throughput: 30,000,000 CF/HR Natural Gas



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

Particulate matter emissions from the individual Source ID 003 space heaters shall not exceed 0.04 grain per dry standard cubic foot of effluent gas.

002 [25 Pa. Code §123.21]

General

Sulfur oxides emissions, expressed as sulfur dioxide, from the Source 003 space heaters shall not exceed a concentration of 500 parts per million, by volume, dry basis, in the effluent gas.

Fuel Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate the Source 003 space heaters on commercial natural gas.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).







VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).



28-05004



SECTION D. Source Level Requirements

Source ID: 111 Source Name: E. PAINT BOOTH-SUB ASSBLY (BLDG 20)

Source Capacity/Throughput: 40.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).


VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







Source ID: 112 Source Name: W. PAINT BOOTH SUB ASSBLY (BLDG 20)

Source Capacity/Throughput: 20.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).





×

SECTION D. Source Level Requirements

Source ID: 113 Source Name: W. PAINT BOOTH-PAINT SHOP (BLDG 16)

Source Capacity/Throughput: 101.400 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







Source ID: 114 Source Name: E. PAINT BOOTH-PAINT SHOP (BLDG 16)

Source Capacity/Throughput: 33.300 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







Source ID: 115-1 Source Name: FINAL 3 PRIME BOOTH

Source Capacity/Throughput: 25.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).





Source ID: 115-2 Source Name: FINAL 3 TOPCOAT BOOTH

> Source Capacity/Throughput: 25.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



RESTRICTIONS. I.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

RECORDKEEPING REQUIREMENTS. IV.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

WORK PRACTICE REQUIREMENTS. VI.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

ADDITIONAL REQUIREMENTS. VII.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).








Source ID: 117 Source Name: PAINT BOOTH-FINAL 4 BLDG

> Source Capacity/Throughput: 14.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



RESTRICTIONS. I.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

RECORDKEEPING REQUIREMENTS. IV.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

WORK PRACTICE REQUIREMENTS. VI.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

ADDITIONAL REQUIREMENTS. VII.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







Source ID: 119A Source Name: E. PAINT BOOTH-FINAL 1 BLDG

Source Capacity/Throughput: 30.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







Source ID: 121 Source Name: N. PAINT BOOTH-PAINT SHOP (BLDG 16)

Source Capacity/Throughput: 200.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).





Source ID: 122 Source Name: GASOLINE STORAGE TANK

Source Capacity/Throughput: 20,000.000 Gal/HR GASOLINE

PROC STAC Z122

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [25 Pa. Code §129.62]

General standards for bulk gasoline terminals/plants, and small gasoline storage tanks

- (a) Gasoline may not be spilled or discarded in sewers or stored in open containers or handled in a manner that would result in uncontrolled evaporation to the atmosphere.
- (b) The permittee may not permit the transfer of gasoline between a tank truck or trailer and the Source ID 122 gasoline storage tank unless the following conditions are met:
 - 1. The vapor balance system is in good working order and is properly designed and operated in a manner that prevents avoidable liquid leaks during loading or unloading of the tank.
 - 2. There are no visually- or audibly-detectable leaks in the subject tank or any associated vapor and liquid lines during loading or unloading.
 - 3. The permittee may not allow a gasoline tank truck subject to 25 Pa. Code, Sections 129.59,

DEP Auth ID: 1319398 Page 35





129.60 or 129.61 to discharge gasoline into Source ID 122 unless the tank truck meets the following:

- a. has been tested by the owner or operator within the immediately preceding 12 months in accordance with 25 Pa. Code Section 139.14.
- b. sustains a pressure change of no more than 750 pascals in 5 minutes when pressurized to a gauge pressure of 4,500 pascals or evacuated to a gauge pressure of 1,500 pascals during the testing required under 3a., above.
- c. displays a clear marking near the Department of Transportation certification plate required by 49 CFR 178.340-10b which shows the most recent date upon which the gasoline tank truck passed the required certification testing.







SECTION D. **Source Level Requirements**

Source ID: 123 Source Name: R&D SPRAY BOOTH

> Source Capacity/Throughput: 100.000 Lbs/HR

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



RESTRICTIONS. I.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

RECORDKEEPING REQUIREMENTS. IV.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

WORK PRACTICE REQUIREMENTS. VI.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

ADDITIONAL REQUIREMENTS. VII.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







SECTION D. Source Level Requirements

Source ID: 124-1 Source Name: CRAWLER STRUCTURES PRIME BOOTH

Source Capacity/Throughput: 8.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).





SECTION D. Source Level Requirements

Source ID: 124-2 Source Name: CRAWLER STRUCTURES TOPCOAT BOOTH

Source Capacity/Throughput: 8.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001 SURFACE COATING

007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).








SECTION D. Source Level Requirements

Source ID: 130 Source Name: SUBPART 4Z EMERGENCY GENERATORS

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 002 40 CFR PART 63 SUBPART 4Z

006



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).




SECTION D. Source Level Requirements

Source ID: 131 Source Name: SUBPART 4I EMERGENCY GENERATORS

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 004 40 CFR PART 60 SUBPART 41

006



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).








SECTION D. **Source Level Requirements**

Source ID: 132 Source Name: SUBPART 4J EMERGENCY GENERATOR

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 005 40 CFR PART 60 SUBPART 4J

006



RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. **TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

MONITORING REQUIREMENTS. III.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

RECORDKEEPING REQUIREMENTS. IV.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

WORK PRACTICE REQUIREMENTS. VI.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).






SECTION D. Source Level Requirements

Source ID: 199 Source Name: CLEAN UP SOLVENTS

Source Capacity/Throughput: 60.000 Lbs/HR CLEANUP SOLVENT

Conditions for this source occur in the following groups: 007

800



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) Source ID 199 shall not emit more than 2.7 tpy of VOCs on a 12-month rolling total.
- (b) The permittee shall maintain and operate the source in accordance with manufacturer's specifications and with good operating practices.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall monitor and record the amount of solvent used in Source ID 199 and the VOC content of the solvents on a monthly basis.

IV. RECORDKEEPING REQUIREMENTS.

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall calculate and keep records of monthly and 12-month rolling total Source ID 199 VOC emissions.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).







SECTION D. Source Level Requirements

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).






SECTION D. Source Level Requirements

Source ID: 200 Source Name: MACT SUBPART 6X ACTIVITIES

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 003 40 CFR PART 63 SUBPART 6X



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements) and/or Section E (Source Group Restrictions).





SECTION D. Source Level Requirements

Source ID: DEGR Source Name: DEGREASERS

Source Capacity/Throughput: 1.000 Lbs/HR VOC



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

001 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall maintain the following records on and after December 22, 2002:

- (a) The name and address of the solvent supplier.
- (b) The type of solvent including the product or vendor identification number.
- (c) The vapor pressure of the solvent measured in mm Hg at 20°C (68°F).

An invoice, bill of sale, or certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this section.

The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

002 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall operate each Source ID DEGR unit in accordance with the following procedures:

- (a) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.
- (b) Flushing of parts using a flexible hose or other flushing device shall be performed only within the unit. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.

DEP Auth ID: 1319398 Page 46



SECTION D. Source Level Requirements

- (c) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in Source ID DEGR units.
- (d) Air-agitated solvent baths may not be used.
- (e) Spills during solvent transfer and use of each Source ID DEGR unit shall be cleaned up immediately.

003 [25 Pa. Code §129.63]

Degreasing operations

Each Source ID DEGR unit shall have a permanent, conspicuous label summarizing the operating requirements in Condition #002. In addition, the label shall include the following discretionary good operating practices:

- (a) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the unit.
- (b) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.
- (c) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

004 [25 Pa. Code §129.63]

Degreasing operations

Source ID DEGR immersion cold cleaning units shall have a freeboard ratio of 0.50 or greater.

005 [25 Pa. Code §129.63]

Degreasing operations

Each Source ID DEGR unit shall be equipped with one of the following:

- (a) A cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent.
- (b) A perforated drain with a diameter of not more than six (6) inches, if the unit drains directly into the solvent storage reservoir.

006 [25 Pa. Code §129.63]

Degreasing operations

Degreasing activities shall be conducted in accordance with the applicable requirements of 25 Pa. Code Section 129.63 to include the following:

- (a) After December 22, 2002, Source ID DEGR units shall not employ any solvent with a vapor pressure of 1.0 millimeter of mercury (mm Hg) or greater and containing greater than 5% VOC by weight, measured at 20°C (68°F) containing VOCs.
- (b) This permit condition does not apply when:
- (1) Source ID DEGR units are used in extreme cleaning service. Extreme cleaning service is defined as the use of a cold cleaning machine to clean parts used in the manufacture of the following gases or to clean parts exposed to these gases in manufacturing, production, research and development, analytical work, or other similar operations:
 - (A) Oxygen in concentrations greater than 23%
 - (B) Ozone
 - (C) Nitrous oxide
 - (D) Fluorine
 - (E) Chlorine
 - (F) Bromine







SECTION D. Source Level Requirements


- (G) Halogenated compounds
- (2) The permittee demonstrates, and the Department approves in writing, that compliance with this permit condition will result in unsafe operating conditions.

VII. ADDITIONAL REQUIREMENTS.

007 [25 Pa. Code §129.63]

Degreasing operations

All of the aforementioned permit conditions apply to each Source ID DEGR unit so long as the cold cleaning machine uses 2 gallons or more of solvents containing greater than 5% VOC content by weight for the cleaning of metal parts.





Group Name: 001 SURFACE COATING

Group Description: Surface Coating

Sources included in this group

ID	Name
111	E. PAINT BOOTH-SUB ASSBLY (BLDG 20)
112	W. PAINT BOOTH SUB ASSBLY (BLDG 20)
113	W. PAINT BOOTH-PAINT SHOP (BLDG 16)
114	E. PAINT BOOTH-PAINT SHOP (BLDG 16)
115-1	FINAL 3 PRIME BOOTH
115-2	FINAL 3 TOPCOAT BOOTH
117	PAINT BOOTH-FINAL 4 BLDG
119A	E. PAINT BOOTH-FINAL 1 BLDG
121	N. PAINT BOOTH-PAINT SHOP (BLDG 16)
123	R&D SPRAY BOOTH
124-1	CRAWLER STRUCTURES PRIME BOOTH
124-2	CRAWLER STRUCTURES TOPCOAT BOOTH

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

Particulate matter emissions from the individual Group 001 sources shall not exceed an exhaust concentration of 0.04 grain per dry standard cubic foot of effluent gas volume.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Total combined VOC emissions from Source ID Nos. 106, 116, 117 and 119A shall not exceed 37 tons for any consecutive 12-month period.

[The above requirement was established in Plan Approval No. 28-05004D]

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Hazardous air pollutant (HAP) emissions from the facility shall not equal or exceed the following limits:

- (a) 10 tons of any individual HAP per consecutive 12-month period
- (b) 25 tons of combined HAP emissions per consecutive 12-month period

The above voluntary limits preclude the applicability of 40 CFR Part 63, Subpart MMMM - National Emission Standards for Hazardous Air Pollutants: Surface Coating of Miscellaneous Metal Parts and Products. Compliance verification requires emissions to be calculated for each month and each consecutive 12-month period. These records shall be maintained onsite for the most recent five-year period and made available to Department representatives upon request.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Total combined VOC emissions from Source ID Nos. 124-1, 124-2 and associated drying ovens shall not exceed 18.22 tons for any consecutive 12-month period.

[The above requirement was established in Plan Approval No. 28-05004F]





II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall demonstrate the VOC/HAP content of each surface coating by one of the following methods:

- (a) For surface coatings applied as they are received from the manufacturer, the permittee may demonstrate compliance with the applicable standard by obtaining EPA Method 24 certification testing from the manufacturer, or by maintaining VOC/HAP data sheets from the manufacturer.
- (b) In the absence of EPA Method 24 certification testing from the manufacturer, or VOC/HAP data sheets from the manufacturer, allowed under part (a), above, the permittee shall perform EPA Method 24 certification testing on all surface coatings applied as received from the manufacturer.
- (c) The permittee may use calculated VOC content values in lieu of EPA Method 24 certification testing for multi-part surface coatings where the permittee maintains VOC/HAP data sheets for all surface coating constituents (i.e. coatings, pigments, thinners/cutting solvents), and also maintains documentation from the manufacturer as to the recommended mix ratio of the parts. In the event of any inconsistency between the calculated VOC content and data obtained from EPA Method 24 certification testing, the latter shall take precedence.

IV. RECORDKEEPING REQUIREMENTS.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall verify compliance with the annual VOC emission limits included in this permit by calculating:

(a) Combined VOC emissions from Sources ID Nos. 106, 115-1, 115-2, 116, 117 and 119A for each calendar month and each consecutive 12-month period.

[The above requirement was established in Plan Approval No. 28-05004D]

007 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Records of EPA Method 24 analyses or supplier's certification of VOC content for all coatings and solvents used at the facility within the most recent five years shall be maintained on-site and shall be made available to Department representatives upon request.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall verify compliance with the annual VOC emission limits in Condition #004 of this Group by calculating:

(a) Combined VOC emissions from Source ID Nos. 124-1, 124-2 and associated drying ovens for each calendar month and each consecutive 12-month period.


[The above requirement was established in Plan Approval No. 28-05004F]

[25 Pa. Code §129.52]

Surface coating processes

The permittee shall maintain daily records for each coating, thinner or component used sufficient to demonstrate compliance with the provisions of 25 Pa. Code Section 129.52. These records shall include the following:

- a. the identification of each coating, thinner or component
- b. the volume used
- c. the mix ratio
- d. the density or specific gravity



28-05004

- e. the weight percent of total volatiles, water, solids and exempt solvents
- f. the volume percent of solids for Table I categories 10(a) through 10(g)
- g. the VOC content of each coating, thinner and other component as supplied
- h. the VOC content of each as-applied coating
- i. monthly records of VOC and HAP emissions from the facility

The above information shall be included in the annual facility emissions report due each March 1st for the preceding calendar year for each year authorized by the operating permit or its renewal.

V. REPORTING REQUIREMENTS.

010 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall provide the following information to obtain credit for waste coatings, solvents or mixtures sent off-site for recycling or incineration at a legally permitted facility:

- a. amount per month of waste coatings, solvents or mixtures shipped from the facility
- b. waste profile or sampling data for each shipment
- c. identification of the waste disposal company for each shipment

VI. WORK PRACTICE REQUIREMENTS.

011 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall provide annual employee training on the handling, use and disposal of coatings, solvents, wastes and related materials to minimize VOC emissions from surface coating operations.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

*** Permit Shield in Effect. ***

DEP Auth ID: 1319398





SECTION E. Source Group Restrictions.

Group Name: 002 40 CFR PART 63 SUBPART 4Z

Group Description: Emission Standards for Emergency IC Engines

Sources included in this group

ID Name

130 SUBPART 4Z EMERGENCY GENERATORS

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6585]

Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

Am I subject to this subpart?

§ 63.6585 Am I subject to this subpart?

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

- (a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.
- (b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.
- (c) An area source of HAP emissions is a source that is not a major source.
- (d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or





other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

- (e) [NA NOT USED FOR NATIONAL SECURITY PURPOSES]
- (f) [NA RICE NOT RESIDENTIAL, COMMERCIAL OR INSTITUTIONAL]
- [69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013]
- § 63.6590 What parts of my plant does this subpart cover?

This subpart applies to each affected source.

- (a) Affected source. An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.
- (1) Existing stationary RICE.
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.
- (iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.
- (2) New stationary RICE.
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (iii) [NA NOT A NEW SOURCE]
- (3) [NA NOT A RECONSTRUCTED SOURCE]
- (b) Stationary RICE subject to limited requirements. (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of § 63.6645(f).
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (2) [NA NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]
- (3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]





- (iii) [NA NOT A MAJOR HAP SOURCE]
- (iv) [NA NOT A MAJOR HAP SOURCE]
- (v) [NA NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]
- (c) [NA NOT SUBJECT TO SUBPARTS IIII OR JJJJ]

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

- § 63.6595 When do I have to comply with this subpart?
- (a) Affected sources. (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. IF YOU HAVE an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or AN EXISTING STATIONARY CIRICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS. OPERATING LIMITATIONS. AND OTHER REQUIREMENTS NO LATER THAN MAY 3, 2013.

IF YOU HAVE an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of hap emissions, or AN EXISTING STATIONARY SI RICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS, OPERATING LIMITATIONS, AND OTHER REQUIREMENTS NO LATER THAN OCTOBER 19, 2013.

- (2) [NA NOT A MAJOR HAP SOURCE]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) [NA NOT A MAJOR HAP SOURCE]
- (5) [NA NOT A MAJOR HAP SOURCE]
- (6) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (7) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (b) Area sources that become major sources. If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.
- (1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.
- (2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.
- (c) If you own or operate an affected source, you must meet the applicable notification requirements in § 63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

Emission and Operating Limitations



§ 63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

[NA – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, YOU MUST COMPLY WITH THE REQUIREMENTS IN TABLE 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

TABLE 2d REQUIREMENTS:

- 4. For each EMERGENCY STATIONARY CI RICE and black start stationary CI RICE**, you must meet the following requirement, except during periods of startup:
- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.
- 5. For each EMERGENCY STATIONARY SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year**, you must meet the following requirement, except during periods of startup:
- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.
- *Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.
- **If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has





ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[END OF TABLE 2d REQUIREMENTS]

- (b) [NA EMERGENCY ENGINE(S)]
- (c) [NA EMERGENCY ENGINE(S)]
- (d) [NA EMERGENCY ENGINE(S)]
- (e) [NA EMERGENCY ENGINE(S)]
- (f) [NA EMERGENCY ENGINE(S)]

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013]

- § 63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?
- (a) [NA EMERGENCY ENGINE(S)]
- (b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in § 63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.
- (c) [NA NOT A MAJOR SOURCE]
- (d) [NA NOT IN SPECIFIED GEOGRAPHIC LOCATIONS]

[78 FR 6702, Jan. 30, 2013]

General Compliance Requirements

- § 63.6605 What are my general requirements for complying with this subpart?
- (a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.
- (b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

Testing and Initial Compliance Requirements

§ 63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?





[NA - NOT A MAJOR HAP SOURCE]

§ 63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

[NA - NOT A MAJOR HAP SOURCE]

§ 63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

[NA - NO PERFORMANCE TESTING REQUIRED]

§ 63.6615 When must I conduct subsequent performance tests?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6620 What performance tests and other procedures must I use?

[NA - NO PERFORMANCE TESTING REQUIRED]

§ 63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

- (a) [NA CEMS NOT REQUIRED]
- (b) [NA CPMS NOT REQUIRED]
- (c) [NA LFG NOT USED]
- (d) [NA NOT A MAJOR HAP SOURCE]
- (e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

Page 57

- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) [NA NOT A MAJOR HAP SOURCE]
- (3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;
- (4) [NA EMERGENCY ENGINE(S)]
- (5) [NA EMERGENCY ENGINE(S)]
- (6) [NA EMERGENCY ENGINE(S)]
- (7) [NA EMERGENCY ENGINE(S)]
- (8) [NA EMERGENCY ENGINE(S)]
- (9) [NA EMERGENCY ENGINE(S)]
- (10) [NA EMERGENCY ENGINE(S)]





(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.

(g) [NA - EMERGENCY ENGINE(S)]

- (h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.
- (i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.
- (j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of Table 2c to this subpart or in items 5, 6, 7, 9, or 11 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013]

§ 63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

- (a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart. [NA NONE OF THE CATEGORIES IN TABLE 5 APPLY TO EMERGENCY ENGINES]
- (b) [NA PERFORMANCE TESTING NOT REQUIRED]
- (c) [NA NOCS NOT REQUIRED FOR EXISTING EMERGENCY RICE]
- (d) [NA EMERGENCY ENGINE(S)]

DEP Auth ID: 1319398 Page 58





(e) [NA - EMERGENCY ENGINE(S)]

28-05004

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

Continuous Compliance Requirements

§ 63.6635 How do I monitor and collect data to demonstrate continuous compliance?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

TABLE 6 REQUIREMENTS

- 9. FOR EACH existing emergency and black start stationary RICE <=500 HP located at a major source of HAP, existing nonemergency stationary RICE <100 HP located at a major source of HAP, EXISTING EMERGENCY and black start STATIONARY RICE LOCATED AT AN AREA SOURCE OF HAP, existing non-emergency stationary CI RICE <=300 HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE <=500 HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are remote stationary RICE, complying with the requirement to "Work or Management practices", you must demonstrate continuous compliance by:
- i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or
- ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.

[END OF TABLE 6 REQUIREMENTS]

- (b) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (c) [NA ANNUAL COMPLIANCE DEMONSTRATION NOT REQUIRED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or





reconstructed limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

- (f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.
- (1) There is no time limit on the use of emergency stationary RICE in emergency situations.
- (2) You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).
- (i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.
- (ii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (iii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.
- (i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.
- (ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:
- (A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.
- (B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.
- (C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.
- (D) The power is provided only to the facility itself or to support the local transmission and distribution system.
- (E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional,





state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013]

Notifications, Reports, and Records

- § 63.6645 What notifications must I submit and when?
- (a) You must submit all of the notifications in §§ 63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) [NA PER (5) BELOW]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) [NA NOT A MAJOR HAP SOURCE]
- (5) THIS REQUIREMENT DOES NOT APPLY IF YOU OWN OR OPERATE an existing stationary RICE less than 100 HP, AN EXISTING STATIONARY EMERGENCY RICE, OR AN EXISTING STATIONARY RICE THAT IS NOT SUBJECT TO ANY NUMERICAL EMISSION STANDARDS.
- (b) [NA NOT A MAJOR HAP SOURCE]
- (c) [NA NOT A MAJOR HAP SOURCE]
- (d) [NA NOT A MAJOR HAP SOURCE]
- (e) [NA NOT A MAJOR HAP SOURCE]
- (f) [NA 63.6590(b) DOES NOT APPLY]
- (g) [NA PERFORMANCE TEST NOT REQUIRED]
- (h) [NA PERFORMANCE TEST NOT REQUIRED]
- (i) [NA EMERGENCY ENGINE(S)]

 $[73\ FR\ 3606, Jan.\ 18, 2008, as\ amended\ at\ 75\ FR\ 9677, Mar.\ 3, 2010;\ 75\ FR\ 51591, Aug.\ 20, 2010;\ 78\ FR\ 6705, Jan.\ 30, 2013]$

- § 63.6650 What reports must I submit and when?
- (a) You must submit each report in Table 7 of this subpart that applies to you.

TABLE 7 REQUIREMENTS

4. For each emergency stationary RICE that operate or are contractually obligated to be available for more than 15 hours per year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operate for the purposes specified in § 63.6640(f)(4)(ii), you must submit a Report. The report must contain the information in § 63.6650(h)(1). You must submit the report annually according to the requirements in § 63.6650(h)(2)-(3).

[END OF TABLE 7 REQUIREMENTS]





- (b) Unless the Administrator has approved a different schedule for submission of reports under § 63.10(a), you must submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.
- (1) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (2) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (3) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (4) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (5) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in § 63.6595 and ending on December 31.
- (7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in § 63.6595.
- (8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.
- (9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.
- (c) [NA "COMPLIANCE REPORT" NOT REQUIRED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (f) [NA NOT SUBJECT TO TITLE V PERMITTING]
- (g) [NA LFG NOT USED]
- (h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in § 63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.
- (1) The report must contain the following information:
- (i) Company name and address where the engine is located.
- (ii) Date of the report and beginning and ending dates of the reporting period.
- (iii) Engine site rating and model year.
- (iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.
- (v) Hours operated for the purposes specified in § 63.6640(f)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in § 63.6640(f)(2)(ii) and (iii).
- (vi) Number of hours the engine is contractually obligated to be available for the purposes specified in § 63.6640(f)(2)(ii) and (iii).





- (vii) Hours spent for operation for the purpose specified in § 63.6640(f)(4)(ii), including the date, start time, and end time for engine operation for the purposes specified in § 63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.
- (viii) If there were no deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.
- (ix) If there were deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), information on the number, duration, and cause of deviations, and the corrective action taken.
- (2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.
- (3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 63.13.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013]

- § 63.6655 What records must I keep?
- (a) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (b) [NA NO CEMS OR CPMS]
- (c) [NA LFG NOT USED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) An existing stationary emergency RICE.
- (3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.
- (f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purposes specified in § 63.6640(f)(2)(ii) or (iii) or § 63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.
- [69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30, 2013]
- § 63.6660 In what form and how long must I keep my records?





SECTION E. **Source Group Restrictions.**

- (a) Your records must be in a form suitable and readily available for expeditious review according to § 63.10(b)(1).
- (b) As specified in § 63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.
- (c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to § 63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

Other Requirements and Information

§ 63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

[75 FR 9678, Mar. 3, 2010]

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart ZZZZ -National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director Air Protection Division (3AP00) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

*** Permit Shield in Effect. ***

DEP Auth ID: 1319398 Page 64





SECTION E. Source Group Restrictions.

Group Name: 003 40 CFR PART 63 SUBPART 6X

Group Description: Emission Standards for Metal Fabrication and Finishing

Sources included in this group

ID Name
200 MACT SUBPART 6X ACTIVITIES

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11514]

Subpart XXXXXX - National Emission Standards for Hazardous Air Pollutants Area Source Standards for Nine Metal Fabrication and Finishing Source Categories

Am I subject to this subpart?

[§63.11514 Am I subject to this subpart?

- (a) You are subject to this subpart if you own or operate an area source that is primarily engaged in the operations in one of the nine source categories listed in paragraphs (a)(1) through (9) of this section. Descriptions of these source categories are shown in Table 1 of this subpart. "Primarily engaged" is defined in §63.11522, "What definitions apply to this subpart?"
- (1) [NA NO ELECTRICAL AND ELECTRONIC EQUIPMENT FINISHING OPERATIONS]
- (2) [NA NO FABRICATED METAL PRODUCTS]
- (3) [NA NO FABRICATED PLATE WORK (BOILER SHOPS]
- (4) [NA NO FABRICATED STRUCTURAL METAL MANUFACTURING]
- (5) [NA NO HEATING EQUIPMENT, EXCEPT ELECTRIC]
- (6) Industrial Machinery and Equipment Finishing Operations;

DEP Auth ID: 1319398 Page 65



- (7) [NA NO IRON AND STEEL FORGING]
- (8) [NA NO PRIMARY METAL PRODUCTS MANUFACTURING] and
- (9) [NA NO VALVES AND PIPE FITTINGS]
- (b) The provisions of this subpart apply to each new and existing affected source listed and defined in paragraphs (b)(1) through (5) of this section if you use materials that contain or have the potential to emit metal fabrication or finishing metal HAP (MFHAP), defined to be the compounds of cadmium, chromium, lead, manganese, and nickel, or any of these metals in the elemental form with the exception of lead. Materials that contain MFHAP are defined to be materials that contain greater than 0.1 percent for carcinogens, as defined by OSHA at 29 CFR 1910.1200(d)(4), and greater than 1.0 percent for noncarcinogens. For the MFHAP, this corresponds to materials that contain cadmium, chromium, lead, or nickel in amounts greater than or equal to 0.1 percent by weight (of the metal), and materials that contain manganese in amounts greater than or equal to 1.0 percent by weight (of the metal), as shown in formulation data provided by the manufacturer or supplier, such as the Material Safety Data Sheet for the material.
- (1) A dry abrasive blasting affected source is the collection of all equipment and activities necessary to perform dry abrasive blasting operations which use materials that contain MFHAP or that have the potential to emit MFHAP.
- (2) [NA NO MACHINING AFFECTED SOURCES]
- (3) [NA NO DRY GRINDING/DRY POLISHING SOURCES]
- (4) [NO NO SPRAY PAINTING AFFECTED SOURCES]
- (5) A welding affected source is the collection of all equipment and activities necessary to perform welding operations which use materials that contain MFHAP, as defined in §63.11522, "What definitions apply to this subpart?", or have the potential to emit MFHAP.
- (c) An affected source is existing if you commenced construction or reconstruction of the affected source, as defined in §63.2, "General Provisions" to part 63, before April 3, 2008.
- (d) An affected source is NEW if you commenced construction or reconstruction of the affected source, as defined in § 63.2, "General Provisions" to part 63, on or after April 3, 2008.
- (e) [NA NO RESEARCH OR LABORATORY FACILITIES]
- (f) This subpart does not apply to tool or equipment repair operations, facility maintenance, or quality control activities as defined in §63.11522, "What definitions apply to this subpart?"
- (g) [NA NOT A MILITARY FACILITY]
- (h) [NA NO MUNITIONS PRODUCTION]
- (i) You are exempt from the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71, provided you are not otherwise required by law to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a). Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart.
- §63.11515 What are my compliance dates?
- (a) If you own or operate an existing affected source, you must achieve compliance with the applicable provisions in this subpart by July 25, 2011.
- (b) If you own or operate a NEW affected source, you must achieve compliance with the applicable provisions in this subpart by July 23, 2008, or upon startup of your affected source, whichever is later.

Standards and Compliance Requirements



§63.11516 What are my standards and management practices?

- (a) Dry abrasive blasting standards. If you own or operate a new or existing dry abrasive blasting affected source, you must comply with the requirements in paragraphs (a)(1) through (3) of this section, as applicable, for each dry abrasive blasting operation that uses materials that contain MFHAP, as defined in §63.11522, "What definitions apply to this subpart?", or has the potential to emit MFHAP. These requirements do not apply when abrasive blasting operations are being performed that do not use any materials containing MFHAP or do not have the potential to emit MFHAP.
- (1) [NA NO DRY ABRASIVE BLASTING IN TOTALLY ENCLOSED AND UNVENTED BLAST CHAMBERS]
- (2) Standards for dry abrasive blasting of objects performed in vented enclosures. If you own or operate a new or existing dry abrasive blasting affected source which consists of a dry abrasive blasting operation which has a vent allowing any air or blast material to escape, you must comply with the requirements in paragraphs (a)(2)(i) and (ii) of this section. Dry abrasive blasting operations for which the items to be blasted exceed 8 feet (2.4 meters) in any dimension, may be performed subject to the requirements in paragraph (a)(3) of this section.
- (i) You must capture emissions and vent them to a filtration control device. You must operate the filtration control device according to manufacturer's instructions, and you must demonstrate compliance with this requirement by maintaining a record of the manufacturer's specifications for the filtration control devices, as specified by the requirements in §63.11519(c)(4), "What are my notification, recordkeeping, and reporting requirements?"
- (ii) You must implement the management practices to minimize emissions of MFHAP as specified in paragraphs (a)(2)(ii)(A) through (C) of this section.
- (A) You must take measures necessary to minimize excess dust in the surrounding area to reduce MFHAP emissions, as practicable; and
- (B) You must enclose dusty abrasive material storage areas and holding bins, seal chutes and conveyors that transport abrasive materials; and
- (C) You must operate all equipment associated with dry abrasive blasting operations according to manufacturer's instructions.
- (3) Standards for dry abrasive blasting of objects greater than 8 feet (2.4 meters) in any one dimension. If you own or operate a new or existing dry abrasive blasting affected source which consists of a dry abrasive blasting operation which is performed on objects greater than 8 feet (2.4 meters) in any one dimension, you may implement management practices to minimize emissions of MFHAP as specified in paragraph (a)(3)(i) of this section instead of the practices required by paragraph (a)(2) of this section. You must demonstrate that management practices are being implemented by complying with the requirements in paragraphs (a)(3)(ii) through (iv) of this section.
- (i) Management practices for dry abrasive blasting of objects greater than 8 feet (2.4 meters) in any one dimension are specified in paragraphs (a)(3)(i)(A) through (E) of this section.
- (A) You must take measures necessary to minimize excess dust in the surrounding area to reduce MFHAP emissions, as practicable; and
- (B) You must enclose abrasive material storage areas and holding bins, seal chutes and conveyors that transport abrasive material; and
- (C) You must operate all equipment associated with dry abrasive blasting operations according to manufacturer's instructions; and
- (D) You must not re-use dry abrasive blasting media unless contaminants (i.e., any material other than the base metal, such as paint residue) have been removed by filtration or screening, and the abrasive material conforms to its original size; and



- (E) Whenever practicable, you must switch from high particulate matter (PM)-emitting blast media (e.g., sand) to low PM-emitting blast media (e.g., crushed glass, specular hematite, steel shot, aluminum oxide), where PM is a surrogate for MFHAP.
- (ii) You must perform visual determinations of fugitive emissions, as specified in § 63.11517(b), "What are my monitoring requirements?", according to paragraphs (a)(3)(ii)(A) or (B) of this section, as applicable.
- (A) For abrasive blasting of objects greater than 8 feet (2.4 meters) in any one dimension that is performed outdoors, you must perform visual determinations of fugitive emissions at the fenceline or property border nearest to the outdoor dry abrasive blasting operation.
- (B) For abrasive blasting of objects greater than 8 feet (2.4 meters) in any one dimension that is performed indoors, you must perform visual determinations of fugitive emissions at the primary vent, stack, exit, or opening from the building containing the abrasive blasting operations.
- (iii) You must keep a record of all visual determinations of fugitive emissions along with any corrective action taken in accordance with the requirements in § 63.11519(c)(2), "What are my notification, recordkeeping, and reporting requirements?"
- (iv) If visible fugitive emissions are detected, you must perform corrective actions until the visible fugitive emissions are eliminated, at which time you must comply with the requirements in paragraphs (a)(3)(iv)(A) and (B) of this section.
- (A) You must perform a follow-up inspection for visible fugitive emissions in accordance with § 63.11517(a), "Monitoring Requirements."
- (B) You must report all instances where visible emissions are detected, along with any corrective action taken and the results of subsequent follow-up inspections for visible emissions, with your annual certification and compliance report as required by § 63.11519(b)(5), "Notification, recordkeeping, and reporting requirements."
- (b) [NA NO AFFECTED MACHINING ACTIVITIES]
- (c) [NA NO AFFECTED DRY GRINDING OR POLISHING ACTIVITIES]
- (d) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]
- (e) [Reserved]
- (f) Standards for welding. If you own or operate a new or existing welding affected source, you must comply with the requirements in paragraphs (f)(1) and (2) of this section for each welding operation that uses materials that contain MFHAP, as defined in §63.11522, "What definitions apply to this subpart?", or has the potential to emit MFHAP. If your welding affected source uses 2,000 pounds or more per year of welding rod containing one or more MFHAP (calculated on a rolling 12-month basis), you must demonstrate that management practices or fume control measures are being implemented by complying with the requirements in paragraphs (f)(3) through (8) of this section. The requirements in paragraphs (f)(1) through (8) of this section do not apply when welding operations are being performed that do not use any materials containing MFHAP or do not have the potential to emit MFHAP.
- (1) You must operate all equipment, capture, and control devices associated with welding operations according to manufacturer's instructions. You must demonstrate compliance with this requirement by maintaining a record of the manufacturer's specifications for the capture and control devices, as specified by the requirements in §63.11519(c)(4), "Notification, recordkeeping, and reporting requirements."
- (2) You must implement one or more of the management practices specified in paragraphs (f)(2)(i) through (v) of this section to minimize emissions of MFHAP, as practicable, while maintaining the required welding quality through the application of sound engineering judgment.
- (i) Use welding processes with reduced fume generation capabilities (e.g., gas metal arc welding (GMAW)—also called metal inert gas welding (MIG));





- (ii) Use welding process variations (e.g., pulsed current GMAW), which can reduce fume generation rates;
- (iii) Use welding filler metals, shielding gases, carrier gases, or other process materials which are capable of reduced welding fume generation;
- (iv) Optimize welding process variables (e.g., electrode diameter, voltage, amperage, welding angle, shield gas flow rate, travel speed) to reduce the amount of welding fume generated; and
- (v) Use a welding fume capture and control system, operated according to the manufacturer's specifications.
- (3) Tier 1 compliance requirements for welding. You must perform visual determinations of welding fugitive emissions as specified in §63.11517(b), "Monitoring requirements," at the primary vent, stack, exit, or opening from the building containing the welding operations. You must keep a record of all visual determinations of fugitive emissions along with any corrective action taken in accordance with the requirements in §63.11519(c)(2), "Notification, recordkeeping, and reporting requirements."
- (4) Requirements upon initial detection of visible emissions from welding. If visible fugitive emissions are detected during any visual determination required in paragraph (f)(3) of this section, you must comply with the requirements in paragraphs (f)(4)(i) and (ii) of this section.
- (i) Perform corrective actions that include, but are not limited to, inspection of welding fume sources, and evaluation of the proper operation and effectiveness of the management practices or fume control measures implemented in accordance with paragraph (f)(2) of this section. After completing such corrective actions, you must perform a follow-up inspection for visible fugitive emissions in accordance with §63.11517(a), "Monitoring Requirements," at the primary vent, stack, exit, or opening from the building containing the welding operations.
- (ii) Report all instances where visible emissions are detected, along with any corrective action taken and the results of subsequent follow-up inspections for visible emissions, and submit with your annual certification and compliance report as required by §63.11519(b)(5), "Notification, recordkeeping, and reporting requirements."
- (5) Tier 2 requirements upon subsequent detection of visible emissions. If visible fugitive emissions are detected more than once during any consecutive 12 month period (notwithstanding the results of any follow-up inspections), you must comply with paragraphs (f)(5)(i) through (iv) of this section.
- (i) Within 24 hours of the end of the visual determination of fugitive emissions in which visible fugitive emissions were detected, you must conduct a visual determination of emissions opacity, as specified in §63.11517(c), "Monitoring requirements," at the primary vent, stack, exit, or opening from the building containing the welding operations.
- (ii) In lieu of the requirement of paragraph (f)(3) of this section to perform visual determinations of fugitive emissions with EPA Method 22, you must perform visual determinations of emissions opacity in accordance with §63.11517(d), "Monitoring Requirements," using EPA Method 9, at the primary vent, stack, exit, or opening from the building containing the welding operations.
- (iii) You must keep a record of each visual determination of emissions opacity performed in accordance with paragraphs (f)(5)(i) or (ii) of this section, along with any subsequent corrective action taken, in accordance with the requirements in §63.11519(c)(3), "Notification, recordkeeping, and reporting requirements."
- (iv) You must report the results of all visual determinations of emissions opacity performed in accordance with paragraphs (f)(5)(i) or (ii) of this section, along with any subsequent corrective action taken, and submit with your annual certification and compliance report as required by §63.11519(b)(6), "Notification, recordkeeping, and reporting requirements."
- (6) Requirements for opacities less than or equal to 20 percent but greater than zero. For each visual determination of emissions opacity performed in accordance with paragraph (f)(5) of this section for which the average of the six-minute average opacities recorded is 20 percent or less but greater than zero, you must perform corrective actions, including inspection of all welding fume sources, and evaluation of the proper operation and effectiveness of the management practices or fume control measures implemented in accordance with paragraph (f)(2) of this section.





- (7) Tier 3 requirements for opacities exceeding 20 percent. For each visual determination of emissions opacity performed in accordance with paragraph (f)(5) of this section for which the average of the six-minute average opacities recorded exceeds 20 percent, you must comply with the requirements in paragraphs (f)(7)(i) through (v) of this section.
- (i) You must submit a report of exceedence of 20 percent opacity, along with your annual certification and compliance report, as specified in §63.11519(b)(8), "Notification, recordkeeping, and reporting requirements," and according to the requirements of §63.11519(b)(1), "Notification, recordkeeping, and reporting requirements."
- (ii) Within 30 days of the opacity exceedence, you must prepare and implement a Site-Specific Welding Emissions Management Plan, as specified in paragraph (f)(8) of this section. If you have already prepared a Site-Specific Welding Emissions Management Plan in accordance with this paragraph, you must prepare and implement a revised Site-Specific Welding Emissions Management Plan within 30 days.
- (iii) During the preparation (or revision) of the Site-Specific Welding Emissions Management Plan, you must continue to perform visual determinations of emissions opacity, beginning on a daily schedule as specified in §63.11517(d), "Monitoring Requirements," using EPA Method 9, at the primary vent, stack, exit, or opening from the building containing the welding operations.
- (iv) You must maintain records of daily visual determinations of emissions opacity performed in accordance with paragraph (f)(7)(iii) of this section, during preparation of the Site-Specific Welding Emissions Management Plan, in accordance with the requirements in §63.11519(b)(9), "Notification, recordkeeping, and reporting requirements."
- (v) You must include these records in your annual certification and compliance report, according to the requirements of §63.11519(b)(1), "Notification, recordkeeping, and reporting requirements."
- (8) Site-Specific Welding Emissions Management Plan. The Site-Specific Welding Emissions Management Plan must comply with the requirements in paragraphs (f)(8)(i) through (iii) of this section.
- (i) Site-Specific Welding Emissions Management Plan must contain the information in paragraphs (f)(8)(i)(A) through (F) of this section.
- (A) Company name and address;
- (B) A list and description of all welding operations which currently comprise the welding affected source;
- (C) A description of all management practices and/or fume control methods in place at the time of the opacity exceedence;
- (D) A list and description of all management practices and/or fume control methods currently employed for the welding affected source:
- (E) A description of additional management practices and/or fume control methods to be implemented pursuant to paragraph (f)(7)(ii) of this section, and the projected date of implementation; and
- (F) Any revisions to a Site-Specific Welding Emissions Management Plan must contain copies of all previous plan entries, pursuant to paragraphs (f)(8)(i)(D) and (E) of this section.
- (ii) The Site-Specific Welding Emissions Management Plan must be updated annually to contain current information, as required by paragraphs (f)(8)(i)(A) through (C) of this section, and submitted with your annual certification and compliance report, according to the requirements of §63.11519(b)(1), "Notification, recordkeeping, and reporting requirements."
- (iii) You must maintain a copy of the current Site-Specific Welding Emissions Management Plan in your records in a readilyaccessible location for inspector review, in accordance with the requirements in §63.11519(c)(12), "Notification, recordkeeping, and reporting requirements."
- §63.11517 What are my monitoring requirements?
- (a) Visual determination of fugitive emissions, general. Visual determination of fugitive emissions must be performed





according to the procedures of EPA Method 22, of 40 CFR part 60, Appendix A-7. You must conduct the EPA Method 22 test while the affected source is operating under normal conditions. The duration of each EPA Method 22 test must be at least 15 minutes, and visible emissions will be considered to be present if they are detected for more than six minutes of the fifteen minute period.

- (b) Visual determination of fugitive emissions, graduated schedule. Visual determinations of fugitive emissions must be performed in accordance with paragraph (a) of this section and according to the schedule in paragraphs (b)(1) through (4) of this section.
- (1) Daily Method 22 Testing. Perform visual determination of fugitive emissions once per day, on each day the process is in operation, during operation of the process.
- (2) Weekly Method 22 Testing. If no visible fugitive emissions are detected in consecutive daily EPA Method 22 tests, performed in accordance with paragraph (b)(1) of this section for 10 days of work day operation of the process, you may decrease the frequency of EPA Method 22 testing to once every five days of operation of the process (one calendar week). If visible fugitive emissions are detected during these tests, you must resume EPA Method 22 testing of that operation once per day during each day that the process is in operation, in accordance with paragraph (b)(1) of this section.
- (3) Monthly Method 22 Testing. If no visible fugitive emissions are detected in four consecutive weekly EPA Method 22 tests performed in accordance with paragraph (b)(2) of this section, you may decrease the frequency of EPA Method 22 testing to once per 21 days of operation of the process (one calendar month). If visible fugitive emissions are detected during these tests, you must resume weekly EPA Method 22 in accordance with paragraph (b)(2) of this section.
- (4) Quarterly Method 22 Testing. If no visible fugitive emissions are detected in three consecutive monthly EPA Method 22 tests performed in accordance with paragraph (b)(3) of this section, you may decrease the frequency of EPA Method 22 testing to once per 60 days of operation of the process (3 calendar months). If visible fugitive emissions are detected during these tests, you must resume monthly EPA Method 22 in accordance with paragraph (b)(3) of this section.
- (c) Visual determination of emissions opacity for welding Tier 2 or 3, general. Visual determination of emissions opacity must be performed in accordance with the procedures of EPA Method 9, of 40 CFR part 60, Appendix A-4, and while the affected source is operating under normal conditions. The duration of the EPA Method 9 test shall be thirty minutes.
- (d) Visual determination of emissions opacity for welding Tier 2 or 3, graduated schedule. You must perform visual determination of emissions opacity in accordance with paragraph (c) of this section and according to the schedule in paragraphs (d)(1) through (5) of this section.
- (1) Daily Method 9 testing for welding, Tier 2 or 3. Perform visual determination of emissions opacity once per day during each day that the process is in operation.
- (2) Weekly Method 9 testing for welding, Tier 2 or 3. If the average of the six minute opacities recorded during any of the daily consecutive EPA Method 9 tests performed in accordance with paragraph (d)(1) of this section does not exceed 20 percent for 10 days of operation of the process, you may decrease the frequency of EPA Method 9 testing to once per five days of consecutive work day operation. If opacity greater than 20 percent is detected during any of these tests, you must resume testing every day of operation of the process according to the requirements of paragraph (d)(1) of this section.
- (3) Monthly Method 9 testing for welding Tier 2 or 3. If the average of the six minute opacities recorded during any of the consecutive weekly EPA Method 9 tests performed in accordance with paragraph (d)(2) of this section does not exceed 20 percent for four consecutive weekly tests, you may decrease the frequency of EPA Method 9 testing to once per every 21 days of operation of the process. If visible emissions opacity greater than 20 percent is detected during any monthly test, you must resume testing every five days of operation of the process according to the requirements of paragraph (d)(2) of this section.
- (4) Quarterly Method 9 testing for welding Tier 2 or 3. If the average of the six minute opacities recorded during any of the consecutive weekly EPA Method 9 tests performed in accordance with paragraph (d)(3) of this section does not exceed 20 percent for three consecutive monthly tests, you may decrease the frequency of EPA Method 9 testing to once per every 120 days of operation of the process. If visible emissions opacity greater than 20 percent is detected during any quarterly test, you must resume testing every 21 days (month) of operation of the process according to the requirements of paragraph



(d)(3) of this section.

(5) Return to Method 22 testing for welding, Tier 2 or 3. If, after two consecutive months of testing, the average of the six minute opacities recorded during any of the monthly EPA Method 9 tests performed in accordance with paragraph (d)(3) of this section does not exceed 20 percent, you may resume EPA Method 22 testing as in paragraphs (b)(3) and (4) of this section. In lieu of this, you may elect to continue performing EPA Method 9 tests in accordance with paragraphs (d)(3) and (4) of this section.

§63.11518 [Reserved]

§63.11519 What are my notification, recordkeeping, and reporting requirements?

- (a) What notifications must I submit?—(1) Initial notification. If you are the owner or operator of an area source in one of the nine metal fabrication and finishing source categories, as defined in §63.11514 "Am I subject to this subpart?," you must submit the Initial Notification required by §63.9(b) "General Provisions," for a NEW affected source no later than 120 days after initial startup or November 20, 2008, whichever is later. For an existing affected source, you must submit the Initial Notification no later than July 25, 2011. Your Initial Notification must provide the information specified in paragraphs (a)(1)(i) through (iv) of this section.
- (i) The name, address, phone number and e-mail address of the owner and operator;
- (ii) The address (physical location) of the affected source;
- (iii) An identification of the relevant standard (i.e., this subpart); and
- (iv) A brief description of the type of operation. For example, a brief characterization of the types of products (e.g., aerospace components, sports equipment, etc.), the number and type of processes, and the number of workers usually employed.
- (2) Notification of compliance status. If you are the owner or operator of an existing affected source, you must submit a notification of compliance status on or before November 22, 2011. If you are the owner or operator of a NEW affected source, you must submit a notification of compliance status within 120 days after initial startup, or by November 20, 2008, whichever is later. You are required to submit the information specified in paragraphs (a)(2)(i) through (iv) of this section with your notification of compliance status:
- (i) Your company's name and address;
- (ii) A statement by a responsible official with that official's name, title, phone number, e-mail address and signature, certifying the truth, accuracy, and completeness of the notification and a statement of whether the source has complied with all the relevant standards and other requirements of this subpart;
- (iii) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]
- (iv) The date of the notification of compliance status.
- (b) What reports must I prepare or submit?—(1) Annual certification and compliance reports. You must prepare and submit annual certification and compliance reports for each affected source according to the requirements of paragraphs (b)(2) through (7) of this section. The annual certification and compliance reporting requirements may be satisfied by reports required under other parts of the CAA, as specified in paragraph (b)(3) of this section.
- (2) Dates. Unless the Administrator has approved or agreed to a different schedule for submission of reports under §63.10(a), "General Provisions," you must prepare and submit each annual certification and compliance report according to the dates specified in paragraphs (b)(2)(i) through (iii) of this section. Note that the information reported for each of the months in the reporting period will be based on the last 12 months of data prior to the date of each monthly calculation.
- (i) The first annual certification and compliance report must cover the first annual reporting period which begins the day after the compliance date and ends on December 31.



- (ii) Each subsequent annual certification and compliance report must cover the subsequent semiannual reporting period from January 1 through December 31.
- (iii) Each annual certification and compliance report must be prepared and submitted no later than January 31 and kept in a readily-accessible location for inspector review. If an exceedence has occurred during the year, each annual certification and compliance report must be submitted along with the exceedence reports, and postmarked or delivered no later than January 31.
- (3) Alternate dates. For each affected source that is subject to permitting regulations pursuant to 40 CFR part 70 or 40 CFR part 71, "Title V."
- (i) If the permitting authority has established dates for submitting annual reports pursuant to 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), "Title V," you may prepare or submit, if required, the first and subsequent compliance reports according to the dates the permitting authority has established instead of according to the date specified in paragraph (b)(2)(iii) of this section.
- (ii) If an affected source prepares or submits an annual certification and compliance report pursuant to this section along with, or as part of, the monitoring report required by 40 CFR 70.6(a)(3)(iii)(A) or 40 CFR 71.6(a)(3)(iii)(A), "Title V," and the compliance report includes all required information concerning exceedences of any limitation in this subpart, its submission will be deemed to satisfy any obligation to report the same exceedences in the annual monitoring report. However, submission of an annual certification and compliance report shall not otherwise affect any obligation the affected source may have to report deviations from permit requirements to the permitting authority.
- (4) General requirements. The annual certification and compliance report must contain the information specified in paragraphs (b)(4)(i) through (iii) of this section, and the information specified in paragraphs (b)(5) through (7) of this section that is applicable to each affected source.
- (i) Company name and address;
- (ii) Statement by a responsible official with that official's name, title, and signature, certifying the truth, accuracy, and completeness of the content of the report; and
- (iii) Date of report and beginning and ending dates of the reporting period. The reporting period is the 12-month period ending on December 31. Note that the information reported for the 12 months in the reporting period will be based on the last 12 months of data prior to the date of each monthly calculation.
- (5) Visual determination of fugitive emissions requirements. The annual certification and compliance report must contain the information specified in paragraphs (b)(5)(i) through (iii) of this section for each affected source which performs visual determination of fugitive emissions in accordance with §63.11517(a), "Monitoring requirements."
- (i) The date of every visual determination of fugitive emissions which resulted in detection of visible emissions;
- (ii) A description of the corrective actions taken subsequent to the test; and
- (iii) The date and results of the follow-up visual determination of fugitive emissions performed after the corrective actions.
- (6) Visual determination of emissions opacity requirements. The annual certification and compliance report must contain the information specified in paragraphs (b)(6)(i) through (iii) of this section for each affected source which performs visual determination of emissions opacity in accordance with §63.11517(c), "Monitoring requirements."
- (i) The date of every visual determination of emissions opacity;
- (ii) The average of the six-minute opacities measured by the test; and
- (iii) A description of any corrective action taken subsequent to the test.
- (7) [Reserved]





- (8) Exceedences of 20 percent opacity for welding affected sources. As required by §63.11516(f)(7)(i), "Requirements for opacities exceeding 20 percent," you must prepare an exceedence report whenever the average of the six-minute average opacities recorded during a visual determination of emissions opacity exceeds 20 percent. This report must be submitted along with your annual certification and compliance report according to the requirements in paragraph (b)(1) of this section, and must contain the information in paragraphs (b)(8)(iii)(A) and (B) of this section.
- (A) The date on which the exceedence occurred; and
- (B) The average of the six-minute average opacities recorded during the visual determination of emissions opacity.
- (9) Site-specific Welding Emissions Management Plan reporting. You must submit a copy of the records of daily visual determinations of emissions recorded in accordance with §63.11516(f)(7)(iv), "Tier 3 requirements for opacities exceeding 20 percent," and a copy of your Site-Specific Welding Emissions Management Plan and any subsequent revisions to the plan pursuant to §63.11516(f)(8), "Site-specific Welding Emission Management Plan," along with your annual certification and compliance report, according to the requirements in paragraph (b)(1) of this section.
- (c) What records must I keep? You must collect and keep records of the data and information specified in paragraphs (c)(1) through (13) of this section, according to the requirements in paragraph (c)(14) of this section.
- (1) General compliance and applicability records. Maintain information specified in paragraphs (c)(1)(i) through (ii) of this section for each affected source.
- (i) Each notification and report that you submitted to comply with this subpart, and the documentation supporting each notification and report.
- (ii) Records of the applicability determinations as in §63.11514(b)(1) through (5), "Am I subject to this subpart," listing equipment included in its affected source, as well as any changes to that and on what date they occurred, must be maintained for 5 years and be made available for inspector review at any time.
- (2) Visual determination of fugitive emissions records. Maintain a record of the information specified in paragraphs (c)(2)(i) through (iii) of this section for each affected source which performs visual determination of fugitive emissions in accordance with §63.11517(a), "Monitoring requirements."
- (i) The date and results of every visual determination of fugitive emissions;
- (ii) A description of any corrective action taken subsequent to the test; and
- (iii) The date and results of any follow-up visual determination of fugitive emissions performed after the corrective actions.
- (3) Visual determination of emissions opacity records. Maintain a record of the information specified in paragraphs (c)(3)(i) through (iii) of this section for each affected source which performs visual determination of emissions opacity in accordance with §63.11517(c), "Monitoring requirements."
- (i) The date of every visual determination of emissions opacity; and
- (ii) The average of the six-minute opacities measured by the test; and
- (iii) A description of any corrective action taken subsequent to the test.
- (4) Maintain a record of the manufacturer's specifications for the control devices used to comply with §63.11516, "What are my standards and management practices?"
- (5) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]
- (6) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]
- (7) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]



- (8) [NA NO AFFECTED SPRAY PAINTING ACTIVITIES]
- (9)-(10) [Reserved]
- (11) Visual determination of emissions opacity performed during the preparation (or revision) of the Site-Specific Welding Emissions Management Plan. You must maintain a record of each visual determination of emissions opacity performed during the preparation (or revision) of a Site-Specific Welding Emissions Management Plan, in accordance with §63.11516(f)(7)(iii), "Requirements for opacities exceeding 20 percent."
- (12) Site-Specific Welding Emissions Management Plan. If you have been required to prepare a plan in accordance with §63.11516(f)(7)(iii), "Site-Specific Welding Emissions Management Plan," you must maintain a copy of your current Site-Specific Welding Emissions Management Plan in your records and it must be readily available for inspector review.
- (13) Manufacturer's instructions. If you comply with this subpart by operating any equipment according to manufacturer's instruction, you must keep these instructions readily available for inspector review.
- (14) Welding Rod usage. If you operate a new or existing welding affected source which is not required to comply with the requirements of §63.11516(f)(3) through (8) because it uses less than 2,000 pounds per year of welding rod (on a rolling 12-month basis), you must maintain records demonstrating your welding rod usage on a rolling 12-month basis.
- (15) Your records must be maintained according to the requirements in paragraphs (c)(14)(i) through (iii) of this section.
- (i) Your records must be in a form suitable and readily available for expeditious review, according to §63.10(b)(1), "General Provisions." Where appropriate, the records may be maintained as electronic spreadsheets or as a database.
- (ii) As specified in §63.10(b)(1), "General Provisions," you must keep each record for 5 years following the date of each occurrence, measurement, corrective action, report, or record.
- (iii) You must keep each record on-site for at least 2 years after the date of each occurrence, measurement, corrective action, report, or record according to §63.10(b)(1), "General Provisions." You may keep the records off-site for the remaining 3 years.

002 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.11514]

Subpart XXXXXX - National Emission Standards for Hazardous Air Pollutants Area Source Standards for Nine Metal **Fabrication and Finishing Source Categories**

Am I subject to this subpart?

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart XXXXXX -National Emissions Standards for Hazardous Air Pollutants Area Source Standards for Nine Metal Fabrication and Finishing Source Categories shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:


Air Protection Division (3AP00) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions







of	the	revised	sub	part.

*** Permit Shield in Effect. ***



28-05004



SECTION E. Source Group Restrictions.

Group Name: 004 40 CFR PART 60 SUBPART 4I

Group Description: Emission Standards for Compression Ignition Engines

Sources included in this group

IE	Name	
13	1 SUBPART 4I EMERGENCY GENERATORS	

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4200] Subpart IIII - Standards of Performance for Stationary Compression Ignition Internal Combustion Engines Am I subject to this subpart?

- § 60.4200 Am I subject to this subpart?
- (a) The provisions of this subpart are applicable to manufacturers, owners, and operators of stationary compression ignition (CI) internal combustion engines (ICE) and other persons as specified in paragraphs (a)(1) through (4) of this section. For the purposes of this subpart, the date that construction commences is the date the engine is ordered by the owner or operator.
- (1) [NA NOT AN ENGINE MANUFACTURER]
- (2) Owners and operators of stationary CI ICE that commence construction after July 11, 2005, where the stationary CI ICE are:
- (i) Manufactured after April 1, 2006, and are not fire pump engines, or
- (ii) [NA NOT FIRE PUMP ENGINE]
- (3) [NA NOT MODIFIED OR RECONSTRUCTED]

DEP Auth ID: 1319398 Page 77



- (4) The provisions of § 60.4208 of this subpart are applicable to all owners and operators of stationary CI ICE that commence construction after July 11, 2005.
- (b) [NA TEST CELL NOT INVOLVED]
- (c) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart applicable to area sources.
- (d) Stationary CI ICE may be eligible for exemption from the requirements of this subpart as described in 40 CFR part 1068, subpart C (or the exemptions described in 40 CFR part 89, subpart J and 40 CFR part 94, subpart J, for engines that would need to be certified to standards in those parts), except that owners and operators, as well as manufacturers, may be eligible to request an exemption for national security.
- (e) [NA NOT TEMPORARY REPLACEMENT UNIT(S)]

[71 FR 39172, July 11, 2006, as amended at 76 FR 37967, June 28, 2011]

Emission Standards for Owners and Operators

- § 60.4204 What emission standards must I meet for non-emergency engines if I am an owner or operator of a stationary CI internal combustion engine?
- (ii) [NA UNIT(S) ARE EMERGENCY]
- § 60.4205 What emission standards must I meet for emergency engines if I am an owner or operator of a stationary CI internal combustion engine?
- (a) Owners and operators of pre-2007 model year emergency stationary CI ICE with a displacement of less than 10 liters per cylinder that are not fire pump engines must comply with the emission standards in Table 1 to this subpart. Owners and operators of pre-2007 model year emergency stationary CI ICE with a displacement of greater than or equal to 10 liters per cylinder and less than 30 liters per cylinder that are not fire pump engines must comply with the emission standards in 40 CFR 94.8(a)(1).
- (b) Owners and operators of 2007 model year and later emergency stationary CI ICE with a displacement of less than 30 liters per cylinder that are not fire pump engines must comply with the emission standards for new nonroad CI engines in § 60.4202, for all pollutants, for the same model year and maximum engine power for their 2007 model year and later emergency stationary CI ICE.

60.4202 REQUIREMENTS

60.4202(a) Stationary CI internal combustion engine manufacturers must certify their 2007 model year and later emergency stationary CI ICE with a maximum engine power less than or equal to 2,237 KW (3,000 HP) and a displacement of less than 10 liters per cylinder that are not fire pump engines to the emission standards specified in paragraphs (a)(1) through (2) of this section.

- (1) [NA UNIT(S) > 37 KW]
- (2) For engines with a maximum engine power greater than or equal to 37 KW (50 HP), the certification emission standards for new nonroad CI engines for the same model year and maximum engine power in 40 CFR 89.112 and 40 CFR 89.113 for all pollutants beginning in model year 2007.

FROM 89.113

- (a) Exhaust opacity from compression-ignition nonroad engines for which this subpart is applicable must not exceed:
- (1) 20 percent during the acceleration mode;

28-05004



SECTION E. Source Group Restrictions.

- (2) 15 percent during the lugging mode; and
- (3) 50 percent during the peaks in either the acceleration or lugging modes.

END OF 60.4202 REQUIREMENTS

- (c) [NA NOT FIRE PUMP ENGINES]
- (d) [NA UNITS(S) < 30 L/CYL]
- (e) [NA DOES NOT CONDUCT PERFORMANCE TESTS IN USE]
- (f) [NA NOT MODIFIED/RECONSRUCTED]

[71 FR 39172, July 11, 2006, as amended at 76 FR 37969, June 28, 2011]

§ 60.4206 How long must I meet the emission standards if I am an owner or operator of a stationary CI internal combustion engine?

Owners and operators of stationary CI ICE must operate and maintain stationary CI ICE that achieve the emission standards as required in §§ 60.4204 and 60.4205 over the entire life of the engine.

[76 FR 37969, June 28, 2011]

Fuel Requirements for Owners and Operators

- § 60.4207 What fuel requirements must I meet if I am an owner or operator of a stationary CI internal combustion engine subject to this subpart?
- (a) Beginning October 1, 2007, owners and operators of stationary CI ICE subject to this subpart that use diesel fuel must use diesel fuel that meets the requirements of 40 CFR 80.510(a).
- (b) Beginning October 1, 2010, owners and operators of stationary CI ICE subject to this subpart with a displacement of less than 30 liters per cylinder that use diesel fuel must use diesel fuel that meets the requirements of 40 CFR 80.510(b) for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to October 1, 2010, may be used until depleted.
- (c) [Reserved]
- (d) Beginning June 1, 2012, owners and operators of stationary CI ICE subject to this subpart with a displacement of greater than or equal to 30 liters per cylinder are no longer subject to the requirements of paragraph (a) of this section, and must use fuel that meets a maximum per-gallon sulfur content of 1,000 parts per million (ppm).
- (e) [NA NO NATIONAL SECURITY EXEMPTION]

[71 FR 39172, July 11, 2006, as amended at 76 FR 37969, June 28, 2011; 78 FR 6695, Jan. 30, 2013]

Other Requirements for Owners and Operators

- § 60.4208 What is the deadline for importing or installing stationary CI ICE produced in previous model years?
- (a) After December 31, 2008, owners and operators may not install stationary CI ICE (excluding fire pump engines) that do not meet the applicable requirements for 2007 model year engines.
- (b) [NA UNIT(S) > 25 HP AND NOT FIRE PUMP ENGINES]
- (c) (g) [NA UNIT(S) ARE EMERGENCY]



(h) [NA - IMPORTATION NOT RELEVANT IN THIS CASE]

(i) The requirements of this section do not apply to owners or operators of stationary CI ICE that have been modified, reconstructed, and do not apply to engines that were removed from one existing location and reinstalled at a new location.

[71 FR 39172, July 11, 2006, as amended at 76 FR 37969, June 28, 2011]

§ 60.4209 What are the monitoring requirements if I am an owner or operator of a stationary CI internal combustion engine?

If you are an owner or operator, you must meet the monitoring requirements of this section. In addition, you must also meet the monitoring requirements specified in § 60.4211.

- (a) If you are an owner or operator of an emergency stationary CI internal combustion engine that does not meet the standards applicable to non-emergency engines, you must install a non-resettable hour meter prior to startup of the engine.
- (b) If you are an owner or operator of a stationary CI internal combustion engine equipped with a diesel particulate filter to comply with the emission standards in § 60.4204, the diesel particulate filter must be installed with a backpressure monitor that notifies the owner or operator when the high backpressure limit of the engine is approached.

[71 FR 39172, July 11, 2006, as amended at 76 FR 37969, June 28, 2011]

Compliance Requirements

- § 60.4211 What are my compliance requirements if I am an owner or operator of a stationary CI internal combustion engine?
- (a) If you are an owner or operator and must comply with the emission standards specified in this subpart, you must do all of the following, except as permitted under paragraph (g) of this section:
- (1) Operate and maintain the stationary CI internal combustion engine and control device according to the manufacturer's emission-related written instructions;
- (2) Change only those emission-related settings that are permitted by the manufacturer; and
- (3) Meet the requirements of 40 CFR parts 89, 94 and/or 1068, as they apply to you.
- (b) If you are an owner or operator of a pre-2007 model year stationary CI internal combustion engine and must comply with the emission standards specified in §§ 60.4204(a) or 60.4205(a), or if you are an owner or operator of a CI fire pump engine that is manufactured prior to the model years in table 3 to this subpart and must comply with the emission standards specified in § 60.4205(c), you must demonstrate compliance according to one of the methods specified in paragraphs (b)(1) through (5) of this section. [THIS APPLIES TO 2006 KOHLER UNIT]
- (1) [NA USES OPTION (3)]
- (2) [NA USES OPTION (3)]
- (3) Keeping records of engine manufacturer data indicating compliance with the standards.
- (4) [NA USES OPTION (3)]
- (5) [NA USES OPTION 3]
- (c) If you are an owner or operator of a 2007 model year and later stationary CI internal combustion engine and must comply with the emission standards specified in § 60.4204(b) or § 60.4205(b), or if you are an owner or operator of a CI fire pump engine that is manufactured during or after the model year that applies to your fire pump engine power rating in table 3 to this subpart and must comply with the emission standards specified in § 60.4205(c), you must comply by purchasing an



engine certified to the emission standards in § 60.4204(b), or § 60.4205(b) or (c), as applicable, for the same model year and maximum (or in the case of fire pumps, NFPA nameplate) engine power. The engine must be installed and configured according to the manufacturer's emission-related specifications, except as permitted in paragraph (g) of this section. [THE THREE NEWER SUBPART 4I GENERATORS HAVE LABELS/DOCUMENTATION INDICATING COMPLIANCE WITH EPA ENGINE REQUIREMENTS]

- (d) [NA UNITS NOT SUBJECT TO § 60.4204(c) or § 60.4205(d)]
- (e) [NA NOT MODIFIED/RECONSRUCTED]
- (f) If you own or operate an emergency stationary ICE, you must operate the emergency stationary ICE according to the requirements in paragraphs (f)(1) through (3) of this section. In order for the engine to be considered an emergency stationary ICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (3) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (3) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.
- (1) There is no time limit on the use of emergency stationary ICE in emergency situations.
- (2) You may operate your emergency stationary ICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraph (f)(3) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).
- (i) Emergency stationary ICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency ICE beyond 100 hours per calendar year.
- (ii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (iii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (3) Emergency stationary ICE may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraph (f)(3)(i) of this section, the 50 hours per calendar year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.
- (i) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:
- (A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator;
- (B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.
- (C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.
- (D) The power is provided only to the facility itself or to support the local transmission and distribution system.
- (E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local



balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.

(ii) [Reserved]

28-05004

- (g) If you do not install, configure, operate, and maintain your engine and control device according to the manufacturer's emission-related written instructions, or you change emission-related settings in a way that is not permitted by the manufacturer, you must demonstrate compliance as follows:
- (1) [NA UNIT(S) > 100 HP]
- (2) If you are an owner or operator of a stationary CI internal combustion engine greater than or equal to 100 HP and less than or equal to 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test to demonstrate compliance with the applicable emission standards within 1 year of startup, or within 1 year after an engine and control device is no longer installed, configured, operated, and maintained in accordance with the manufacturer's emission-related written instructions, or within 1 year after you change emission-related settings in a way that is not permitted by the manufacturer.
- (3) If you are an owner or operator of a stationary CI internal combustion engine greater than 500 HP, you must keep a maintenance plan and records of conducted maintenance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions. In addition, you must conduct an initial performance test to demonstrate compliance with the applicable emission standards within 1 year of startup, or within 1 year after an engine and control device is no longer installed, configured, operated, and maintained in accordance with the manufacturer's emission-related written instructions, or within 1 year after you change emissionrelated settings in a way that is not permitted by the manufacturer. You must conduct subsequent performance testing every 8,760 hours of engine operation or 3 years, whichever comes first, thereafter to demonstrate compliance with the applicable emission standards.
- (h) The requirements for operators and prohibited acts specified in 40 CFR 1039.665 apply to owners or operators of stationary CI ICE equipped with AECDs for qualified emergency situations as allowed by 40 CFR 1039.665.

[71 FR 39172, July 11, 2006, as amended at 76 FR 37970, June 28, 2011; 78 FR 6695, Jan. 30, 2013; 81 FR 44219, July 7, 2016]

Testing Requirements for Owners and Operators

§ 60.4212 What test methods and other procedures must I use if I am an owner or operator of a stationary CI internal combustion engine with a displacement of less than 30 liters per cylinder?

[NA - TESTING NOT REQUIRED FOR CERTIFIED UNITS WHICH ARE NOT ALTERED PER 60.4211(g)]

[71 FR 39172, July 11, 2006, as amended at 76 FR 37971, June 28, 2011]

§ 60.4213 What test methods and other procedures must I use if I am an owner or operator of a stationary CI internal combustion engine with a displacement of greater than or equal to 30 liters per cylinder?

[NA - DISPLACEMENT < 30 L/CYL]

[71 FR 39172, July 11, 2006, as amended at 76 FR 37971, June 28, 2011]

Notification, Reports, and Records for Owners and Operators

§ 60.4214 What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary CI internal combustion engine?

(a) [NA – UNIT(S) ARE EMERGENCY]





- (b) If the stationary CI internal combustion engine is an emergency stationary internal combustion engine, the owner or operator is not required to submit an initial notification. Starting with the model years in table 5 to this subpart, if the emergency engine does not meet the standards applicable to non-emergency engines in the applicable model year, the owner or operator must keep records of the operation of the engine in emergency and non-emergency service that are recorded through the non-resettable hour meter. The owner must record the time of operation of the engine and the reason the engine was in operation during that time.
- (c) If the stationary CI internal combustion engine is equipped with a diesel particulate filter, the owner or operator must keep records of any corrective action taken after the backpressure monitor has notified the owner or operator that the high backpressure limit of the engine is approached.
- (d) If you own or operate an emergency stationary CI ICE with a maximum engine power more than 100 HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 60.4211(f)(2)(ii) and (iii) or that operates for the purposes specified in § 60.4211(f)(3)(i), you must submit an annual report according to the requirements in paragraphs (d)(1) through (3) of this section.
- (1) The report must contain the following information:
- (i) Company name and address where the engine is located.
- (ii) Date of the report and beginning and ending dates of the reporting period.
- (iii) Engine site rating and model year.
- (iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.
- (v) Hours operated for the purposes specified in § 60.4211(f)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in § 60.4211(f)(2)(ii) and (iii).
- (vi) Number of hours the engine is contractually obligated to be available for the purposes specified in § 60.4211(f)(2)(ii) and (iii).
- (vii) Hours spent for operation for the purposes specified in \S 60.4211(f)(3)(i), including the date, start time, and end time for engine operation for the purposes specified in \S 60.4211(f)(3)(i). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.
- (2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.
- (3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 60.4.
- (e) Owners or operators of stationary CI ICE equipped with AECDs pursuant to the requirements of 40 CFR 1039.665 must report the use of AECDs as required by 40 CFR 1039.665(e).

[71 FR 39172, July 11, 2006, as amended at 78 FR 6696, Jan. 30, 2013; 81 FR 44219, July 7, 2016]

General Provisions

§ 60.4218 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 60.1 through 60.19 apply to you.

Regulatory Changes





Individual sources within this source group that are subject to 40 CFR Part 60 Subpart IIII shall comply with all applicable requirements of the Subpart. 40 CFR 60.4 requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director Air Protection Division (3AP00) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

*** Permit Shield in Effect. ***



28-05004



SECTION E. Source Group Restrictions.

Group Name: 005 40 CFR PART 60 SUBPART 4J

Group Description: Emission Standards for Spark Ignition Engines

Sources included in this group

ID Name
132 SUBPART 4J EMERGENCY GENERATOR

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 60 Standards of Performance for New Stationary Sources §40 CFR 60.4230] Subpart JJJJ - Standards of Performance for Stationary Spark Ignition Internal Combustion Engines Am I subject to this subpart?

§ 60.4230 Am I subject to this subpart?

- (a) The provisions of this subpart are applicable to manufacturers, owners, and operators of stationary spark ignition (SI) internal combustion engines (ICE) as specified in paragraphs (a)(1) through (6) of this section. For the purposes of this subpart, the date that construction commences is the date the engine is ordered by the owner or operator.
- (1) [NA NOT AN ENGINE MANUFACTURER]
- (2) [NA NOT AN ENGINE MANUFACTURER]
- (3) [NA NOT AN ENGINE MANUFACTURER]
- (4) Owners and operators of stationary SI ICE that commence construction after June 12, 2006, where the stationary SI ICE are manufactured:
- (i) [NA UNIT(S) < 500 HP]
- (ii) [NA UNIT(S) < 500 HP]

DEP Auth ID: 1319398 Page 85





- (iii) on or after July 1, 2008, for engines with a maximum engine power less than 500 HP; or
- (iv) on or after January 1, 2009, for emergency engines with a maximum engine power greater than 19 KW (25 HP).
- (5) [NA ENGINES NOT MODIFIED OR RECONSTRUCTED]
- (6) The provisions of § 60.4236 of this subpart are applicable to all owners and operators of stationary SI ICE that commence construction after June 12, 2006.
- (b) [NA ENGINE TEST CELL NOT RELEVANT HERE]
- (c) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 40 CFR part 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.
- (d) [NA UNITS NOT GASOLINE-FUELED]
- (e) [NA NO NATIONAL SECURITY EXEMPTION]
- (f) [NA NOT TEMPORARY REPLACEMENT UNITS]

[73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37972, June 28, 2011]

Emission Standards for Owners and Operators

- § 60.4233 What emission standards must I meet if I am an owner or operator of a stationary SI internal combustion engine?
- (a) [NA UNITS > 25 HP]
- (b) [NA UNIT(S) DO NOT BURN GASOLINE]
- (c) [NA UNIT(S) DO NOT BURN LPG]
- (d) Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) (except gasoline and rich burn engines that use LPG) must comply with the emission standards for field testing in 40 CFR 1048.101(c) for their non-emergency stationary SI ICE and with the emission standards in Table 1 to this subpart for their emergency stationary SI ICE. Owners and operators of stationary SI ICE with a maximum engine power greater than 19 KW (25 HP) and less than 75 KW (100 HP) manufactured prior to January 1, 2011, that were certified to the standards in Table 1 to this subpart applicable to engines with a maximum engine power greater than or equal to 100 HP and less than 500 HP, may optionally choose to meet those standards.
- (e) [NA UNITS < 100 HP]
- (f) [NA UNIT(S) NOT MODIFIED OR RECONSTRUCTED]
- (g) [NA STATIONARY WELLHEAD GAS NOT USED]
- (h) Owners and operators of stationary SI ICE that are required to meet standards that reference 40 CFR 1048.101 must, if testing their engines in use, meet the standards in that section applicable to field testing, except as indicated in paragraph (e) of this section.
- [73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37973, June 28, 2011]
- § 60.4234 How long must I meet the emission standards if I am an owner or operator of a stationary SI internal combustion engine?



Owners and operators of stationary SI ICE must operate and maintain stationary SI ICE that achieve the emission standards as required in § 60.4233 over the entire life of the engine.

Other Requirements for Owners and Operators

§ 60.4235 What fuel requirements must I meet if I am an owner or operator of a stationary SI gasoline fired internal combustion engine subject to this subpart?

[NA - UNIT(S) DO NOT BURN GASOLINE]

- § 60.4236 What is the deadline for importing or installing stationary SI ICE produced in previous model years?
- (a) After July 1, 2010, owners and operators may not install stationary SI ICE with a maximum engine power of less than 500 HP that do not meet the applicable requirements in § 60.4233.
- (b) [NA UNITS < 500 HP]
- (c) For emergency stationary SI ICE with a maximum engine power of greater than 19 KW (25 HP), owners and operators may not install engines that do not meet the applicable requirements in § 60.4233 after January 1, 2011.
- (d) [NA IMPORTATION NOT RELEVANT IN THIS CASE]
- (e) The requirements of this section do not apply to owners and operators of stationary SI ICE that have been modified or reconstructed, and they do not apply to engines that were removed from one existing location and reinstalled at a new location.
- § 60.4237 What are the monitoring requirements if I am an owner or operator of an emergency stationary SI internal combustion engine?
- (a) [NA UNIT(S) < 500 HP]
- (b) NA UNIT(S) < 130 HP]
- (c) [NA UNIT(S) < 130 HP]

Compliance Requirements for Owners and Operators

- § 60.4243 What are my compliance requirements if I am an owner or operator of a stationary SI internal combustion engine?
- (a) [THIS SECTION APPLIES, AS REFERENCED BACK FROM 60.4243(b)(1)] If you are an owner or operator of a stationary SI internal combustion engine that is manufactured after July 1, 2008, and must comply with the emission standards specified in § 60.4233(a) through (c), you must comply by purchasing an engine certified to the emission standards in § 60.4231(a) through (c), as applicable, for the same engine class and maximum engine power. In addition, you must meet one of the requirements specified in (a)(1) and (2) of this section.
- (1) If you operate and maintain the certified stationary SI internal combustion engine and control device according to the manufacturer's emission-related written instructions, you must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required if you are an owner or operator. You must also meet the requirements as specified in 40 CFR part 1068, subparts A through D, as they apply to you. If you adjust engine settings according to and consistent with the manufacturer's instructions, your stationary SI internal combustion engine will not be considered out of compliance.
- (2) If you do not operate and maintain the certified stationary SI internal combustion engine and control device according to the manufacturer's emission-related written instructions, your engine will be considered a non-certified engine, and you must demonstrate compliance according to (a)(2)(i) through (iii) of this section, as appropriate.



- (i) If you are an owner or operator of a stationary SI internal combustion engine less than 100 HP, you must keep a maintenance plan and records of conducted maintenance to demonstrate compliance and must, to the extent practicable, maintain and operate the engine in a manner consistent with good air pollution control practice for minimizing emissions, but no performance testing is required if you are an owner or operator.
- (ii) [NA UNIT(S) < 100 HP]
- (iii) [NA UNIT(S) < 500 HP]
- (b) If you are an owner or operator of a stationary SI internal combustion engine and must comply with the emission standards specified in § 60.4233(d) or (e), you must demonstrate compliance according to one of the methods specified in paragraphs (b)(1) and (2) of this section.
- (1) Purchasing an engine certified according to procedures specified in this subpart, for the same model year and demonstrating compliance according to one of the methods specified in paragraph (a) of this section. [WEST GUARD GENERATOR HAS LABEL INDICATING EPA COMPLIANCE]
- (2) [NA CERTIFIED ENGINE(S) PURCHASED]
- (c) [NA UNIT(S) NOT MODIFIED OR RECONSTRUCTED]
- (d) If you own or operate an emergency stationary ICE, you must operate the emergency stationary ICE according to the requirements in paragraphs (d)(1) through (3) of this section. In order for the engine to be considered an emergency stationary ICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (d)(1) through (3) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (d)(1) through (3) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.
- (1) There is no time limit on the use of emergency stationary ICE in emergency situations.
- (2) You may operate your emergency stationary ICE for any combination of the purposes specified in paragraphs (d)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraph (d)(3) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (d)(2).
- (i) Emergency stationary ICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency ICE beyond 100 hours per calendar year.
- (ii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (iii) [VACATED PER COURT ORDER AS OF 5/2/16]
- (3) Emergency stationary ICE may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (d)(2) of this section. Except as provided in paragraph (d)(3)(i) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.
- (i) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:

GROVE US LLC/SHADY GROVE PLT

SECTION E. Source Group Restrictions.

28-05004

- (A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator;
- (B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.
- (C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.
- (D) The power is provided only to the facility itself or to support the local transmission and distribution system.
- (E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine owner or operator.
- (ii) [Reserved]
- (e) Owners and operators of stationary SI natural gas fired engines may operate their engines using propane for a maximum of 100 hours per year as an alternative fuel solely during emergency operations, but must keep records of such use. If propane is used for more than 100 hours per year in an engine that is not certified to the emission standards when using propane, the owners and operators are required to conduct a performance test to demonstrate compliance with the emission standards of § 60.4233.
- (f) If you are an owner or operator of a stationary SI internal combustion engine that is less than or equal to 500 HP and you purchase a non-certified engine or you do not operate and maintain your certified stationary SI internal combustion engine and control device according to the manufacturer's written emission-related instructions, you are required to perform initial performance testing as indicated in this section, but you are not required to conduct subsequent performance testing unless the stationary engine is rebuilt or undergoes major repair or maintenance. A rebuilt stationary SI ICE means an engine that has been rebuilt as that term is defined in 40 CFR 94.11(a).
- (g) [NA CATALYSTS NOT EMPLOYED]
- (h) [NA UNIT(S) < 500 HP]
- (i) [NA UNIT(S) NOT MODIFIED OR RECONSTRUCTED]

[73 FR 3591, Jan. 18, 2008, as amended at 76 FR 37974, June 28, 2011; 78 FR 6697, Jan. 30, 2013]

Testing Requirements for Owners and Operators

§ 60.4244 What test methods and other procedures must I use if I am an owner or operator of a stationary SI internal combustion engine?

[NA - TESTING NOT REQUIRED FOR CERTIFIED UNITS WHICH ARE NOT ALTERED PER 60.4243(f)]

Notification, Reports, and Records for Owners and Operators

§ 60.4245 What are my notification, reporting, and recordkeeping requirements if I am an owner or operator of a stationary SI internal combustion engine?

Owners or operators of stationary SI ICE must meet the following notification, reporting and recordkeeping requirements.

- (a) Owners and operators of all stationary SI ICE must keep records of the information in paragraphs (a)(1) through (4) of this section.
- (1) All notifications submitted to comply with this subpart and all documentation supporting any notification.

DEP Auth ID: 1319398 Page 89



- (2) Maintenance conducted on the engine.
- (3) If the stationary SI internal combustion engine is a certified engine, documentation from the manufacturer that the engine is certified to meet the emission standards and information as required in 40 CFR parts 90, 1048, 1054, and 1060, as applicable.
- (4) If the stationary SI internal combustion engine is not a certified engine or is a certified engine operating in a non-certified manner and subject to § 60.4243(a)(2), documentation that the engine meets the emission standards.
- (b) For all stationary SI emergency ICE greater than or equal to 500 HP manufactured on or after July 1, 2010, that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. For all stationary SI emergency ICE greater than or equal to 130 HP and less than 500 HP manufactured on or after July 1, 2011 that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. For all stationary SI emergency ICE greater than 25 HP and less than 130 HP manufactured on or after July 1, 2008, that do not meet the standards applicable to non-emergency engines, the owner or operator of must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation.
- (c) [NA UNIT(S) < 500 HP]
- (d) [NA TESTING NOT REQUIRED FOR CERTIFIED UNITS WHICH ARE NOT ALTERED PER 60.4243(f)]
- (e) If you own or operate an emergency stationary SI ICE with a maximum engine power more than 100 HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 60.4243(d)(2)(ii) and (iii) or that operates for the purposes specified in § 60.4243(d)(3)(i), you must submit an annual report according to the requirements in paragraphs (e)(1) through (3) of this section.
- (1) The report must contain the following information:
- (i) Company name and address where the engine is located.
- (ii) Date of the report and beginning and ending dates of the reporting period.
- (iii) Engine site rating and model year.
- (iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.
- (v) Hours operated for the purposes specified in § 60.4243(d)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in § 60.4243(d)(2)(ii) and (iii).
- (vi) Number of hours the engine is contractually obligated to be available for the purposes specified in § 60.4243(d)(2)(ii) and (iii).
- (vii) Hours spent for operation for the purposes specified in \S 60.4243(d)(3)(i), including the date, start time, and end time for engine operation for the purposes specified in \S 60.4243(d)(3)(i). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.
- (2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.
- (3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 60.4.

28-05004



SECTION E. **Source Group Restrictions.**

[73 FR 3591, Jan. 18, 2008, as amended at 73 FR 59177, Oct. 8, 2008; 78 FR 6697, Jan. 30, 2013; 81 FR 59809, Aug. 30, 2016]

General Provisions

§ 60.4246 What parts of the General Provisions apply to me?

Table 3 to this subpart shows which parts of the General Provisions in §§ 60.1 through 60.19 apply to you.

Regulatory Changes

Individual sources within this source group that are subject to 40 CFR Part 60 Subpart JJJJ shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director Air Protection Division (3AP00) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

*** Permit Shield in Effect. ***



28-05004



SECTION E. Source Group Restrictions.

Group Name: 006

Group Description: RACT 2 Presumptive Requirements

Sources included in this group

ID	Name
130	SUBPART 4Z EMERGENCY GENERATORS
131	SUBPART 4I EMERGENCY GENERATORS
132	SUBPART 4J EMERGENCY GENERATOR

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.97]

Presumptive RACT requirements, RACT emission limitations and petition for alternative compliance schedule.

[Authority for this permit condition is derived from 25 Pa. Code Section 129.97(c)(8)]

Beginning January 1, 2017, the permittee shall operate each engine less than 500 hours in any 12-month rolling period.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

002 [25 Pa. Code §129.97]

Presumptive RACT requirements, RACT emission limitations and petition for alternative compliance schedule.

[Authority for this permit condition is derived from 25 Pa. Code Section 129.97(c)(8)]

The permittee shall monitor and record the number of hours each emergency engine operates within any 12-month rolling period.

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §129.97]

Presumptive RACT requirements, RACT emission limitations and petition for alternative compliance schedule.

[Authority for this permit condition is derived from 25 Pa. Code Section 129.97(c)(8)]

The permittee shall operate and maintain each emergency generator in accordance with the manufacturer's specifications and with good operating practices.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).





*** Permit Shield in Effect. ***







Group Name: 007

Group Description: 25 Pa. Code, Section 129.52d Requirements

Sources included in this group

ID	Name
111	E. PAINT BOOTH-SUB ASSBLY (BLDG 20)
112	W. PAINT BOOTH SUB ASSBLY (BLDG 20)
113	W. PAINT BOOTH-PAINT SHOP (BLDG 16)
114	E. PAINT BOOTH-PAINT SHOP (BLDG 16)
115-1	FINAL 3 PRIME BOOTH
115-2	FINAL 3 TOPCOAT BOOTH
117	PAINT BOOTH-FINAL 4 BLDG
119A	E. PAINT BOOTH-FINAL 1 BLDG
121	N. PAINT BOOTH-PAINT SHOP (BLDG 16)
123	R&D SPRAY BOOTH
124-1	CRAWLER STRUCTURES PRIME BOOTH
124-2	CRAWLER STRUCTURES TOPCOAT BOOTH
199	CLEAN UP SOLVENTS

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

§ 129.52d. Control of VOC emissions from miscellaneous metal parts surface coating processes, miscellaneous plastic parts surface coating processes and pleasure craft surface coatings.

- (a) Applicability.
- (1) This section applies to the owner and operator of a miscellaneous metal part surface coating process or miscellaneous



plastic part surface coating process, or both, if the total actual VOC emissions from all miscellaneous metal part coating units and miscellaneous plastic part coating units, including related cleaning activities, at the facility are equal to or greater than 2.7 tons per 12-month rolling period, before consideration of controls.

- (2) This section applies, as specified, to the owner and operator of a miscellaneous metal part surface coating process or miscellaneous plastic part surface coating process, or both, if the total actual VOC emissions from all miscellaneous metal part coating units and miscellaneous plastic part coating units, including related cleaning activities, at the facility are below 2.7 tons per 12-month rolling period, before consideration of controls.
- (3) Compliance with the VOC emission limits and other requirements of this section assures compliance with the VOC emission limits and other requirements of § 129.52 (relating to surface coating processes) for the miscellaneous metal parts and products surface coating processes as specified in § 129.52, Table I, Category 10.
- (4) If an owner or operator elects to comply with § 129.52e (relating to control of VOC emissions from automobile and lightduty truck assembly surface coating operations and heavier vehicle coating operations) under § 129.52e(a)(2) or (3), then § 129.52e instead of this section applies to the separate coating line at the facility, or to the coating of a body or body part for a new heavier vehicle at the facility, or both, for which the election is made.
- (5) This section does not apply to an owner or operator in the use or application of the following:
- (i) Aerosol coatings that meet the requirements of 40 CFR Part 59, Subpart E (relating to National volatile organic compound emission standards for aerosol coatings).
- (ii) Aerospace coatings.
- (iii) Architectural coatings.
- (iv) Automobile refinishing coatings.
- (v) Auto and light-duty truck assembly coatings.
- (vi) Can, coil or magnet wire coatings.
- (vii) Coating applied to a test panel or coupon, or both, in research and development, quality control or performance testing activities, if records are maintained as required under subsections (e) and (f).
- (viii) Fiberglass boat manufacturing materials.
- (ix) Flat wood paneling coatings.
- (x) Large appliance coatings.
- (xi) Metal furniture coatings.
- (xii) Miscellaneous industrial adhesives.
- (xiii) Paper, film and foil coatings.
- (xiv) Shipbuilding and repair coatings.
- (xv) Wood furniture coatings.
- (b) Definitions. [INCORPORATED BY REFERENCE]
- (c) Existing RACT permit. The requirements of this section supersede the requirements of a RACT permit issued under §§ 129.91—129.95 (relating to stationary sources of NOx and VOCs) to the owner or operator of a source subject to subsection (a) prior to January 1, 2017, to control, reduce or minimize VOCs from a miscellaneous metal part or miscellaneous plastic



part surface coating process, except to the extent the RACT permit contains more stringent requirements.

- (d) Emission limitations. Beginning January 1, 2017, a person subject to subsection (a)(1) may not cause or permit the emission into the outdoor atmosphere of VOCs from a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, unless emissions of VOCs are controlled in accordance with paragraph (1), (2) or (3).
- (1) Compliant materials option. The VOC content of each miscellaneous metal part coating or each miscellaneous plastic part coating, as applied, excluding water and exempt compounds, is equal to or less than the VOC content limit for the applicable coating category specified in the applicable table of VOC content limits in Tables I—V.

Table I. VOC Content Limits for Metal Parts and Products Surface Coatings Weight of VOC per Volume of Coating, Less Water and Exempt Compounds, as Applied.

	Air Dried		Baked	
Coating Category	kg VOC/ I coating	lb VOC/ gal coating	kg VOC/ I coating	lb VOC/ gal coating
General One-component	0.34	2.8	0.28	2.3
General Multicomponent	0.34	2.8	0.28	2.3
Extreme Performance	0.42	3.5	0.36	3.0
Touch-up and Repair	0.42	3.5	0.36	3.0

- (2)-(3) [NA NO VOC CONTROL DEVICE]
- (4) Least restrictive VOC limit. If more than one VOC content limit or VOC emission rate limit applies to a specific coating, then the least restrictive VOC content limit or VOC emission rate limit applies.
- (5) Coatings not listed in Table I, II, VI or VII. For a miscellaneous metal part or miscellaneous plastic part coating that does not meet the coating categories listed in Table I, II, VI or VII, the VOC content limit or VOC emission rate limit shall be determined by classifying the coating as a general one component coating or general multicomponent coating. The corresponding general one component coating or general multicomponent coating limit applies.
- (6) Coatings not listed in Table IV or IX. [NA FACILITY DOES NOT USE PLEASURE CRAFT COATINGS]
- (e) Compliance and monitoring requirements.
- (1) All owners and operators. Regardless of the facility's VOC emissions, the owner or operator of a miscellaneous metal part surface coating process or miscellaneous plastic part surface coating process, or both, subject to subsection (a)(1) or (2), shall comply with this section as specified throughout this section. For an owner or operator subject only to subsection (a)(2), the compliance requirements are the recordkeeping requirements in subsection (f)(2).
- (2) [NA NO VOC CONTROL DEVICE]
- (f) Recordkeeping and reporting requirements.
- (1) The owner or operator of a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, subject to subsection (a)(1) shall maintain monthly records sufficient to demonstrate compliance with this section. The records must include the following information:
- (i) The following parameters for each coating, thinner, component and cleaning solvent as supplied:
- (A) Name and identification number of the coating, thinner, other component or cleaning solvent.
- (B) Volume used.




(C) Mix ratio.

28-05004

- (D) Density or specific gravity.
- (E) Weight percent of total volatiles, water, solids and exempt solvents.
- (F) Volume percent of total volatiles, water and exempt solvents for the applicable table of limits in Tables I—V.
- (G) Volume percent of solids for the applicable table of limits in Tables VI—IX.
- (ii) The VOC content of each coating, thinner, other component and cleaning solvent as supplied.
- (iii) The VOC content of each as applied coating or cleaning solvent.
- (iv) The calculations performed for each applicable requirement under subsections (d) and (e).
- (v) The information required in a plan approval issued under subsection (e)(2).
- (2) An owner or operator subject to subsection (a)(2), or otherwise claiming an exemption or exception in this section, shall maintain records sufficient to verify the applicability of subsection (a)(2), the exemption or exception. Records maintained for compliance demonstrations may include purchase, use, production and other records.
- (3) The records shall be maintained onsite for 2 years, unless a longer period is required by an order, plan approval or operating permit issued under Chapter 127 (relating to construction, modification, reactivation and operation of sources).
- (4) The records shall be submitted to the Department in an acceptable format upon receipt of a written request from the Department.
- (g) Coating application methods. A person subject to subsection (a)(1) may not cause or permit the emission into the outdoor atmosphere of VOCs from a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, unless the coatings are applied using one or more of the following coating application methods:
- (1) Electrostatic coating.
- (2) Flow coating.
- (3) Dip coating, including electrodeposition.
- (4) Roll coating.
- (5) High volume-low pressure (HVLP) spray coating.
- (6) Airless spray coating.
- (7) Air-assisted airless spray coating.
- (8) Other coating application method if approved in writing by the Department prior to use.
- (i) The coating application method must be capable of achieving a transfer efficiency equivalent to or better than that achieved by HVLP spray coating.
- (ii) The owner or operator shall submit the request for approval to the Department in writing.
- (h) Exempt coatings and exempt coating unit operations.
- (1) The requirements of subsections (d) and (g) do not apply to the application of the following coatings to a metal part:

DEP Auth ID: 1319398 Page 97






CTION F	Source Group Restrictions		
28-05	5004	GROVE US LLC/SHADY GROVE PLT	P

- (i) Stencil coating.
- (ii) Safety-indicating coating.
- (iii) Solid-film lubricant.
- (iv) Electric-insulating and thermal-conducting coating.
- (v) Magnetic data storage disk coating.
- (vi) Plastic extruded onto metal parts to form a coating.
- (vii) Powder coating.
- (2) The requirements of subsection (d) do not apply to the application of the following coatings to a plastic part:
- (i) Touch-up and repair coating.
- (ii) Stencil coating applied on a clear or transparent substrate.
- (iii) Clear or translucent coating.
- (iv) Coating applied at a paint manufacturing facility while conducting performance tests on coating.
- (v) Reflective coating applied to highway cones.
- (vi) Mask coating, if the coating is less than 0.5 millimeter thick (dried) and the area coated is less than 25 square inches.
- (vii) EMI/RFI shielding coating.
- (viii) Heparin-benzalkonium chloride (HBAC)-con-taining coating applied to a medical device, provided that the total usage of HBAC-containing coatings does not exceed 100 gallons in 1 calendar year at the facility.
- (ix) Powder coating.
- (x) An individual coating category used in an amount less than 50 gallons in 1 calendar year provided that the total usage of all of the coatings, combined, does not exceed 200 gallons per year at the facility. This exception applies only if substitute compliant coatings are not available.
- (3) The requirements of subsection (d) do not apply to the application of the following coatings to automotive-transportation and business machine parts:
- (i) Texture coat.
- (ii) Vacuum-metalizing coating.
- (iii) Gloss reducer.
- (iv) Texture topcoat.
- (v) Adhesion primer.
- (vi) Electrostatic prep coat.
- (vii) Resist coating.
- (viii) Stencil coating.

DEP Auth ID: 1319398 Page 98





(ix) Powder coating.

28-05004

- (4) The requirements of subsection (g) do not apply to the following activities:
- (i) Application of a touch-up coating, repair coating or textured finish to a metal part.
- (ii) Application of a powder coating to the following:
- (A) Plastic part.
- (B) Automotive-transportation plastic part.
- (C) Business machine plastic part.
- (iii) Airbrush application of coating to a metal part or plastic part using no more than 5 gallons of coating per year.
- (iv) Use of an add-on air pollution control device to comply with subsection (d).
- (v) Application of extreme high-gloss coating in a pleasure craft surface coating operation.
- (i) Work practice requirements for coating-related activities. The owner or operator of a miscellaneous metal part coating unit or miscellaneous plastic part coating unit, or both, subject to subsection (a)(1) shall comply with the following work practices for coating-related activities:
- (1) Store all VOC-containing coatings, thinners or coating-related waste materials in closed containers.
- (2) Ensure that mixing and storage containers used for VOC-containing coatings, thinners or coating-related waste materials are kept closed at all times, except when depositing or removing these coatings, thinners or waste materials.
- (3) Minimize spills of VOC-containing coatings, thinners or coating-related waste materials and clean up spills immediately.
- (4) Convey VOC-containing coatings, thinners or coating-related waste materials from one location to another in closed containers or pipes.
- (j) Work practice requirements for cleaning materials. The owner or operator of a miscellaneous metal part coating unit or miscellaneous plastic part coating unit subject to subsection (a)(1) shall comply with the following work practices for cleaning materials:
- (1) Store all VOC-containing cleaning materials and used shop towels in closed containers.
- (2) Ensure that mixing vessels and storage containers used for VOC-containing cleaning materials are kept closed at all times except when depositing or removing these materials.
- (3) Minimize spills of VOC-containing cleaning materials and clean up spills immediately.
- (4) Convey VOC-containing cleaning materials from one location to another in closed containers or pipes.
- (5) Minimize VOC emissions from cleaning of application, storage, mixing or conveying equipment by ensuring that equipment cleaning is performed without atomizing the cleaning solvent and all spent solvent is captured in closed containers.
- (k) Measurements and calculations. To determine the properties of a coating or component used in a miscellaneous metal parts surface coating process or miscellaneous plastic parts surface coating process, measurements and calculations shall be performed according to one or more of the following:
- (1) EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, found at 40 CFR Part 60, Subpart D, Appendix A, including updates and revisions.







- (2) Manufacturer's formulation data.
- (3) Sampling and testing done in accordance with the procedures and test methods specified in Chapter 139.
- (4) Other test method demonstrated to provide results that are acceptable for purposes of determining compliance with this section if prior approval is obtained in writing from the Department.
- (5) [NA NO VOC CONTROL DEVICE]
- (6) EPA calculations information in the following:
- (i) A Guideline for Surface Coating Calculations, EPA-340/1-86-016, including updates and revisions.
- (ii) Procedures for Certifying Quantity of Volatile Organic Compounds Emitted by Paint, Ink, and Other Coatings, EPA-450/3-84-019, including updates and revisions.

*** Permit Shield in Effect. ***



28-05004



SECTION E. Source Group Restrictions.

Group Name: 008

Group Description: RACT 2 CASE-BY-CASE

Sources included in this group

ID Name
199 CLEAN UP SOLVENTS

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

001 [25 Pa. Code §129.99]

Alternative RACT proposal and petition for alternative compliance schedule.

[Authority for this permit condition is derived from 25 Pa. Code Section 129.99]

The permittee shall comply with the following work practices for cleaning materials:

- a. Store all VOC-containing cleaning materials and used shop towels in closed containers.
- b. Ensure that mixing vessels and storage containers used for VOC-containing cleaning materials are kept closed at all times except when depositing or removing these materials.
- c. Minimize spills of VOC-containing cleaning materials and clean-up spills immediately.
- d. Convey VOC-containing cleaning materials from one location to another in closed containers or pipes.
- e. Minimize VOC emissions from cleaning of application, storage, mixing or conveying equipment by ensuring that equipment cleaning is performed without atomizing the cleaning solvent and all spent solvent is captured in closed containers.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (Title V General Requirements).

*** Permit Shield in Effect. ***

DEP Auth ID: 1319398 Page 101



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this permit.


DEP Auth ID: 1319398



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

DEP Auth ID: 1319398 Page 103





SECTION H. Miscellaneous.

This operating permit includes sources and applicable conditions covered in the previous operating permit and supersedes that permit.

The Source ID 130 Subpart 4Z emergency generators includes the following:

Generac 20 KW, natural gas, installed 2001 at Small Welding/Fabrication

Onan Model 7.5JB, 7.5 KW, natural gas, installed 1973 at CAC/Final 4

Onan Model 30.0EK, 3 KW, natural gas, installed 1974 at Boom Factory Final 3

Onan Model 7.5 JB, 7.5 KW, natural gas, installed 1972 at Cylinder Building

Onan Model 7.5 JB, 7.5 KW, natural gas, installed 1981 at Paint Shop

Onan Model 7.5 JB, 7.5 KW, natural gas, installed 1970 at Final 1

Onan Model KTA50-G1, 1080 KW, diesel, installed 1989 at Main Admin

Onan Model 5CCK, 5 KW, natural gas, installed in 1975 at Small Crane

Onan Model 5CCK, 5 KW, natural gas, installed in 1976 at Building 14

Kohler Model 35 RZG, 35 KW, natural gas, installed in 2007 at Large Weld Fab

Dyna Tech Model FB 21-501, 8 KW, natural gas, mfg. 2002,installed in 2011 at Plant Engineering

The Source ID 131 Subpart 4I emergency generators with compression ignition (CI) engines includes the following:

Kohler Model 600REOZM, 670 KW, diesel, installed 2006 at Sales/Marketing Kohler Model 400 REOZDD, 400 KW, diesel, installed 2008 at Crane Care Kohler Model 200REOZJF, 200 KW, diesel, installed 2014 at Main Admin Computer Room Kohler Model 600REOZVB, 600 KW, diesel, installed 2014 at Main Admin

The Source ID 132 Subpart 4J emergency generators with spark ignition (SI) engines includes the following:

Kohler Model 20 RESA, 20 KW, natural gas, installed 2014 at West Guard

The Source ID 200 MACT Subpart 6X activities include the following:

Five dry metal abrasive units (Four existing, One New) Six (6) robotic welders (Existing) Portable welders (~200) (Existing)

The following sources and activities are not subject to any specific work practice standards, testing, monitoring, recordkeeping or reporting requirements:

- 1. Air conditioning and ventilation systems
- 2. Office equipment (copiers, printers, FAX, etc.)
- 3. Janitorial activities
- 4. Plant maintenance (painting, welding, paving, cleaning, etc.)
- 5. Mobile sources (cranes, trucks, forklifts, snowblowers, etc.)
- 6. Touch-up painting
- 7. Surface preparation (3-stage washer, zinc phosphate process, phosphoric acid dip and rust preventive dip)
- 9. Machining, plasma cutting, water tables and deburr grinding
- 10. Kohler Model 50 RZGB emergency generator, 50 KW, natural gas, installed at Final 2 in 2008 (engine not subject to NSPS Subpart 4J or MACT Subpart 4Z)

In November 2016, the company submitted a minor modification application to incorporate RACT II requirements for Sources 199, 130, 131 and 132. As requested by the Facility, Source 106- Paint Booth- Cylinder Bldg and Source 116- Paint Booth- Hemmit Bldg were removed from the permit and the Patrick Cassner was added as the responsible official.



***** End of Report *****