


RURA FIELD  
EROSION & SEDIMENT CONTROL PLANS  
HOMER CITY, PA  
CENTER TOWNSHIP & BLACK LICK TOWNSHIP, INDIANA COUNTY

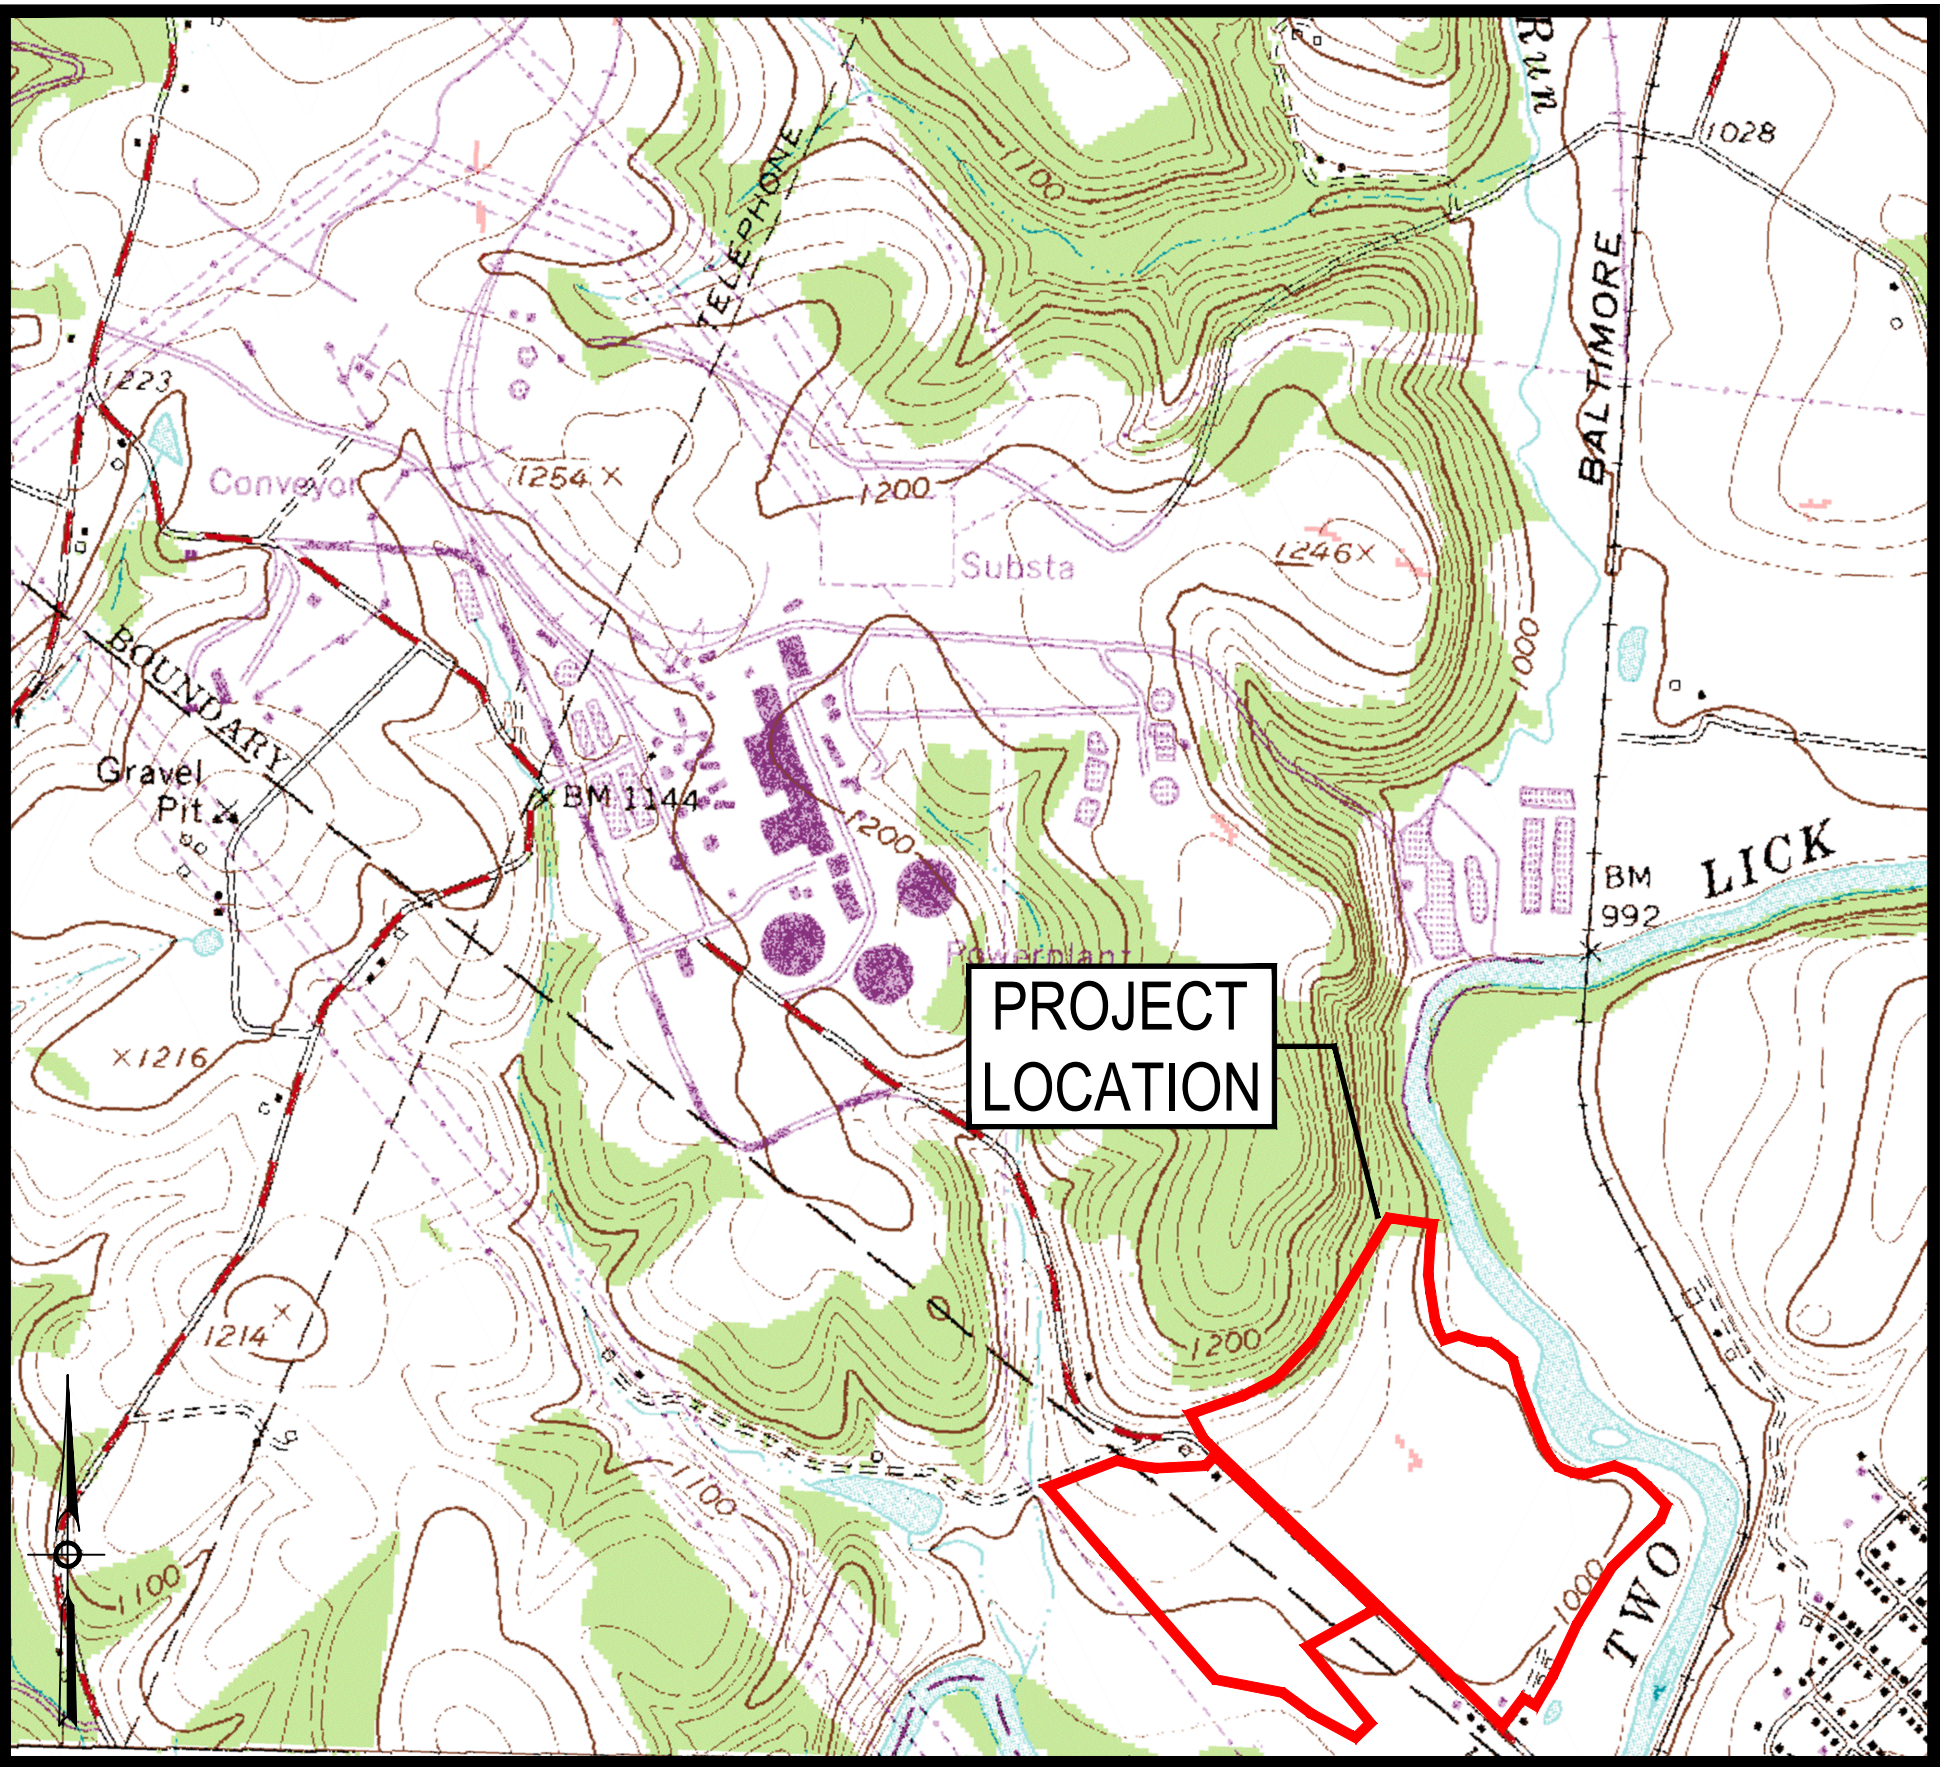

LOCATION MAP  
INDIANA QUADRANGLE, 7.5-MINUTE SERIES  
1" = 400'

MARCH 31, 2025

SHEET INDEX		
EROSION AND SEDIMENT CONTROL DRAWINGS		
NO.	TITLE	REVISION
G-001-1001	COVER SHEET	A
G-001-1002	GENERAL NOTES	A
C-744-1001	OVERALL EXISTING CONDITIONS PLAN	A
C-744-3001	OVERALL EROSION & SEDIMENT CONTROL PLAN - PHASE 1	A
C-744-3002	EROSION & SEDIMENT CONTROL PLANS - PHASE 1 (4 SHEETS)	A
C-744-3003	OVERALL EROSION & SEDIMENT CONTROL PLAN - PHASE 2	A
C-744-3004	EROSION & SEDIMENT CONTROL PLANS - PHASE 2 (4 SHEETS)	A
C-744-3201	SECTIONS	A
C-744-3202	CHANNEL PROFILES	A
C-744-3501	EROSION & SEDIMENT CONTROL NOTES	A
C-744-3502	EROSION & SEDIMENT CONTROL DETAILS	A
C-744-3503	EROSION & SEDIMENT CONTROL DETAILS	A
C-744-3504	EROSION & SEDIMENT CONTROL DETAILS	A
C-744-3505	EROSION & SEDIMENT CONTROL DETAILS	A

Michael Baker  
INTERNATIONAL

MICHAEL BAKER  
INTERNATIONAL, LLC  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: GENERAL  
TITLE: COVER SHEET

PROJECT NAME: RURA FIELDRURA FEILD

NTS	RURA1	G-001-1001	1	A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET	REV



A

B

C

D

E

F

G

H

GENERAL NOTES:

1. UTILITIES. THE CONTRACTOR IS HEREBY INFORMED THAT THE LOCATION OF UTILITIES AS SHOWN ON THE CONTRACT DRAWINGS IS BASED UPON AVAILABLE INFORMATION ONLY. NO GUARANTEE OR ASSURANCE IS GIVEN BY THE OWNER OR ENGINEER AS TO THEIR ACCURACY, COMPLETENESS OR VALIDITY.
- THE CONTRACTOR IS REQUIRED TO VERIFY THE EXISTENCE AND LOCATION OF UTILITIES IN THE WORK AREA BY CONTACTING BOTH THE PENNSYLVANIA ONE-CALL SYSTEM AT 1-800-242-1776 AND THE BELOW LISTED UTILITY COMPANIES KNOWN TO HAVE FACILITIES LOCATED WITHIN THE PROJECT WORK AREA.
2. INSPECTIONS. THIS PROJECT IS SUBJECT TO INSPECTIONS BY THE OWNER, THE ENGINEER, THE PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, AND OTHERS THE OWNER MAY DESIGNATE. THE CONTRACTOR WILL COOPERATE IN ACCOMMODATING THESE INSPECTIONS BY PERMITTING ACCESS TO THE WORK SITE AND ACCESS TO PROJECT RECORDS AND FILES.
3. PERMITS. THE CONTRACTOR IS REQUIRED TO OBTAIN ALL PERMITS FOR: STREET OPENINGS, UTILITY RELOCATIONS, TEMPORARY UTILITIES, SANITARY FACILITIES, HAZARDOUS AND NON-HAZARDOUS WASTE DISPOSAL, STREET USE, OVERSIZE LOADS, WATER USAGE AND ANY OTHER PERMITS NECESSARY FOR THE WORK DESCRIBED HEREIN AND PAY THE FEES THEREOF.
4. DISPOSAL AREA. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING A LEGAL OFF-SITE DISPOSAL AREA AT AN NPDES APPROVED FACILITY FOR ALL DEBRIS AND WASTE MATERIALS. THIS SHALL BE PERFORMED AT NO ADDITIONAL PAYMENT.
5. CONSTRUCTION LIMITS. THE CONTRACTOR SHALL CONFINE MATERIALS, EQUIPMENT, AND WORK ACTIVITIES TO WITHIN DESIGNATED CONSTRUCTION LIMITS AND PUBLIC RIGHTS-OF-WAY. THE CONTRACTOR IS FULLY RESPONSIBLE FOR ALL WORK AND DAMAGE OCCURRING OUTSIDE OF THE CONSTRUCTION LIMITS AND RIGHTS-OF-WAY AND SHALL REPAIR THE SAME TO THE SATISFACTION OF THE OWNER. CONTRACTOR SHALL COMPLETE SITE CLEANUP TO THE SATISFACTION OF THE OWNER.
6. ROAD CONSTRUCTION. WHERE PROPOSED ROAD CONSTRUCTION MEETS EXISTING PAVEMENTS, THE LINE AND GRADE OF THE PROPOSED ROAD CONSTRUCTION SHALL BE ADJUSTED AS REQUIRED TO PROVIDE A SMOOTH TRANSITION HORIZONTALLY AND VERTICALLY TO MEET THE EXISTING ROAD SECTION OR AS DIRECTED BY THE ENGINEER.
7. CONNECTION TO EXISTING FACILITIES. THE DETAILS, DIMENSIONS AND ELEVATIONS SHOWN REGARDING EXISTING FACILITIES ARE BASED ON FIELD SURVEY INFORMATION AND RECORDS PROVIDED BY FACILITY OWNERS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO THOROUGHLY VERIFY ALL RELEVANT DIMENSIONS IN THE FIELD PRIOR TO BEGINNING ANY CONSTRUCTION ACTIVITIES. THE OWNER AND ENGINEER SHALL IMMEDIATELY BE NOTIFIED OF ANY VARIATIONS FOUND WHICH MAY RESULT IN CHANGES OR ADJUSTMENTS TO THE DESIGN AS PRESENTED IN THE THE ORIGINAL CONTRACT DRAWINGS AND/OR SPECIFICATIONS. THE CONTRACTOR SHALL SUBMIT, FOR THE OWNER AND ENGINEER'S APPROVAL, A DETAILED PLAN OF ANY ADJUSTMENTS WHICH MAY BE REQUIRED AS A RESULT OF ACTUAL FIELD CONDITIONS.
8. MAINTAINING ACCESS. THE CONTRACTOR IS REQUIRED TO MAINTAIN REASONABLE ACCESS TO EXISTING RESIDENCES IN THE VICINITY OF THE SITE. AT THE END OF THE WORK DAY, THE SITE MUST BE FULLY SECURED.
9. SOIL EROSION & SEDIMENT CONTROL. THE CONTRACTOR IS REQUIRED TO MAINTAIN ALL SOIL EROSION & SEDIMENT CONTROL (SESC) DEVICES AS REQUIRED BY THE CONTRACT DOCUMENTS. ALL (SESC) DEVICES SHALL BE INSPECTED BY THE CONTRACTOR AFTER EACH RAINFALL EVENT OR EVERY 7 DAYS TO ASSURE PROPER PERFORMANCE. NO (SESC) DEVICES WILL BE REMOVED WITHOUT PRIOR WRITTEN APPROVAL OF THE GOVERNING AGENCY AND THE OWNER.
10. PROTECTION OF ADJACENT FACILITIES. THE CONTRACTOR IS REQUIRED TO PROTECT ADJACENT STRUCTURES, UTILITIES AND OTHER FACILITIES FROM DAMAGE BY PROVIDING SHEETING, SHORING, UNDERPINNING OR OTHER SUPPORT AS DEEMED NECESSARY.

LEGEND


- LIMIT OF DISTURBANCE
- UTILITY EASEMENT LINE
- PROPERTY LINE
- EXISTING MAJOR CONTOUR
- EXISTING MINOR CONTOUR
- EXISTING COMM LINE
- EXISTING GAS LINE
- EXISTING OVERHEAD ELECTRIC LINE
- EXISTING UNDERGROUND ELECTRIC LINE
- EXISTING SANITARY
- EXISTING SANITARY FORCEMAIN
- EXISTING WATERLINE
- EXISTING GAS WELL
- EXISTING SANITARY MANHOLE
- EXISTING ELECTRICAL TRANSFORMER
- MISCELLANEOUS SURVEYED ITEM
- EXISTING WATER METER
- EXISTING INLET
- EXISTING UTILITY POLE
- EXISTING PAVED ROADWAY
- EXISTING GRAVEL ROADWAY
- EXISTING RAILROAD
- EXISTING STREAM CENTERLINE
- EXISTING DELINEATED WETLAND
- FEMA ZONE A
- REGULATORY FLOODWAY
- FEMA ZONE AE
- EXISTING TREE LINE
- PROPOSED MAJOR CONTOUR
- PROPOSED MINOR CONTOUR
- ELEVATION POINT
- E&S CONTROL BLANKET
- COMPOST FILTER SOCK
- ROCK CONSTRUCTION ENTRANCE
- STRUCTURAL LEVEL SPREADER
- RIPRAP APRON
- SKIMMER
- PERMANENT OUTLET CONTROL STRUCTURE
- BAFFLE
- PROPOSED STORM PIPE

DEMOLITION NOTES:

1. THE CONTOURS SHOWN ON THE PLANS ARE BASED ON AVAILABLE INFORMATION FROM RECORD DRAWINGS.
2. THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS FROM THE PROPERTY RECORD DRAWINGS. INFORMATION REGARDING THE REPORTED PRESENCE, SIZE, CHARACTER, AND LOCATION OF EXISTING UNDERGROUND UTILITIES HAS BEEN SHOWN ON THE CONSTRUCTION DRAWINGS AND RECORDED AS SUCH IN GOOD FAITH. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY THE LOCATIONS AND DEPTHS OF ALL UNDERGROUND UTILITIES PRIOR TO THE START OF CONSTRUCTION (PA ONE CALL). THE CONTRACTOR SHALL COORDINATE HIS CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES AS NECESSARY. THE CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR ANY UTILITIES DAMAGED IN THE PROCESS OF HIS WORK, AND SHALL REPAIR, OR PAY FOR THE REPAIR OF, ANY DAMAGED UTILITY TO THE SATISFACTION OF THE OWNER.
3. THE CONTRACTOR IS RESPONSIBLE, PRIOR TO CONSTRUCTION, FOR VERIFYING THE ACCURACY OF THE TOPOGRAPHY AND SUBSURFACE INFORMATION FOR THE PURPOSE OF CALCULATING QUANTITIES. IF ANY DISCREPANCIES ARE FOUND IN THE SURVEY OR GEOTECHNICAL REPORTS, THE ENGINEER SHALL BE NOTIFIED IMMEDIATELY. ONCE THE CONTRACTOR PROCEEDS WITH ANY LAND DISTURBANCE ACTIVITIES, THIS ACTION SHALL BE TAKEN AS ACCEPTANCE BY THE CONTRACTOR THAT THE SURVEY AND GEOTECHNICAL REPORTS DEPICT THE EXISTING CONDITIONS OF THE SITE TO THE CONTRACTOR'S SATISFACTION. LATER CLAIMS BY THE CONTRACTOR RELATING TO INACCURACIES IN THE EXISTING TOPOGRAPHY OR GEOTECHNICAL INFORMATION SHALL NOT BE ACCEPTED AND RELATED CONSTRUCTION CLAIMS SHALL NOT BE ALLOWED.
4. CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGED UTILITY THAT IS TO REMAIN.
5. PROTECT EXISTING UTILITIES TO REMAIN. THESE UTILITIES SHALL NOT BE DISTURBED.
6. ALL UTILITY SERVICE LINES SHALL BE REMOVED AS NOTED PER DETAILS AND SPECIFICATIONS OF THE CORRESPONDING UTILITY COMPANY.
7. ALL UTILITY DEMOLITION/REMOVAL SHALL BE COORDINATED WITH CORRESPONDING UTILITY COMPANY SO NO UTILITY INTERRUPTIONS OCCUR.
8. EXISTING UTILITIES SHALL BE COMPLETELY REMOVED WHEN INSIDE OR WITHIN FIFTEEN (15) FEET OF WHERE THEY INTERFERE WITH CONSTRUCTION OF PROPOSED UTILITIES OR FALL LESS THAN THREE (3) FEET FROM EXISTING OR PROPOSED GRADES (WHICH EVER IS DEEPER). ALL REMAINING ON-SITE UTILITY SERVICES SHALL BE ABANDONED IN PLACE. ALL EXISTING UTILITY SERVICES ON-SITE TO BE DISCONNECTED OR REMOVED, RELOCATED, CUT, CAPPED AND/OR ABANDONED SHALL BE COORDINATED WITH THE APPROPRIATE UTILITY COMPANY. ALL ABANDONED UTILITY STRUCTURES (I.E. MANHOLES, PULL BOXES, INLETS, ETC.) SHALL BE BACKFILLED WITH #57 AGGREGATE AND COMPACTED PER SPECIFICATIONS.
9. ALL PAVEMENT SAW CUTS SHALL BE STRAIGHT, VERTICAL, SMOOTH AND CLEAN CUTS.
10. THE CONTRACTOR SHALL NOTIFY THE PENNSYLVANIA ONE CALL SYSTEM NOT LESS THAN TEN (10) DAYS PRIOR TO THE BEGINNING OF WORK. THE CONTRACTOR SHALL PLACE THE CALL AND PROVIDE TO THE OWNER OR THE OWNER'S REPRESENTATIVE THE TIME AND DATE THAT THE CALL WAS MADE AS WELL AS THE PENNSYLVANIA ONE CALL SYSTEM SERIAL NUMBER.
11. THE CONTRACTOR SHALL COORDINATE ALL DEMOLITION OPERATIONS WITH DEMOLITION PLANS, SPECIFICATIONS AND LOCAL UTILITY COMPANIES.
12. CONTRACTOR SHALL ADHERE TO ALL LOCAL, STATE, FEDERAL AND OSHA REGULATIONS DURING ALL CONSTRUCTION ACTIVITIES.
13. CONTRACTOR SHALL PROTECT ALL CORNER PINS, MONUMENTS, PROPERTY CORNERS AND BENCHMARKS DURING CONSTRUCTION ACTIVITIES. IF DISTURBED, CONTRACTOR SHALL HAVE DISTURBED ITEMS RESET BY A LICENSED SURVEYOR AT NO ADDITIONAL COST TO THE OWNER.
14. THE CONTRACTOR WILL CONFINE ALL WORK TO WITHIN THE DESIGNATED CONTRACT LIMITS FOR THE PROJECT. THE CONTRACTOR WILL BE RESPONSIBLE FOR DAMAGES RESULTING FROM OPERATIONS CARRIED OUT IN LOCATIONS OUTSIDE OF THE WORK AREA. ANY DISRUPTIONS SHALL BE COORDINATED WITH THE CONSTRUCTION MANAGER.
15. ALL BUILDINGS AND CORRESPONDING FOUNDATIONS SHALL BE REMOVED FROM THE SITE UNLESS THEY ARE NOTED AS TO REMAIN. BASEMENTS SHALL BE BACKFILLED WITH CLEAN FILL MATERIAL AND COMPACTED ACCORDING TO PROJECT SPECIFICATIONS.

PENNSYLVANIA ACT 38  
(AMENDING ACT 172)

Requires three (3) working days notification to utility companies prior to any digging, drilling, blasting or excavating. Contractor shall contact:




PA ONE-CALL  
1-800-242-1776  
prior to start of work.

PROJECT SERIAL NUMBER:

Existing utilities have been plotted from available information and the locations must be considered approximate. Other utilities may exist which are not shown. It shall be the Contractor's responsibility to ascertain the physical location of all utility lines prior to the start of construction.


		MICHAEL BAKER INTERNATIONAL, LLC		1750 POWER PLANT ROAD HOMER CITY, PA 15748	
		HOMER CITY STATION		1750 POWER PLANT ROAD HOMER CITY, PA 15748	
		DWG. TYPE:		GENERAL	
		TITLE:		GENERAL NOTES	
		PROJECT NAME:		RURA FIELD	
		NTS		RURA1	
		SCALE		PROJECT NO.	
		DRAWING NUMBER		SHEET	
		REV		REV	



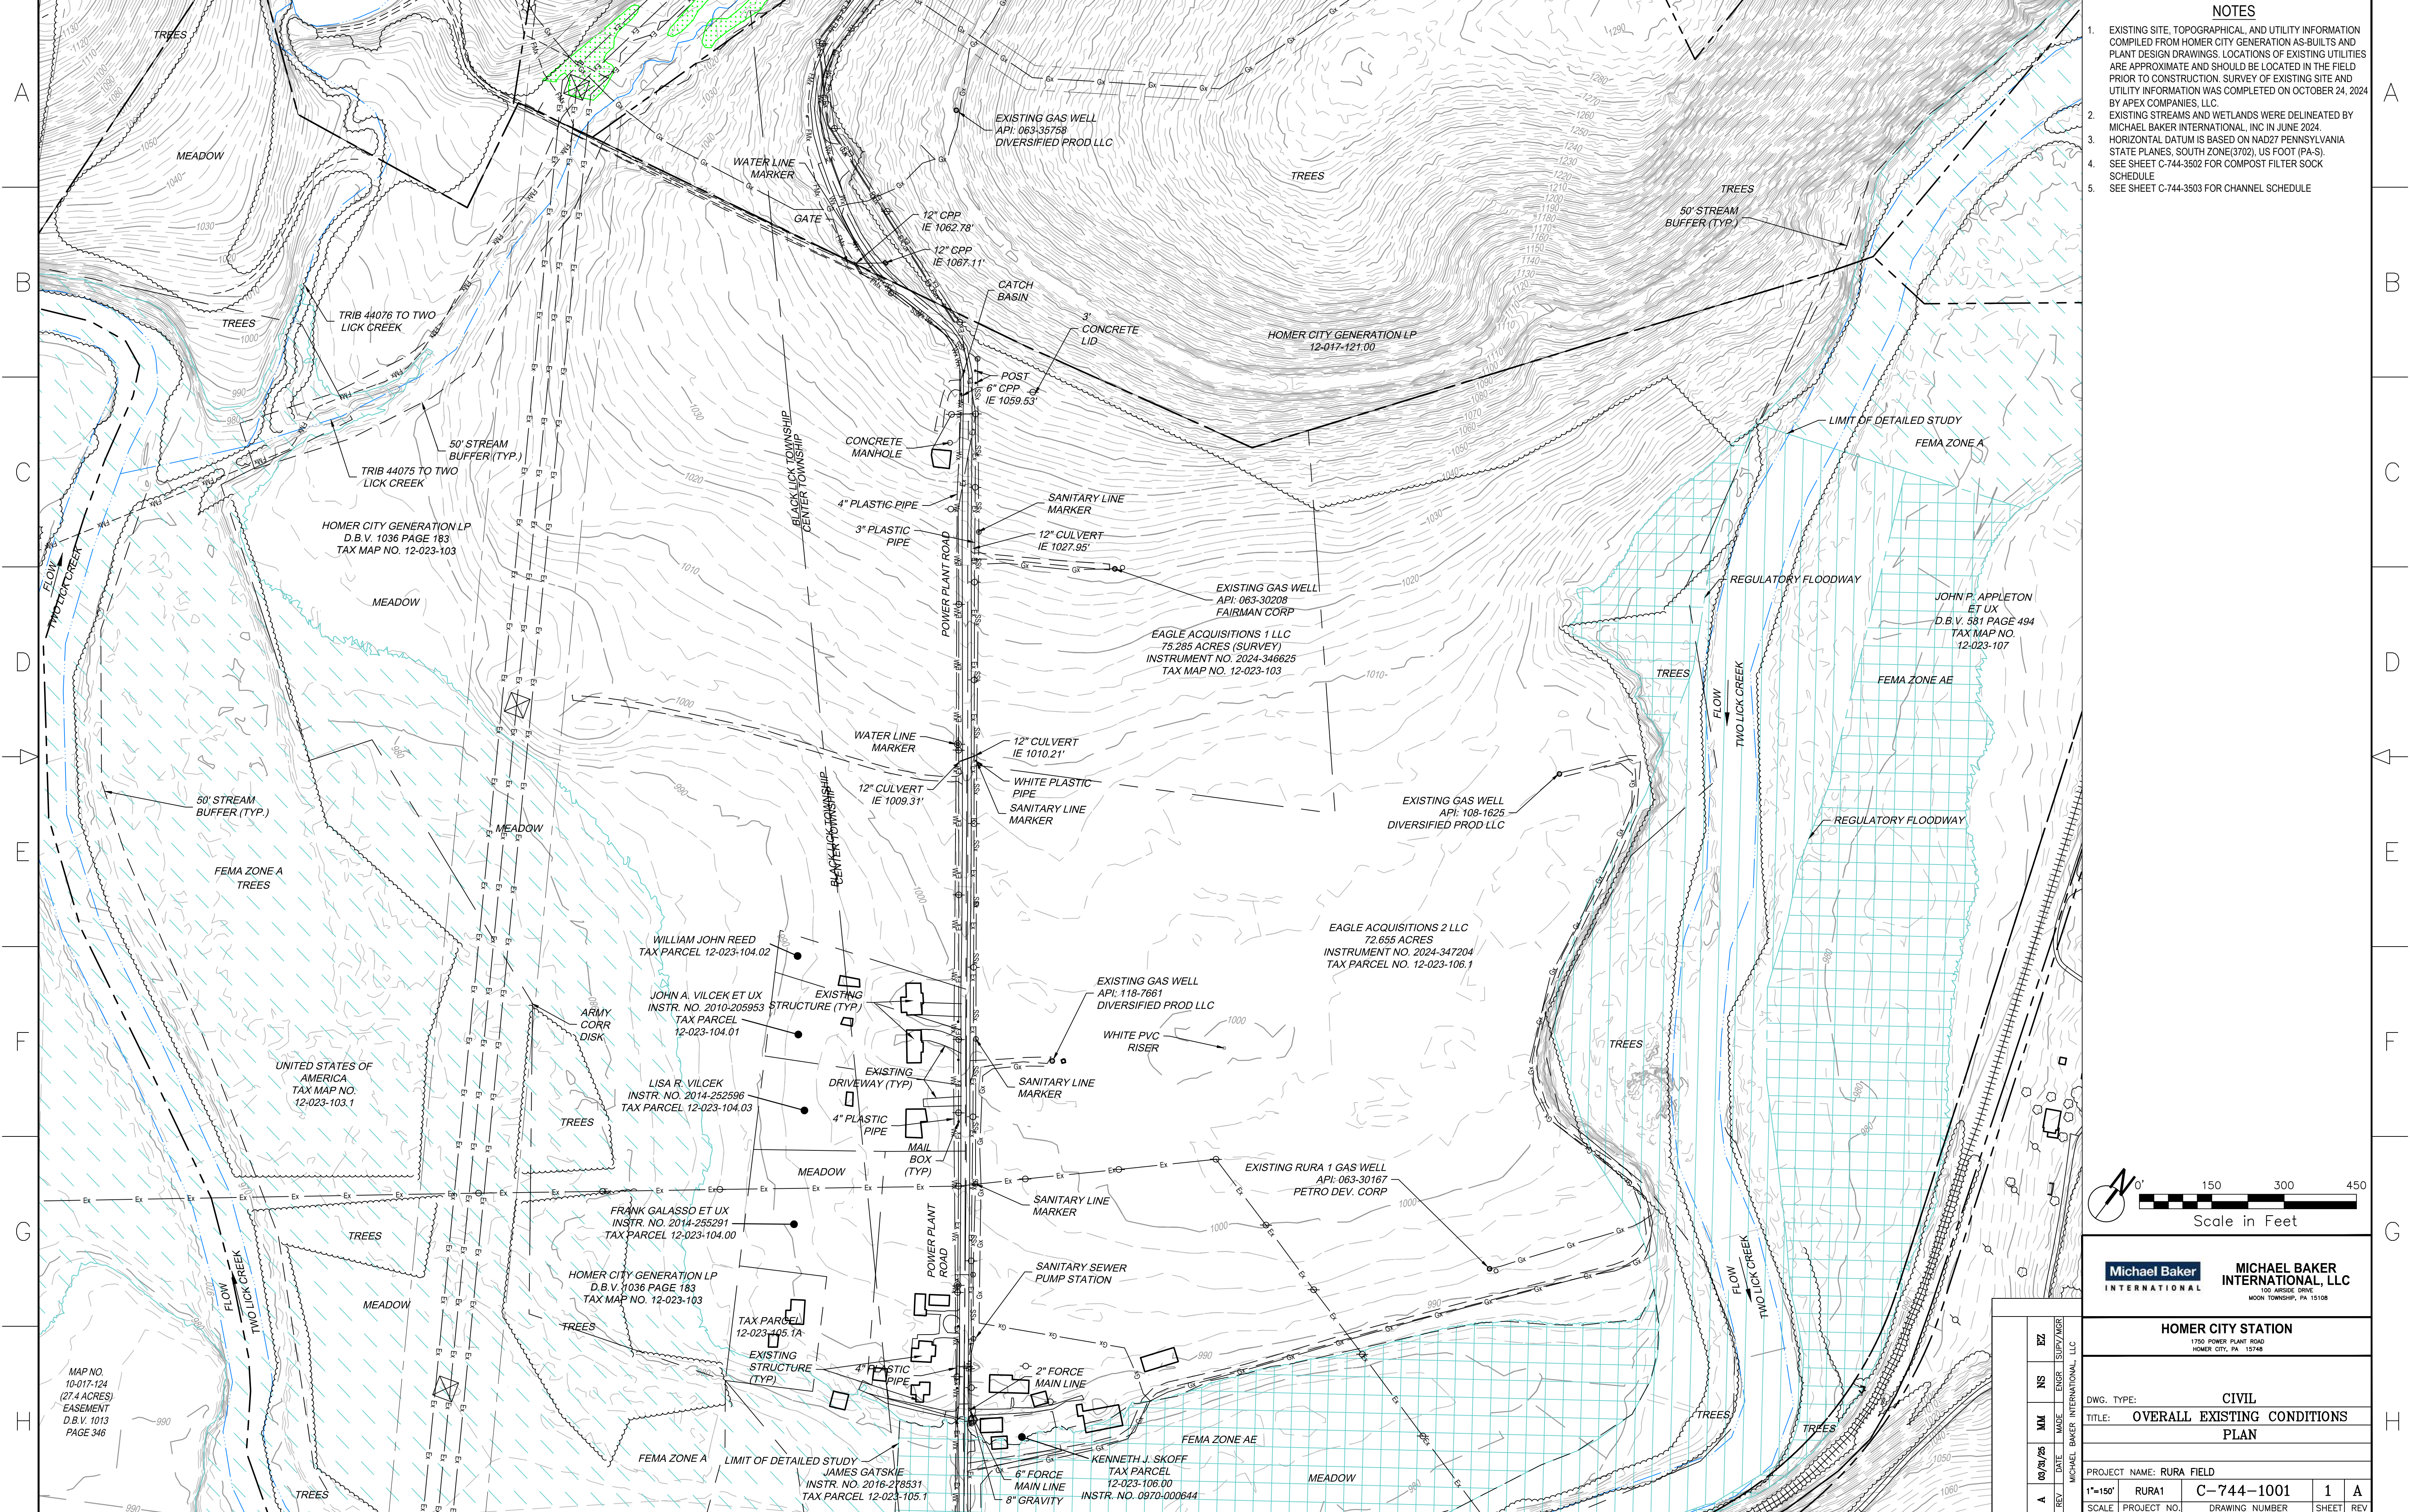

NOTES

1. EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
2. EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
3. HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
4. SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
5. SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

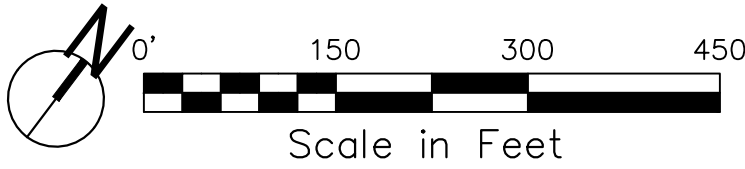

**Michael Baker International, LLC**  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION


1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: CIVIL  
TITLE: OVERALL EXISTING CONDITIONS PLAN

PROJECT NAME: RURA FIELD				
1"=150'	RURA1	C-744-1001	1	A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET	REV

MAP NO.  
10-017-124  
(27.4 ACRES)  
EASEMENT  
D.B.V. 1013  
PAGE 346



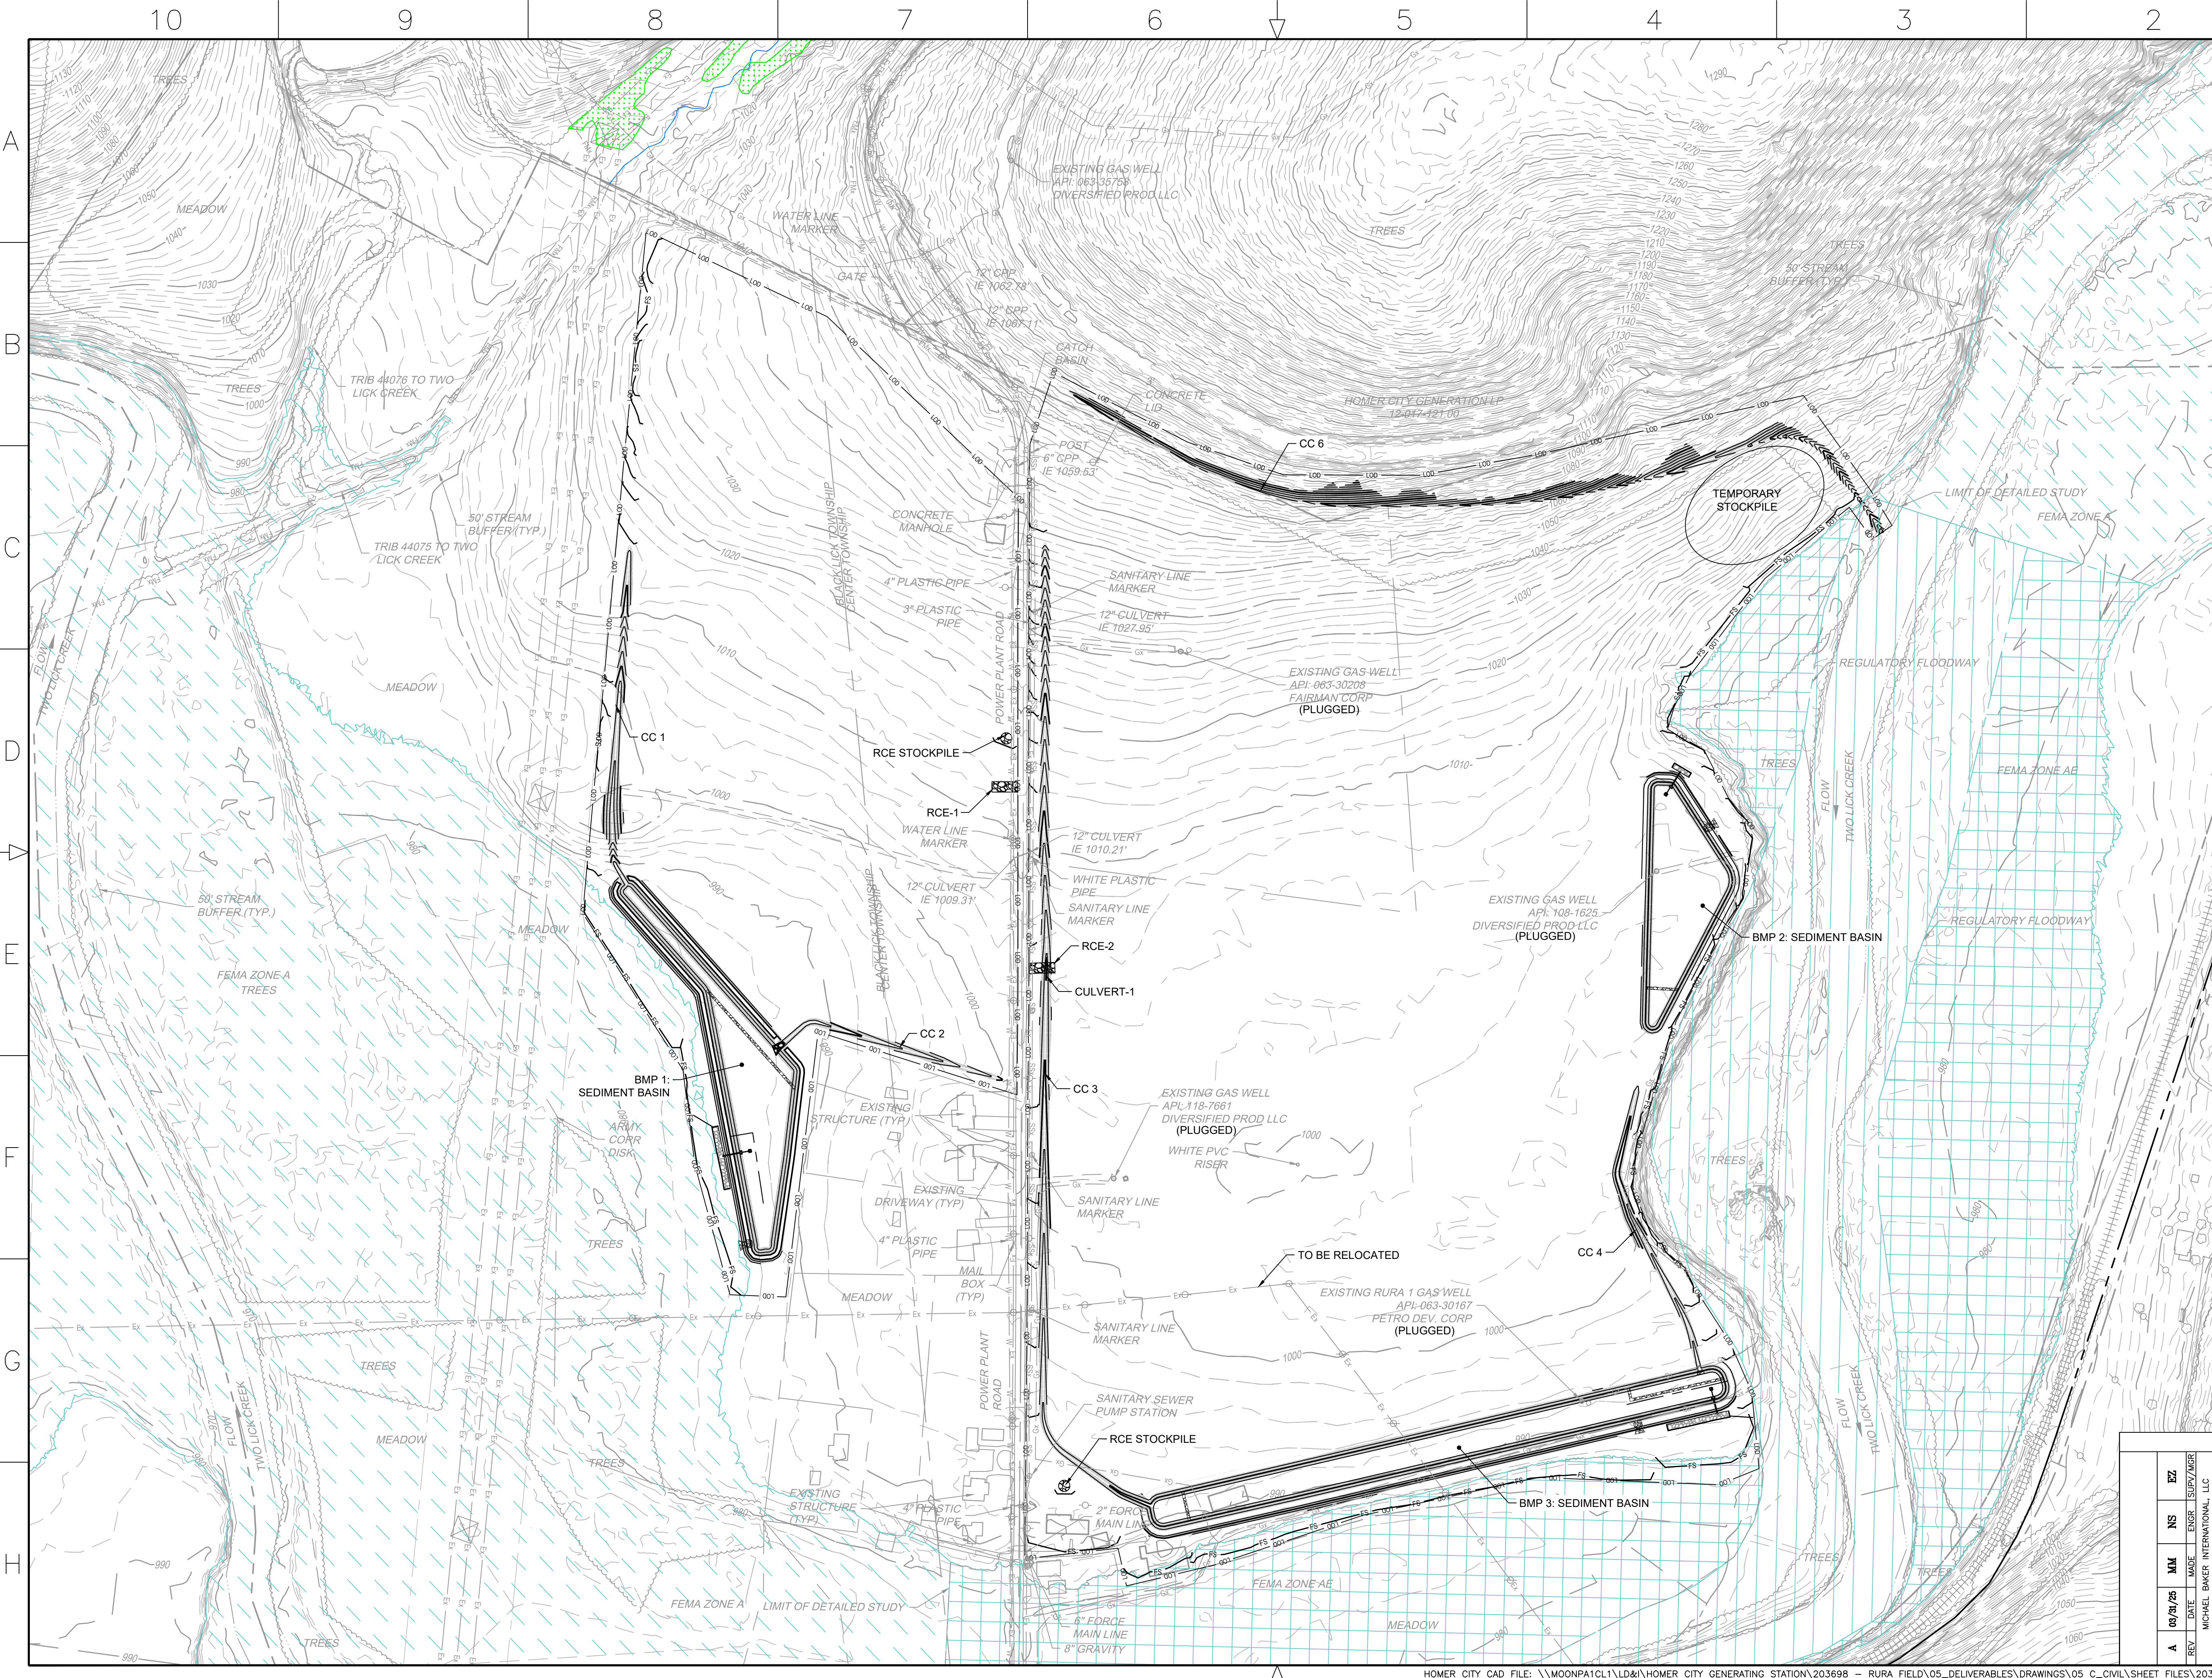

- NOTES**
1. EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
  2. EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
  3. HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
  4. SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
  5. SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE



Michael Baker  
INTERNATIONAL

**MICHAEL BAKER  
INTERNATIONAL, LLC**  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

**HOMER CITY STATION**  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: **CIVIL**

TITLE: **OVERALL EROSION & SEDIMENT  
CONTROL PLAN - PHASE 1**


PROJECT NAME: RURA FIELD

1"=150' RURA1 C-744-3001 1 A



SCALE PROJECT NO. DRAWING NUMBER SHEET REV

HOMER CITY CAD FILE: \\MOONPA1CL1\LD&\HOMER CITY GENERATING STATION\203698 - RURA FIELD\05\_DELIVERABLES\DRAWINGS\05\_C\_CIVIL\SHEET FILES\203698\_CE100 - PHASE 1.DWG PLOT DATE:3/31/2025 11:36 AM



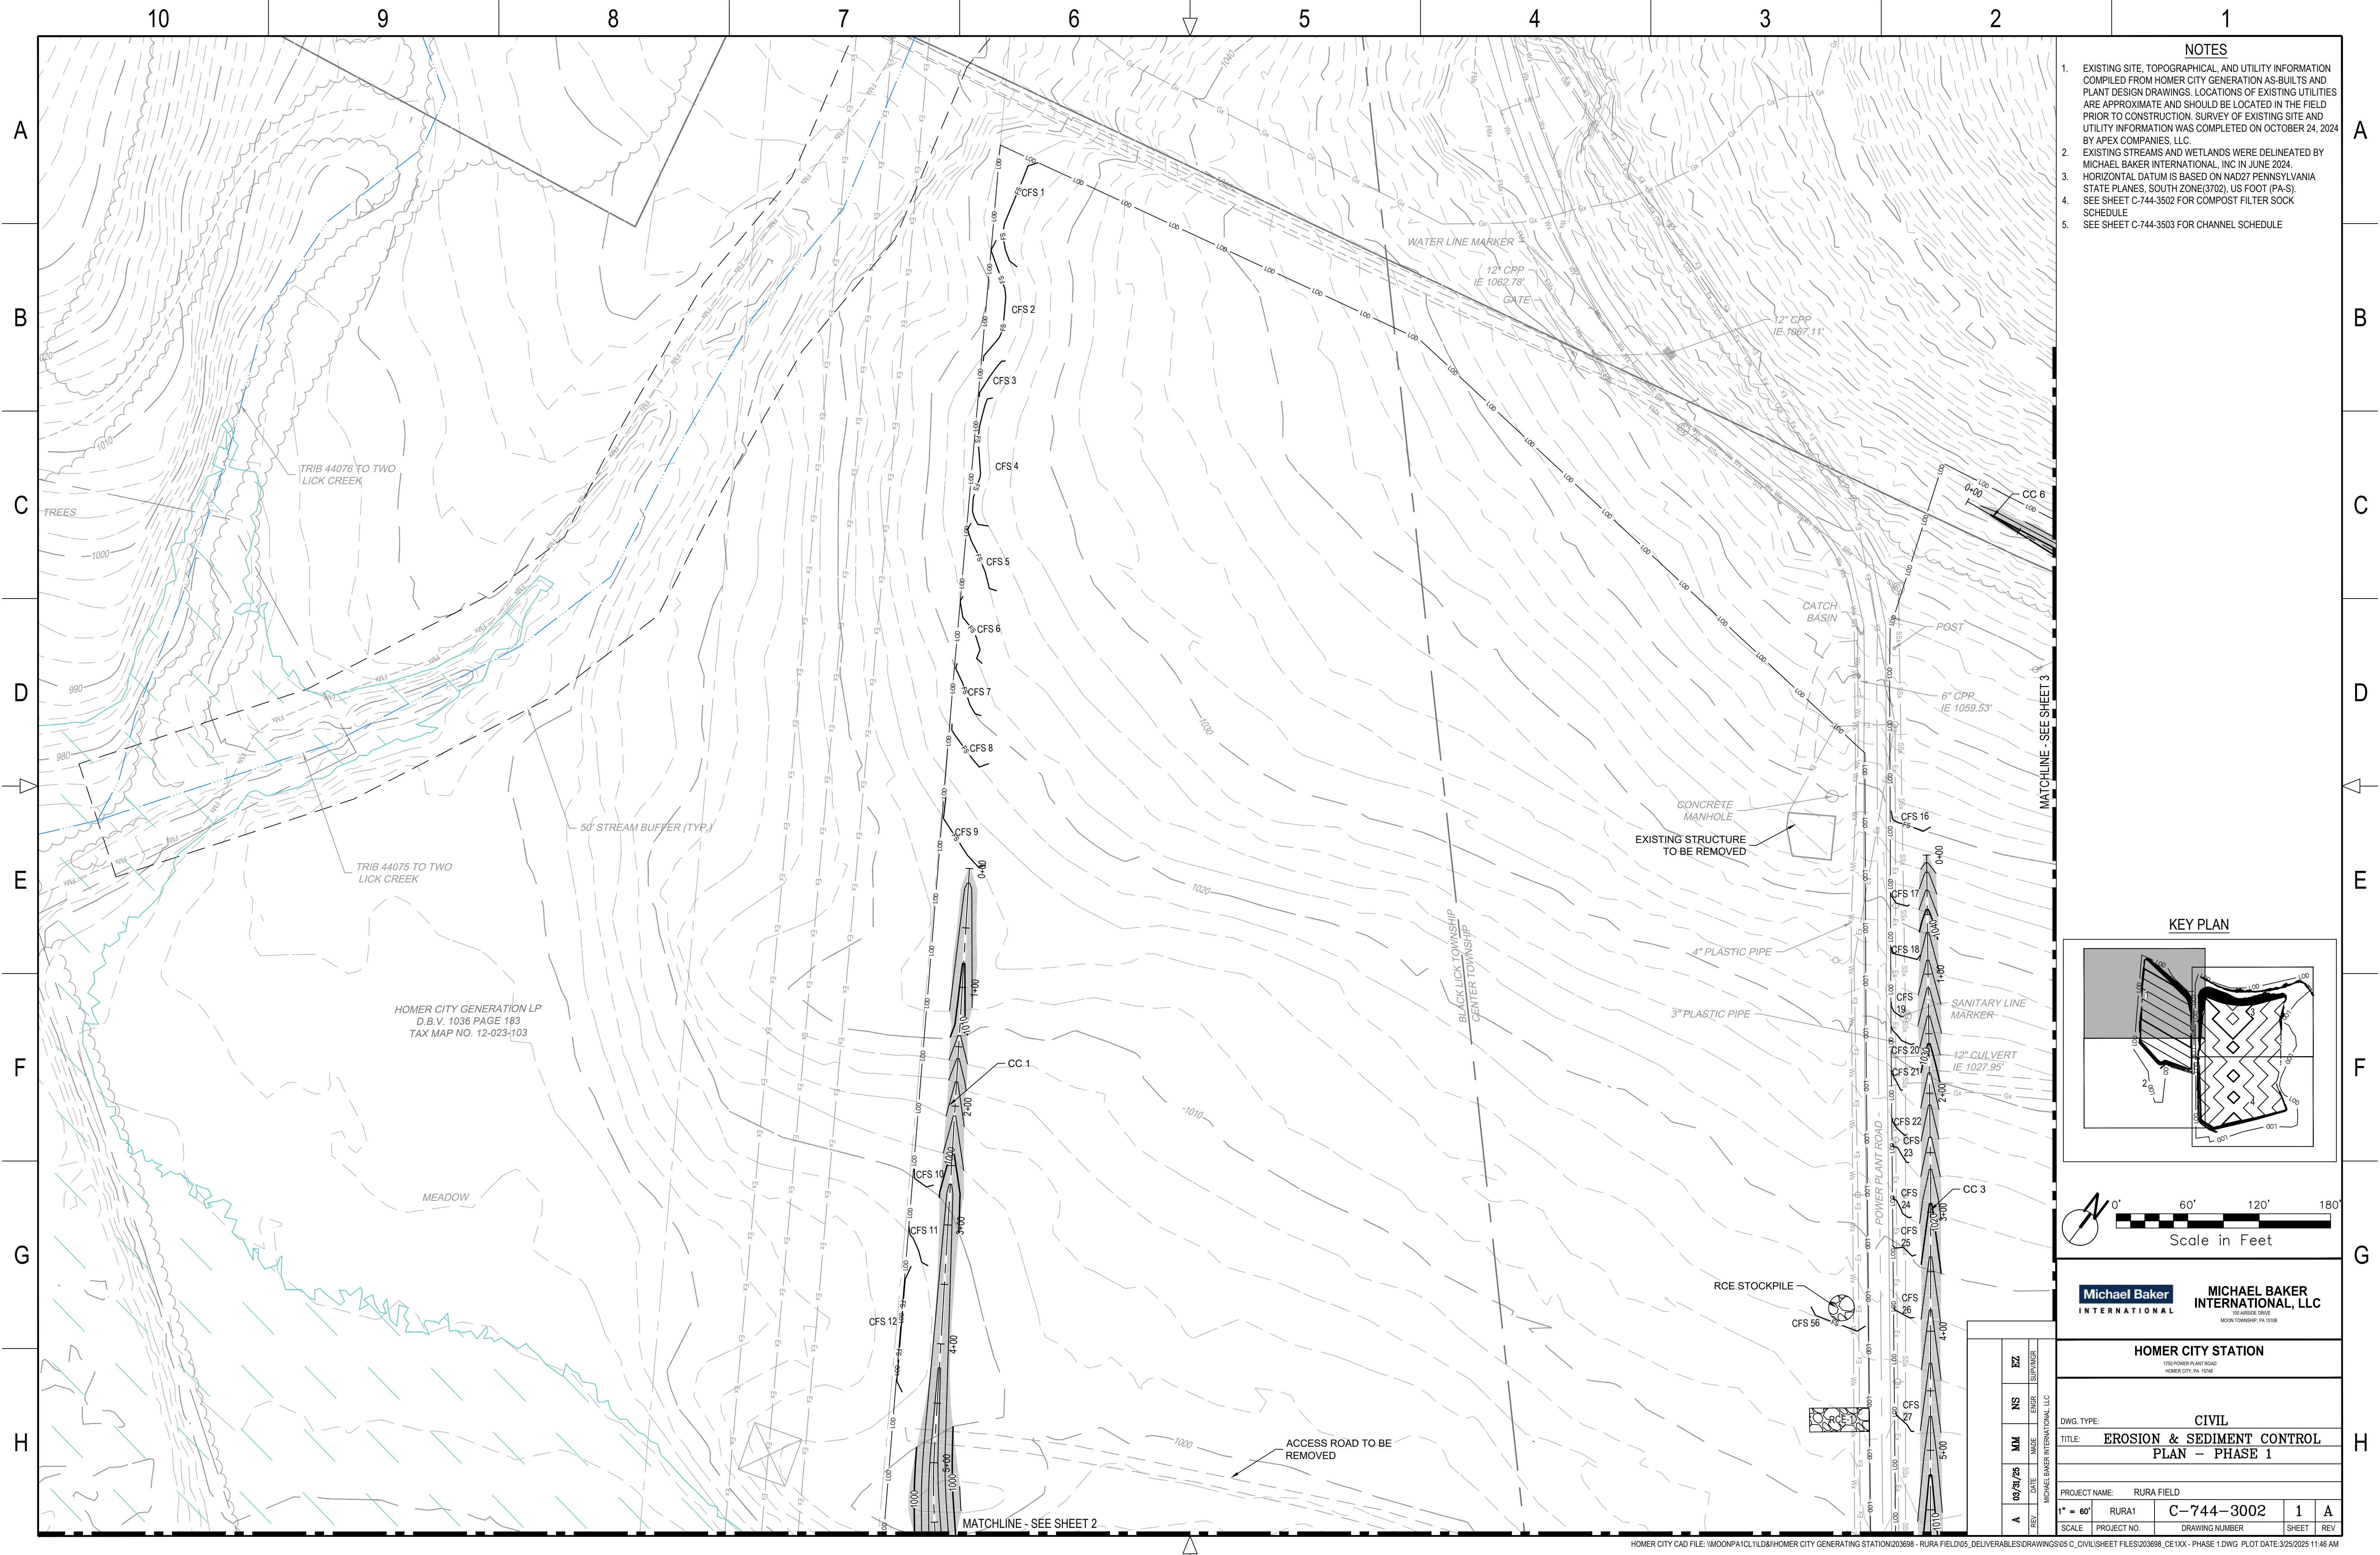


- NOTES**
- EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
  - EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
  - HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
  - SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
  - SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

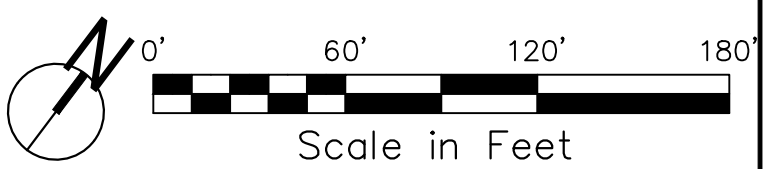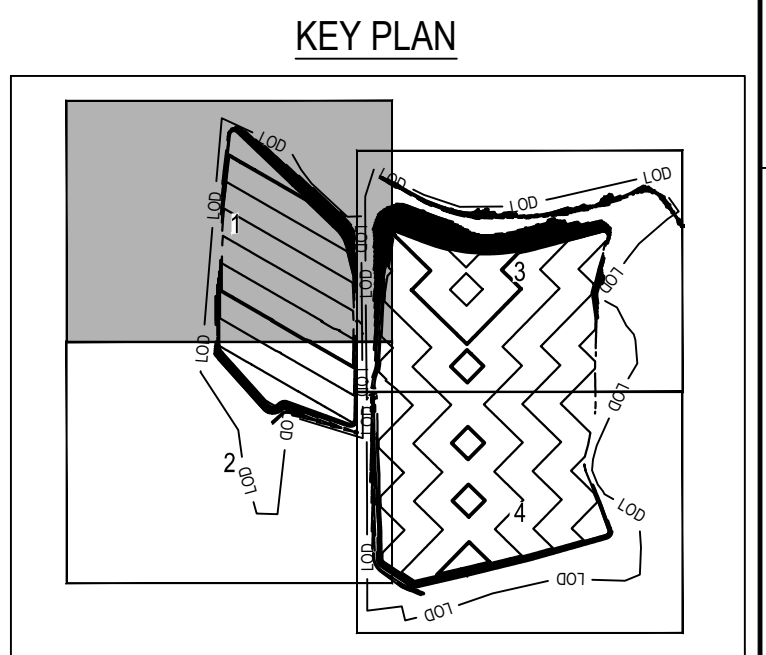


**Michael Baker International, LLC**  
100 ARBEE DRIVE  
MOORE TOWNSHIP, PA 15106

HOMER CITY STATION				
1700 POWER PLANT ROAD HOMER CITY, PA 15068				
DWG. TYPE: CIVIL				
TITLE: EROSION & SEDIMENT CONTROL PLAN - PHASE 1				
PROJECT NAME: RURA FIELD				
* = 60'	RURA 1	C-744-3002	1	A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET	REV




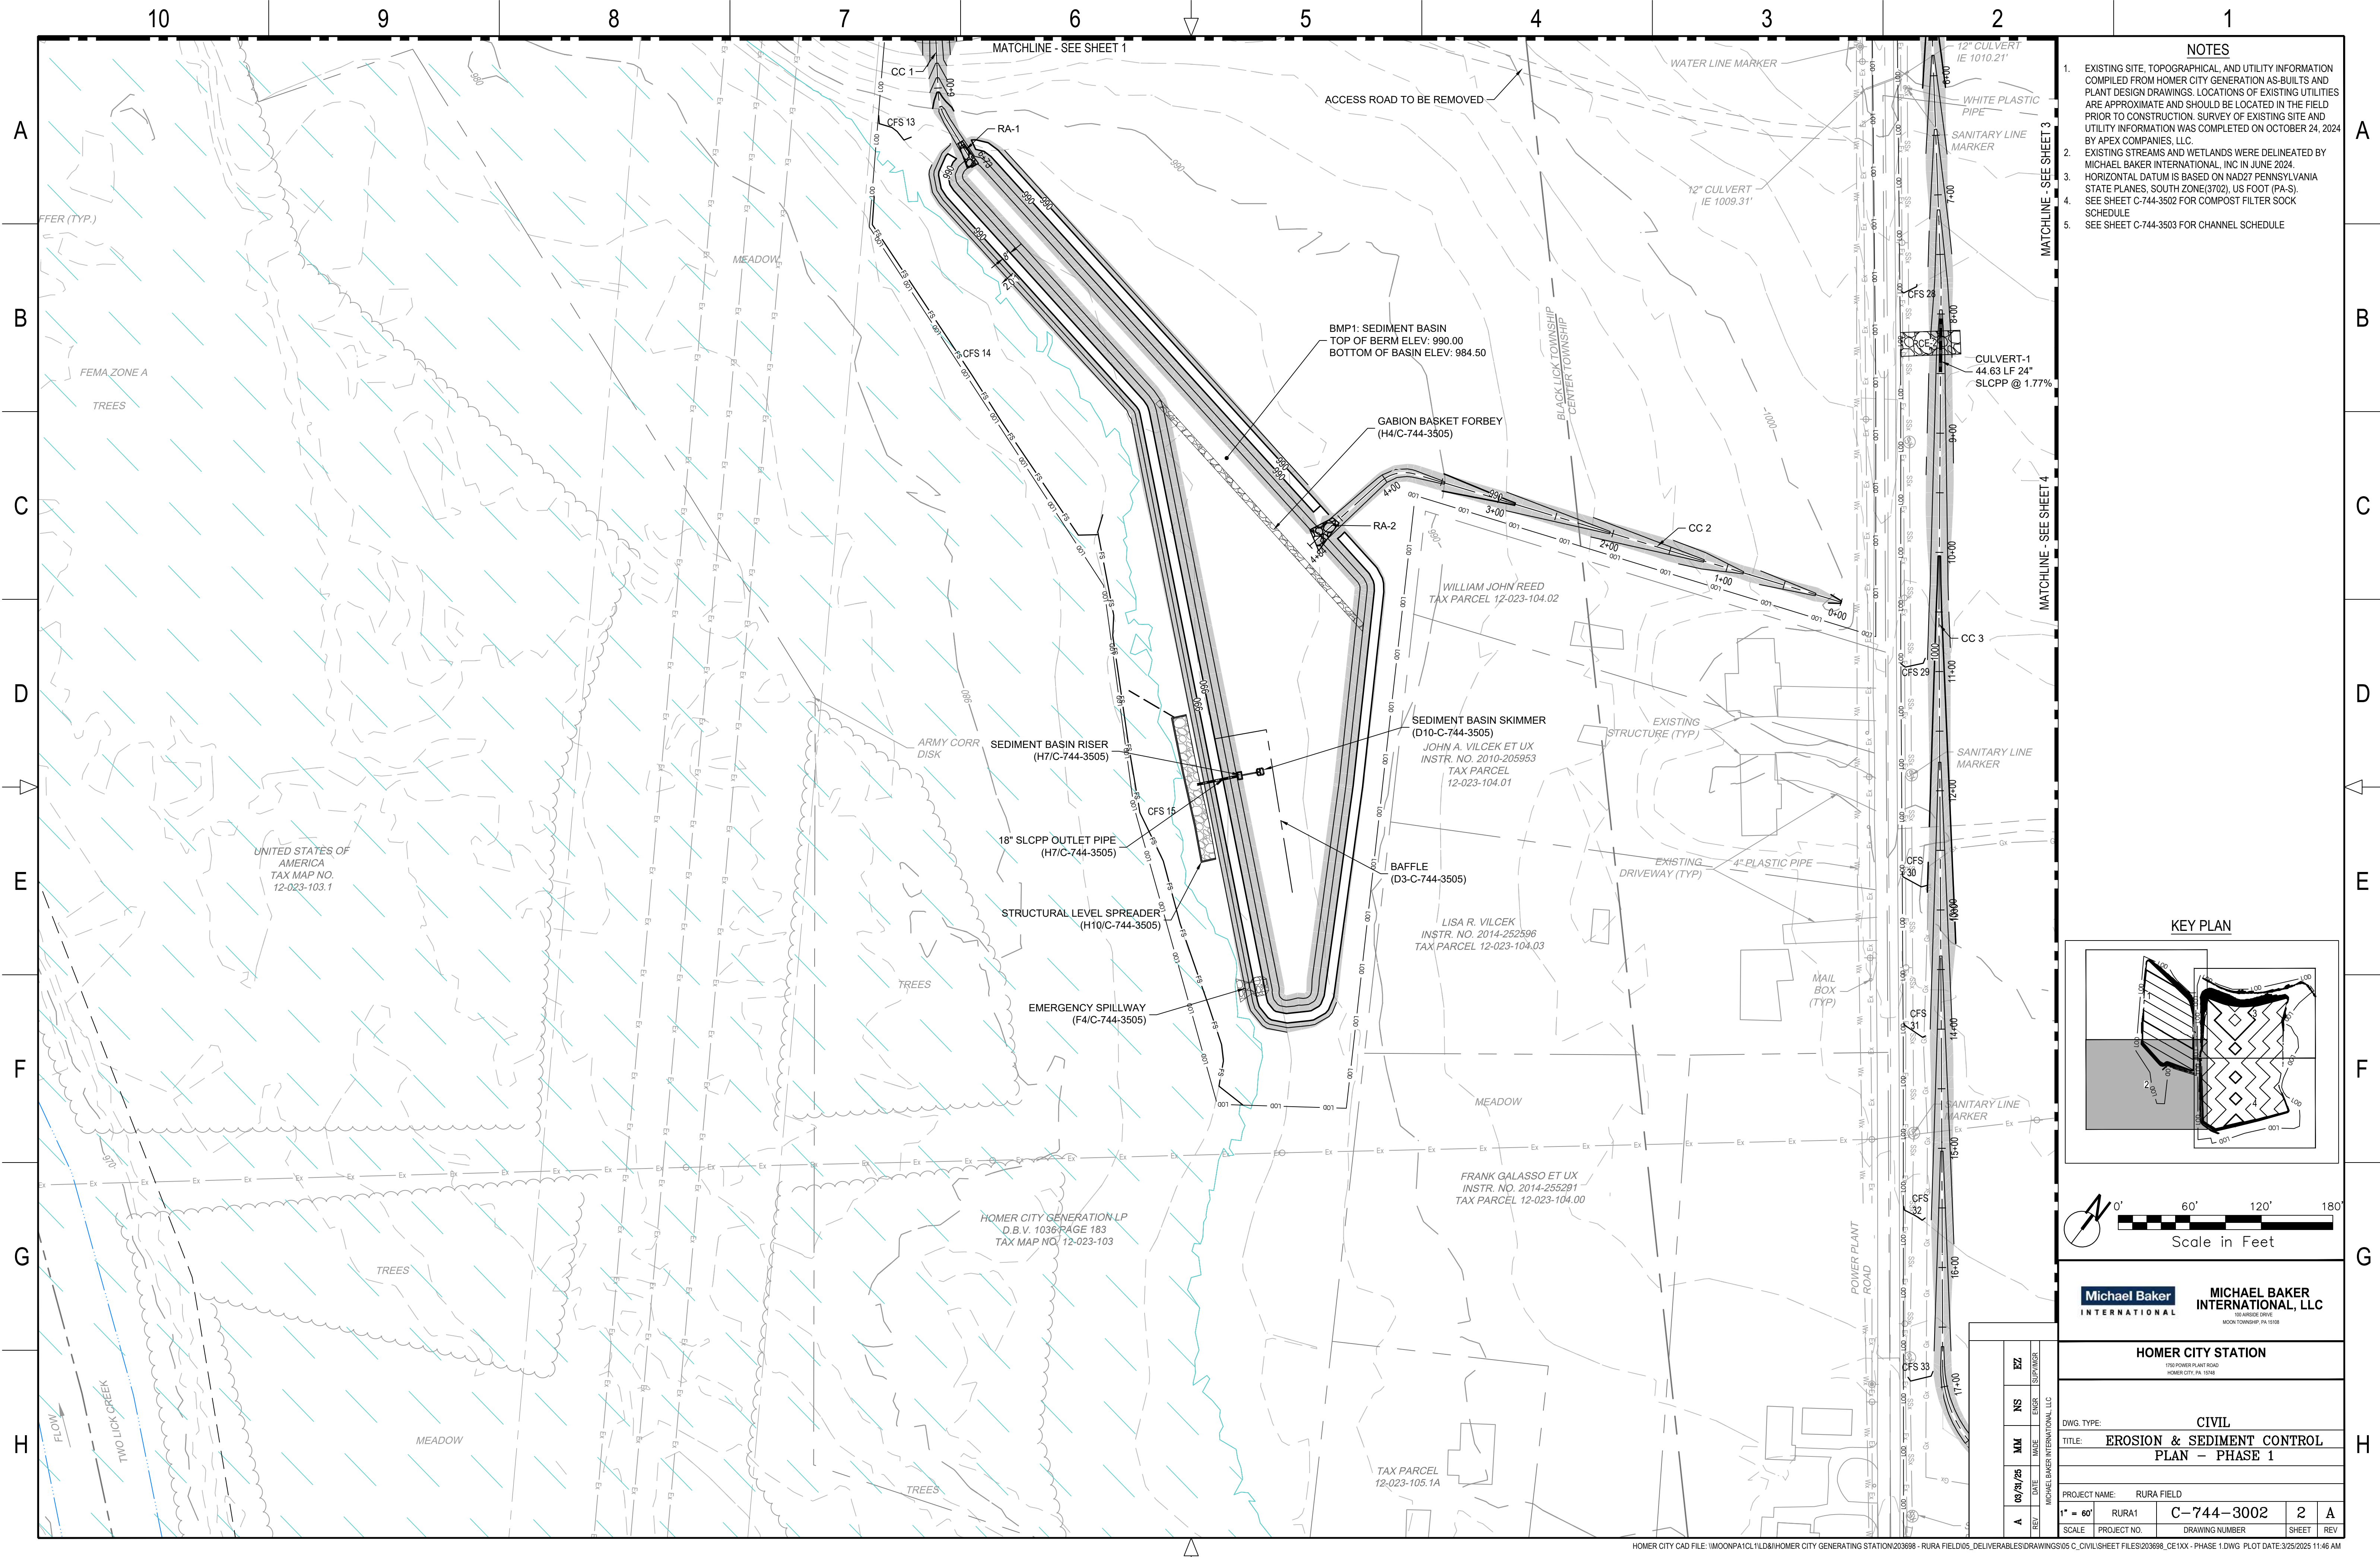




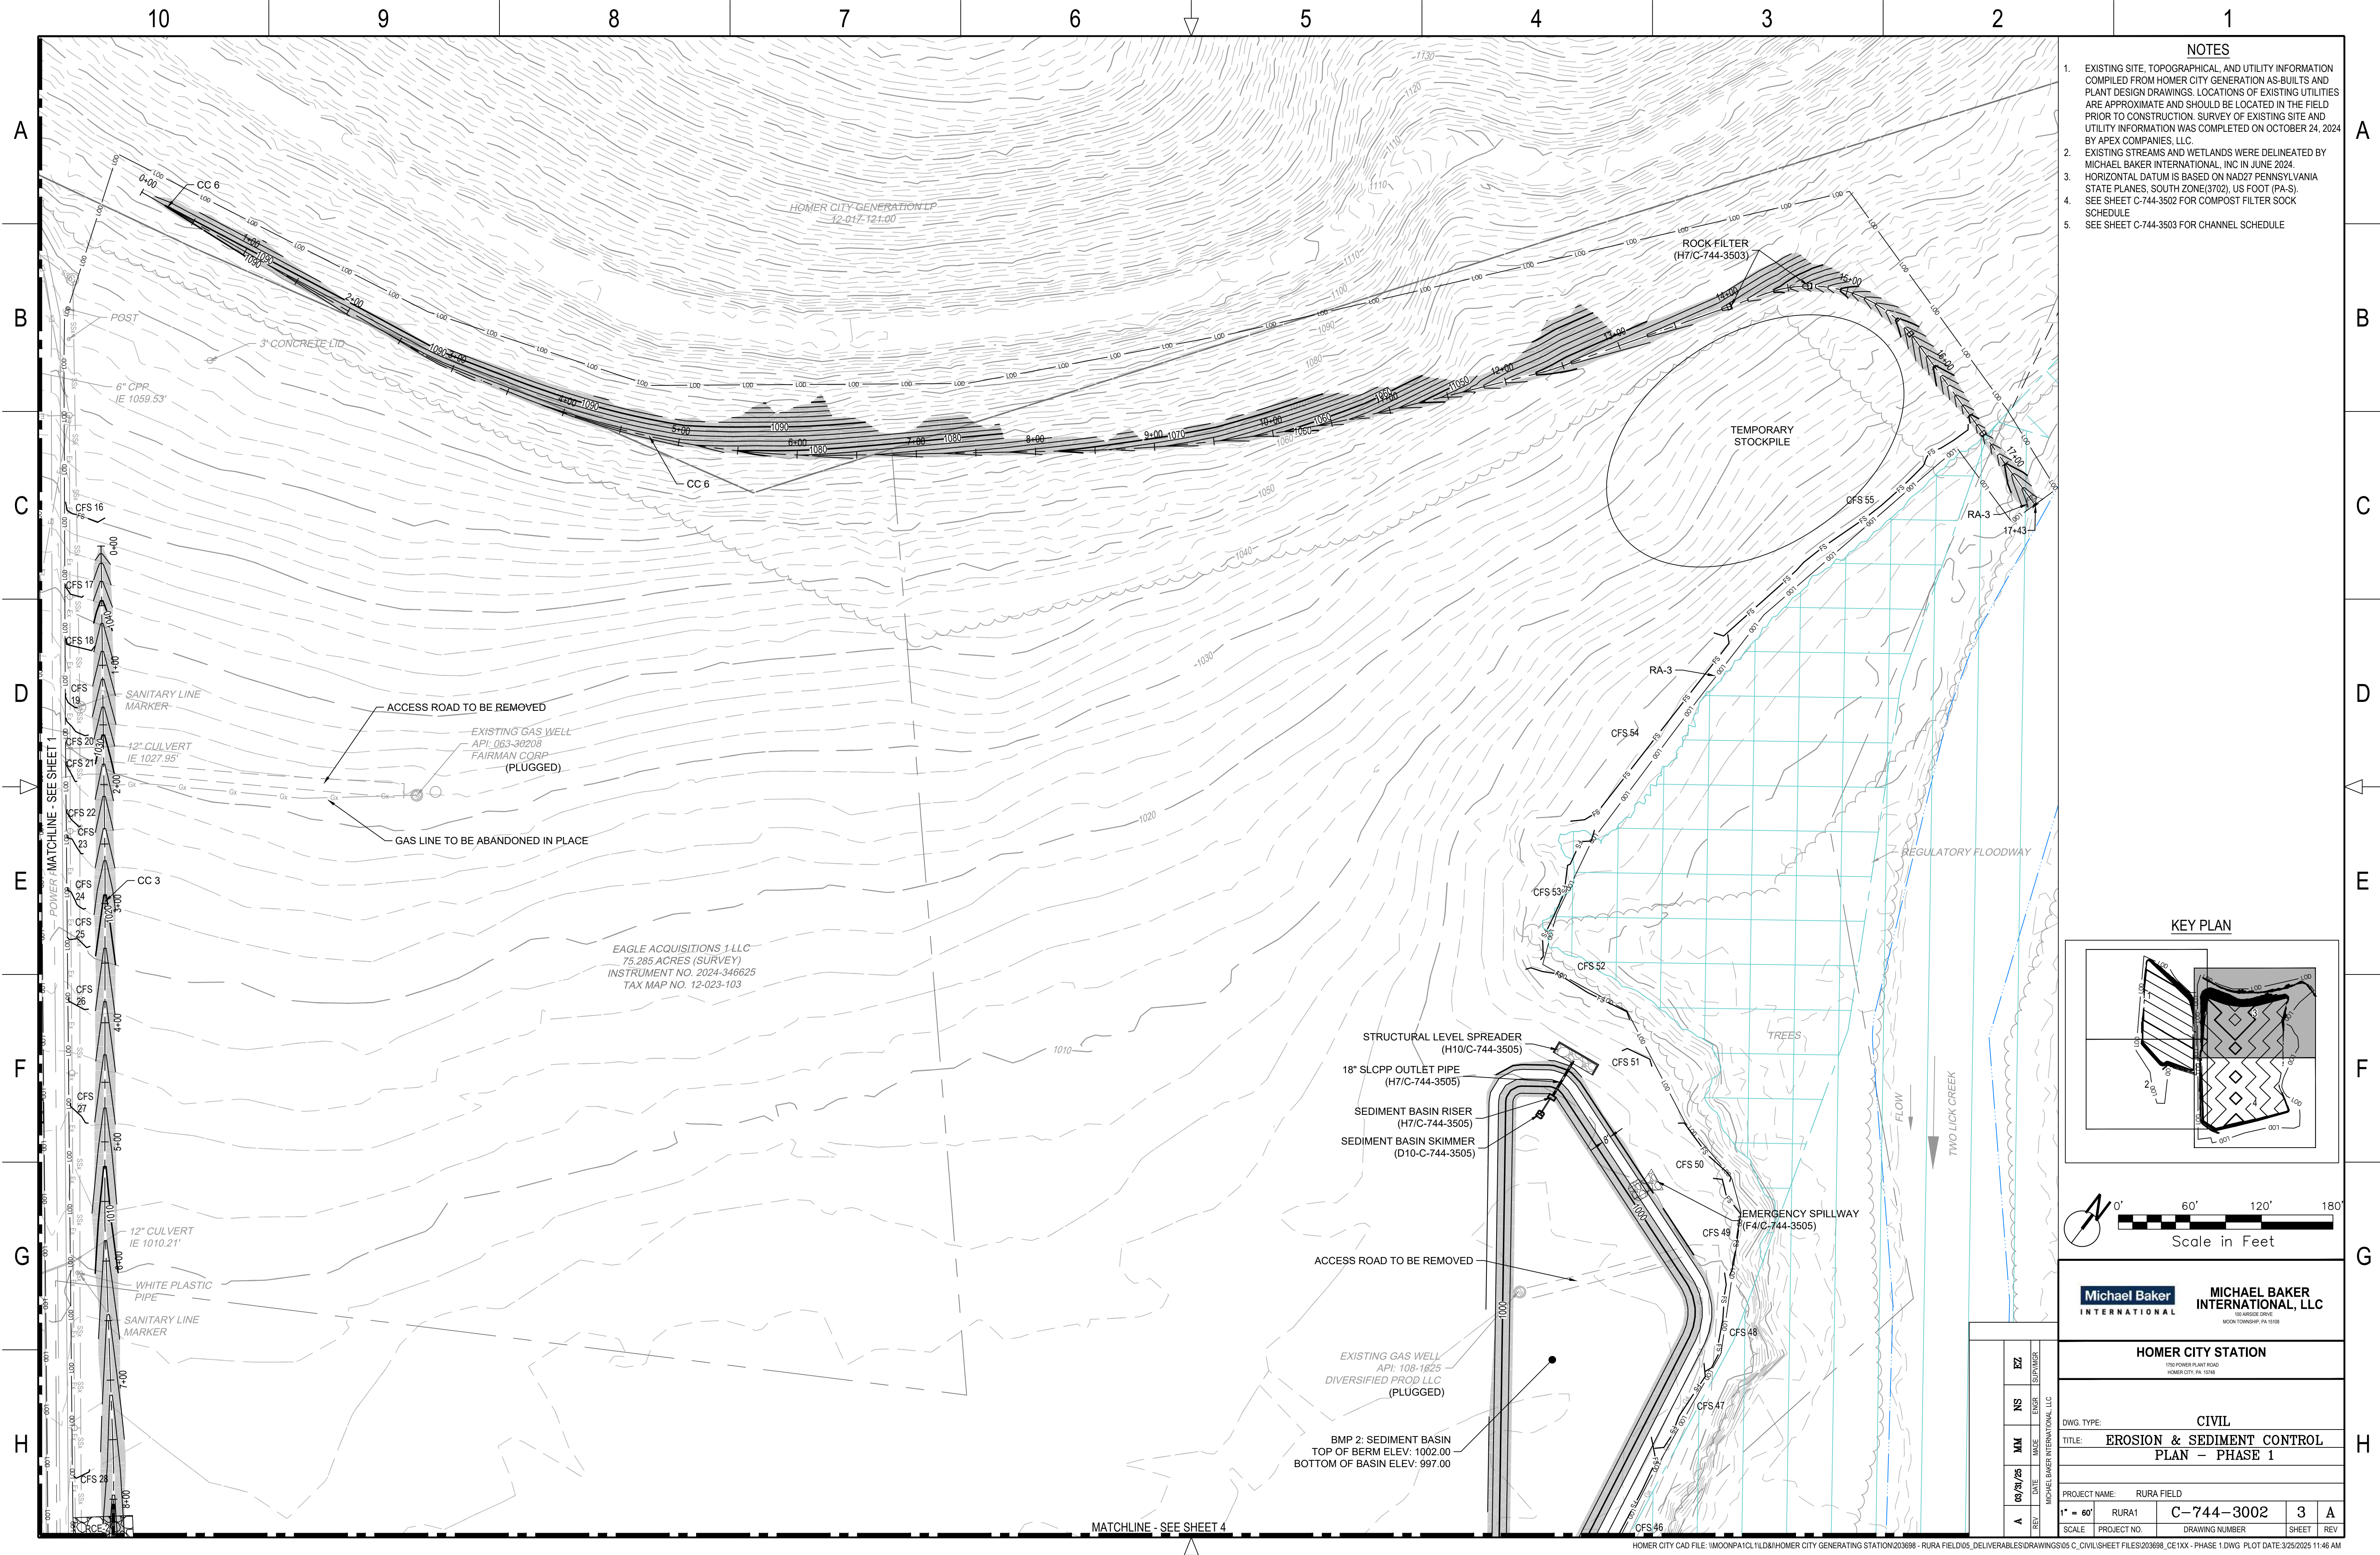

HOMER CITY CAD FILE \\MOONPA1C1\1\DWG\HOMER CITY GENERATING STATION\203698 - RURA FILE D\05 DE I\VERA\ESI\DRAWINGS\05 C CIVIL\ SHEET FILE\ESI\203698 CE1XX - PHASE 1.DWG PLOT DATE:3/25/2025 11:46 A



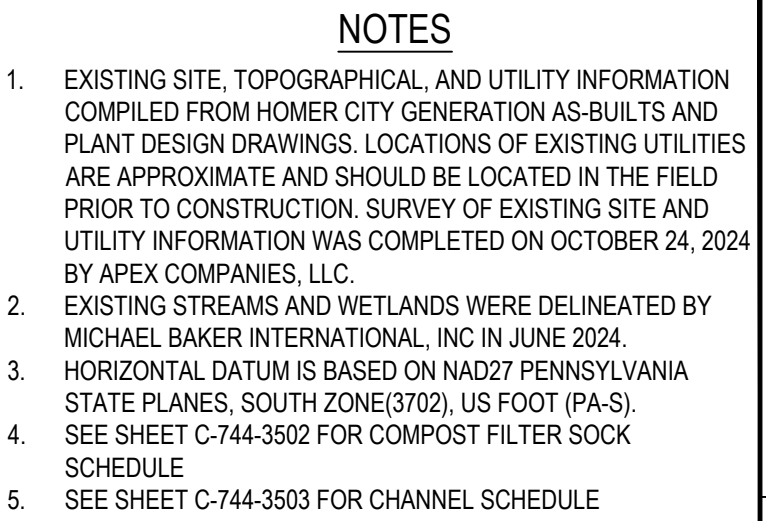


HOMER CITY CAD FILE: \\MOONPA1CL1\LD&I\HOMER CITY GENERATING STATION\203698 - RURA FIELD\05\_DELIVERABLES\DRAWINGS\05\_C\_CIVIL\SHEET FILES\203698\_CE1XX - PHASE 1.DWG PLOT DATE: 3/25/2025 11:46 AM





NOTES

1. EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
2. EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
3. HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
4. SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
5. SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

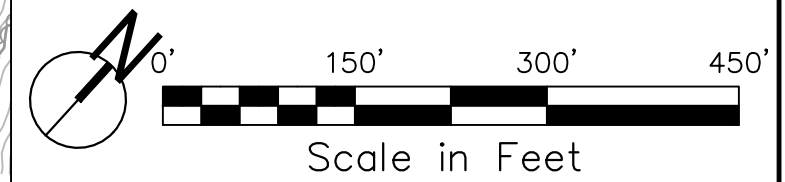

Michael Baker  
INTERNATIONAL

MICHAEL BAKER  
INTERNATIONAL, LLC  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION


1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: CIVIL  
TITLE: OVERALL EROSION & SEDIMENT  
CONTROL PLAN - PHASE 2


PROJECT NAME: RURA FIELD

1"=150'	RURA1	C-744-3003	1	A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET	REV



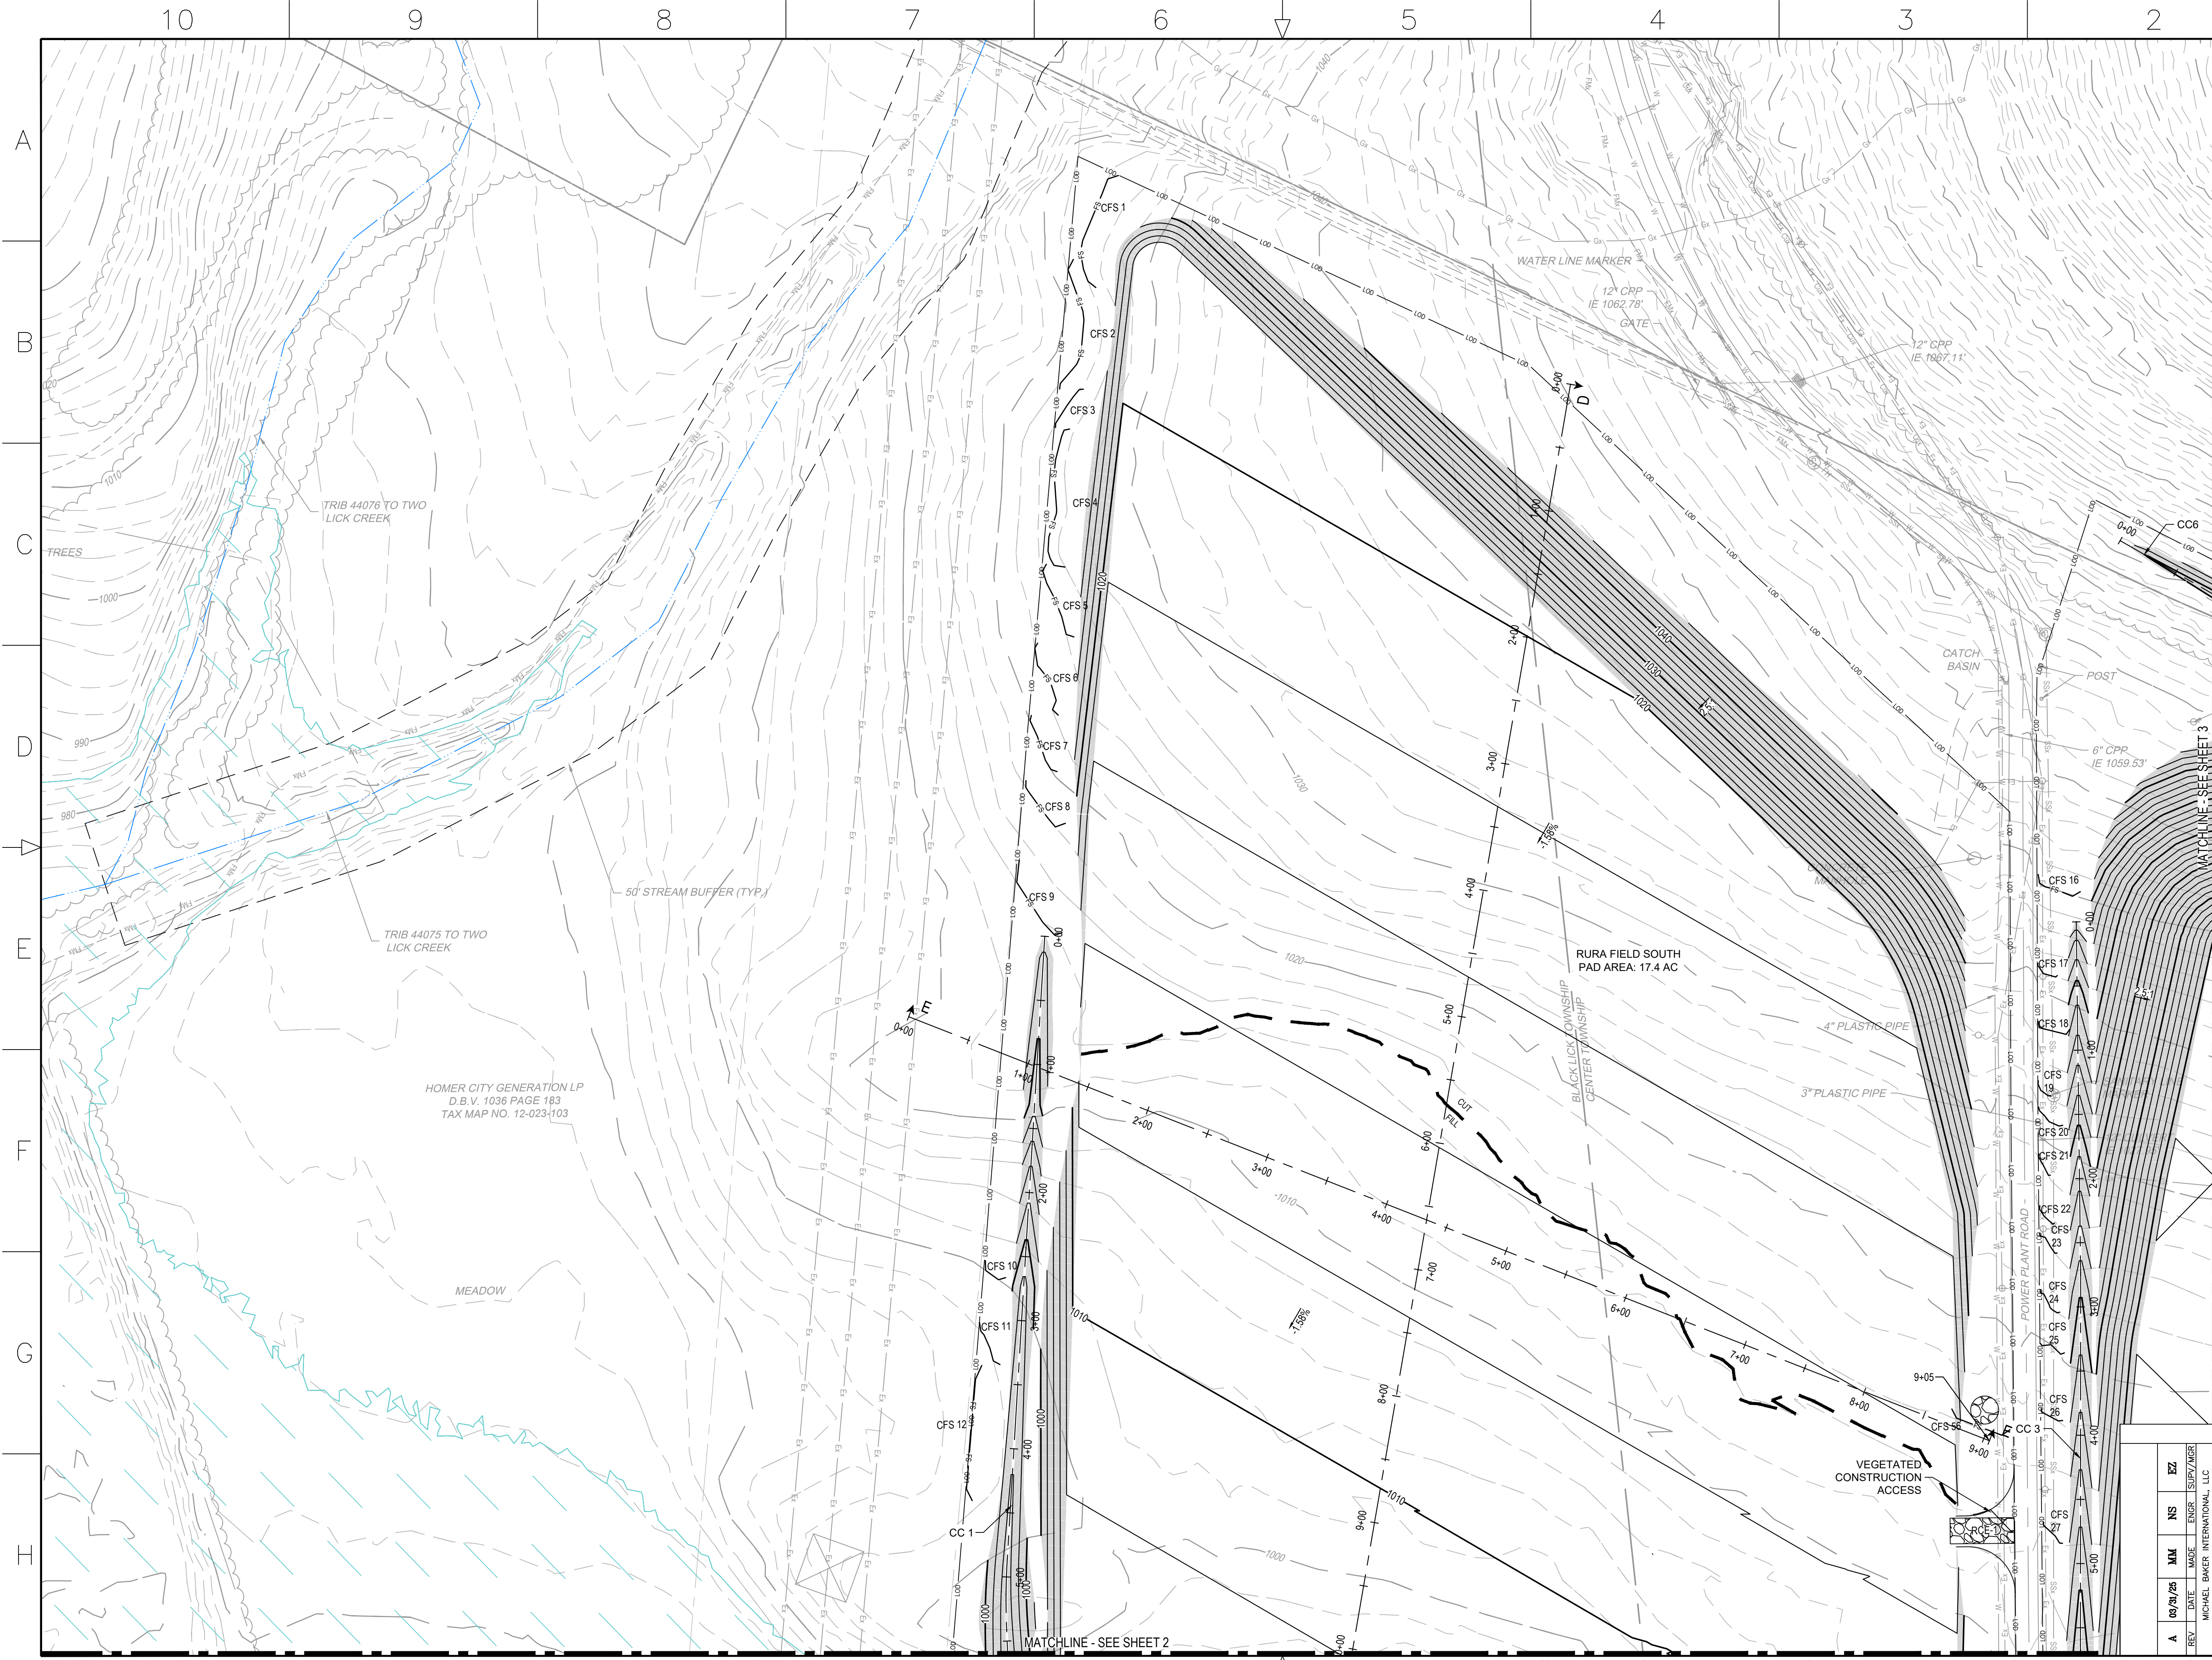

- NOTES**
1. EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
  2. EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
  3. HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
  4. SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
  5. SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

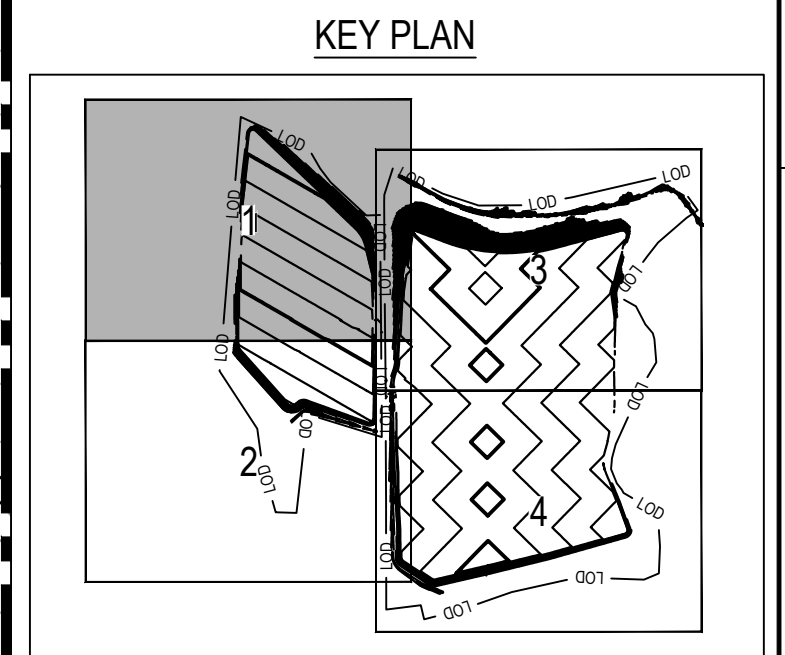


**Michael Baker International, LLC**  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION		1750 POWER PLANT ROAD HOMER CITY, PA 15748	
DWG. TYPE:		CIVIL	
TITLE:		EROSION & SEDIMENT CONTROL PLAN - PHASE 2	
PROJECT NAME:		RURA FIELD	
1" = 60'	RURA1	C-744-3004	1 A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET REV







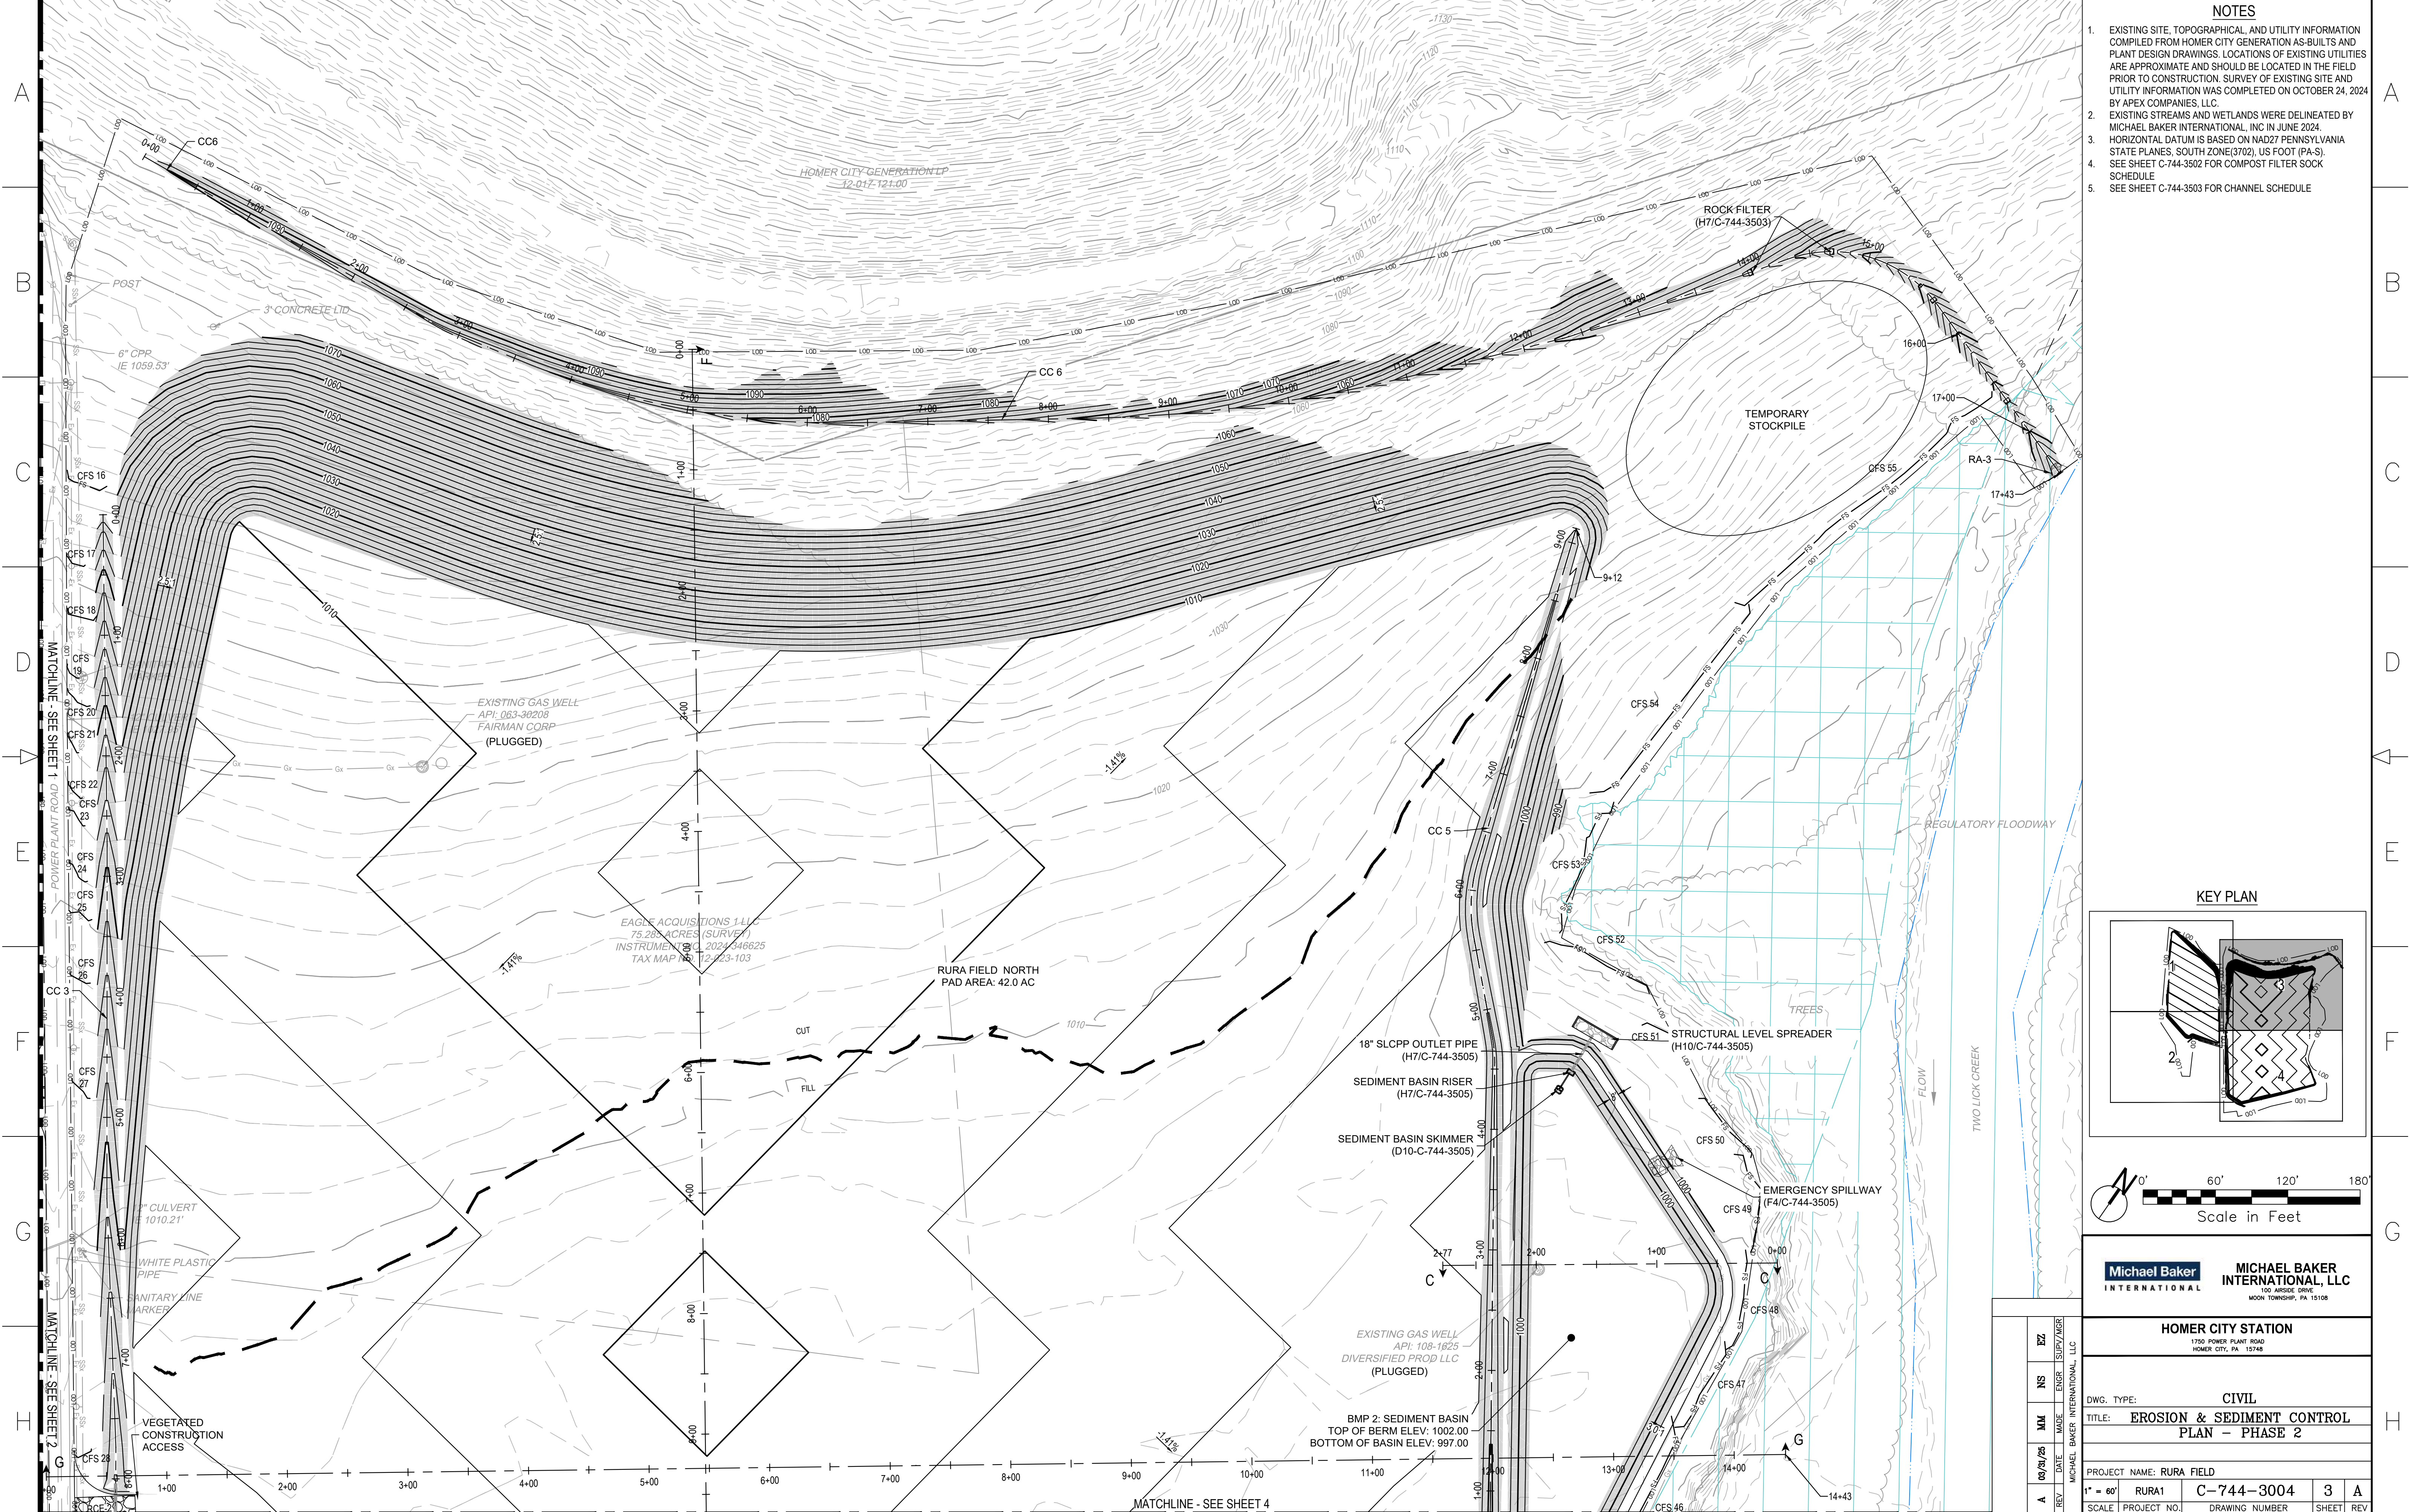

- NOTES
1.



EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
2.

EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
3.

HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
4.

SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
5.

SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

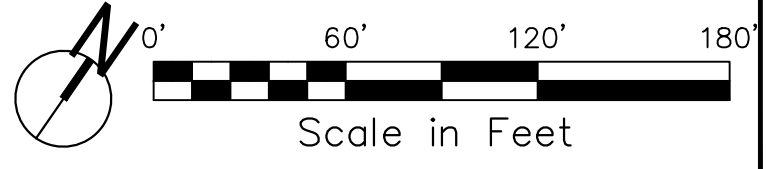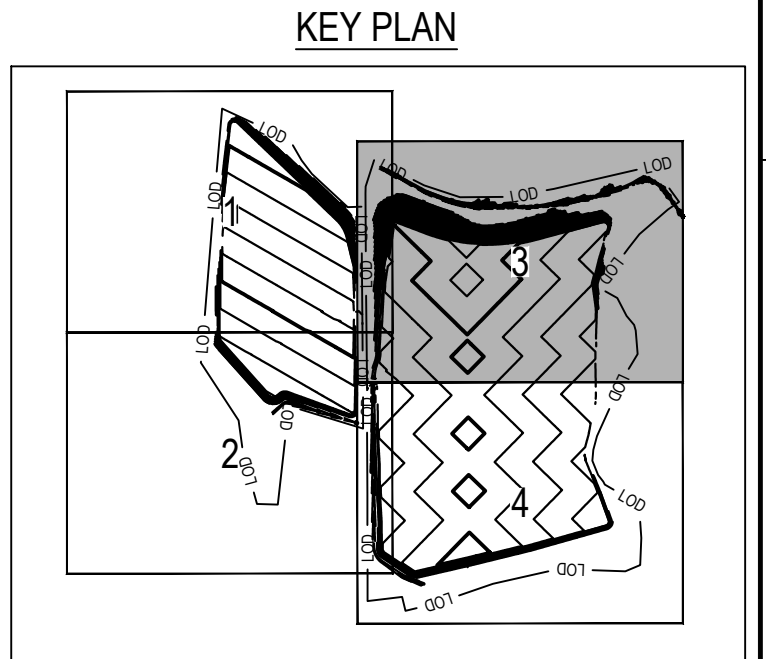


Michael Baker International



MICHAEL BAKER INTERNATIONAL, LLC  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION	
1750 POWER PLANT ROAD HOMER CITY, PA 15748	
DWG. TYPE: CIVIL	
TITLE: EROSION & SEDIMENT CONTROL PLAN - PHASE 2	
PROJECT NAME: RURA FIELD	
1" = 60'	RURA1 C-744-3004 3 A
SCALE	PROJECT NO. DRAWING NUMBER SHEET REV



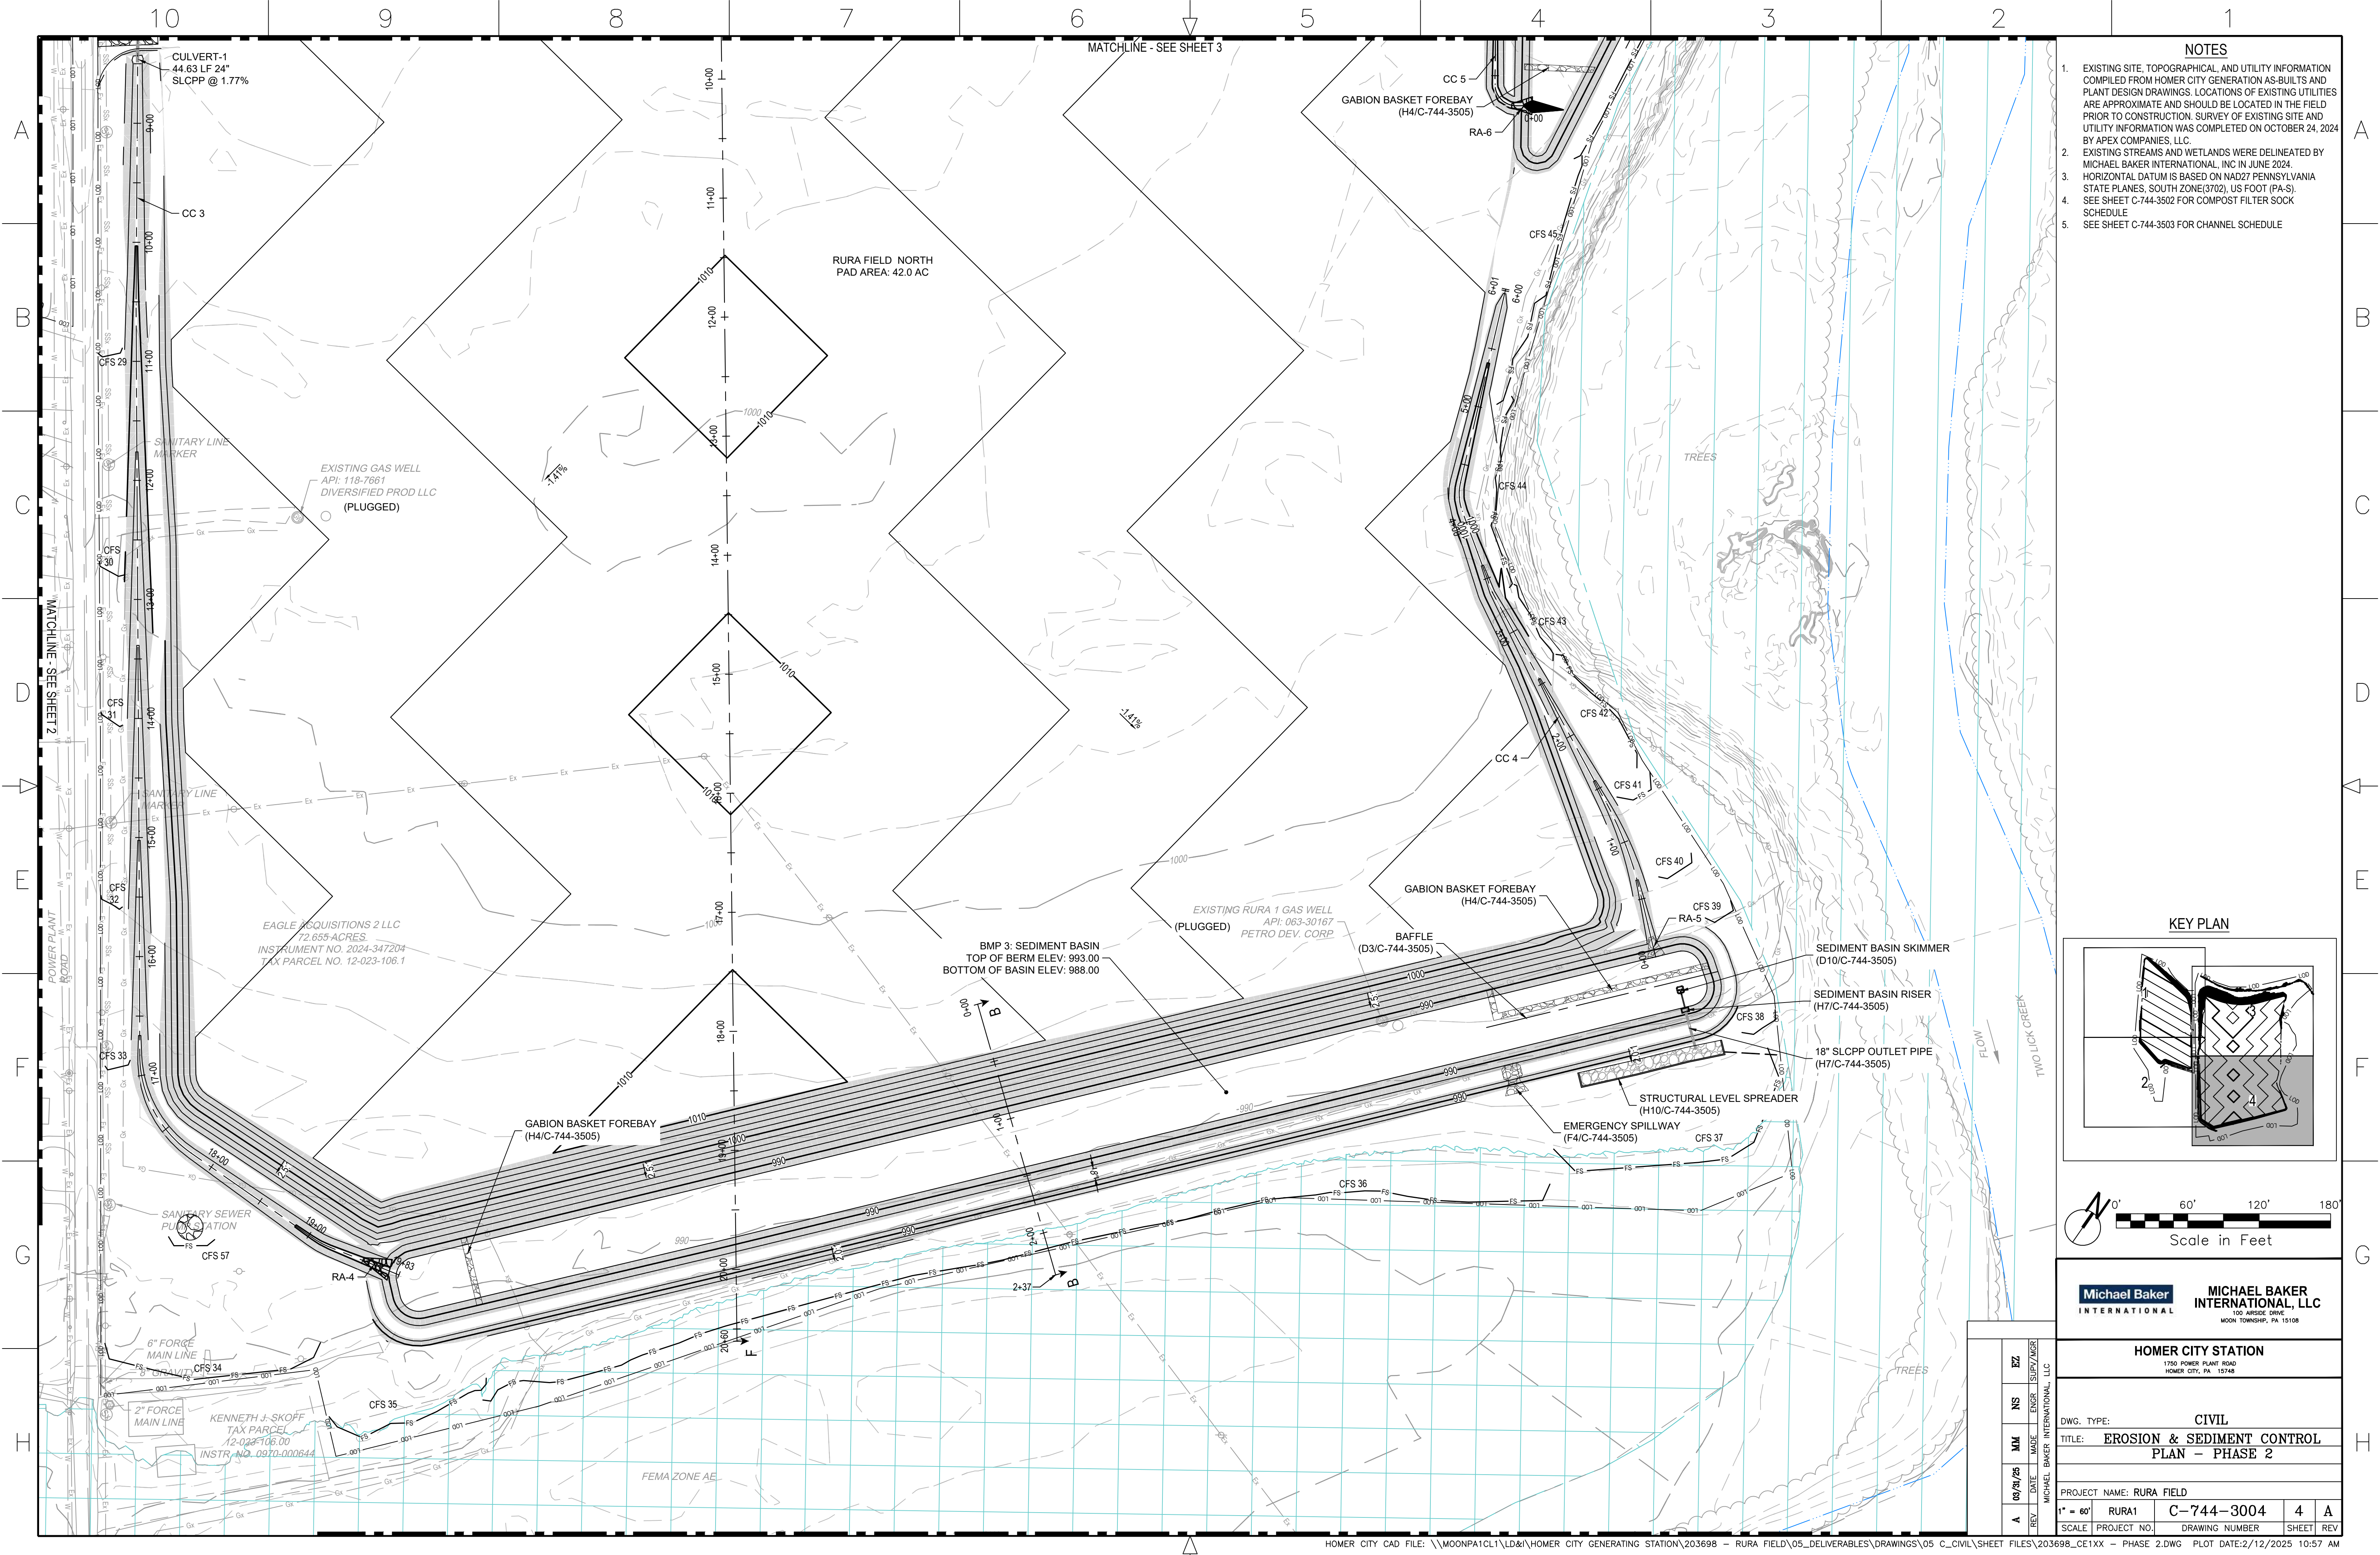

- NOTES**
- EXISTING SITE, TOPOGRAPHICAL, AND UTILITY INFORMATION COMPILED FROM HOMER CITY GENERATION AS-BUILTS AND PLANT DESIGN DRAWINGS. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND SHOULD BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. SURVEY OF EXISTING SITE AND UTILITY INFORMATION WAS COMPLETED ON OCTOBER 24, 2024 BY APEX COMPANIES, LLC.
  - EXISTING STREAMS AND WETLANDS WERE DELINEATED BY MICHAEL BAKER INTERNATIONAL, INC IN JUNE 2024.
  - HORIZONTAL DATUM IS BASED ON NAD27 PENNSYLVANIA STATE PLANES, SOUTH ZONE(3702), US FOOT (PA-S).
  - SEE SHEET C-744-3502 FOR COMPOST FILTER SOCK SCHEDULE
  - SEE SHEET C-744-3503 FOR CHANNEL SCHEDULE

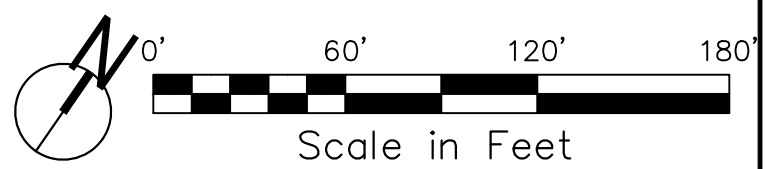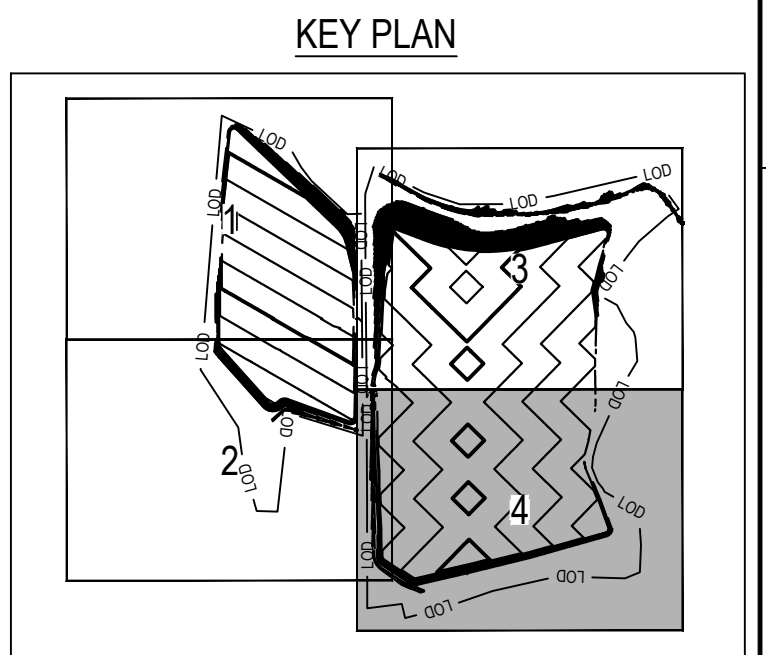

<div><div>Michael Baker</div><div>INTERNATIONAL</div></div>		<div><div>MICHAEL BAKER</div><div>INTERNATIONAL, LLC</div><div>100 ARPSIDE DRIVE MOON TOWNSHIP, PA 15108</div></div>	
<div><div>HOMER CITY STATION</div><div>1750 POWER PLANT ROAD HOMER CITY, PA 15748</div></div>			
DWG. TYPE:		CIVIL	
TITLE: EROSION & SEDIMENT CONTROL PLAN - PHASE 2			
PROJECT NAME: RURA FIELD			
1" = 60'	RURA1	C-744-3004	4 A
SCALE	PROJECT NO.	DRAWING NUMBER	SHEET REV



A

B

C

D

E

F

G

H

A

B

C


D

E

F

G


H

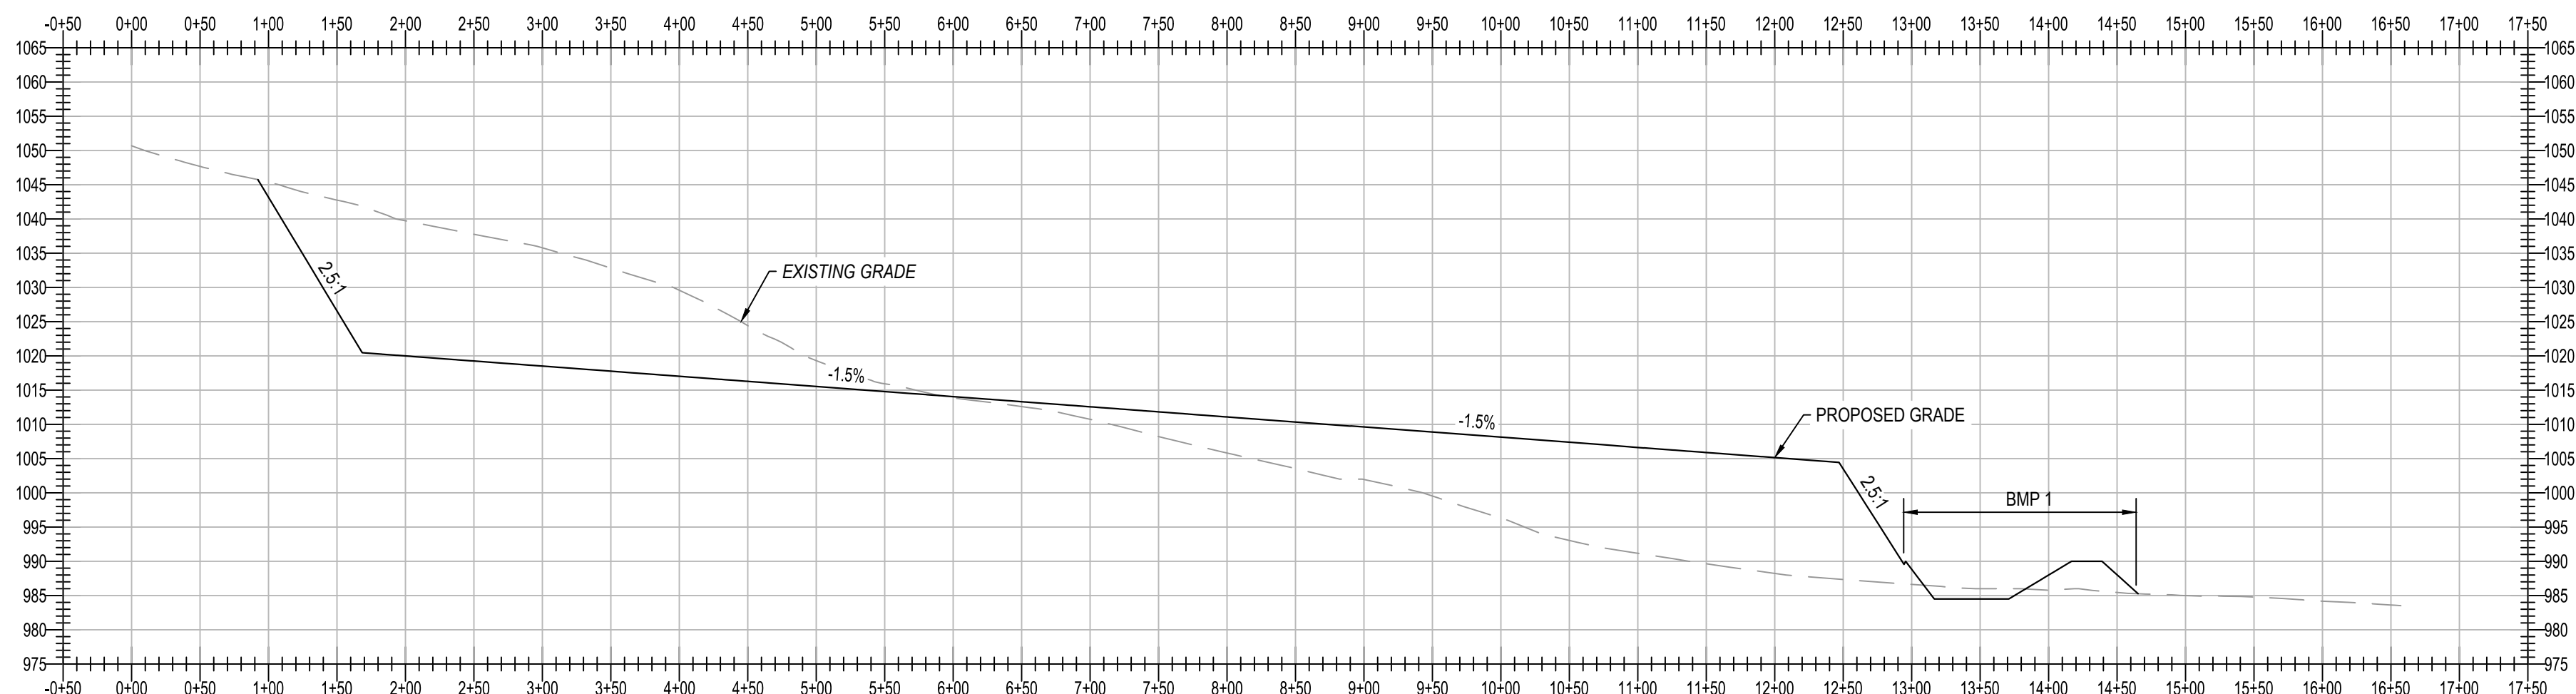

C10

SECTION D-D


SCALE: 1"=100' H. 1"= 20' V.

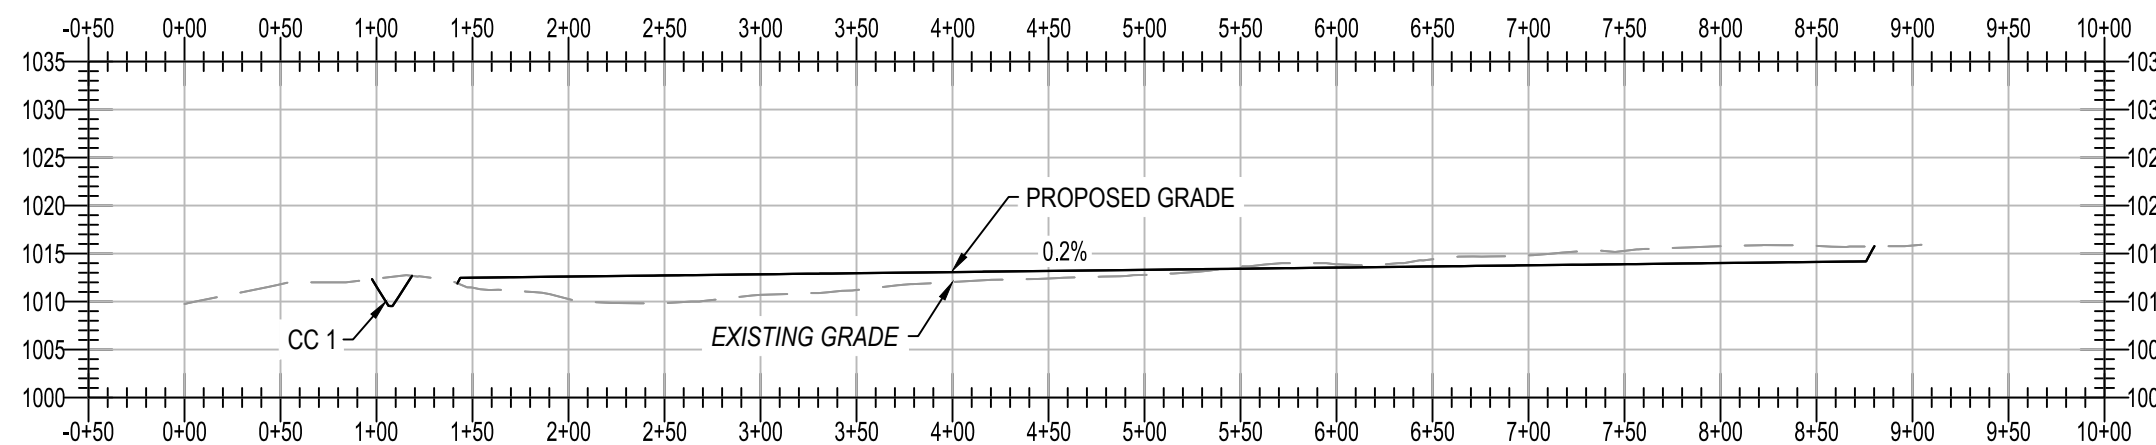

D10

SECTION E-E


SCALE: 1"=100' H. 1"= 20' V.

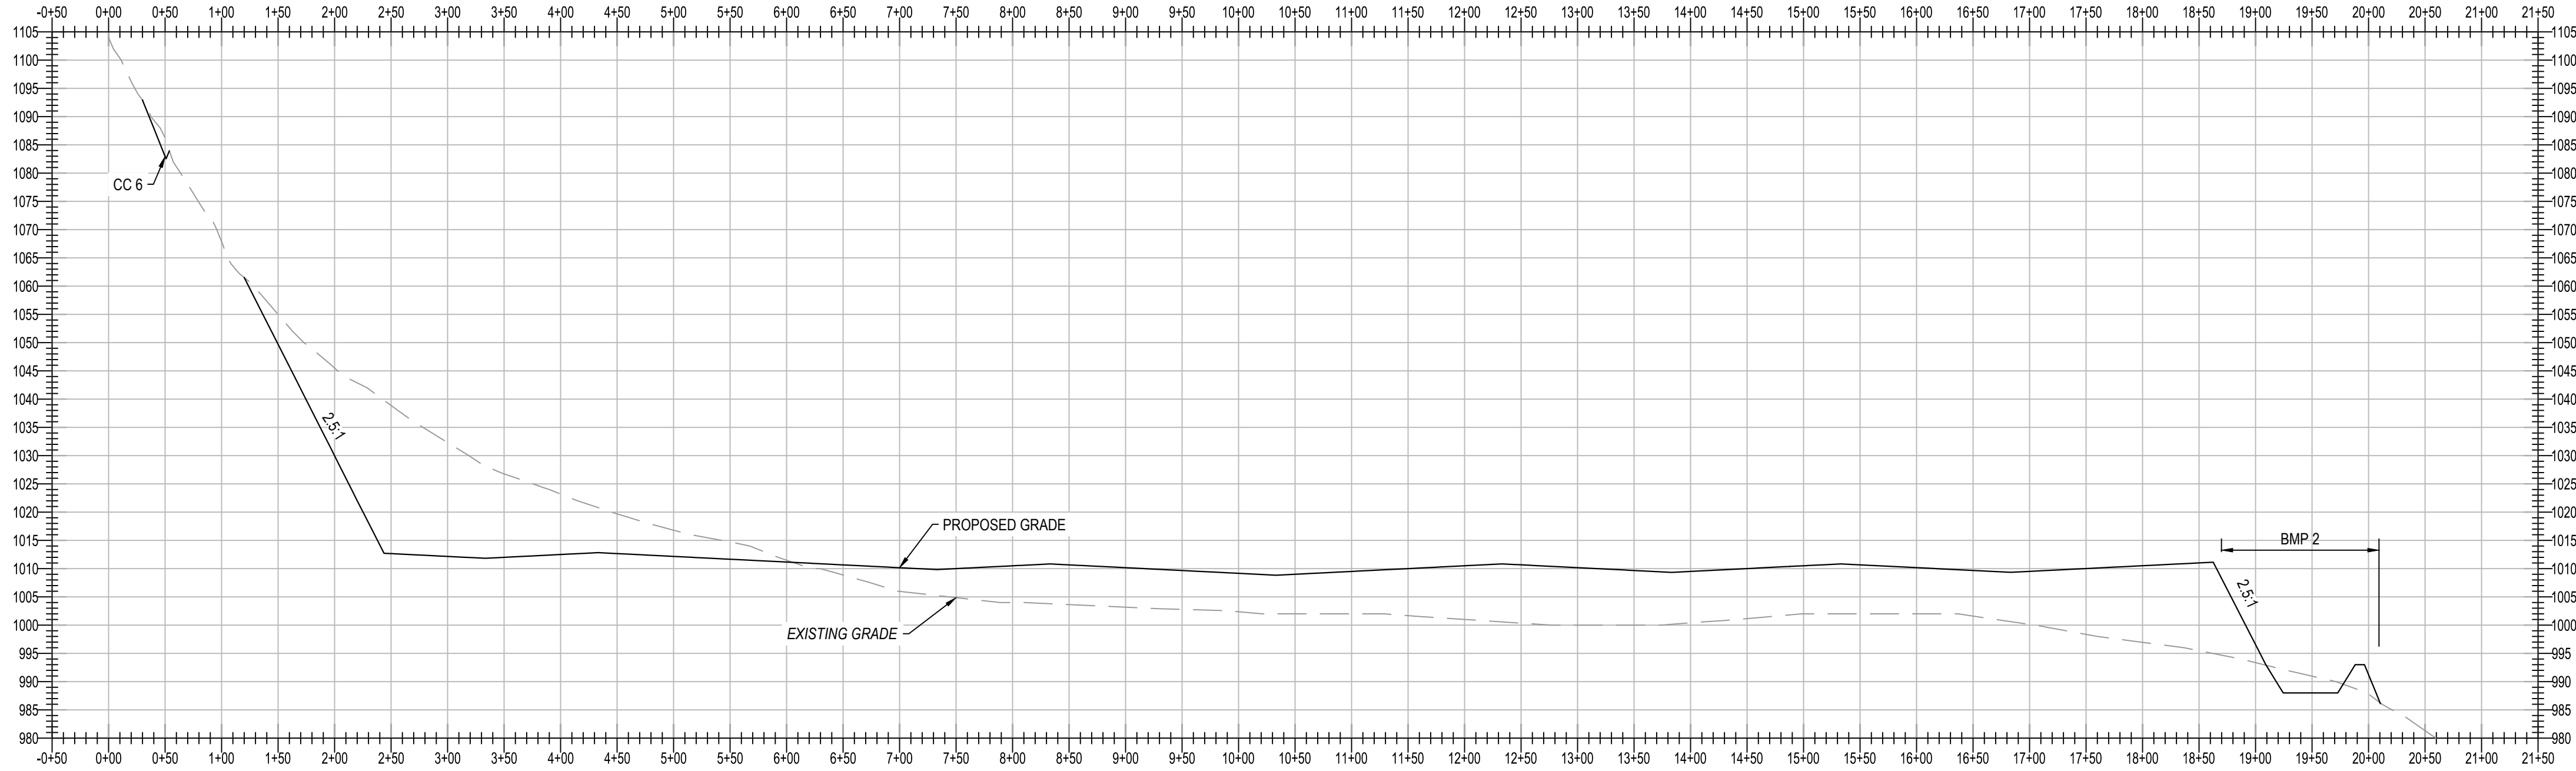

G10

SECTION F-F


SCALE: 1"=100' H. 1"= 20' V.

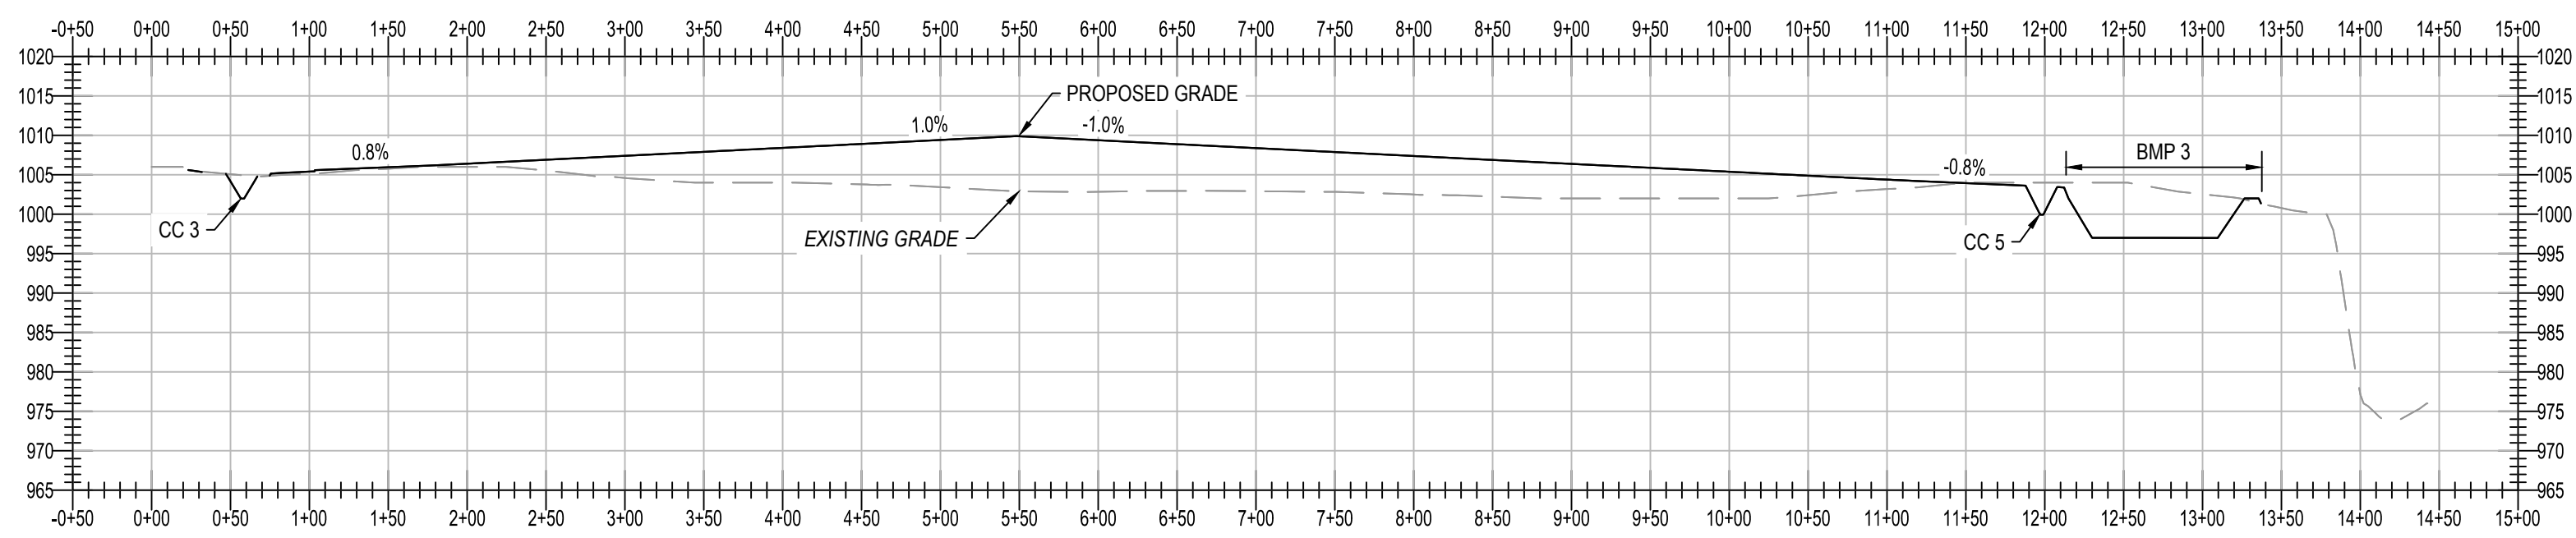

H10

SECTION G-G

SCALE: 1"=100' H. 1"= 20' V.

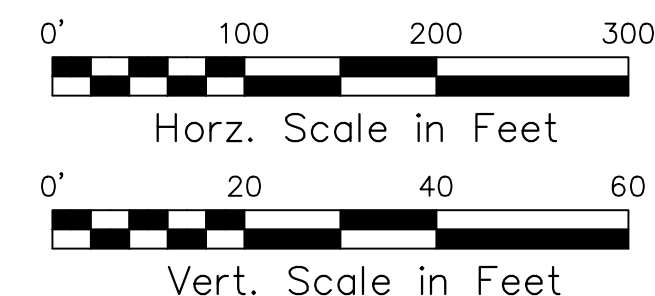

**Michael Baker International**  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

**HOMER CITY STATION**  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: **CIVIL**  
TITLE: **SECTIONS**

PROJECT NAME: RURA FIELD  
SCALE PROJECT NO. DRAWING NUMBER SHEET REV  
RURA1 C-744-3201 1 A



A

B

C









D

E

F

G

H

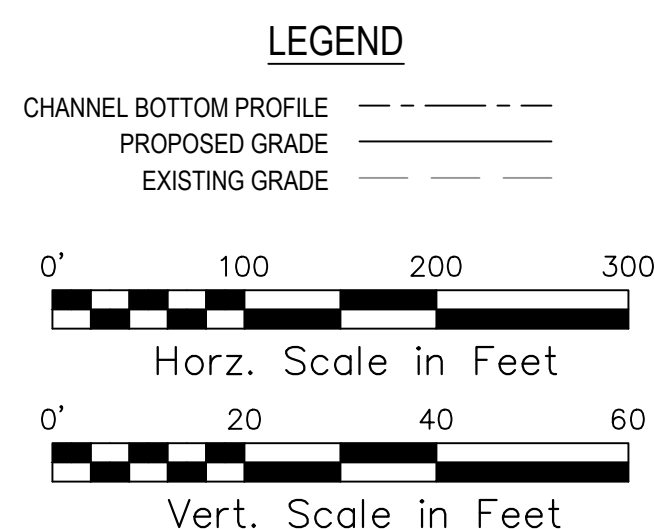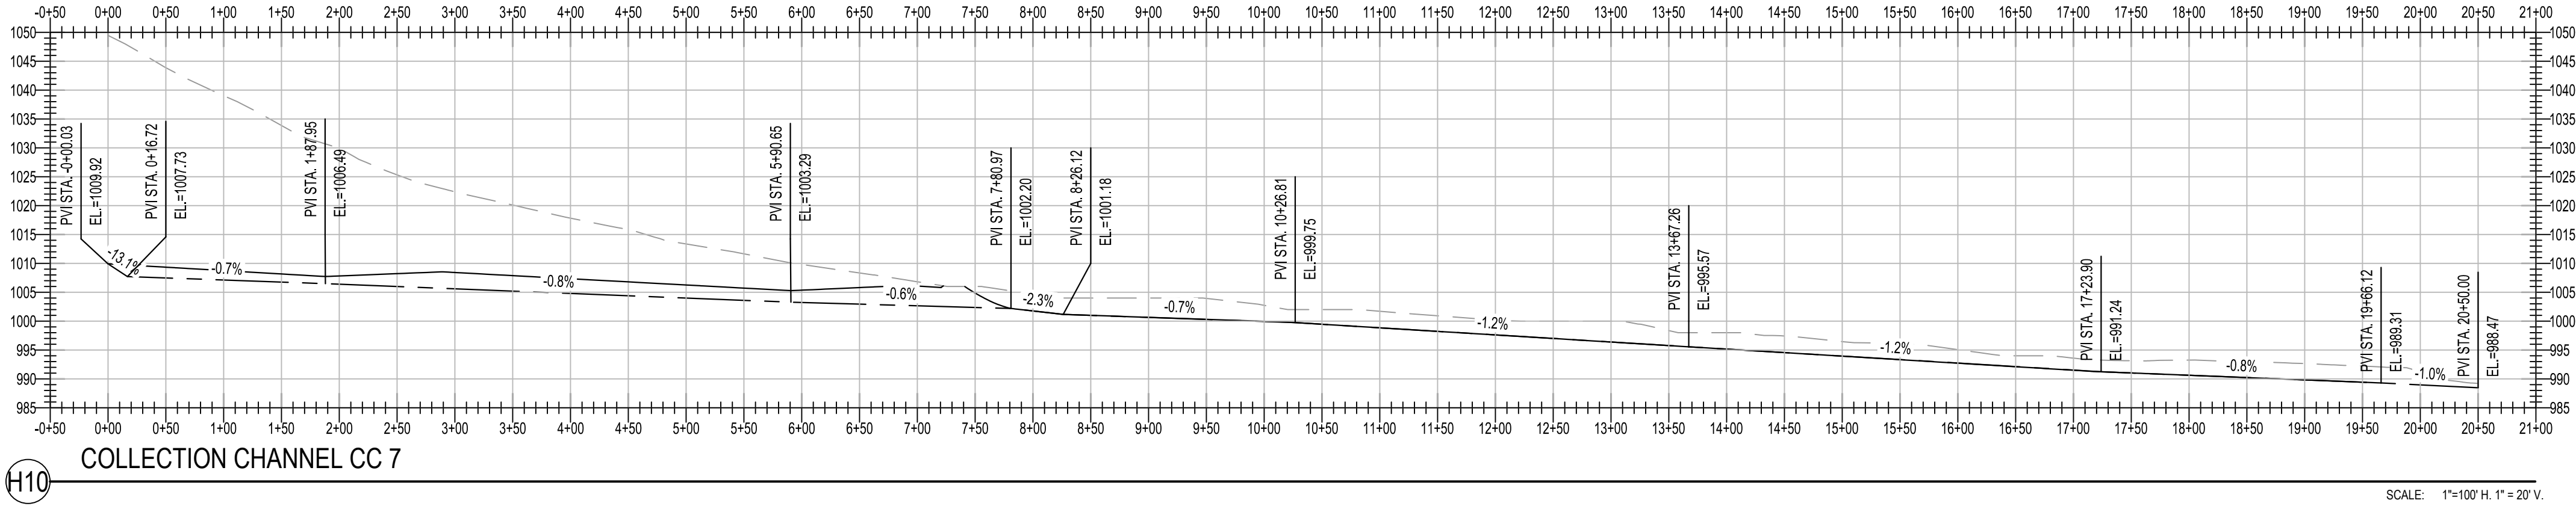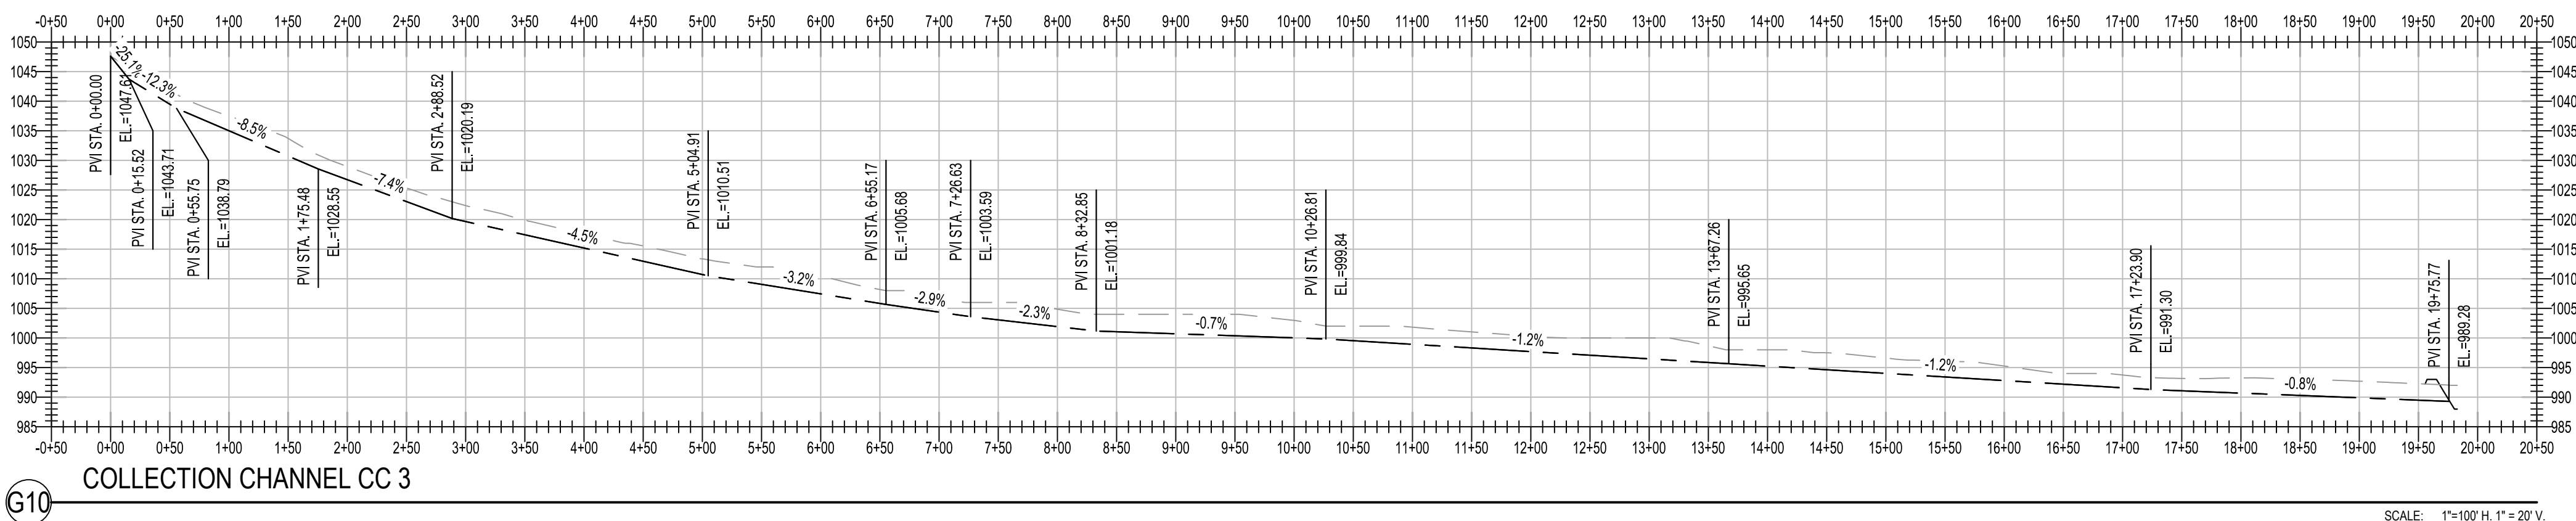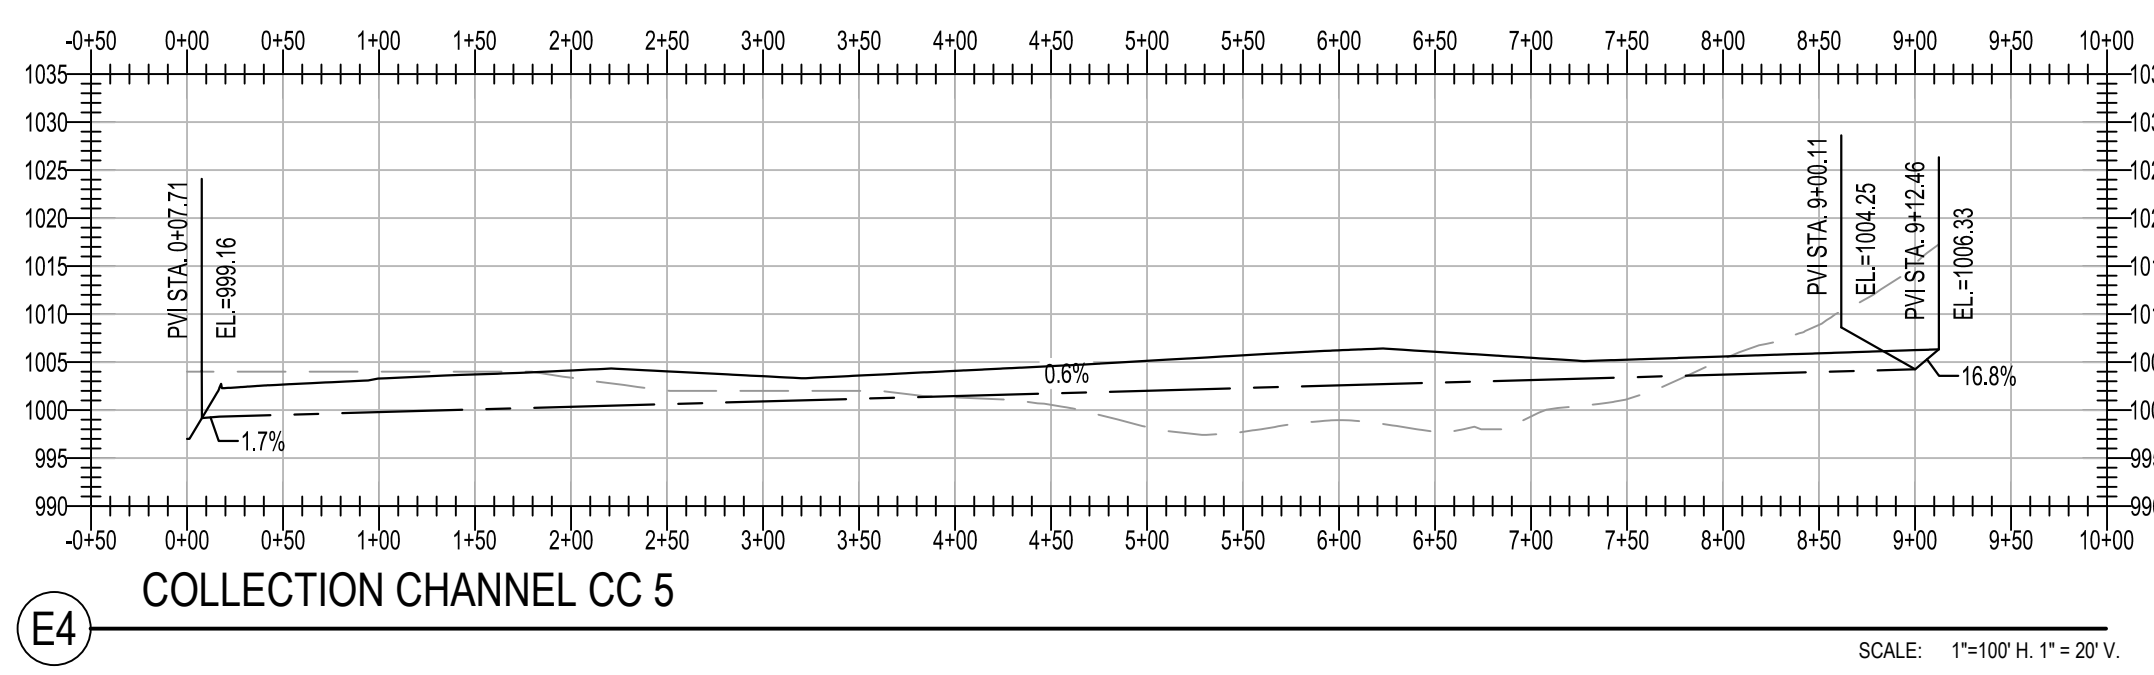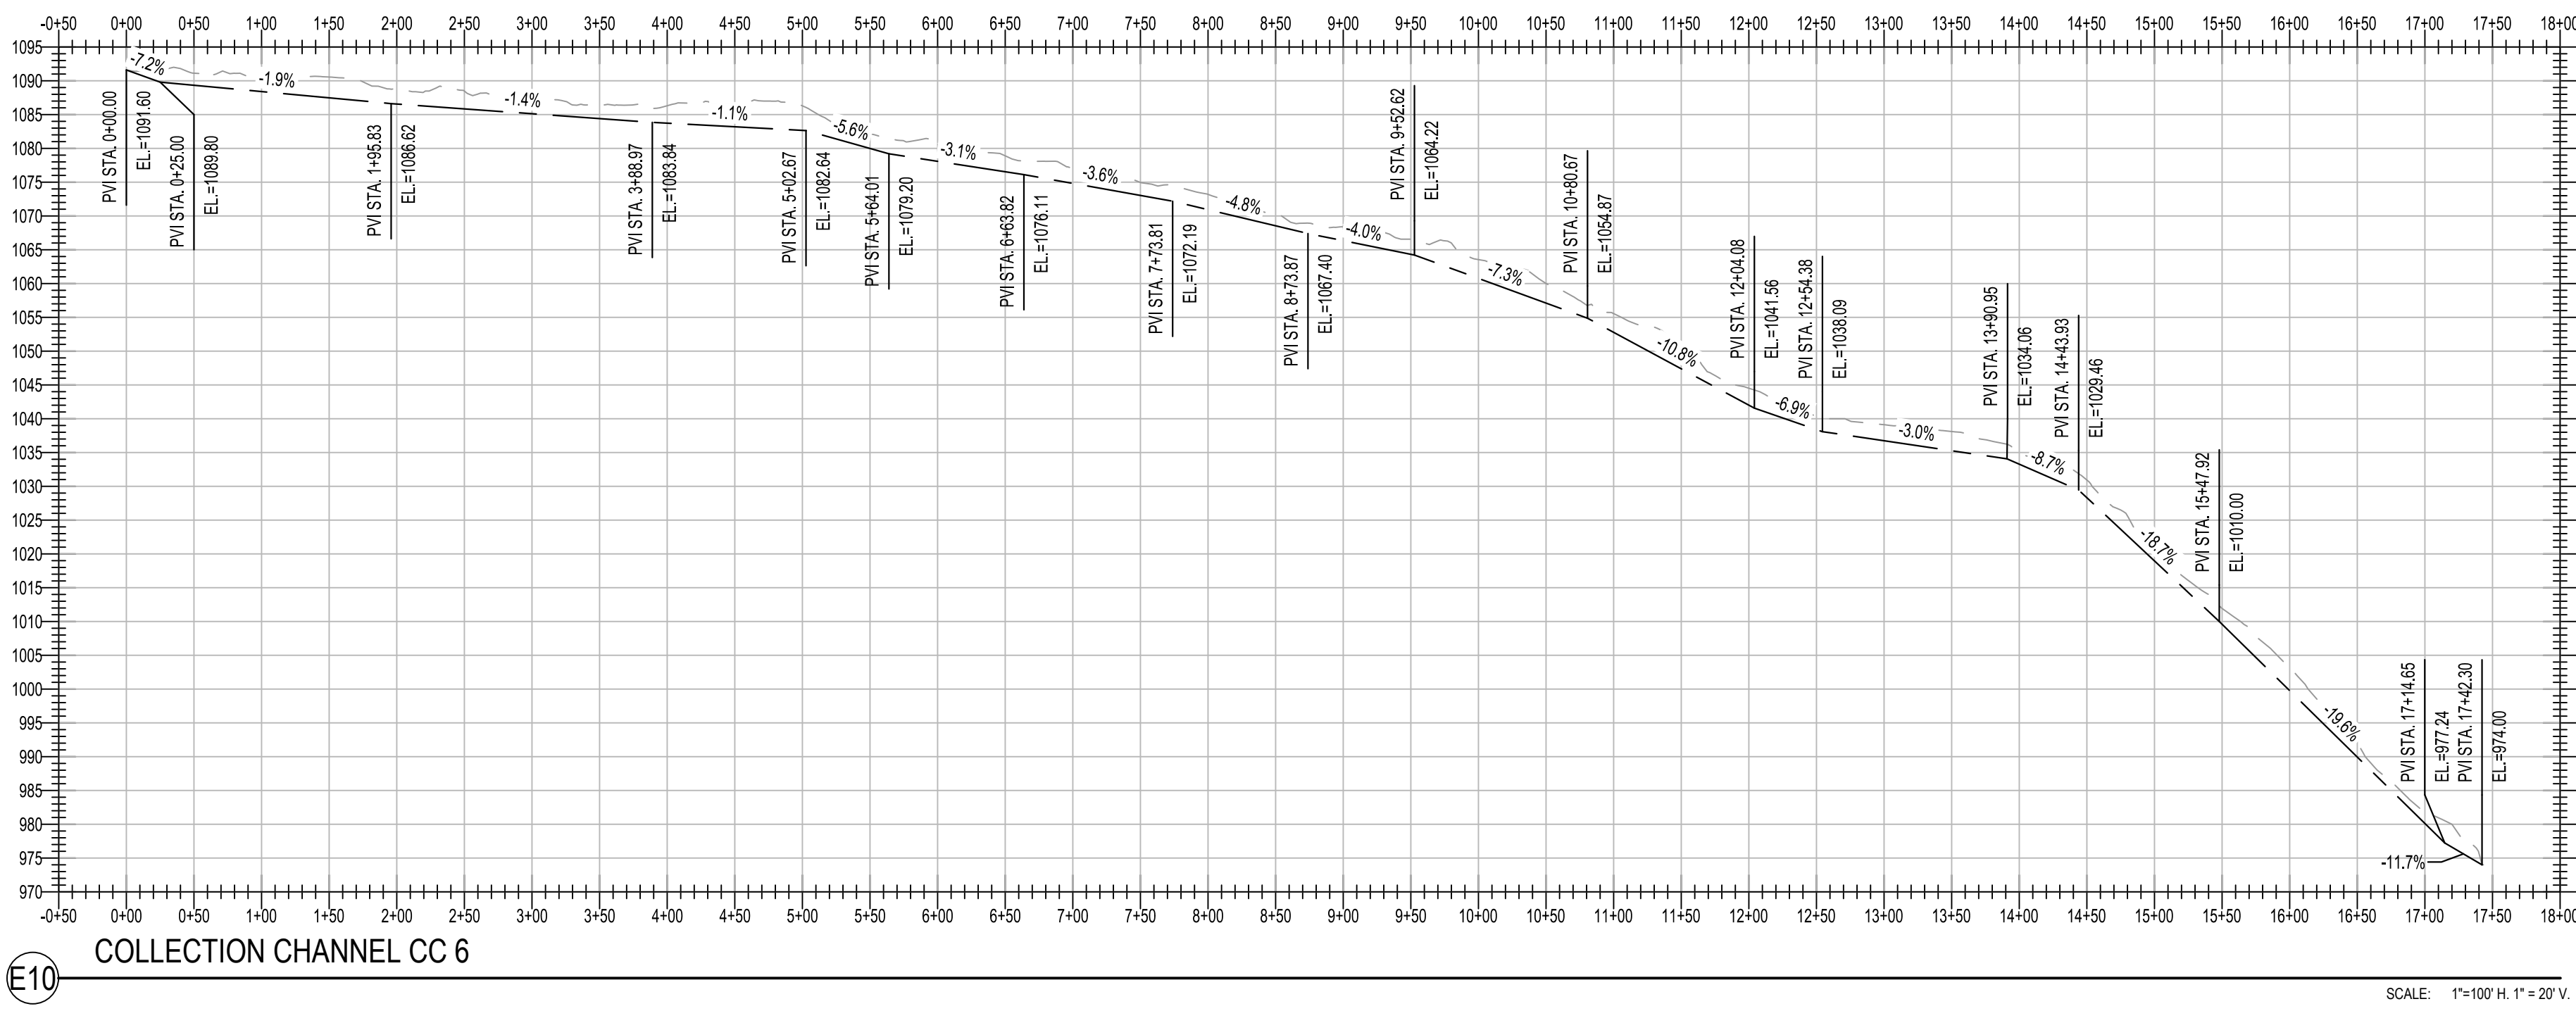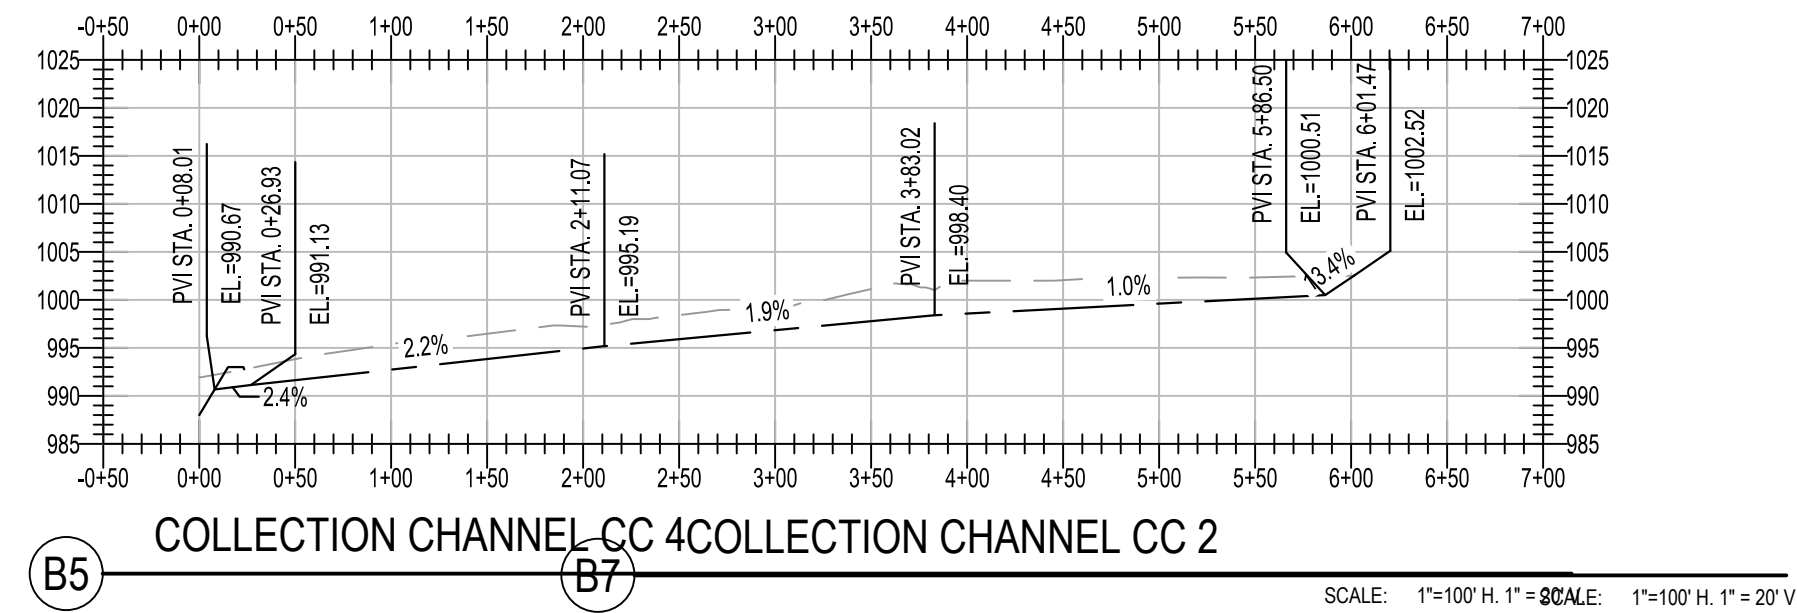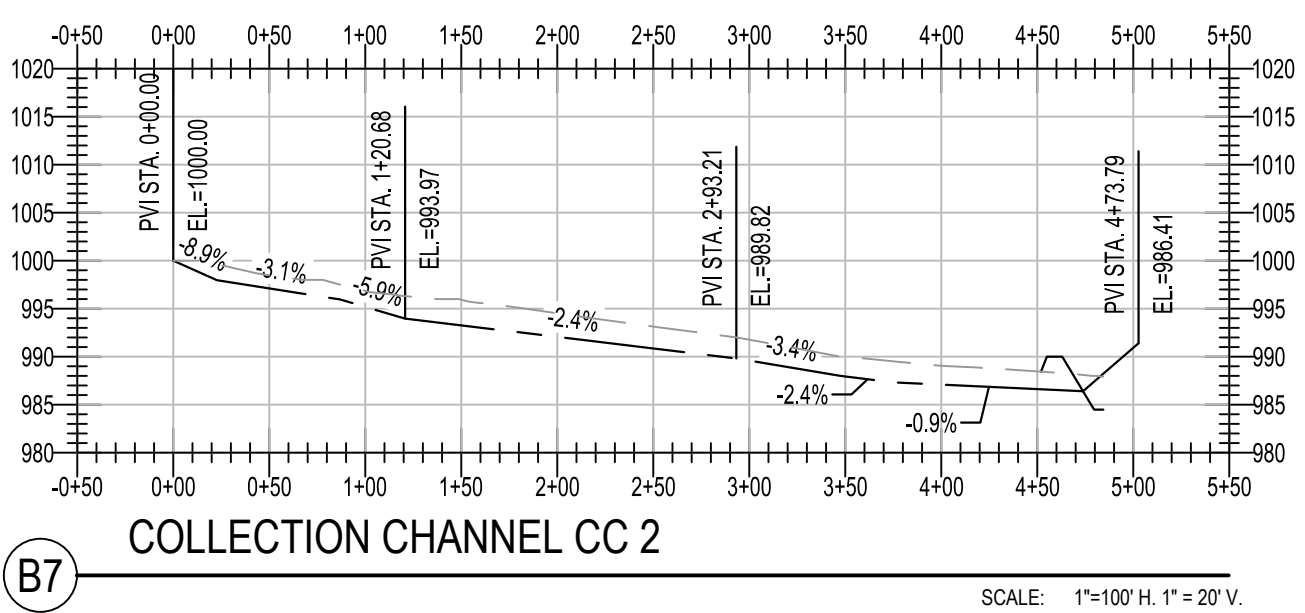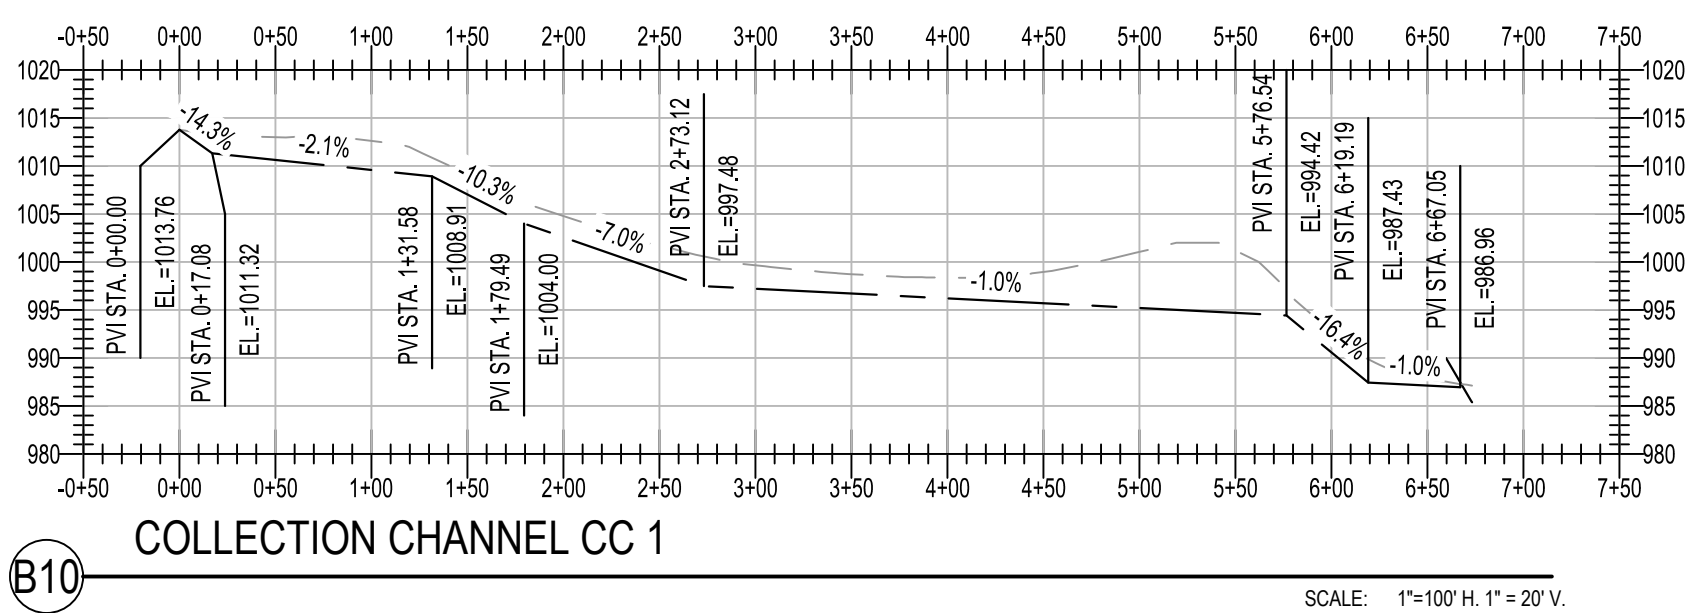

Michael Baker International

MICHAEL BAKER INTERNATIONAL, LLC  
100 ARSIDE DRIVE  
MOON TOWNSHIP, PA 15108

HOMER CITY STATION  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15748

DWG. TYPE: CIVIL  
TITLE: CHANNEL PROFILES

PROJECT NAME: RURA FIELD  
SCALE: RURA1 C-744-3202 1 A  
PROJECT NO. DRAWING NUMBER SHEET REV



	10	9	8	7	6	5	4	3	2	1		
A	GENERAL NOTES:										A	
	1. ALL EARTH DISTURBANCES, INCLUDING CLEARING AND GRUBBING AS WELL AS CUTS AND FILLS SHALL BE DONE IN ACCORDANCE WITH THE APPROVED E&S PLAN. A COPY OF THE APPROVED DRAWINGS (STAMPED, SIGNED AND DATED BY THE REVIEWING AGENCY) MUST BE AVAILABLE AT THE PROJECT SITE AT ALL TIMES. THE REVIEWING AGENCY SHALL BE NOTIFIED OF ANY CHANGES TO THE APPROVED PLAN PRIOR TO IMPLEMENTATION OF THOSE CHANGES. THE REVIEWING AGENCY MAY REQUIRE A WRITTEN SUBMITTAL OF THOSE CHANGES FOR REVIEW AND APPROVAL AT ITS DISCRETION.											
	2. AT LEAST 7 DAYS PRIOR TO STARTING ANY EARTH DISTURBANCE ACTIVITIES, INCLUDING CLEARING AND GRUBBING, THE OWNER AND/OR OPERATOR SHALL INVITE ALL CONTRACTORS, THE LANDOWNER, APPROPRIATE MUNICIPAL OFFICIALS, THE E&S PLAN PREPARER, THE PCSM PLAN PREPARER, THE LICENSED PROFESSIONAL RESPONSIBLE FOR OVERSIGHT OF CRITICAL STAGES OF IMPLEMENTATION OF THE PCSM PLAN, AND A REPRESENTATIVE FROM REVIEWING AGENCY TO AN ON-SITE PRECONSTRUCTION MEETING.											
B	3. AT LEAST 3 DAYS PRIOR TO STARTING ANY EARTH DISTURBANCE ACTIVITIES, OR EXPANDING INTO AN AREA PREVIOUSLY UNMARKED, THE PENNSYLVANIA ONE CALL SYSTEM INC. SHALL BE NOTIFIED AT 1-800-242-1776 FOR THE LOCATION OF EXISTING UNDERGROUND UTILITIES.										B	
	4. ALL EARTH DISTURBANCE ACTIVITIES SHALL PROCEED IN ACCORDANCE WITH THE SEQUENCE PROVIDED ON THE PLAN DRAWINGS. DEVIATION FROM THAT SEQUENCE MUST BE APPROVED IN WRITING FROM THE REVIEWING AGENCY PRIOR TO IMPLEMENTATION.											
	5. AREAS TO BE FILLED ARE TO BE CLEARED, GRUBBED, AND STRIPPED OF TOPSOIL TO REMOVE TREES, VEGETATION, ROOTS AND OTHER OBJECTIONABLE MATERIAL.											
C	6. CLEARING, GRUBBING, AND TOPSOIL STRIPPING SHALL BE LIMITED TO THOSE AREAS DESCRIBED IN EACH STAGE OF THE CONSTRUCTION SEQUENCE. GENERAL SITE CLEARING, GRUBBING AND TOPSOIL STRIPPING MAY NOT COMMENCE IN ANY STAGE OR PHASE OF THE PROJECT UNTIL THE E&S BMPS SPECIFIED BY THE BMP SEQUENCE FOR THAT STAGE OR PHASE HAVE BEEN INSTALLED AND ARE FUNCTIONING AS DESCRIBED IN THIS E&S PLAN.										C	
	7. AT NO TIME SHALL CONSTRUCTION VEHICLES BE ALLOWED TO ENTER AREAS OUTSIDE THE LIMIT OF DISTURBANCE BOUNDARIES SHOWN ON THE PLAN MAPS. THESE AREAS MUST BE CLEARLY MARKED BEFORE CLEARING AND GRUBBING OPERATIONS BEGIN.											
	8. IMMEDIATELY UPON DISCOVERING UNFORESEEN CIRCUMSTANCES POSING THE POTENTIAL FOR ACCELERATED EROSION AND/OR SEDIMENT POLLUTION, THE OPERATOR SHALL IMPLEMENT APPROPRIATE BEST MANAGEMENT PRACTICES TO MINIMIZE THE POTENTIAL FOR EROSION AND SEDIMENT POLLUTION AND NOTIFY THE LOCAL CONSERVATION DISTRICT OR PADEP.											
D	9. ALL BUILDING MATERIALS AND WASTES SHALL BE REMOVED FROM THE SITE AND RECYCLED OR DISPOSED OF IN ACCORDANCE WITH THE DEPARTMENT'S SOLID WASTE MANAGEMENT REGULATIONS AT 25 PA CODE 260.1 ET SEQ., 271.1, AND 287.1 ET. SEQ. NO BUILDING MATERIALS OR WASTES OR UNUSED BUILDING MATERIALS SHALL BE BURNED, BURIED, DUMPED, OR DISCHARGED AT THE SITE.										D	
	10. ALL OFF-SITE WASTE AND BORROW AREAS MUST HAVE AN E&S PLAN APPROVED BY THE LOCAL CONSERVATION DISTRICT OR PADEP FULLY IMPLEMENTED PRIOR TO BEING ACTIVATED.											
	11. THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ANY MATERIAL BROUGHT ON SITE IS CLEAN FILL. FORM FP-001 MUST BE RETAINED BY THE PROPERTY OWNER FOR ANY FILL MATERIAL AFFECTED BY A SPILL OR RELEASE OF A REGULATED SUBSTANCE BUT QUALIFYING AS CLEAN FILL DUE TO ANALYTICAL TESTING.											
E	12. ALL PUMPING OF WATER FROM ANY WORK AREA SHALL BE DONE ACCORDING TO THE PROCEDURE DESCRIBED IN THIS PLAN, OVER UNDISTURBED VEGETATED AREAS.										E	
	13. ALL VEHICLES AND EQUIPMENT ENTERING OR EXITING THE SITE MUST USE ROCK CONSRUCTION ENTRANCES.											
	14. UNTIL THE SITE IS STABILIZED, ALL EROSION AND SEDIMENT BMPS SHALL BE MAINTAINED PROPERLY. MAINTENANCE SHALL INCLUDE INSPECTIONS OF ALL EROSION AND SEDIMENT BMPS AFTER EACH RUNOFF EVENT AND ON A WEEKLY BASIS. ALL PREVENTATIVE AND REMEDIAL MAINTENANCE WORK, INCLUDING CLEAN OUT, REPAIR, REPLACEMENT, REGRADING, RESEEDING, REMULCHING AND RENETTING MUST BE PERFORMED IMMEDIATELY. IF THE E&S BMPS FAIL TO PERFORM AS EXPECTED, REPLACEMENT BMPS, OR MODIFICATIONS OF THOSE INSTALLED WILL BE REQUIRED.											
F	15. A LOG SHOWING DATES THAT E&S BMPS WERE INSPECTED AS WELL AS ANY DEFICIENCIES FOUND AND THE DATE THEY WERE CORRECTED SHALL BE MAINTAINED ON THE SITE AND BE MADE AVAILABLE TO REGULATORY AGENCY OFFICIALS AT THE TIME OF INSPECTION.										F	
	16. SEDIMENT TRACKED ONTO ANY PUBLIC ROADWAY OR SIDEWALK SHALL BE RETURNED TO THE CONSTRUCTION SITE BY THE END OF EACH WORK DAY AND DISPOSED IN THE MANNER DESCRIBED IN THIS PLAN. IN NO CASE SHALL THE SEDIMENT BE WASHED, SHOVELED, OR SWEEP INTO ANY ROADSIDE DITCH, STORM SEWER, OR SURFACE WATER.											
	17. ALL SEDIMENT REMOVED FROM BMPS SHALL BE DISPOSED OF IN THE MANNER DESCRIBED ON THE PLAN DRAWINGS.											
G	18. AREAS WHICH ARE TO BE TOPSOILED SHALL BE SCARIFIED TO A MINIMUM DEPTH OF 3 TO 5 INCHES -- 6 TO 12 INCHES ON COMPACTED SOILS -- PRIOR TO PLACEMENT OF TOPSOIL. AREAS TO BE VEGETATED SHALL HAVE A MINIMUM 4 INCHES OF TOPSOIL IN PLACE PRIOR TO SEEDING AND MULCHING. FILL OUTSLOPES SHALL HAVE A MINIMUM OF 2 INCHES OF TOPSOIL.										G	
	19. ALL FILLS SHALL BE COMPACTED AS REQUIRED TO REDUCE EROSION, SLIPPAGE, SETTLEMENT, SUBSIDENCE OR OTHER RELATED PROBLEMS. FILL INTENDED TO SUPPORT BUILDINGS, STRUCTURES AND CONDUITS, ETC. SHALL BE COMPACTED IN ACCORDANCE WITH LOCAL REQUIREMENTS OR CODES.											
	20. ALL EARTHEN FILLS SHALL BE PLACED IN COMPACTED LAYERS NOT TO EXCEED 9 INCHES IN THICKNESS.											
H	21. FILL MATERIALS SHALL BE FREE OF FROZEN PARTICLES, BRUSH, ROOTS, SOD, OR OTHER FOREIGN OR OBJECTIONABLE MATERIALS THAT WOULD INTERFERE WITH OR PREVENT CONSTRUCTION OF SATISFACTORY FILLS.										H	
	22. FROZEN MATERIALS OR SOFT, MUCKY, OR HIGHLY COMPRESSIBLE MATERIALS SHALL NOT BE INCORPORATED INTO FILLS.											
	23. FILL SHALL NOT BE PLACED ON SATURATED OR FROZEN SURFACES.											
	24. SEEPS OR SPRINGS ENCOUNTERED DURING CONSTRUCTION SHALL BE HANDLED IN ACCORDANCE WITH THE STANDARD AND SPECIFICATION FOR SUBSURFACE DRAIN OR OTHER APPROVED METHOD.											
	25. ALL GRADED AREAS SHALL BE PERMANENTLY STABILIZED IMMEDIATELY UPON REACHING FINISHED GRADE. CUT SLOPES IN COMPETENT BEDROCK AND ROCK FILLS NEED NOT BE VEGETATED. SEEDED AREAS WITHIN 50 FEET OF A SURFACE WATER, OR AS OTHERWISE SHOWN ON THE PLAN DRAWINGS, SHALL BE BLANKETED ACCORDING TO THE STANDARDS OF THIS PLAN.											
	26. IMMEDIATELY AFTER EARTH DISTURBANCE ACTIVITIES CEASE IN ANY AREA OR SUBAREA OF THE PROJECT, THE OPERATOR SHALL STABILIZE ALL DISTURBED AREAS. DURING NON-GERMINATING MONTHS, MULCH OR PROTECTIVE BLANKETING SHALL BE APPLIED AS DESCRIBED IN THE PLAN. AREAS NOT AT FINISHED GRADE, WHICH WILL BE REACTIVATED WITHIN 1 YEAR, MAY BE STABILIZED IN ACCORDANCE WITH THE TEMPORARY STABILIZATION SPECIFICATIONS. THOSE AREAS WHICH WILL NOT BE REACTIVATED WITHIN 1 YEAR SHALL BE STABILIZED IN ACCORDANCE WITH THE PERMANENT STABILIZATION SPECIFICATIONS.											
PERMANENT STABILIZATION IS DEFINED AS A MINIMUM UNIFORM, PERENNIAL 70% VEGETATIVE COVER OR OTHER PERMANENT NON-VEGETATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED EROSION. CUT AND FILL SLOPES SHALL BE CAPABLE OF RESISTING FAILURE DUE TO SLUMPING, SLIDING, OR OTHER MOVEMENTS.												
E&S BMPS SHALL REMAIN FUNCTIONAL AS SUCH UNTIL ALL AREAS TRIBUTARY TO THEM ARE PERMANENTLY STABILIZED OR UNTIL THEY ARE REPLACED BY ANOTHER BMP APPROVED BY THE LOCAL CONSERVATION DISTRICT OR THE DEPARTMENT.												
UPON COMPLETION OF ALL EARTH DISTURBANCE ACTIVITIES AND PERMANENT STABILIZATION OF ALL DISTURBED AREAS, THE OWNER AND/OR OPERATOR SHALL CONTACT THE REVIEWING AGENCY FOR AN INSPECTION PRIOR TO REMOVAL/CONVERSION OF THE E&S BMPS.												
AFTER FINAL SITE STABILIZATION HAS BEEN ACHIEVED, TEMPORARY EROSION AND SEDIMENT BMPS MUST BE REMOVED OR CONVERTED TO PERMANENT POST CONSTRUCTION STORMWATER MANAGEMENT BMPS. AREAS DISTURBED DURING REMOVAL OR CONVERSION OF THE BMPS SHALL BE STABILIZED IMMEDIATELY. IN ORDER TO ENSURE RAPID REVEGETATION OF DISTURBED AREAS, SUCH REMOVAL/CONVERSIONS ARE TO BE DONE ONLY DURING THE GERMINATING SEASON.												
UPON COMPLETION OF ALL EARTH DISTURBANCE ACTIVITIES AND PERMANENT STABILIZATION OF ALL DISTURBED AREAS, THE OWNER AND/OR OPERATOR SHALL CONTACT THE REVIEWING AGENCY TO SCHEDULE A FINAL INSPECTION.												
FAILURE TO CORRECTLY INSTALL E&S BMPS, FAILURE TO PREVENT SEDIMENT-LADEN RUNOFF FROM LEAVING THE CONSTRUCTION SITE, OR FAILURE TO TAKE IMMEDIATE CORRECTIVE ACTION TO RESOLVE FAILURE OF E&S BMPS MAY RESULT IN ADMINISTRATIVE, CIVIL, AND/OR CRIMINAL PENALTIES BEING INSTITUTED BY THE DEPARTMENT AS DEFINED IN SECTION 602 OF THE PENNSYLVANIA CLEAN STREAMS LAW. THE CLEAN STREAMS LAW PROVIDES FOR UP TO \$10,000 PER DAY IN CIVIL PENALTIES, UP TO \$10,000 IN SUMMARY CRIMINAL PENALTIES, AND UP TO \$25,000 IN MISDEMEANOR CRIMINAL PENALTIES FOR EACH VIOLATION.												
RECYCLING AND DISPOSAL PROCEDURES OF CONSTRUCTION WASTES												
1. ALL OFF-SITE WASTE AND BORROW AREAS MUST HAVE AN E&S CONTROL PLAN APPROVED BY THE LOCAL CONSERVATION DISTRICT OR PADEP FULLY IMPLEMENTED PRIOR TO BEING ACTIVATED.												
2. GARBAGE DISPOSAL IS HANDLED THROUGH ONE OF THE LOCAL WASTE MANAGEMENT PROVIDERS/FACILITIES. THE CONTRACTOR WILL LEASE A DUMPSTER FOR THE DURATION OF THE PROJECT WHICH WILL BE DISPOSED OF AT A LICENSED/PERMITTED MUNICIPAL LANDFILL.												
3. THE CONTRACTOR WILL DISPOSE OF ALL SCRAP MATERIAL. THE SCRAP MATERIAL MUST BE REMOVED FROM THE SITE AND DISPOSED OF OR RECYCLED AT A PROPERLY LICENSED/PERMITTED FACILITY. THE CONTRACTOR WILL BE RESPONSIBLE FOR ANY PERMITS AND/OR DISPOSAL FEES. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE TO ASSURE THAT ALL MATERIALS ARE HANDLED AND DISPOSED OF IN ACCORDANCE WITH APPLICABLE LAWS, RULES, AND REGULATIONS, INCLUDING, BUT NOT LIMITED TO THOSE ISSUED BY THE ENVIRONMENTAL PROTECTION AGENCY, PADEP, AND THE OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION.												
4. ALL WASTE OR EXCESS MATERIALS NOT SUITABLE FOR THE ON-SITE STOCKPILE OR BACKFILL SHALL BE DISPOSED OF IN ACCORDANCE WITH THE DEPARTMENTS SOLID WASTE MANAGEMENT REGULATIONS AT 25 PA CODE CHAPTER 260 §260.1 ET SEQ. 271.1 AND 287.1 ET. SEQ. AT THE PADEP-APPROVED WASTE SITE WHERE FEASIBLE CONSTRUCTION WASTE MATERIALS WILL BE RECYCLED OR WILL BE TAKEN TO THE NEAREST PADEP APPROVED FACILITY FOR DISPOSAL. EXCESS SOIL MATERIAL IF ANY WILL BE SPREAD AND REVEGETATED WITHIN THE LOD. OFF-SITE SPOIL AND/OR BORROW SITES MUST BE OPERATED UNDER A CURRENT NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT.												
GENERAL PROJECT CONSTRUCTION NOTES:												
1. MAPPING AND TOPOGRAPHY PROVIDED BY PA DCNR LIDAR SURVEY AND LIMITED FIELD SURVEY. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ITS ACCURACY.												
2. DISCREPANCIES FOUND IN THE PROJECT MAPPING MUST BE REPORTED TO THE PROJECT ENGINEER/OWNER.												
3. THIS DRAWING PRESENTS THE RECOMMENDED EROSION AND SEDIMENTATION CONTROL BMPS BASED ON THE PROJECT MAPPING. THE TYPE AND LOCATION OF THESE BMPS SHOULD BE REVISED BASED ON ACTUAL CONDITIONS IN ACCORDANCE WITH THE DETAILS PRESENTED HEREIN AND LOCAL, STATE, AND FEDERAL REQUIREMENTS INCLUDING THE PADEP EROSION AND SEDIMENT POLLUTION CONTROL PROGRAM MANUAL. ALL BMPS SHALL BE INSPECTED, MAINTAINED, AND REPAIRED AS NEEDED TO ASSURE CONTINUED PERFORMANCE OF THEIR INTENDED FUNCTION.												
4. LOCATIONS OF EXISTING UTILITIES ARE BASED ON LIMITED FIELD SURVEY. NO GUARANTEE OR ASSURANCE IS GIVEN BY THE OWNER OR ENGINEER AS TO THEIR ACCURACY, COMPLETENESS, OR VALIDITY. CONTRACTOR TO PERFORM 'DIG' PA ONES CALL, COORDINATE WITH UTILITY COMPANIES, AND LOCATE AND IDENTIFY ALL UTILITIES PRIOR TO CONSTRUCTION.												
CONTRACTOR IS RESPONSIBLE FOR ADHERING TO ALL OSHA SAFETY REGULATIONS DURING CONSTRUCTION.												
6. ALL EXISTING ACCESS ROAD DISTURBANCE SHALL BE REMEDIED AND REPLACED IN KIND.												
7. CONTRACTOR SHALL DELINEATE THE LIMIT OF TREE CLEARING & GRADING AS SHOWN WITH VISIBLE BARRIER AND MINIMIZE STRIPPING TOPSOIL, REMOVAL OF EXISTING VEGETATION, AND SOIL COMPACTION OUTSIDE OF THIS LIMIT TO THE MAXIMUM EXTENT POSSIBLE.												
PERSONS RESPONSIBLE FOR CONSTRUCTION AND OFF SITE DISPOSAL REQUIREMENTS												
IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE SATISFACTORY SOIL E&SC AND TO INTERFACE WITH APPLICABLE REGULATORY AGENCIES.												
THE CONTRACTOR IS RESPONSIBLE FOR HAVING AN APPROVED E&SCP AND FOR CONFIRMING THAT AN ACTIVE E&SCP PERMIT EXISTS FOR ANY OFF-SITE BORROW AREA LOCATIONS. IF OFF-SITE DISPOSAL IS REQUIRED, DISPOSAL MUST OCCUR AT A SITE APPROVED BY THE LOCAL CONSERVATION DISTRICT OR PADEP. PROOF OF THESE PERMISSONS MUST BE PROVIDED TO THE OWNER AND APPLICABLE REGULATORY AGENCIES PRIOR TO USE. ALL FILL MATERIAL MUST BE USED IN ACCORDANCE WITH THE PADEP'S POLICY "MANAGEMENT OF FILL" DOCUMENT NUMBER 258-2182-773. ENVIRONMENTAL DUE DILIGENCE IS DEFINED AS: INVESTIGATIVE TECHNIQUES, INCLUDING, BUT NOT LIMITED TO, VISUAL PROPERTY INSPECTIONS, ELECTRONIC DATA BASE SEARCHES, REVIEW OF PROPERTY OWNERSHIP, REVIEW OF PROPERTY USE HISTORY, SANBORN MAPS, ENVIRONMENTAL QUESTIONNAIRES, TRANSACTION SCREENS, ANALYTICAL TESTING, ENVIRONMENTAL ASSESSMENTS OR AUDITS.												
IN THE EVENT THE CONTRACTOR WISHES TO MODIFY THE E&SCP, A COPY OF THE REVISED E&SCP MUST BE SUBMITTED TO THE ENGINEER AND LOCAL CONSERVATION DISTRICT OR PADEP FOR APPROVAL. THE USE OF THE TERM "ENGINEER" IN THIS REPORT SHALL REFER TO THE PROFESSIONAL ENGINEER WHO SIGNED AND SEALED THE E&SCP AND ESCOP-3 FOR THIS PROJECT.												
LOCATION AND CLASSIFICATION OF SURFACE WATERS												
REFER TO THE PLAN DRAWINGS FOR LOCATIONS OF THE STREAMS AND WETLANDS IN THE PROJECT AREA.												
TEMPORARY STRUCTURAL PRACTICES												
ROCK CONSTRUCTION ENTRANCE. IN ORDER TO PREVENT THE TRACKING OF MUD ONTO PAVED ROADWAYS, ROCK CONSTRUCTION ENTRANCES (RCE) SHALL BE INSTALLED FROM ANY PUBLIC ROAD, AS SHOWN ON THE PLAN SHEETS AND THE DETAIL SHEETS. THE CONTRACTOR MAY DEVIATE FROM THE LOCATIONS SHOWN ON THE PLAN WITHIN THE LOD, BUT MUST OBTAIN APPROVAL FROM THE ENGINEER. UPON SITE STABILIZATION, THE RCE SHALL BE REMOVED ALONG WITH ANY UNSUITABLE MATERIAL, AND THE AREA RESTORED ACCORDING TO MAINTENANCE PROGRAM OF THIS PLAN.												
COMPOST FILTER SOCK. COMPOST FILTER SOCK SHALL BE INSTALLED IN ACCORDANCE WITH THE DETAILS AND SIZING CHART ON THE DRAWINGS TO FILTER SEDIMENT LADEN SHEET FLOW RUNOFF FROM THE LOD. ANY PORTION OF THE SEDIMENT BARRIER THAT IS UNDERMINED OR OVERTOPPED WILL BE IMMEDIATELY REPAIRED. IF THE SECTION CONTINUES TO BE UNDERMINED OR OVERTOPPED, A ROCK FILTER OUTLET WILL BE INSTALLED TO REPLACE THE SECTION. FOR SEDIMENT BARRIER LOCATIONS, SEE THE PLAN SHEETS.												
TEMPORARY SEEDING. UPON TEMPORARY CESSATION OF AN EARTH DISTURBANCE ACTIVITY OR ANY STAGE OF AN ACTIVITY WHERE A CESSATION OF EARTH DISTURBANCE ACTIVITIES WILL EXCEED FOUR DAYS, THE SITE SHALL BE IMMEDIATELY SEEDED, MULCHED, OR OTHERWISE PROTECTED FROM ACCELERATED E&S PENDING FUTURE EARTH DISTURBANCE ACTIVITIES. FOR AN EARTH DISTURBANCE ACTIVITY OR ANY STAGE OF AN ACTIVITY TO BE CONSIDERED TEMPORARILY STABILIZED, THE DISTURBED AREAS SHALL BE COVERED WITH ONE OF THE FOLLOWING: A MINIMUM UNIFORM COVERAGE OF MULCH AND SEED, WITH A DENSITY CAPABLE OF RESISTING ACCELERATED E&S, OR AN ACCEPTABLE BMP WHICH TEMPORARILY MINIMIZES ACCELERATED E&S. TEMPORARY STABILIZATION WILL NOT OCCUR ON ACTIVE VEHICULAR TRAVEL WAYS WITHIN THE LOD. THE ON-SITE ENVIRONMENTAL INSPECTOR WILL LOG DAILY ACTIVITY WITHIN THE PROJECT LOD AND NOTIFY THE CONTRACTOR OF AREAS REQUIRING TEMPORARY STABILIZATION (I.E. AREAS WHERE WORK HAS CEASED FOR AT LEAST FOUR DAYS.)												
PUMPED WATER FILTER BAG. SEDIMENT LADEN WATER THAT COLLECTS DURING EXCAVATION SHALL BE PUMPED INTO A PUMPED WATER FILTER BAG. THE MEANS AND METHODS OF CONSTRUCTION BY THE CONTRACTOR WILL DICTATE THE LOCATION AND PLACEMENT OF THIS CONTROL, BUT THE CONTRACTOR MUST CONFORM TO THE MANUFACTURER'S RECOMMENDATIONS FOR USE OF THIS CONTROL. A COMPOST FILTER SOCK WILL BE INSTALLED BELOW THE BAG FOR ADDITIONAL SEDIMENT REMOVAL CAPACITY. PUMPED WATER FILTER BAGS WILL BE REPLACED ONCE THEY ARE HALF FULL.												
SEDIMENT BASIN. SEDIMENT BASINS ARE TEMPORARY SETTLING PONDS THAT RELEASE RUNOFF AT A CONTROLLED RATE. THE TRAP AND BASIN ARE DESIGNED TO SLOWLY RELEASE RUNOFF, DETAINING IT LONG ENOUGH TO ALLOW MOST OF THE SEDIMENT TO SETTLE. THE SEDIMENT TRAP AND SEDIMENT BASIN WILL BE CONVERTED TO INFILTRATION BASINS DURING THE PCSM PHASE OF THE PROJECT.												
EROSION CONTROL BLANKETS (ECB). SLOPES EQUAL TO OR GREATER THAN 3:1 AND AREAS WITHIN 50 FEET OF WETLANDS WILL HAVE ECB OR FLEXIBLE GROWTH MEDIUM (FGM) INSTALLED. REVEGETATE THESE AREAS AS SOON AS POSSIBLE WITH PERMANENT SEEDING.												
STRUCTURAL LEVEL SPREADER. STRUCTURES DESIGNED TO UNIFORMLY DISTRIBUTE CONCENTRATED FLOW OVER A LARGE ARE CONVERTING CONCENTRATED FLOW TO SHEET FLOW. INFILTRATION AND WATER QUALITY FUNCTIONS ARE BOTH POSSIBILITIES.												
PERMANENT STRUCTURAL PRACTICES												
PERMANENT SEEDING. THE DISTURBED UPLAND AREAS WITHIN THE LOD WILL BE REVEGETATED IN ACCORDANCE WITH THE SEEDING INFORMATION PROVIDED ON THESE PLANS. FOR THE DISTURBED AREAS, TOPSOIL WILL BE SEGREGATED AND RESEEDED.												
CHANNEL LININGS. APPROPRIATELY DESIGNED LININGS, INCLUDING EROSION CONTROL BLANKETS, TURF REINFORCEMENT MATS, AND RIPRAP, WILL BE INSTALLED IN THE DITCHES TO PREVENT EROSION AND PROTECT THE CHANNELS.												
OUTLET PROTECTION. RIPRAP APRONS WILL BE USED TO PREVENT SCOUR AT CHANNEL AND CULVERT OUTFALLS.												
STRUCTURAL LEVEL SPREADER. STRUCTURES DESIGNED TO UNIFORMLY DISTRIBUTE CONCENTRATED FLOW OVER A LARGE ARE CONVERTING CONCENTRATED FLOW TO SHEET FLOW. INFILTRATION AND WATER QUALITY FUNCTIONS ARE BOTH POSSIBILITIES.												
PERMANENT AND TEMPORARY VEGETATIVE PRACTICES												
PERMANENT VEGETATIVE STABILIZATION. DISTURBED AREAS WILL RECEIVE TOPSOIL AND PERMANENT VEGETATIVE STABILIZATION, DEFINED AS A UNIFORM 70 PERCENT PERENNIAL VEGETATIVE COVER. THE DISTURBED AREAS WILL BE PERMANENTLY STABILIZED IN ACCORDANCE WITH SEEDING INFORMATION PROVIDED ON THESE SHEETS. IF SEEDING DATES ARE EXTENDED APPLY FULL TEMPORARY SEEDING MIXTURE IN ADDITION TO APPLYING ONLY 50 PERCENT OF THE PERMANENT SEEDING AND SOIL SUPPLEMENTS. APPLY THE REMAINING 50 PERCENT WITHIN THE NEXT SEEDING DATES.												
TEMPORARY VEGETATIVE PRACTICES (INTERIM STABILIZATION). UPON TEMPORARY CESSATION OF ANY EARTH DISTURBANCE ACTIVITY OR ANY STAGE OF AN ACTIVITY WHERE A CESSATION OF EARTH DISTURBANCE ACTIVITIES WILL EXCEED FOUR DAYS, THE SITE SHALL BE IMMEDIATELY SEEDED, MULCHED, OR OTHERWISE PROTECTED FROM ACCELERATED E&S PENDING FUTURE EARTH DISTURBANCE ACTIVITIES. FOR AN EARTH DISTURBANCE ACTIVITY OR ANY STAGE OF AN ACTIVITY TO BE CONSIDERED TEMPORARILY STABILIZED, THE DISTURBED AREAS SHALL BE COVERED WITH ONE OF THE FOLLOWING: A MINIMUM UNIFORM COVERAGE OF MULCH AND SEED, WITH A DENSITY CAPABLE OF RESISTING ACCELERATED E&S, OR AN ACCEPTABLE BMP WHICH TEMPORARILY MINIMIZES ACCELERATED E&S. TEMPORARY STABILIZATION WILL NOT OCCUR ON ACTIVE VEHICULAR TRAVEL WAYS WITHIN THE LOD. THE ON-SITE ENVIRONMENTAL INSPECTOR WILL LOG DAILY ACTIVITY WITHIN THE PROJECT LOD AND NOTIFY THE CONTRACTOR OF AREAS REQUIRING TEMPORARY STABILIZATION (I.E. AREAS WHERE WORK HAS CEASED FOR AT LEAST FOUR DAYS.)												
SEQUENCE OF BMP INSTALLATION AND REMOVAL												
A COPY OF THE APPROVED DRAWINGS (STAMPED, SIGNED, AND DATED BY THE REVIEWING AGENCY) MUST BE AVAILABLE AT THE PROJECT SITE AT ALL TIMES. AT LEAST SEVEN DAYS PRIOR TO STARTING ANY EARTH DISTURBANCE ACTIVITIES, THE OWNER AND/OR OPERATOR SHALL INVITE ALL CONTRACTORS, THE LANDOWNER, APPROPRIATE MUNICIPAL OFFICIALS, THE E&S PLAN PREPARER, THE POST CONSTRUCTION STORMWATER MANAGEMENT PLAN PREPARER, AND A REPRESENTATIVE FROM THE REVIEWING AGENCY TO THE ONSITE PRE-CONSTRUCTION MEETING. AT LEAST THREE DAYS PRIOR TO STARTING EARTH DISTURBANCE ACTIVITIES OR EXPANDING INTO AREAS PREVIOUSLY UNMARKED, THE PENNSYLVANIA ONE CALL SYSTEM, INC. SHALL BE NOTIFIED AT 1-800-242-1776 FOR THE LOCATIONS OF EXISTING UNDERGROUND UTILITIES.												
ALL BMPS SHALL BE INSTALLED IN ACCORDANCE WITH: THE E&S PLAN STANDARD DETAILS; SPECIFICATIONS DEFINED IN THE PADEP EROSION AND SEDIMENT BEST MANAGEMENT PRACTICE (BMP) MANUAL, LATEST EDITION; AND, WHERE APPLICABLE, THE PRODUCT MANUFACTURER'S RECOMMENDATIONS. EACH STEP OF THE SEQUENCE SHALL BE COMPLETED BEFORE PROCEEDING TO THE NEXT STEP EXCEPT WHERE NOTED.												
RECOMMENDED CONSTRUCTION SEQUENCE:												
1. STAKE OUT LIMIT OF DISTURBANCE FOR GRADING OPERATIONS FOR WELL SITE AND ASSOCIATED ACCESS ROAD.												
2. LOCATE EXISTING UTILITIES WITHIN THE LIMIT OF DISTURBANCE. TAKE CARE NOT TO DAMAGE EXISTING UTILITIES SCHEDULED TO REMAIN IN PLACE DURING CONSTRUCTION.												
3. PLACE ORANGE CONSTRUCTION FENCE AROUND ALL ENVIRONMENTAL FEATURES AND NEIGHBORING PROPERTY ON SITE.												
4. INSTALL ROCK CONSTRUCTION ENTRANCES 1 & 2 AT THE LOCATIONS SHOWN ON THE PLANS.												
5. INSTALL COMPOST FILTER SOCK AT THE LOCATIONS SHOWN ON THE PLANS.												
6. INSTALL COLLECTION CHANNEL CC 6. INSTALL COLLECTION CHANNELS STARTING AT THE DOWNSTREAM END AND WORK UPSTREAM.												
7. BEGIN GRADING SEDIMENT BASIN 1, 2 & 3 AND COLLECTION CHANNELS. INSTALL THE RISERS, OUTLET PIPES, ROCK APRON AND EMERGENCY SPILLWAYS FOR BMP 1-3 PER THE PLANS. INSTALL COLLECTION CHANNELS STARTING AT THE DOWNSTREAM END AND WORK UPSTREAM.												
8. CONTINUE GRADING OPERATIONS FOR CONSTRUCTION OF THE PAD AND CHANNELS AS REQUIRED IN ACCORDANCE WITH THE DETAILS. INSTALL STORMWATER CONVEYANCE FEATURES STARTING ON DOWNSTREAM SIDE AND WORK UPSTREAM. STORMWATER CONVEYANCE FACILITY INSTALLATION SHALL BE PERFORMED DURING DRY (NO FLOW) CONDITIONS. ADJUST INSTALLED E&S BMPS AS NECESSARY TO FACILITATE WORK WHILE MAINTAINING PROTECTION OF STORMWATER FACILITIES. INSTALL ROCK APRONS BELOW CULVERT AND CHANNEL OUTFALLS AS EACH IS INSTALLED.												
9. STOCKPILE TOPSOIL AND SITE SPOILS AT LOCATIONS INDICATED ON PLANS OR REMOVE MATERIAL OFFSITE AND DISPOSE OF PROPERLY.												
10. TOPSOIL ALL SLOPES AND STOCKPILES. ONCE OPERATIONS ARE COMPLETE, SEED AND MULCH ALL DISTURBED AREAS, USING THE SPECIFIED SEEDING REQUIREMENTS FOUND ON THE PLANS. EROSION CONTROL BLANKET SHALL BE INSTALLED AS REQUIRED IN AREAS WITH SLOPES EXCEEDING 3H:1V IN REGULAR 15 VERTICAL INCREMENTS. ALL DISTURBED AREAS MUST BE TEMPORARILY STABILIZED IF REMAINING IDLE OR ANTICIPATED TO REMAIN IDLE. IN THE ABSENCE OF A SOIL TEST, LIME SHOULD BE ADDED AT A RATE OF 3 TON / ACRE. DISTURBED AREAS MUST BE TEMPORARILY STABILIZED IF REMAINING IDLE OR ANTICIPATED TO REMAIN IDLE.												
11. HYDROSEEDING TO BE USED AT DISCRETION OF CONTRACTOR BETWEEN APRIL 1ST AND NOVEMBER 1ST.												
12. RESEED ALL DISTURBED AREAS IF VEGETATION IS NOT ESTABLISHED AFTER 30 DAYS. *CRITICAL STAGES OF CONSTRUCTION ARE INDICATED WITH UNDERLINED TEXT. AN ENGINEER MUST BE PRESENT ON-SITE TO MONITOR THE INSTALLATION OF CRITICAL STAGES.												
MAINTENANCE PROGRAM												
AFTER CONSTRUCTION IS COMPLETED AND SITE HAS REACHED FINAL GRADE, ALL TEMPORARY BMPS WILL BE REMOVED AND ANY LAND DISTURBED BY REMOVAL WILL BE PERMANENTLY STABILIZED, UNLESS OTHERWISE SPECIFIED, ALL MAINTENANCE MUST BE COMPLETED IMMEDIATELY AFTER AN INSPECTION IDENTIFIES THAT A BMP IS NOT FUNCTIONING.												
1. IF CONCENTRATED FLOW AREAS FORM DUE TO ANY STORM EVENT AND ANY AREA BECOMES UNSTABLE, THE AREA SHALL BE STABILIZED BY INSTALLING ADDITIONAL BMPS IN THE CONCENTRATED FLOW AREAS. ANY REQUIRED REPAIRS OR MAINTENANCE SHALL BE MADE IMMEDIATELY.												
2. THE CONTRACTOR SHALL ASSESS THE WORKING CONDITION OF THE E&S MEASURES AT LEAST WEEKLY AND AFTER EACH MEASURABLE RAIN EVENT (GREATER THAN ONE-HALF INCH IN 24 HOURS OR ANY SIGNIFICANT THAW EVENT). DAMAGED, BLOCKED, OR OTHERWISE COMPROMISED MEASURES OBSERVED DURING THE INSPECTION SHALL BE REPAIRED IMMEDIATELY.												
3. COMPOST FILTER SOCKS SHALL BE INSPECTED WEEKLY AND AFTER EACH MEASURABLE RAIN EVENT. THE FILTER SOCK SHALL BE INSPECTED TO ENSURE THEY HAVE NOT BEEN DISLODGED OR BROKEN. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN ACCUMULATIONS REACH ONE-HALF THE ABOVE GROUND HEIGHT OF THE SOCK. DAMAGED SOCKS SHALL BE REPAIRED IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS, OR REPLACED WITHIN TWENTY-FOUR HOURS OF INSPECTION.												
4. BIODEGRADABLE FILTER SOCK SHALL BE REPLACED AFTER SIX MONTHS; PHOTODEGRADABLE SOCKS AFTER ONE YEAR; POLYPROPYLENE SOCKS SHALL BE REPLACED IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS. STAKES SHALL BE REMOVED FROM SOCKS UPON STABILIZATION OF THE AREAS TRIBUTARY TO A SOCK. SOCK MAY BE LEFT IN PLACE AND VEGETATED, OR REMOVED. IF LEFT IN PLACE, THE MESH SHALL BE CUT OPEN AND THE MULCH SPREAD AS A SOIL SUPPLEMENT.												
5. PUMPED WATER FILTER BAGS SHALL BE INSPECTED DAILY FOR BREAKS OR LEAKS. THE FILTER BAG AND UNDERLYING EROSION PROTECTION MATERIALS (E.G. STRAW BALES, GEOTEXTILE) SHALL BE CLOSELY MONITORED FOR STABILITY. BAGS SHALL BE DISPOSED OF IN ACCORDANCE WITH THE PROJECT E&S PLAN AND REPLACED WHEN THE BAG BECOMES ONE-HALF FULL OF SEDIMENT. SPARE BAGS AND UNDERLYING MATERIALS SHALL BE KEPT AVAILABLE FOR REPLACEMENT. EROSION AND UNDERCUTTING OF FILTER BAGS SHALL BE PROMPTLY REPAIRED. THE PUMPING RATE TO FILTER BAGS FOR PUMPED WATER SHALL BE ONE-HALF THE MAXIMUM PUMPING RATE RECOMMENDED BY THE MANUFACTURER.												
6. THE SEDIMENT BASIN SHALL BE INSPECTED ON AT LEAST A WEEKLY BASIS AND AFTER EACH RUNOFF EVENT. A CLEANOUT STAKE SHALL BE PLACED NEAR THE CENTER OF THE FACILITIES. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT HAS REACHED THE CLEANOUT ELEVATION ON THE STAKE AND THE FACILITY RESTORED TO ITS ORIGINAL DIMENSIONS. SILT REMOVED FROM THE FACILITY SHALL BE SPREAD AND DRIED ON-SITE, WITHIN THE LIMIT-OF-DISTURBANCE AND UPSLOPE OF EROSION AND SEDIMENT CONTROL DEVICES. EXCESS MATERIALS THAT CANNOT BE SPREAD ON-SITE MUST BE DISPOSED OF AT A PADEP APPROVED SITE. EMBANKMENTS, SPILLWAYS, AND OUTLETS SHALL BE INSPECTED FOR EROSION, PIPING, AND SETTLEMENT. NECESSARY REPAIRS SHALL BE MADE PROMPTLY. ACCUMULATED SEDIMENT SHALL BE REMOVED AND DISTURBED AREAS SHALL BE STABILIZED INSIDE THE FACILITIES BEFORE CONVERSION TO A STORMWATER MANAGEMENT FACILITY.												
7. RIPRAP APRONS SHALL BE INSPECTED FOR DISPLACED RIPRAP. ANY DISPLACED RIPRAP SHALL BE REPLACED IMMEDIATELY.												
8. CHANNELS SHALL BE MAINTAINED TO ENSURE THAT THE SPECIFIED DESIGN DIMENSIONS AND PROTECTIVE LININGS ARE AVAILABLE AT ALL TIMES. A CHANNEL SHOULD BE CLEANED WHENEVER TOTAL CHANNEL DEPTH IS REDUCED BY 25% AT ANY LOCATION. DAMAGED CHANNEL LININGS SHOULD BE REPAIRED OR REPLACED IMMEDIATELY.												
9. ROCK CONSTRUCTION ENTRANCES WILL BE REGULARLY MAINTAINED SO THAT THE ENTRANCE REMAINS IN A CONDITION THAT WILL PREVENT TRACKING MUD OR FLOWING OF SEDIMENT ONTO THE PUBLIC ROADWAYS. ALL SEDIMENT SPILLED, DROPPED, WASHED, OR TRACKED ONTO PUBLIC ROADWAYS MUST BE REMOVED IMMEDIATELY.												
10. STRUCTURAL LEVEL SPREADERS SHOULD BE MONITORED FOR 2 YEARS ON A QUARTERLY BASIS AND SEMI-ANNUALLY THEREAFTER. INSPECTIONS ARE TO BE MADE FOLLOWING RAIN EVENTS EXCEEDING 1 INCH. INSPECTION AND MONITORING INCLUDES BOTH THE LEVEL SPREADER AND THE DOWN SLOPE AREA. MONITORING SHOULD BE DOCUMENTED IN INSPECTION REPORTS. ACCUMULATED SEDIMENT SHALL BE REMOVED FROM THE LEVEL SPREADER AND PROPERLY DISPOSED.												
11. A LOG SHOWING DATES THAT E&S BMPS WERE INSPECTED AS WELL AS ALL DEFICIENCIES FOUND AND THE DATE THEY WERE CORRECTED SHALL BE MAINTAINED ON THE SITE AND BE MADE AVAILABLE TO REGULATORY AGENCY OFFICIALS AT THE TIME OF INSPECTION.												
12. RE-VEGETATED AREAS SHALL BE INSPECTED FOR ADEQUATE VEGETATIVE COVER. AREAS EXHIBITING STRESSED VEGETATION OR SIGNS OF EROSION SHALL HAVE THE SEEDBED PREPARED AND HAVE SEED AND MULCH RE-APPLIED. ADDITIONAL MAINTENANCE ITEMS ARE OUTLINED IN THE "STANDARD EROSION AND SEDIMENT POLLUTION CONTROL NOTES."												
13. ALL BMPS SHALL BE INSPECTED, MAINTAINED, AND REPAIRED AS NEEDED TO ASSURE CONTINUED PERFORMANCE OF THEIR INTENDED FUNCTION. WHENEVER INSPECTION AND/OR MONITORING REVEALS THAT THE BMPS IDENTIFIED IN THE E&S PLAN ARE INADEQUATE, THE E&S PLAN SHALL BE MODIFIED, AS APPROPRIATE, IN A TIMELY MANNER. DAMAGED BMPS WILL BE REPAIRED OR REPLACED AS SOON AS PRACTICABLE, BUT NO MORE THAN 24 TO 48 HOURS AFTER DISCOVERING THE DAMAGE. ANY SPILLAGE OR DISCHARGE OF POLLUTANTS SHALL BE REPORTED WITHIN TWENTY-FOUR HOURS.												
MICHAEL BAKER INTERNATIONAL, LLC												
HOMER CITY STATION 1750 POWER PLANT ROAD HOMER CITY, PA 15748												
DWG. TYPE: CIVIL												
TITLE: EROSION & SEDIMENT CONTROL NOTES												
PROJECT NAME: RURA FIELD												
NTS RURA1 C-744-3501 1 A												
SCALE PROJECT NO. DRAWING NUMBER SHEET REV												
HOMER CITY CAD FILE: \\MOONPA1CL1\LD\H\HOMER CITY GENERATING STATION\203698 - RURA FIELD\05_DELIVERABLES\DRAWINGS\05_C-CIVIL\SHEET FILES\203698_CFSXX.DWG PLOT DATE:3/25/2025 11:26 AM												













A  
B  
C  
D  
E  
F  
G  
H

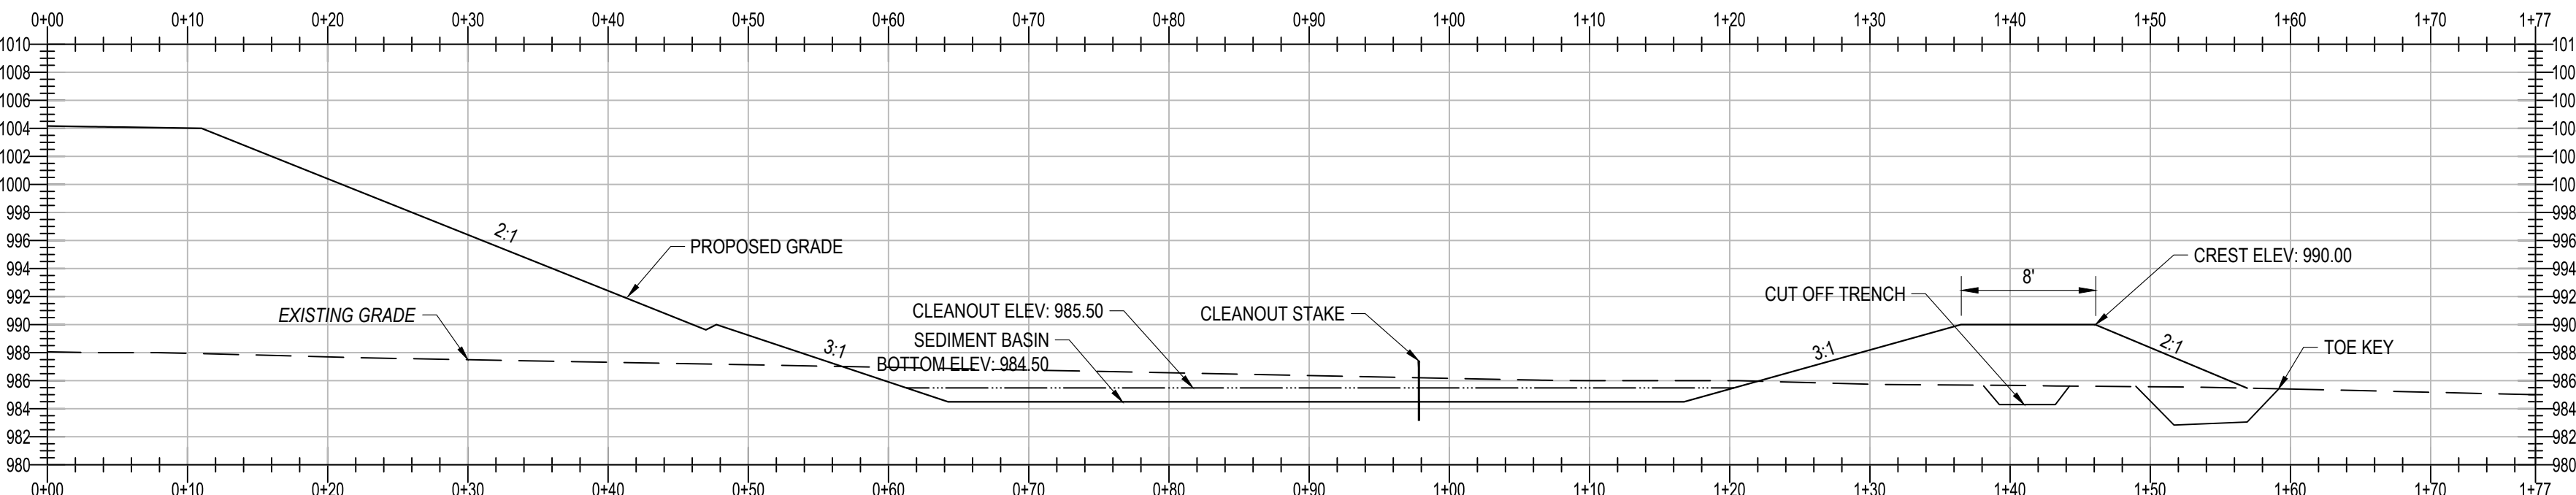


SECTION A-A  
BMP 1: SEDIMENT BASIN  
SCALE: 1" = 10' H, 1" = 10' V




SECTION B-B  
BMP 2: SEDIMENT BASIN  
SCALE: 1" = 10' H, 1" = 10' V

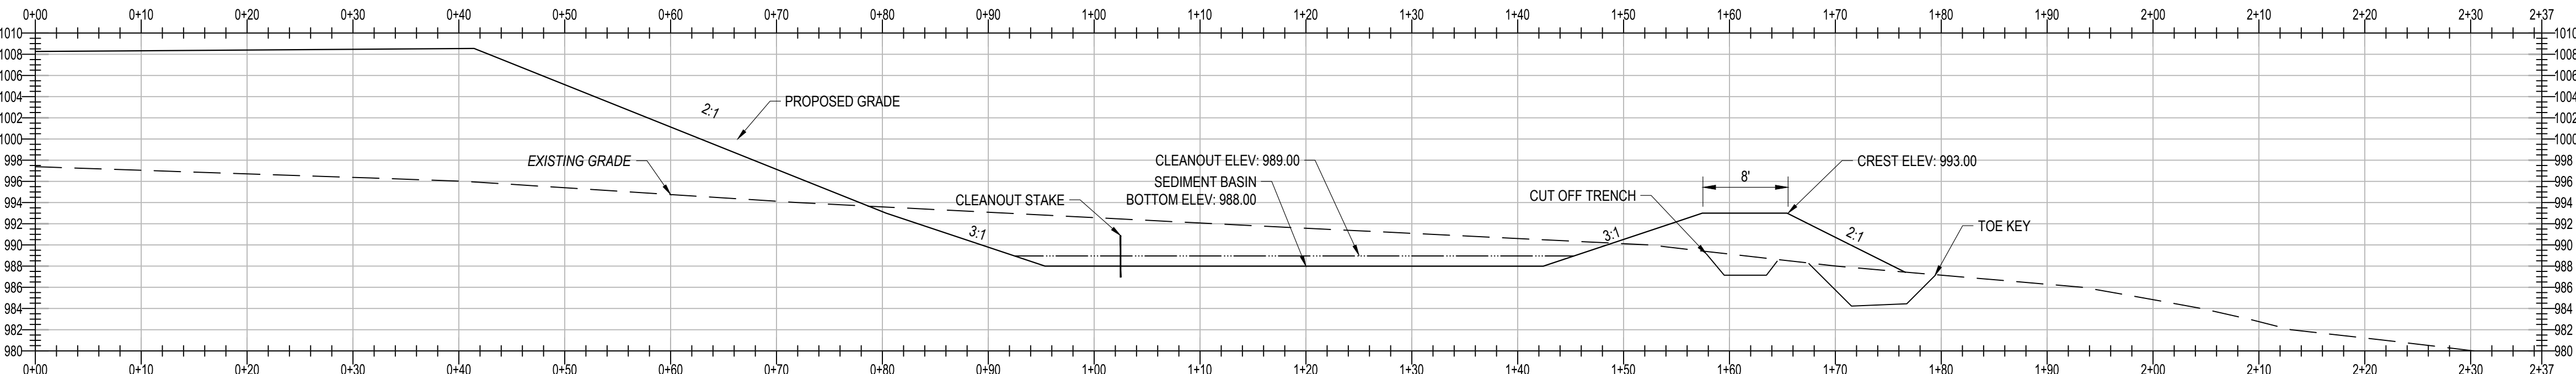


SECTION C-C  
BMP 3: SEDIMENT BASIN  
SCALE: 1" = 10' H, 1" = 10' V

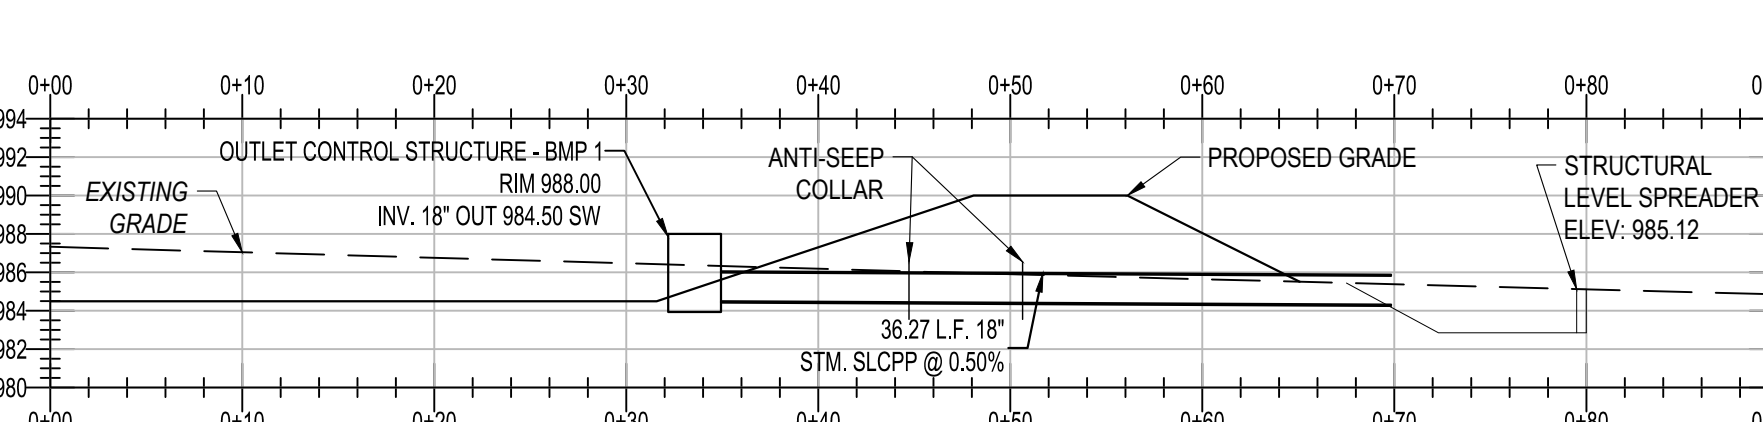

SECTION BMP 1 OUTLET PIPE PROFILE-BMP 1 OUTLET PIPE PROFILE  
SCALE: 1"=100 H, 1"=100V

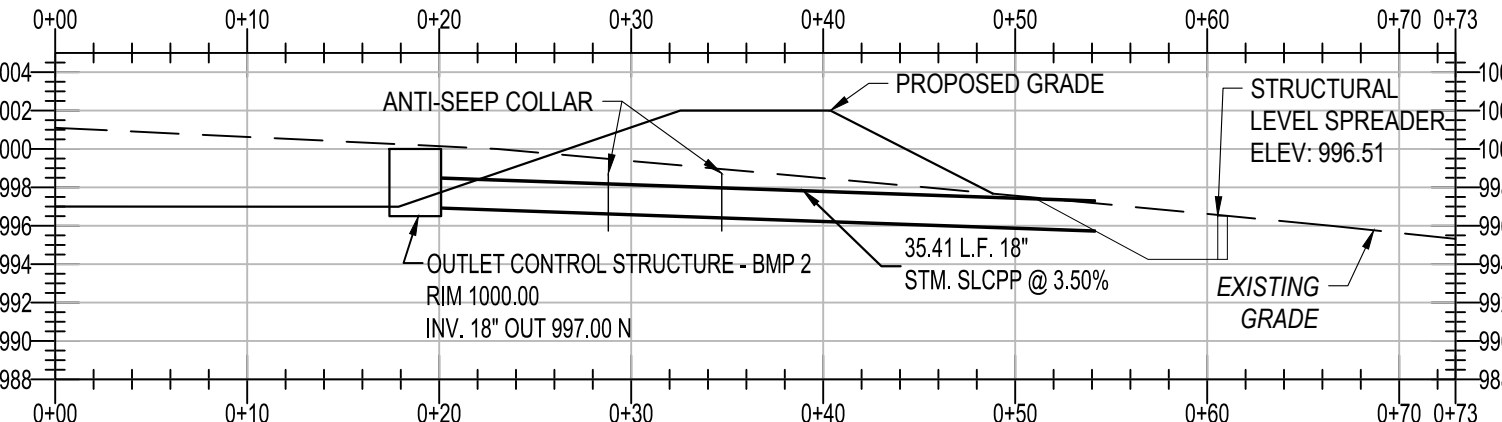

SECTION BMP 2 OUTLET PIPE PROFILE-BMP 2 OUTLET PIPE PROFILE  
SCALE: 1"=100 H, 1"=100V

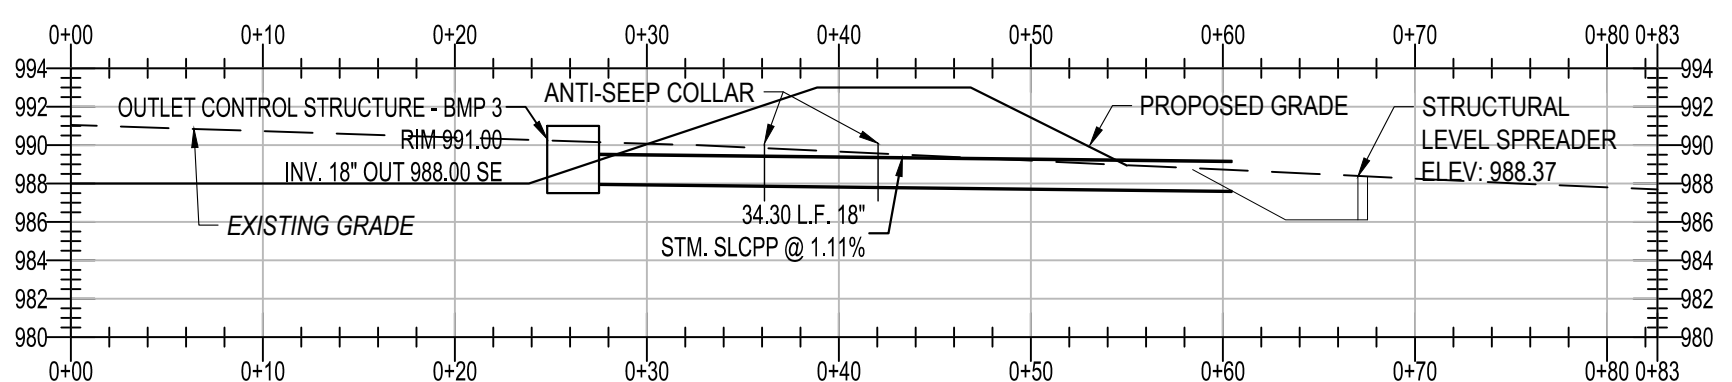

SECTION BMP 3 OUTLET PIPE PROFILE-BMP 3 OUTLET PIPE PROFILE  
SCALE: 1"=100 H, 1"=100V

- SEDIMENT BASIN CONSTRUCTION NOTES:
- SEDIMENT BASINS, INCLUDING ALL APPURTENANT WORKS, SHALL BE CONSTRUCTED TO THE DETAIL AND DIMENSIONS SHOWN ON THE E&S PLAN DRAWINGS.
  - ACCESS FOR SEDIMENT REMOVAL AND OTHER REQUIRED MAINTENANCE ACTIVITIES SHALL BE PROVIDED.
  - A MINIMUM OF 2-#8 REBAR SHALL BE PLACED AT RIGHT ANGLES AND PROJECTING THROUGH SIDES OF RISER TO ANCHOR IT TO CONCRETE BASE. REBAR SHALL PROJECT A MINIMUM OF 1/4 RISER DIAMETER BEYOND OUTSIDE OF RISER.
  - CONCRETE BASE SHALL BE POURED IN SUCH A MANNER SO AS TO INSURE THAT CONCRETE FILLS BOTTOM OF RISER TO INVERT OF THE OUTLET PIPE TO PREVENT RISER FROM BREAKING AWAY FROM THE BASE. MINIMUM BASE WIDTH EQUALS 2 TIMES RISER DIAMETER.
  - THE AREA UNDER EMBANKMENT SHALL BE CLEARED, GRUBBED, AND STRIPPED OF TOPSOIL TO A DEPTH OF TWO FEET PRIOR TO ANY PLACEMENT AND COMPACTION OF EARTHEN FILL.
  - THE EMBANKMENT SHALL BE COMPACTED IN LAYERED LIFTS OF NOT MORE THAN 6" TO 9". THE MAXIMUM ROCK SIZE SHALL BE NO GREATER THAN 2/3 THE LIFT THICKNESS. FIVE PASSES OF THE COMPACTION EQUIPMENT OVER THE ENTIRE SURFACE OF EACH LIFT IS REQUIRED. EMBANKMENT COMPACTION TO VISIBLE NON-MOVEMENT IS ALSO REQUIRED.
  - SOILS ACCEPTABLE FOR EMBANKMENT CONSTRUCTION SHOULD BE LIMITED TO GC, GM, SC, SM, CL OR ML AS DESCRIBED IN ASTM D-2487 (UNIFIED SOILS CLASSIFICATION). FILL MATERIAL FOR THE EMBANKMENTS SHALL BE FREE OF ROOTS, OR OTHER WOODY VEGETATION, ORGANIC MATERIAL, LARGE STONES, AND OTHER OBJECTIONABLE MATERIALS.
  - THE KEY TRENCH SHALL HAVE A MINIMUM TRENCH DEPTH = 2', MINIMUM WIDTH = 4', MAXIMUM SIDE SLOPE STEEPNESS IS 1H:1V. THE TRENCH SHALL EXTEND UP BOTH ABUTMENTS TO THE RISER CREST ELEVATION. COMPACTION REQUIREMENTS SHALL BE THE SAME AS THOSE FOR THE EMBANKMENT. THE TRENCH SHALL BE DEWATERED DURING BACKFILLING AND COMPACTION OPERATIONS.
  - ANY SPRINGS ENCOUNTERED IN THE FOUNDATION AREA OF THE POND EMBANKMENT SHALL BE DRAINED TO THE OUTSIDE/DOWNSTREAM TOE OF THE EMBANKMENT WITH A DRAIN SECTION TWO FEET BY TWO FEET IN DIMENSION CONSISTING OF PENNDOT TYPE A SAND, COMPACTED BY HAND TAMPER. NO GEOTEXTILES ARE TO BE USED AROUND THE SAND. THE LAST THREE FEET OF THIS DRAIN AT THE OUTSIDE/DOWNSTREAM SLOPE SHALL BE CONSTRUCTED WITH AASHTO #8 MATERIAL.
  - A CLEAN OUT STAKE SHALL BE PLACED NEAR THE CENTER OF EACH BASIN. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT HAS REACHED THE CLEAN OUT ELEVATION ON THE STAKE AND RESTORE THE BASIN TO ITS ORIGINAL DIMENSIONS. DISPOSE OF MATERIALS REMOVED FROM THE BASIN IN THE MANNER DESCRIBED IN THE E&S PLAN.
  - TYPE OF PIPE SHALL BE SLCPP (SMOOTH LINED CORRUGATED PLASTIC PIPE).
  - INSPECT ALL SEDIMENT BASINS ON AT LEAST A WEEKLY BASIS AND AFTER EACH RUNOFF EVENT. CHECK BASIN EMBANKMENTS, SPILLWAYS, AND OUTLETS FOR EROSION, PIPING AND SETTLEMENT. NECESSARY REPAIRS SHALL BE MADE IMMEDIATELY. DISPLACED RIPRAP WITHIN THE OUTLET ENERGY DISSIPATER SHALL BE REPLACED IMMEDIATELY. ACCUMULATED SEDIMENT SHALL BE REMOVED AND DISTURBED AREAS SHALL BE STABILIZED INSIDE THE BASIN BEFORE CONVERSION TO A STORMWATER MANAGEMENT FACILITY.
  - CHECK EMBANKMENTS, SPILLWAYS, AND OUTLETS FOR EROSION, PIPING AND SETTLEMENT, CLOGGED OR DAMAGED SPILLWAYS AND/OR EMBANKMENTS SHALL BE RESTORED TO THE DESIGN SPECIFICATIONS.
  - CLOGGED OR DAMAGED SPILLWAYS SHALL BE REPAIRED IMMEDIATELY. TRASH AND OTHER DEBRIS SHALL BE REMOVED FROM THE BASIN AND RISER.
  - PROVIDE MANHOLE STEPS IN PERMANENT RISER WHEN THE DEPTH BETWEEN THE TOP OF RISER BOX AND THE TOP OF BOTTOM SLAB ELEVATION IS GREATER THEN 5'-0". PROVIDE MANOLE STEPS TO WITHIN 18" OF THE BOTTOM SLAB. MANHOLE STEPS SHALL BE IN ACCORDANCE WITH PENNDOT PUBLICATION, 408 SECTION 605.2(C).



Michael Baker International  
1750 POWER PLANT ROAD  
HOMER CITY, PA 15108

HOMER CITY STATION

1750 POWER PLANT ROAD HOMER CITY, PA 15748					
DWG. TYPE:		CIVIL			
TITLE:		EROSION & SEDIMENT CONTROL DETAILS			
PROJECT NAME: RURA FIELD					
1" = 10'	RURA1	C-744-3504		1	A
SCALE	PROJECT NO.	DRAWING NUMBER		SHEET	REV



A

B

C


D

E

F

G

H

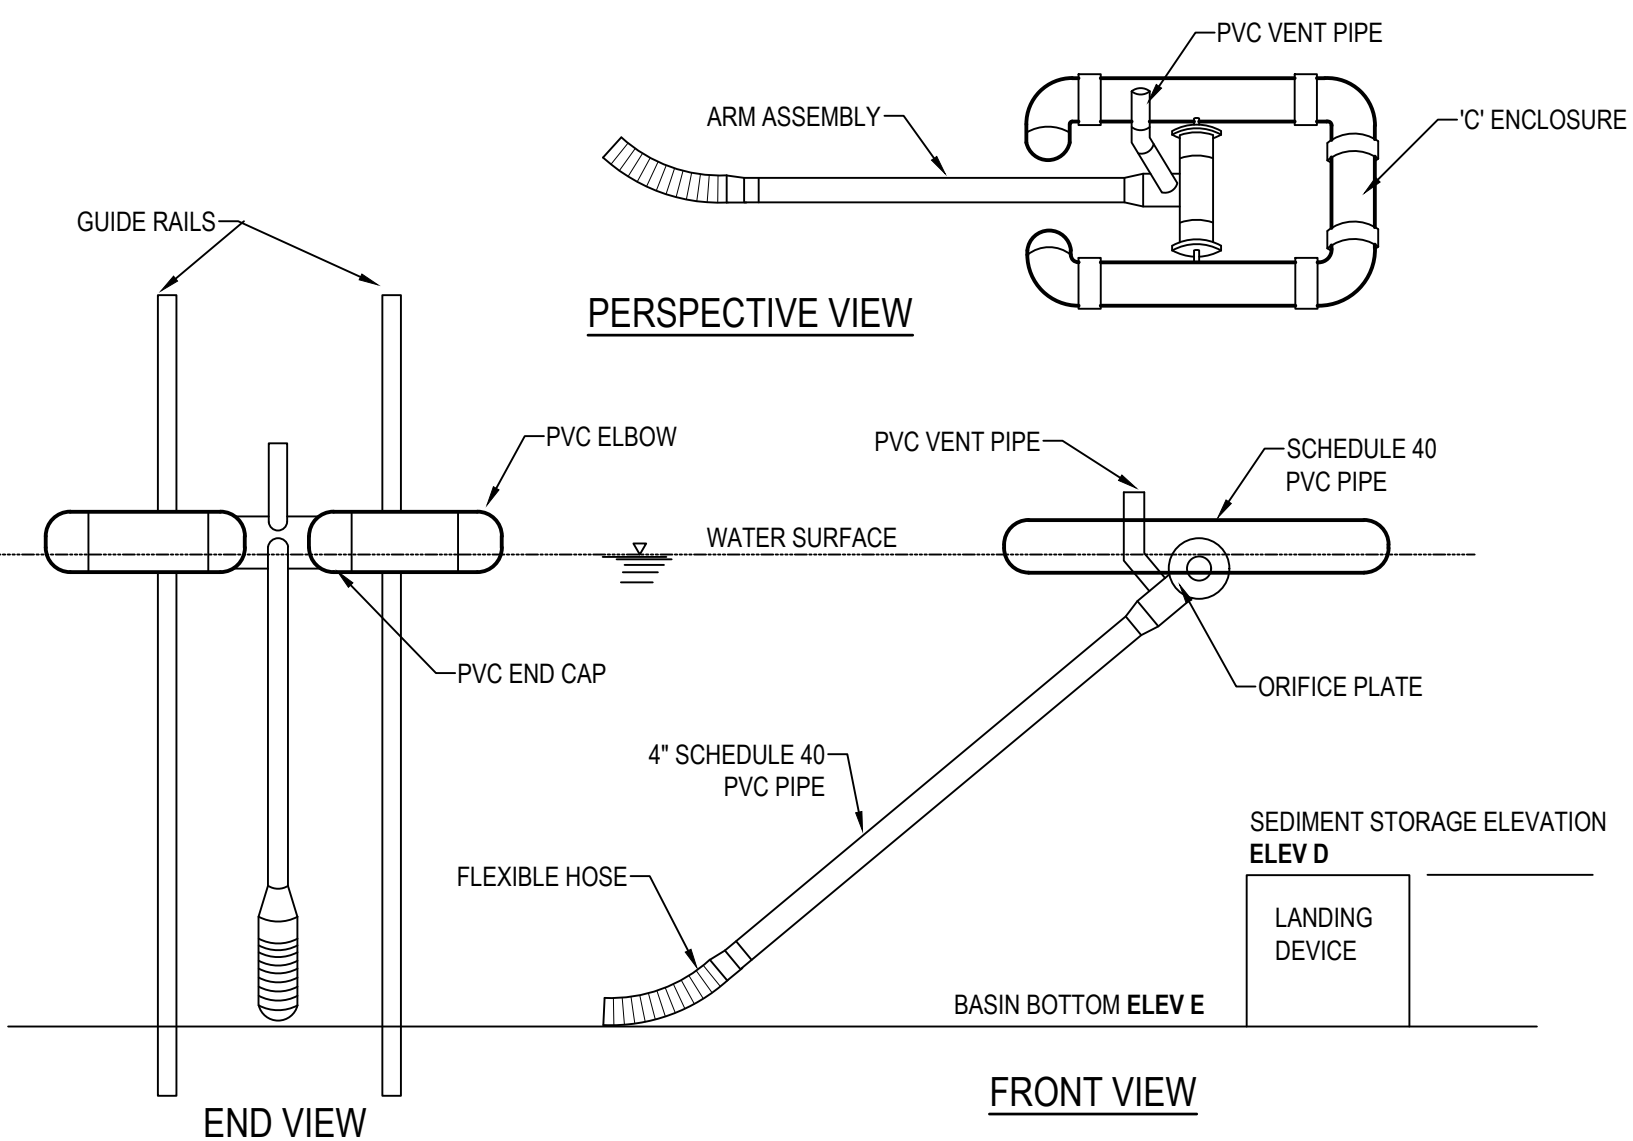

NOTES:

ORIFICE DIAMETER MUST BE EQUAL TO OR LESS THAN ARM DIAMETER

A ROPE SHALL BE ATTACHED TO THE SKIMMER ARM TO FACILITATE ACCESS TO THE SKIMMER ONCE INSTALLED.

SKIMMER SHALL BE INSPECTED WEEKLY AND AFTER EACH RUNOFF EVENT. ANY MALFUNCTIONING SKIMMER SHALL BE REPAIRED OR REPLACED WITHIN 24 HOURS OF INSPECTION.

ICE OR SEDIMENT BUILDUP AROUND THE PRINCIPAL SPILLWAY SHALL BE REMOVED SO AS TO ALLOW THE SKIMMER TO RESPOND TO FLUCTUATING WATER ELEVATIONS.

SEDIMENT SHALL BE REMOVED FROM THE BASIN WHEN IT REACHES THE LEVEL MARKED ON THE CLEAN-OUT STAKE OR THE TOP OF THE LANDING DEVICE.


A SEMI-CIRCULAR LANDING ZONE MAY BE SUBSTITUTED FOR THE GUIDE RAILS (STANDARD CONSTRUCTION DETAIL # 7-3).

RURA FIELD					
NAME	Skimmer Size	Orifice Size Dia.	Orifice RAD.	Required Basin Volume	Days to Drain
BMP 1: SEDIMENT BASIN	5"	4 7/8"	2 7/16"	123,975	4
BMP 2: SEDIMENT BASIN	5"	4 3/16"	2 1/8"	95,574	4
BMP 3: SEDIMENT BASIN	6"	4 13/16"	2 7/16"	133,245	4

D10

SEDIMENT BASIN SKIMMER

SCALE: N.T.S.

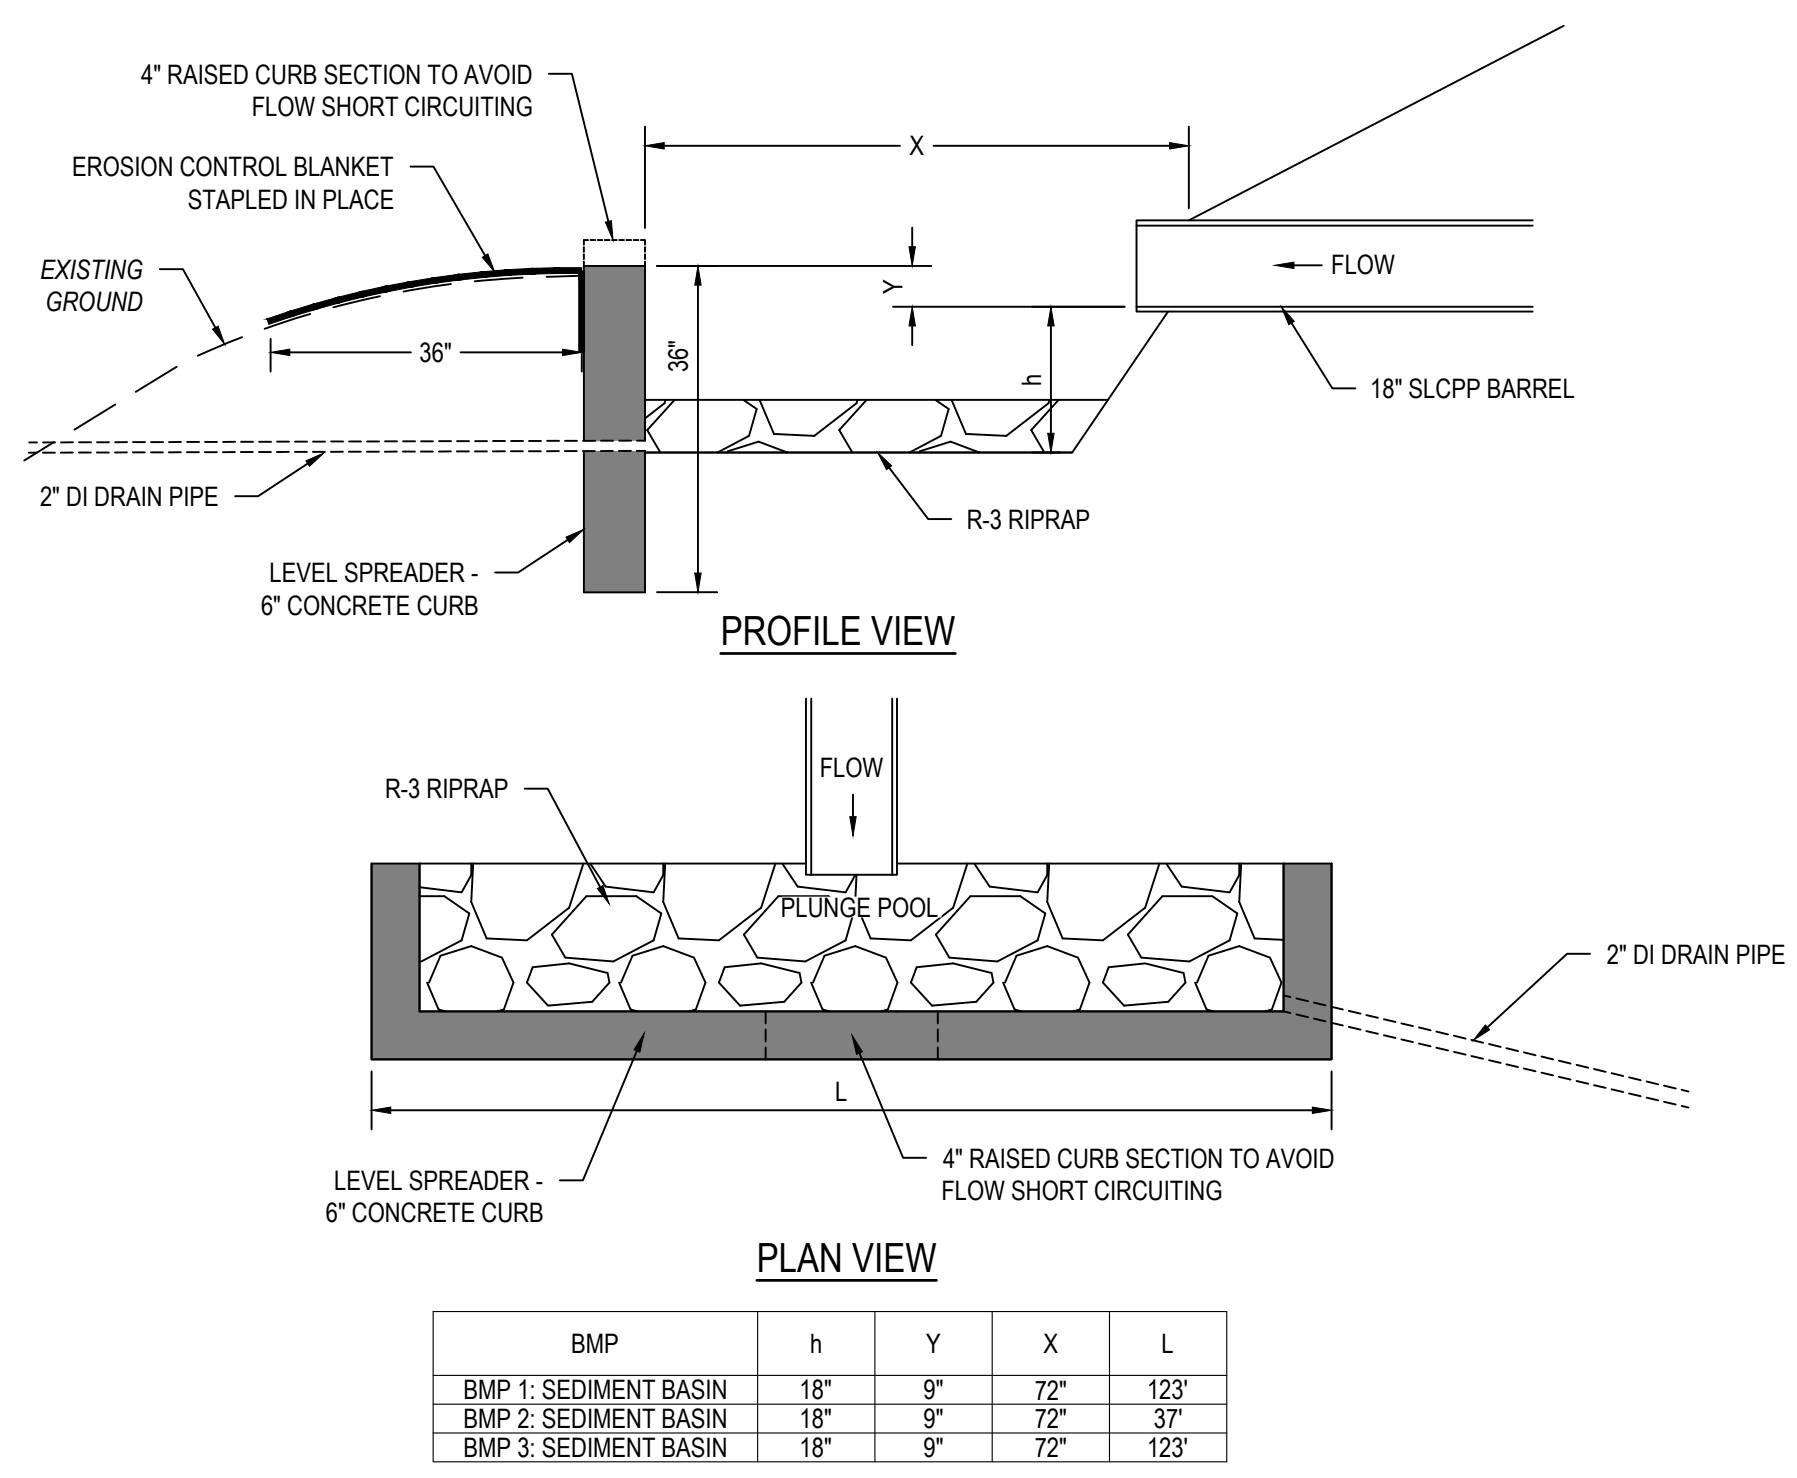


BMP	h	Y	X	L
BMP 1: SEDIMENT BASIN	18"	9"	72"	123'
BMP 2: SEDIMENT BASIN	18"	9"	72"	37'
BMP 3: SEDIMENT BASIN	18"	9"	72"	123'

H10

STRUCTURAL LEVEL SPREADER

SCALE: N.T.S.

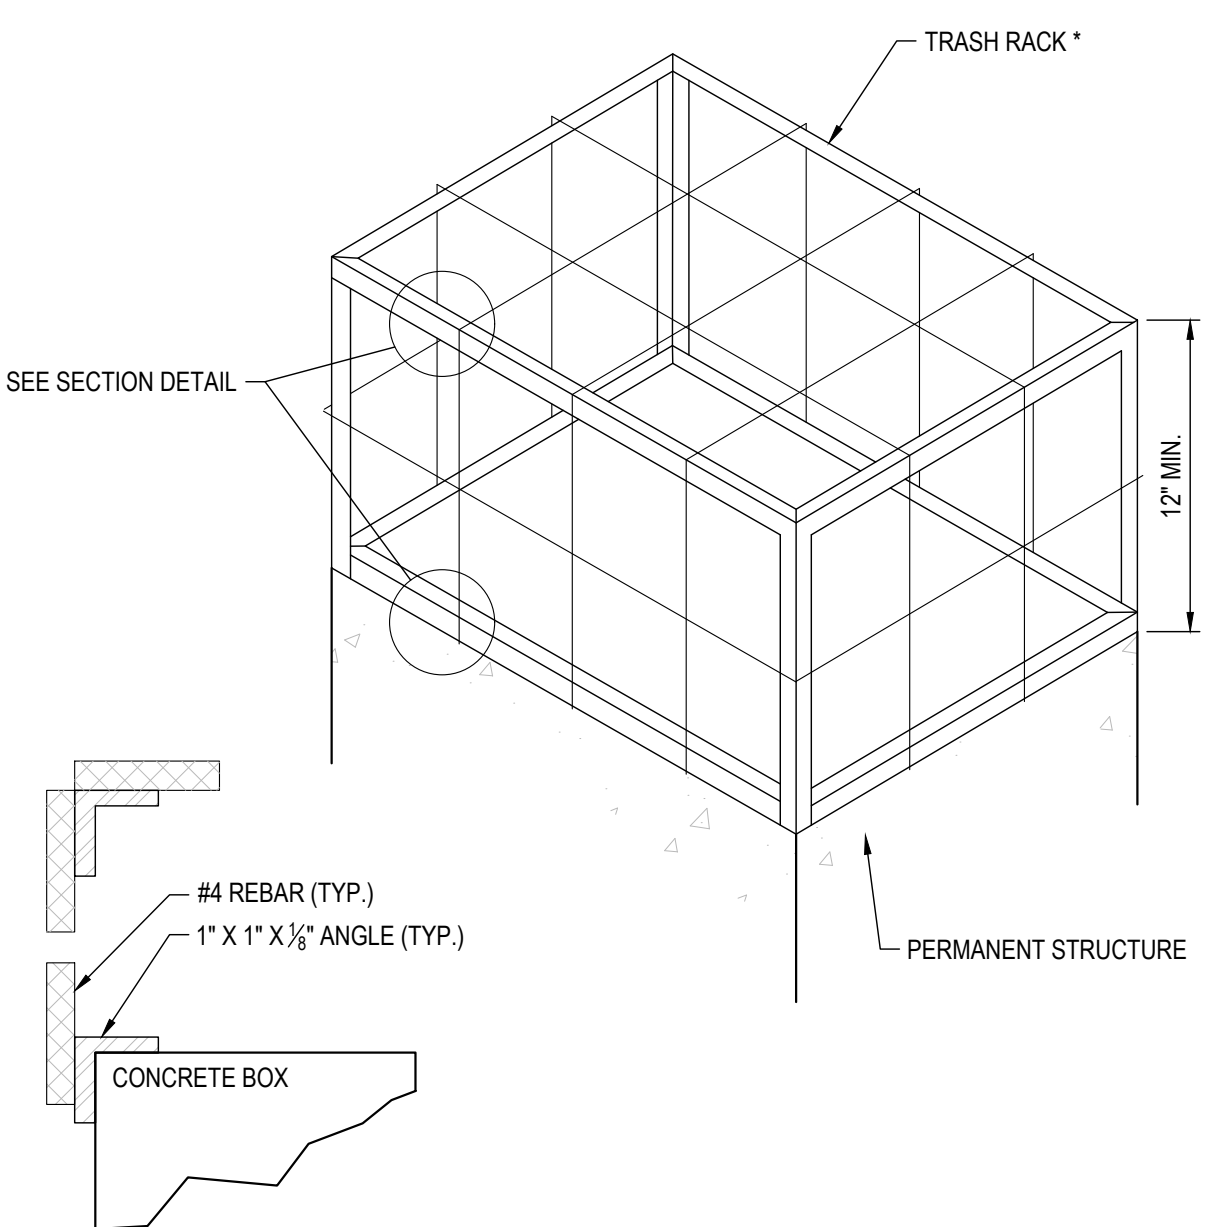

\* TRASH RACK COMPOSED OF 1 IN. X 1 IN. X 1/8 IN. L (TYP.) AND #4 BARS (TYP.) WELDED TO THE ANGLES AND AT EACH INTERSECTION OF THE BARS; #4 BARS SPACED AT HALF THE DIAMETER OF THE BARREL MAX.


NOTES:

- BOX SHALL BE BOLTED, STRAPPED, OR OTHERWISE SECURED TO THE PERMANENT RISER.
- ALL JOINTS SHALL BE WATER TIGHT.
- CLOGGED OR DAMAGED SPILLWAYS SHALL BE REPAIRED IMMEDIATELY. TRASH AND OTHER DEBRIS SHALL BE REMOVED FROM THE BASIN AND RISER.
- ALL TRASH RACKS SHALL BE PROTECTED FROM CORROSION BY UNDERGOING HOT DIP GALVANIZATION AFTER FABRICATION. ALL STRUCTURAL MATERIAL SHALL MEET ASTM A-123. ALL STRUCTURAL BOLTS SHALL MEET ASTM A-153

D7

TRASH RACK FOR OUTLET CONTROL STRUCTURE

SCALE: N.T.S.

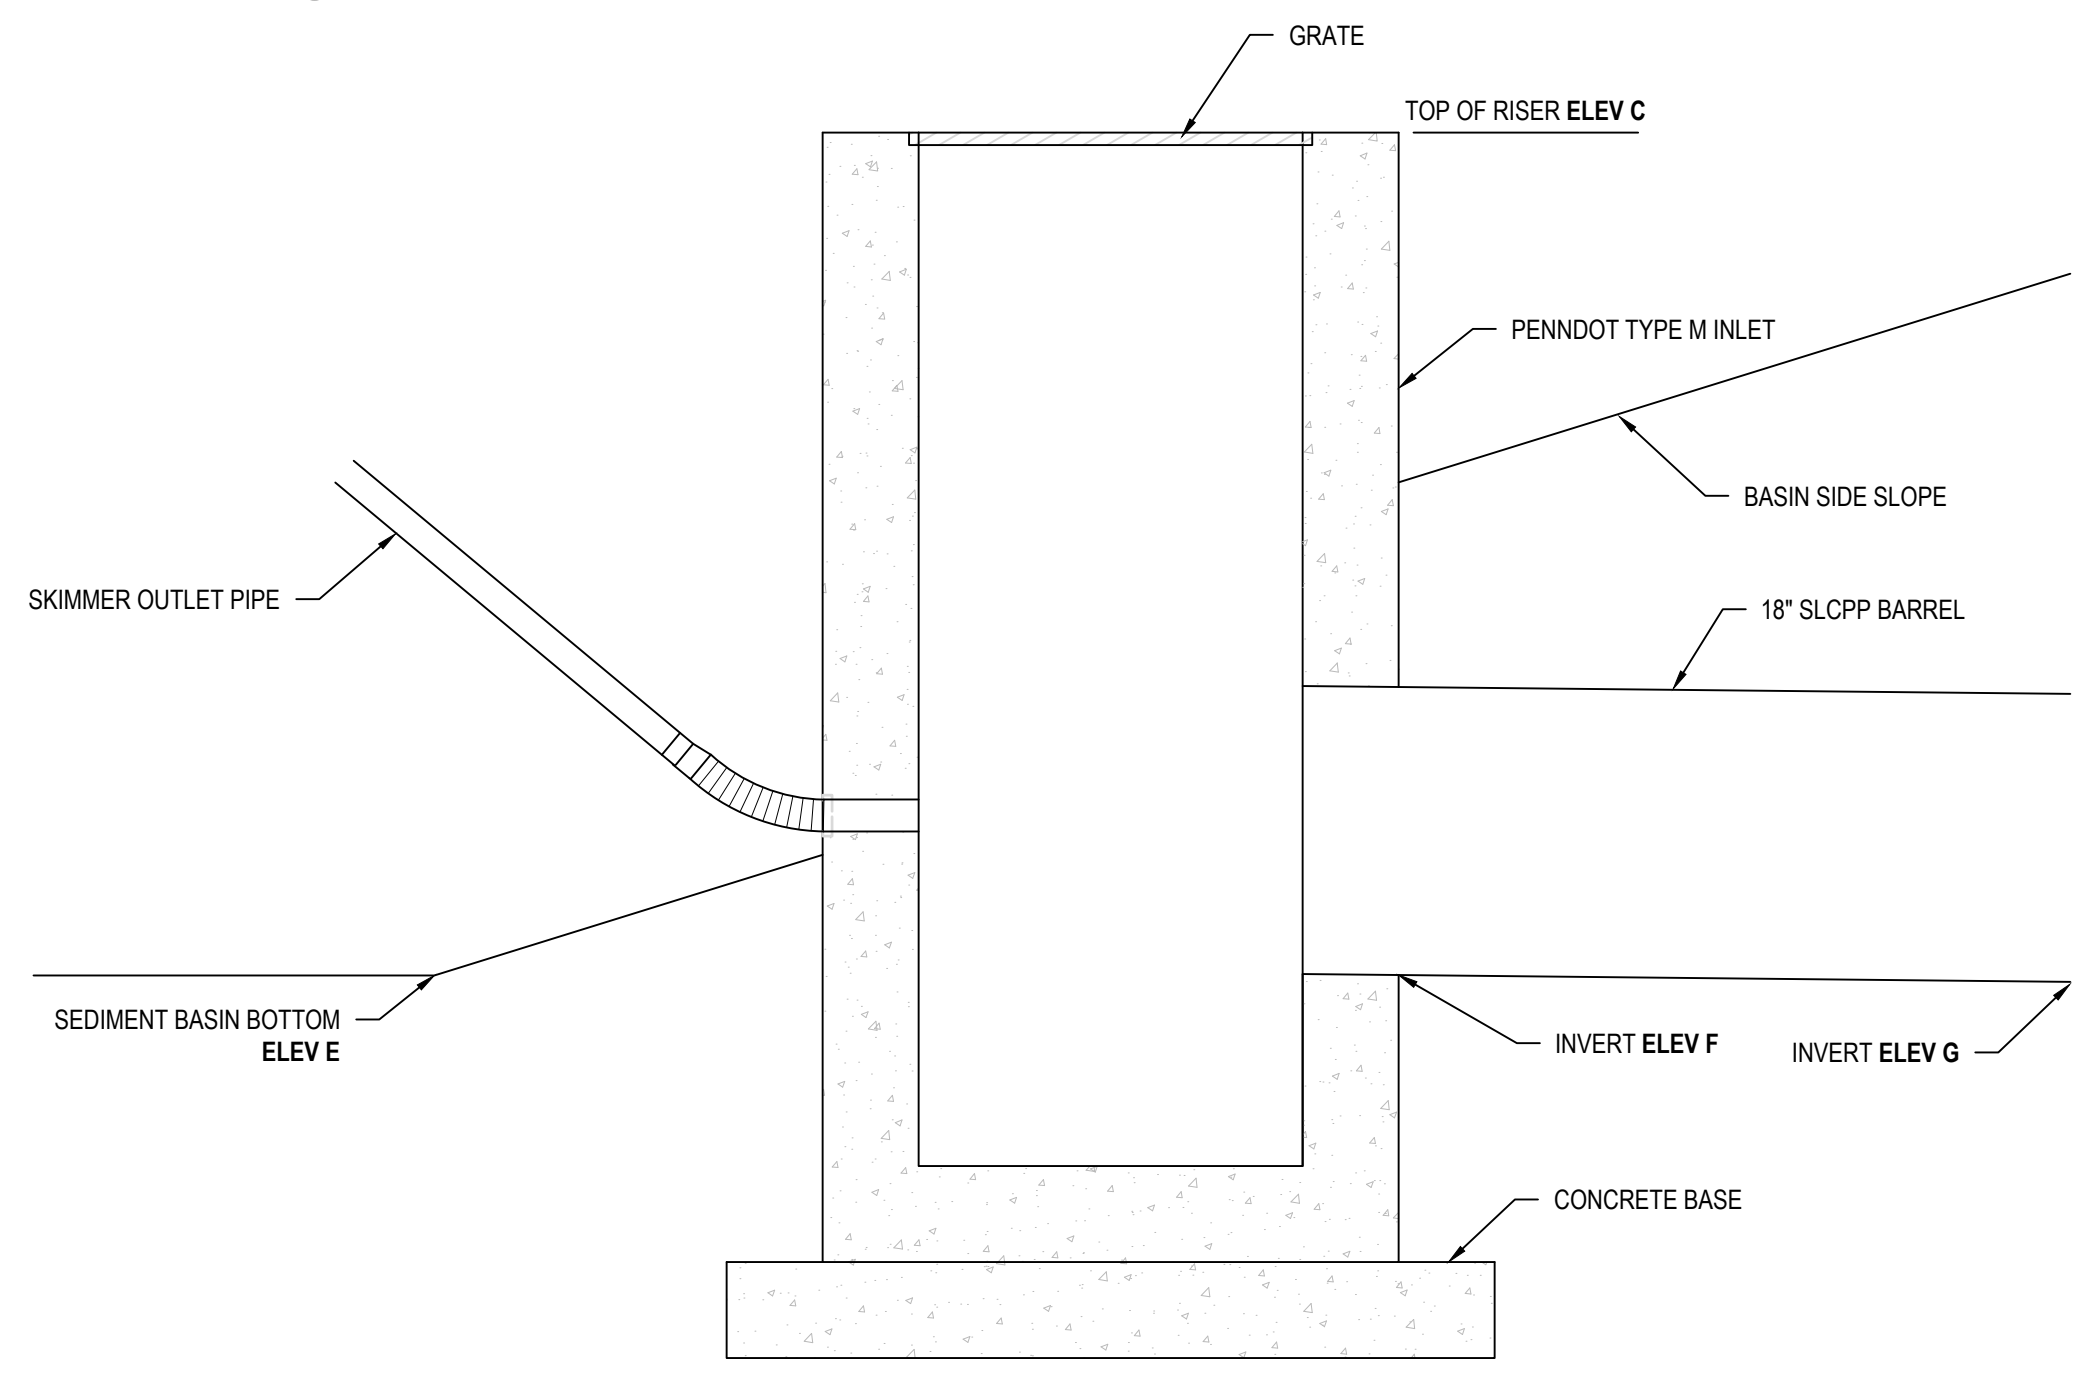

H7

SEDIMENT BASIN RISER


SCALE: N.T.S.

BMP	EMBANKMENT TOP ELEV A	EMERGENCY SPILLWAY CREST ELEV B	TOP OF RISER ELEV C	SEDIMENT STORAGE ELEVATION ELEV D	SEDIMENT BASIN BOTTOM ELEV E	INVERT ELEV F	INVERT ELEV G
BMP 1: SEDIMENT BASIN	990.00	989.00	988.00	985.50	984.50	984.50	984.32
BMP 2: SEDIMENT BASIN	1002.00	1001.00	1000.00	998.00	997.00	997.00	995.76
BMP 3: SEDIMENT BASIN	993.00	992.00	991.00	989.00	988.00	988.00	987.62

G4

BMP ELEVATION TABLE

SCALE: N.T.S.

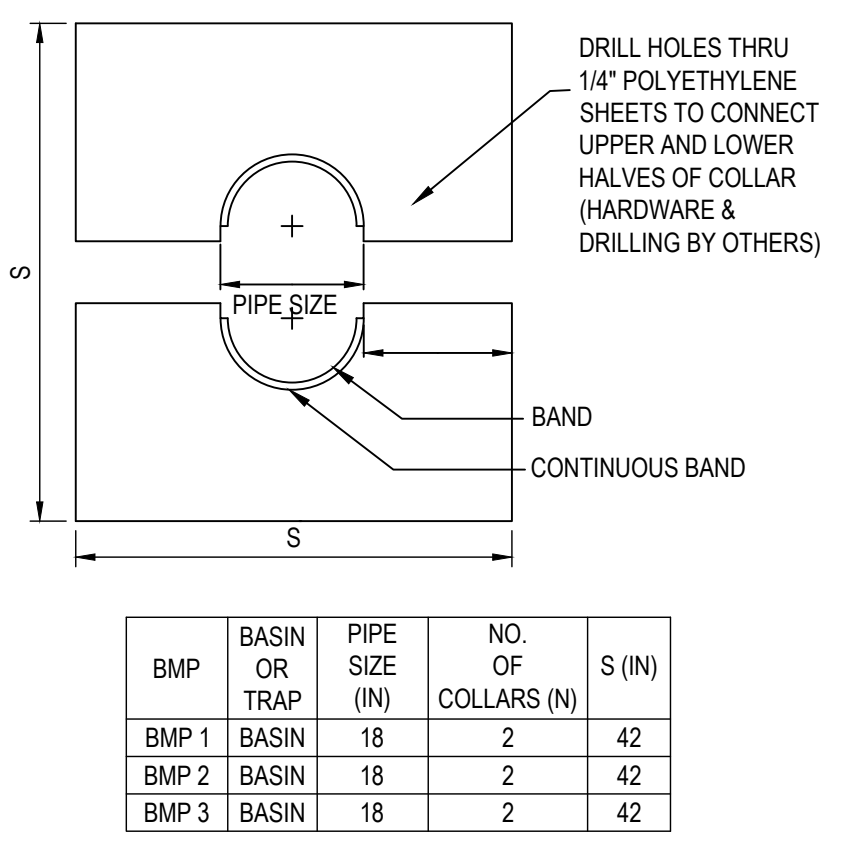


NOTES:

- MINIMUM DISTANCE TO PIPE JOINT SHALL BE 2 FEET.
- ALL COLLARS SHALL BE INSTALLED SO AS TO BE WATERTIGHT.

D4

HDPE ANTI-SEEP COLLAR

SCALE: N.T.S.

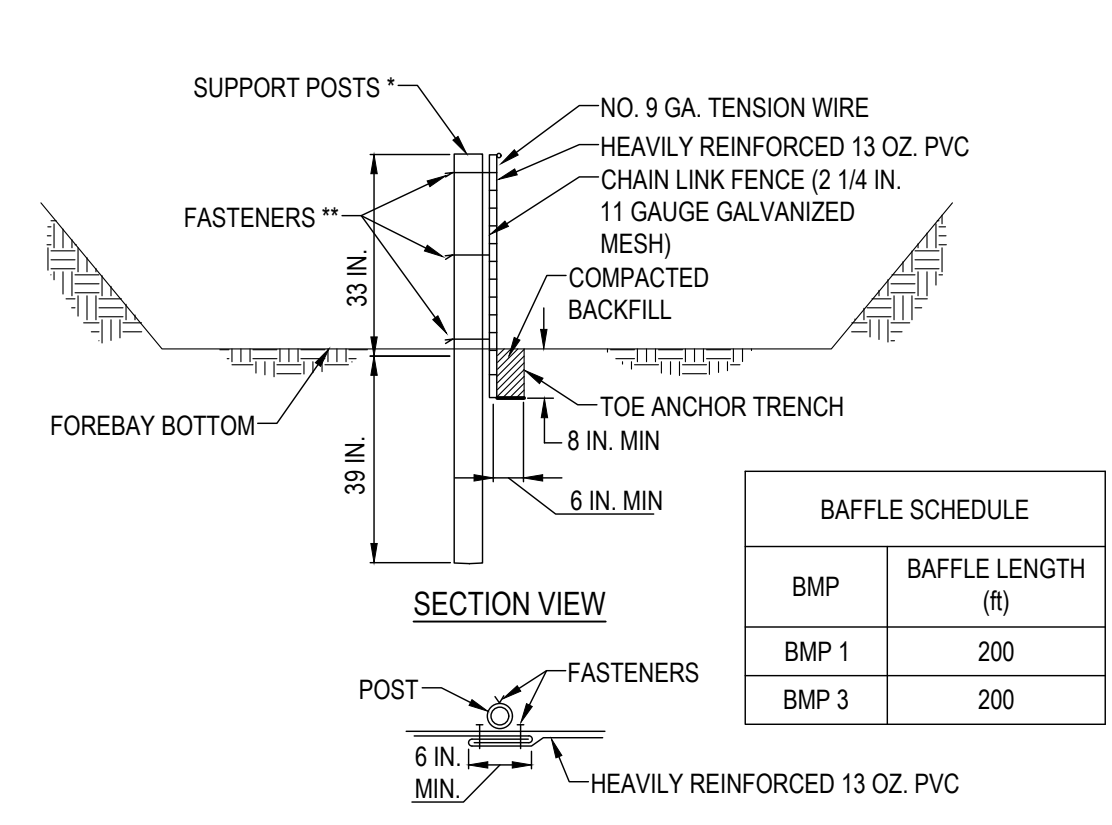

NOTES:

POSTS SPACED AT 8 FT. MAX. USE 2-1/2 IN. DIA HEAVY DUTY GALVANIZED OR ALUMINUM POSTS.


\*\* CHAIN LINK TO POST FASTENERS SPACED AT 14 IN. MAX. USE NO. 9 GA. ALUMINUM WIRE OR NO. 9 GALVANIZED STEEL WIRE. PVC SHEET TO CHAIN FASTENERS SPACED AT 24 IN. MAX. ON CENTER.

CHAIN LINK SHALL BE GALVANIZED NO. 11 GA. STEEL WIRE WITH 2-1/4 IN. OPENING, NO. 11 GA. ALUMINUM COATED STEEL WIRE IN ACCORDANCE WITH ASTM-A-491, OR GALVANIZED NO. 9 GA. STEEL WIRE TOP AND BOTTOM WITH GALVANIZED NO. 11 GA. STEEL INTERMEDIATE WIRES. NO. 9 GAGE TENSION WIRE TO BE INSTALLED HORIZONTALLY THROUGH HOLES AT TOP AND BOTTOM OF CHAIN-LINK FENCE.

D3

BAFFLE


SCALE: N.T.S.

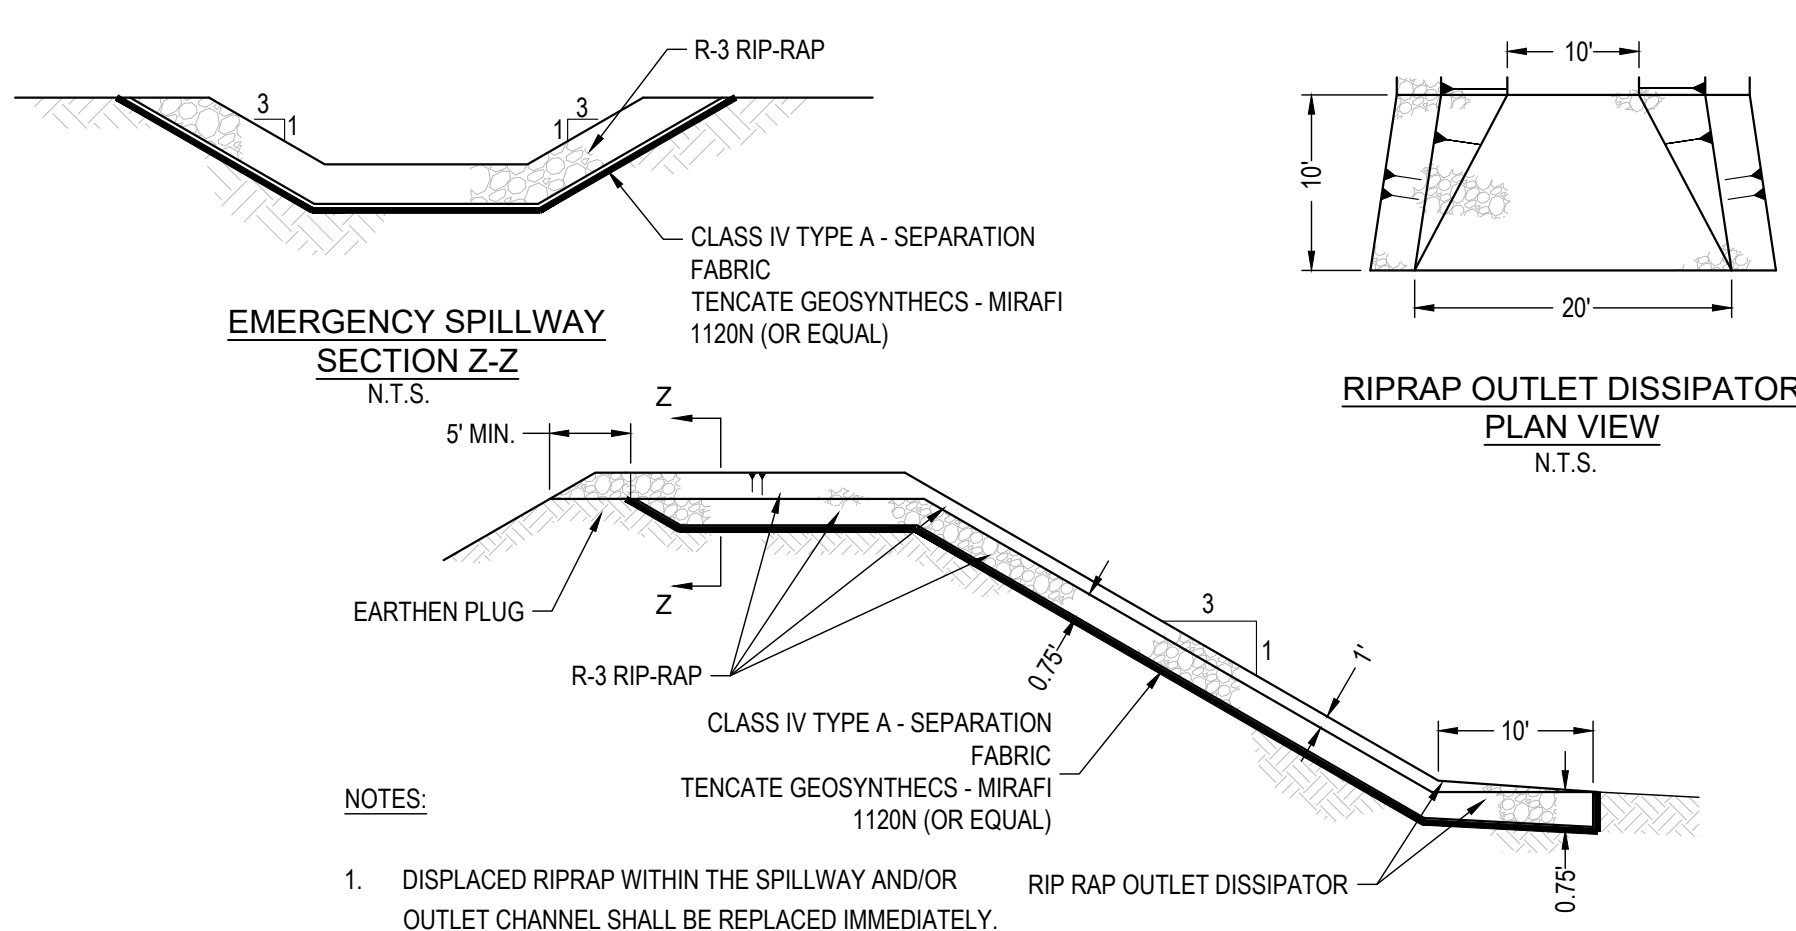

F4

EMERGENCY SPILLWAY

SCALE: N.T.S.

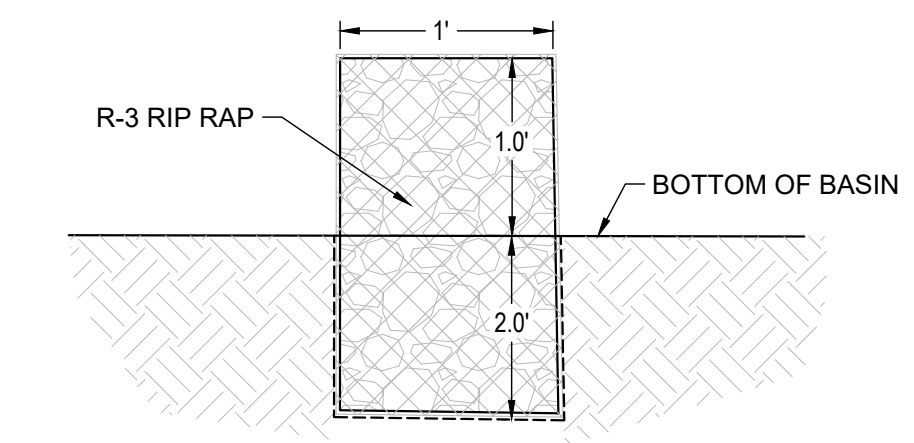

NOTES:

CONSTRUCT GABION BASKET FOREBAY BERM IN ACCORDANCE WITH PROJECT SPECIFICATIONS. GABION BASKET MATERIALS AND INSTALLATION SHALL CONFORM WITH PENNDOT PUBLICATION 72M, RC-43.

GABION FOREBAY LENGTH	
BMP	FOREBAY LENGTH (ft)
BMP 1	250
BMP 2	60
BMP 3	60 / 200

H4

GABION BASKET FOREBAY

SCALE: N.T.S.

03/24/25

DATE

MA

MADE

NS

ENGR

EZ

SUPV/MGR

REV

DATE

A

03/24/25

Michael Baker International, LLC

1750 POWER PLANT ROAD  
HOMER CITY, PA 15108

HOMER CITY STATION

1750 POWER PLANT ROAD  
HOMER CITY, PA 15108

DWG. TYPE:

CIVIL

TITLE:

EROSION & SEDIMENT CONTROL DETAILS

PROJECT NAME:

RURA FIELD

SCALE

PROJECT NO.

DRAWING NUMBER

SHEET

REV

NTS

RURA1

C-744-3505

1

A