



**COMMONWEALTH OF PENNSYLVANIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
AIR QUALITY PROGRAM**

**STATE ONLY NATURAL MINOR OPERATING PERMIT**

Issue Date: September 1, 2022

Effective Date: September 1, 2022

Expiration Date: August 31, 2027

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

**State Only Permit No: 22-03041**

Natural Minor

Federal Tax Id - Plant Code: 23-1928026-1

**Owner Information**

Name: LIBRANDIS MACH SHOP INC

Mailing Address: 93 AIRPORT DR  
MIDDLETOWN, PA 17057-5022

**Plant Information**

Plant: LIBRANDIS MACHINE SHOP/MIDDLETOWN

Location: 22 Dauphin County 22922 Lower Swatara Township

SIC Code: 3544 Manufacturing - Special Dies, Tools, Jigs, And Fixture

**Responsible Official**

Name: TODD A. LIBRANDI

Title: PRES

Phone: (717) 944 - 9442

Email: todd@carchrome.com

**Permit Contact Person**

Name: TODD A. LIBRANDI

Title: PRES

Phone: (717) 944 - 9442

Email: todd@carchrome.com

[Signature] \_\_\_\_\_

WILLIAM R. WEAVER, SOUTH CENTRAL REGION AIR PROGRAM MANAGER



## SECTION A. Table of Contents

### Section A. Facility/Source Identification

Table of Contents  
Site Inventory List

### Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #023 Reporting
- #024 Report Format

### Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

### Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

### Section E. Source Group Restrictions

- E-I: Restrictions



## **SECTION A. Table of Contents**

- E-II: Testing Requirements
- E-III: Monitoring Requirements
- E-IV: Recordkeeping Requirements
- E-V: Reporting Requirements
- E-VI: Work Practice Standards
- E-VII: Additional Requirements

### **Section F. Alternative Operating Scenario(s)**

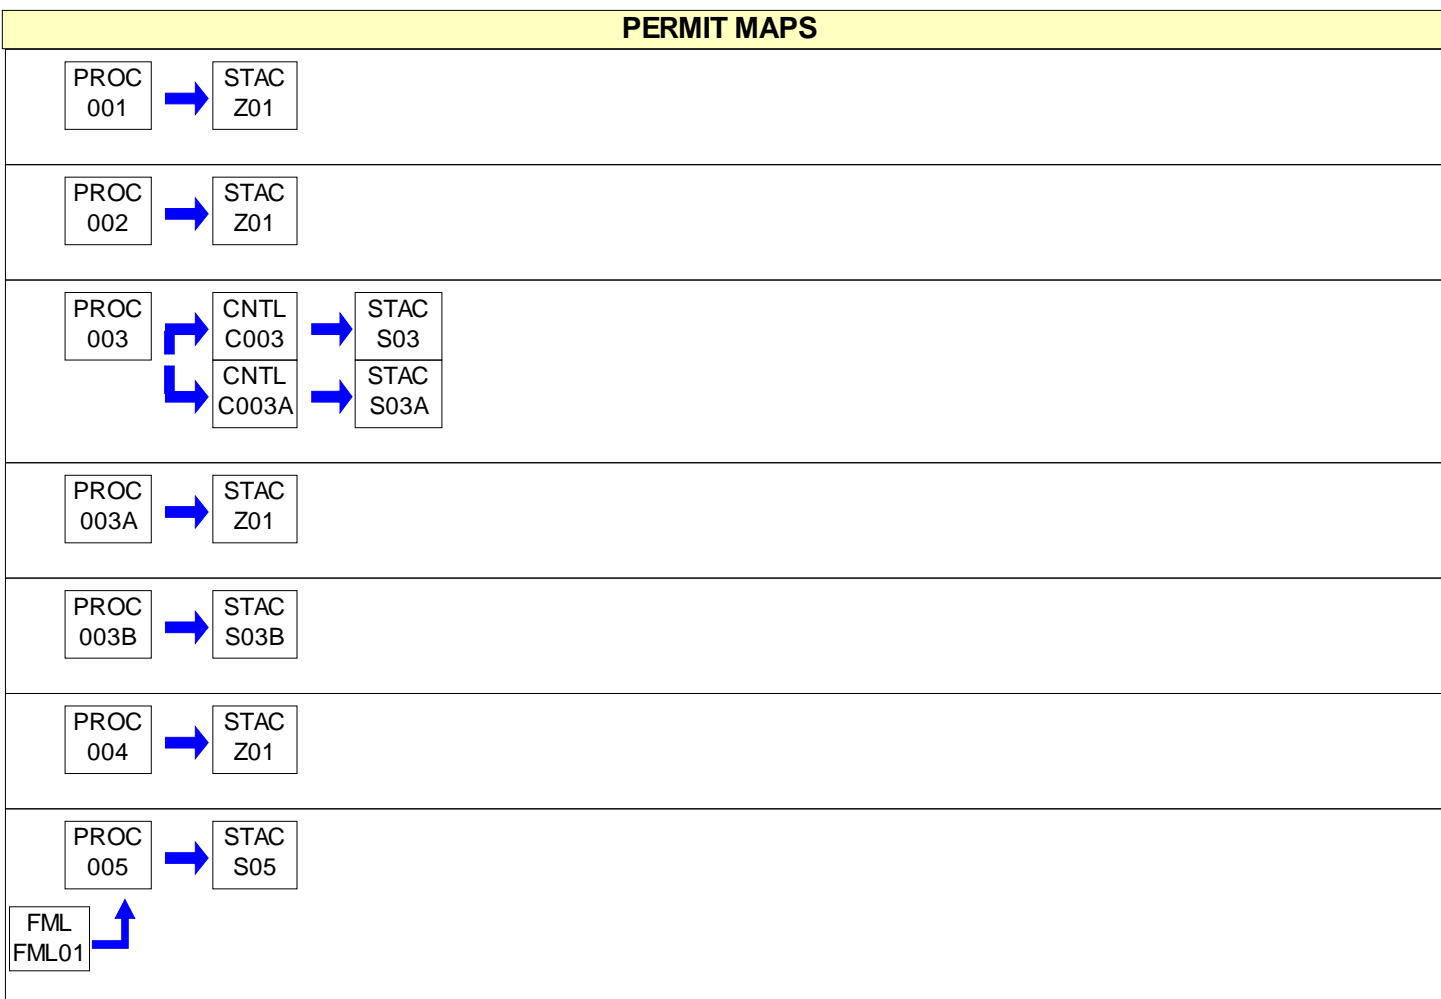
- F-I: Restrictions
- F-II: Testing Requirements
- F-III: Monitoring Requirements
- F-IV: Recordkeeping Requirements
- F-V: Reporting Requirements
- F-VI: Work Practice Standards
- F-VII: Additional Requirements

### **Section G. Emission Restriction Summary**

### **Section H. Miscellaneous**

**SECTION A. Site Inventory List**

Source ID	Source Name	Capacity/Throughput	Fuel/Material
001	CHROMEPLATING TANK 1, WORKCENTER 145		
002	CHROMEPLATING TANK 2, WORKCENTER 510		
003	ELECTROPLATING OPERATION #1		
003A	TRIVALENT CHROMIUM TANK ON LINE #4, WORKCENTER 217		
003B	ELECTROPLATING OPERATION #2		
004	CHROMEPLATING TANK 3, STATION 25		
005	BURN OFF OVEN	1.000 MCF/HR	NATURAL GAS
C003	CONTROL, VIRON WET SCRUBBER 1		
C003A	CONTROL, VIRON WET SCRUBBER 2		
FML01	NATURAL GAS, PIPE LINE		
S03	STACK, ELECTROPLATING OPERATION VIRON1		
S03A	STACK, ELECTROPLATING OPERATION VIRON2		
S03B	STACK, ELECTROPLATING OPERATION		
S05	STACK, BURN OFF EVEN		
Z01	FUGITIVE		

**PERMIT MAPS**

**SECTION B. General State Only Requirements****#001 [25 Pa. Code § 121.1]****Definitions.**

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

**#002 [25 Pa. Code § 127.446]****Operating Permit Duration.**

(a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.

(b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

**#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]****Permit Renewal.**

(a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.

(b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.

(c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.

(d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.

(e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).

(f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

**#004 [25 Pa. Code § 127.703]****Operating Permit Fees under Subchapter I.**

(a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.

(1) For a synthetic minor facility, a fee equal to:

(i) Four thousand dollars (\$4,000) for calendar years 2021—2025.

(ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.

(iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.

**SECTION B. General State Only Requirements**

(2) For a facility that is not a synthetic minor, a fee equal to:

- (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
- (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
- (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.

(b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

**#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]****Transfer of Operating Permits.**

(a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.

(b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.

(c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

**#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]****Inspection and Entry.**

(a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:

(1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;

(3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;

(4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.

(b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.

(c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

**#007 [25 Pa. Code §§ 127.441 & 127.444]****Compliance Requirements.**

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:

**SECTION B. General State Only Requirements**

- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application

(b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.

(c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

**#008 [25 Pa. Code § 127.441]****Need to Halt or Reduce Activity Not a Defense.**

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

**#009 [25 Pa. Code §§ 127.442(a) & 127.461]****Duty to Provide Information.**

(a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.

(b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

**#010 [25 Pa. Code § 127.461]****Revising an Operating Permit for Cause.**

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

**#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]****Operating Permit Modifications**

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:

**SECTION B. General State Only Requirements**

(b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.

(c) Minor Operating Permit Modifications. The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.

(d) Significant Operating Permit Modifications. The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.

(e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

**#012 [25 Pa. Code § 127.441]****Severability Clause.**

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

**#013 [25 Pa. Code § 127.449]****De Minimis Emission Increases.**

(a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:

(1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.

(2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.

(b) The Department may disapprove or condition de minimis emission increases at any time.

(c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:

(1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.

(2) One ton of NO<sub>x</sub> from a single source during the term of the permit and 5 tons of NO<sub>x</sub> at the facility during the term of the permit.

(3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.

(4) Six-tenths of a ton of PM<sub>10</sub> from a single source during the term of the permit and 3.0 tons of PM<sub>10</sub> at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.

(6) Other sources and classes of sources determined to be of minor significance by the Department.

(d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:



**SECTION B. General State Only Requirements**

- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
  - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
  - (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
  - (4) Space heaters which heat by direct heat transfer.
  - (5) Laboratory equipment used exclusively for chemical or physical analysis.
  - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
  - (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
  - (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

**#014 [25 Pa. Code § 127.3]****Operational Flexibility.**

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)

**SECTION B. General State Only Requirements**

(6) Section 127.462 (relating to minor operating permit modifications)

(7) Subchapter H (relating to general plan approvals and general operating permits)

**#015 [25 Pa. Code § 127.11]****Reactivation**

(a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).

(b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

**#016 [25 Pa. Code § 127.36]****Health Risk-based Emission Standards and Operating Practice Requirements.**

(a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].

(b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

**#017 [25 Pa. Code § 121.9]****Circumvention.**

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

**#018 [25 Pa. Code §§ 127.402(d) & 127.442]****Reporting Requirements.**

(a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.

(b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.

(c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager  
PA Department of Environmental Protection  
(At the address given in the permit transmittal letter, or otherwise notified)

(d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.

(e) Any records, reports or information submitted to the Department shall be available to the public except for such

**SECTION B. General State Only Requirements**

records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

**#019 [25 Pa. Code §§ 127.441(c) & 135.5]****Sampling, Testing and Monitoring Procedures.**

(a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.

(b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

**#020 [25 Pa. Code §§ 127.441(c) and 135.5]****Recordkeeping.**

(a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:

- (1) The date, place (as defined in the permit) and time of sampling or measurements.
- (2) The dates the analyses were performed.
- (3) The company or entity that performed the analyses.
- (4) The analytical techniques or methods used.
- (5) The results of the analyses.
- (6) The operating conditions as existing at the time of sampling or measurement.

(b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.

(c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

**#021 [25 Pa. Code § 127.441(a)]****Property Rights.**

This permit does not convey any property rights of any sort, or any exclusive privileges.

**#022 [25 Pa. Code § 127.447]****Alternative Operating Scenarios.**

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.

**SECTION B. General State Only Requirements****#023 [25 Pa. Code §135.3]****Reporting**

(a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.

(b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

**#024 [25 Pa. Code §135.4]****Report Format**

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.

**SECTION C. Site Level Requirements****I. RESTRICTIONS.****Emission Restriction(s).****# 001 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

No person shall permit the emission into the outdoor atmosphere of any fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of building or structure.
- (b) Grading, paving and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of material.
- (f) Sources and classes of sources other than those identified above, for which the operator has obtained a determination from the Department, in accordance with 25 Pa. Code §123.1(b), that fugitive emissions from the source, after appropriate control, meet the following requirements:
  - (1) The emissions are of minor significance with respect to causing air pollution.
  - (2) The emissions are not preventing or interfering with the attainment or maintenance of any ambient air standard.

**# 002 [25 Pa. Code §123.2]****Fugitive particulate matter**

No person shall emit particulate matter into the outdoor atmosphere from a source specified in Section C, Condition #001 if the emissions are visible at the point the emissions pass outside the person's property.

**# 003 [25 Pa. Code §123.31]****Limitations**

No person shall permit the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the person's property.

**# 004 [25 Pa. Code §123.41]****Limitations**

No person shall permit the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (a) Equal to or greater than 20 percent for a period or periods aggregating more than three minutes in any one hour.
- (b) Equal to or greater than 60 percent at any time.

**# 005 [25 Pa. Code §123.42]****Exceptions**

The emission limitation of 25 Pa. Code §123.41 shall not apply when:

- (a) The presence of uncombined water is the only reason for failure of the emission to meet the limitation.
- (b) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (c) The emission results from sources specified in Section C, Condition #001.

**SECTION C. Site Level Requirements****II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**III. MONITORING REQUIREMENTS.****# 006 [25 Pa. Code §123.43]****Measuring techniques**

Visible emissions may be measured using either of the following:

- (1) A device approved by the Department and maintained to provide accurate opacity measurements.
- (2) Observers, trained and certified in EPA Method 9 to measure plume opacity with the naked eye or with the aid of any devices approved by the Department.

**# 007 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall conduct a monthly inspection around the facility periphery during daylight hours when the plant is operating to detect visible emissions, fugitive emissions, and odorous air contaminants. Monthly inspections are necessary to determine:

- (a) The presence of visible emissions. Visible emissions may be measured according to the methods specified in Section C, Condition #007. Alternatively, plant personnel who observe visible emissions may report the incidence of visible emissions to the Department within two (2) hours of the incident and make arrangements for a certified observer to measure the visible emissions.
- (b) The presence of fugitive emissions beyond the plant property boundaries, as stated in Section C, Condition #002.
- (c) The presence of malodorous air contaminants beyond the plant property boundaries, as stated in Section C, Condition #003.

**IV. RECORDKEEPING REQUIREMENTS.****# 008 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall maintain records of the monthly inspections referenced in Section C, Condition #007. The records shall include, at a minimum, the name of the company representative monitoring these instances, the date and time of the observation and the wind direction during each observation.

The permittee shall retain these records for a minimum of two (2) years. The records shall be made available to the Department upon request.

**V. REPORTING REQUIREMENTS.****# 009 [25 Pa. Code §127.441]****Operating permit terms and conditions.**

The permittee shall report malfunctions which occur at the facility to the Department. A malfunction is defined as any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner. Failures that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:

- (a) Malfunctions which pose an imminent danger to public health, safety, welfare and the environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two hours after discovery of the incident. Telephone reports can be made to the Air Quality Program at (717) 705-4702 during normal business hours, or to the Department's Emergency Hotline at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at <https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx>. The permittee shall submit a written report of instances of such malfunctions to the Department within three (3) days of the telephone report.

**SECTION C. Site Level Requirements**

(b) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirement of subsection (a) above, shall be reported to the Department, in writing, within five (5) days of malfunction discovery.

**VI. WORK PRACTICE REQUIREMENTS.****# 010 [25 Pa. Code §123.1]****Prohibition of certain fugitive emissions**

The permittee shall take all reasonable actions to prevent particulate matter from a source identified in Section C, Condition #001 from becoming airborne, as per §123.1(c). These actions shall include, but are not limited to, the following:

- (a) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (b) Application of asphalt, oil, water or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.
- (c) Paving and maintenance of roadways.
- (d) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earthmoving equipment, erosion by water, or other means.

**VII. ADDITIONAL REQUIREMENTS.****# 011 [25 Pa. Code §129.14]****Open burning operations**

(a) No person shall conduct open burning of material at the facility, as per the §129.14(a), except where the open burning operations result from:

- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public official.
- (2) Any fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set solely for recreational or ceremonial purposes.
- (5) A fire set solely for cooking food.

(b) This permit condition does not constitute authorization to burn solid waste in violation of Section 610(3) of the Solid Waste Management Act (SWMA), contained at 35 P.S. Section 6018.610(3), or any other provisions of the SWMA.

**VIII. COMPLIANCE CERTIFICATION.**

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

**IX. COMPLIANCE SCHEDULE.**

No compliance milestones exist.


**SECTION D. Source Level Requirements**

Source ID: 001

Source Name: CHROMEPLATING TANK 1, WORKCENTER 145

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 001

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).




**SECTION D. Source Level Requirements**

Source ID: 002

Source Name: CHROMEPLATING TANK 2, WORKCENTER 510

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 001

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VII. ADDITIONAL REQUIREMENTS.**


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 003

Source Name: ELECTROPLATING OPERATION #1

Source Capacity/Throughput:

**I. RESTRICTIONS.****Emission Restriction(s).**

# 001 [25 Pa. Code §127.441]

**Operating permit terms and conditions.**

The pH of the wet scrubbers liquid shall be maintained at or greater than pH7.

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**III. MONITORING REQUIREMENTS.**

# 002 [25 Pa. Code §127.441]

**Operating permit terms and conditions.**

The pH of the scrubber liquid shall be monitored on a daily basis when operating.

**IV. RECORDKEEPING REQUIREMENTS.**

# 003 [25 Pa. Code §127.441]

**Operating permit terms and conditions.**

The pH of the scrubber liquid shall be recorded on a weekly basis, and the records shall be made available to the Department's representative upon request.

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).


**SECTION D. Source Level Requirements**

Source ID: 003A

Source Name: TRIVALENT CHROMIUM TANK ON LINE #4, WORKCENTER 217

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 001

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VII. ADDITIONAL REQUIREMENTS.**


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

Source ID: 003B

Source Name: ELECTROPLATING OPERATION #2

Source Capacity/Throughput:

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VI. WORK PRACTICE REQUIREMENTS.****# 001 [25 Pa. Code §127.444]****Compliance requirements.**

The electroplating line, System #6 shall be operated and maintained in accordance with the manufacturer's specifications, or as per operational instructions.

**VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).


**SECTION D. Source Level Requirements**

Source ID: 004

Source Name: CHROMEPLATING TANK 3, STATION 25

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 001

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

**SECTION D. Source Level Requirements**

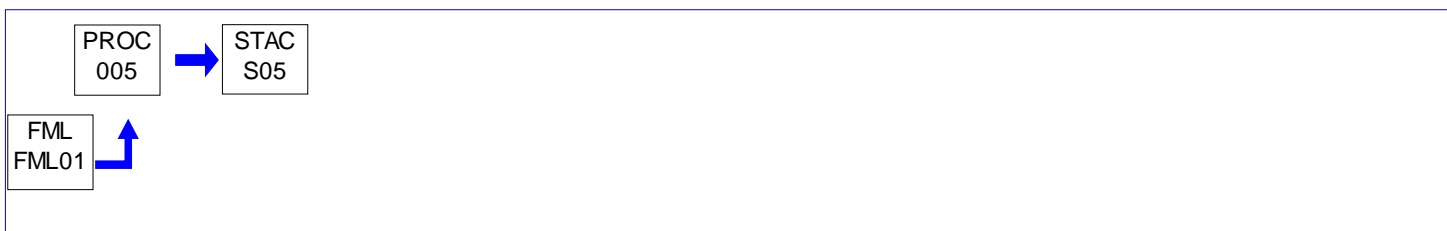
Source ID: 005

Source Name: BURN OFF OVEN

Source Capacity/Throughput:

1.000 MCF/HR

NATURAL GAS

**I. RESTRICTIONS.****Emission Restriction(s).**

# 001 [25 Pa. Code §123.13]

**Processes**

No person may permit the emission of particulate matter into the outdoor atmosphere from Source ID 005 in excess of 0.04 grain per dry standard cubic foot in the effluent gas.

# 002 [25 Pa. Code §127.441]

**Operating permit terms and conditions.**

(a) The oven is operated to coke the plastisol coating on racks to facilitate scraping.

(b) During the coking of plastisol coating on the racks, the permittee shall maintain the oven temperature at greater than 1,500 degree Fahrenheit.

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VI. WORK PRACTICE REQUIREMENTS.**

# 003 [25 Pa. Code §127.441]

**Operating permit terms and conditions.**

For Source ID 005, the afterburner temperature gauge shall be calibrated at least once during the term of this permit.

# 004 [25 Pa. Code §127.444]

**Compliance requirements.**

**SECTION D. Source Level Requirements**

The Source ID 005 shall be operated and maintained in accordance with the manufacturer's specifications.

**VII. ADDITIONAL REQUIREMENTS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**SECTION E. Source Group Restrictions.**

Group Name: 001

Group Description: NESHAP Subpart N (for Chromium Emissions from Hard and Decorative Chromium Electroplating)

**Sources included in this group**

ID	Name
001	CHROMEPLATING TANK 1, WORKCENTER 145
002	CHROMEPLATING TANK 2, WORKCENTER 510
003A	TRIVALENT CHROMIUM TANK ON LINE #4, WORKCENTER 217
004	CHROMEPLATING TANK 3, STATION 25

**I. RESTRICTIONS.**

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**II. TESTING REQUIREMENTS.**

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**III. MONITORING REQUIREMENTS.**

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**IV. RECORDKEEPING REQUIREMENTS.**

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**V. REPORTING REQUIREMENTS.**

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VI. WORK PRACTICE REQUIREMENTS.**

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

**VII. ADDITIONAL REQUIREMENTS.****# 001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.340]****Subpart N - National Emission Standards for Chromium Emissions from Hard and Decorative Electroplating and Chromium Anodizing Tanks.****Applicability and designation of sources.**

§63.340 Applicability and designation of sources.

(a) The affected source to which the provisions of this subpart apply is each chromium electroplating or chromium anodizing tank at facilities performing hard chromium electroplating, decorative chromium electroplating, or chromium anodizing.

(b) Owners or operators of affected sources subject to the provisions of this subpart must also comply with the requirements of subpart A of this part, according to the applicability of subpart A of this part to such sources, as identified in Table 1 of this subpart.

(c) Process tanks associated with a chromium electroplating or chromium anodizing process, but in which neither chromium electroplating nor chromium anodizing is taking place, are not subject to the provisions of this subpart. Examples of such tanks include, but are not limited to, rinse tanks, etching tanks, and cleaning tanks. Likewise, tanks that contain a chromium solution, but in which no electrolytic process occurs, are not subject to this subpart. An example of such a tank is a chrome conversion coating tank where no electrical current is applied.



**SECTION E. Source Group Restrictions.**

(d) Affected sources in which research and laboratory operations are performed are exempt from the provisions of this subpart when such operations are taking place.

(e) If you are an owner or operator of an area source subject to this subpart, you are exempt from the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart applicable to area sources.

[60 FR 4963, Jan. 25, 1995, as amended at 61 FR 27787, June 3, 1996; 64 FR 69643, Dec. 14, 1999; 70 FR 75345, Dec. 19, 2005]

§63.341 Definitions and nomenclature. [INCORPORATED BY REFERENCE]

§63.342 Standards.

(a)(1) At all times, each owner or operator must operate and maintain any affected source subject to the requirements of this subpart, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require the owner or operator to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

(2) Each owner or operator of an affected source subject to the provisions of this subpart shall comply with these requirements in this section on and after the compliance dates specified in §63.343(a). All affected sources are regulated by applying maximum achievable control technology.

(b) Applicability of emission limitations. (1) The emission limitations in this section apply during tank operation as defined in §63.341, and during periods of startup and shutdown as these are routine occurrences for affected sources subject to this subpart. In response to an action to enforce the standards set forth in this subpart, the owner or operator may assert a defense to a claim for civil penalties for violations of such standards that are caused by a malfunction, as defined in 40 CFR 63.2. Appropriate penalties may be assessed, however, if the owner or operator fails to meet the burden of proving all the requirements in the affirmative defense. The affirmative defense shall not be available for claims for injunctive relief.

(i) To establish the affirmative defense in any action to enforce such a standard, the owner or operator must timely meet the reporting requirements of paragraph (b)(1)(ii) of this section, and must prove by a preponderance of evidence that:

(A) The violation was caused by a sudden, infrequent, and unavoidable failure of air pollution control equipment, process equipment, or a process to operate in a normal and usual manner; and could not have been prevented through careful planning, proper design or better operation and maintenance practices; and did not stem from any activity or event that could have been foreseen and avoided, or planned for; and was not part of a recurring pattern indicative of inadequate design, operation, or maintenance; and

(B) Repairs were made as expeditiously as possible when exceeded violation occurred. Off-shift and overtime labor were used, to the extent practicable to make these repairs; and

(C) The frequency, amount and duration of the violation (including any bypass) were minimized to the maximum extent practicable; and

(D) If the violation resulted from a bypass of control equipment or a process, then the bypass was unavoidable to prevent loss of life, personal injury, or severe property damage; and

(E) All possible steps were taken to minimize the impact of the violation on ambient air quality, the environment, and human health; and

(F) All emissions monitoring and control systems were kept in operation if at all possible, consistent with safety and good air pollution control practices; and

**SECTION E. Source Group Restrictions.**

(G) All of the actions in response to the violation were documented by properly signed, contemporaneous operating logs; and

(H) At all times, the affected sources were operated in a manner consistent with good practices for minimizing emissions; and

(I) A written root cause analysis was prepared, the purpose of which is to determine, correct, and eliminate the primary causes of the malfunction and the excess emissions resulting from the malfunction event at issue. The analysis shall also specify, using the best monitoring methods and engineering judgment, the amount of excess emissions that were the result of the malfunction.

(ii) Report. The owner or operator seeking to assert an affirmative defense shall submit a written report to the Administrator with all necessary supporting documentation, that it has met the requirements set forth in paragraph (i) of this section. This affirmative defense report shall be included in the first periodic compliance, deviation report or excess emission report otherwise required after the initial occurrence of the violation of the relevant standard (which may be the end of any applicable averaging period). If such compliance, deviation report or excess emission report is due less than 45 days after the initial occurrence of the violation, the affirmation defense report may be included in the second compliance, deviation report or excess emission report due after the initial occurrence of the violation of the relevant standard.

(2) If an owner or operator is controlling a group of tanks with a common add-on air pollution control device, the emission limitations of paragraphs (c), (d), and (e) of this section apply whenever any one affected source is operated. The emission limitation that applies to the group of affected sources is:

(i) The emission limitation identified in paragraphs (c), (d), and (e) of this section if the affected sources are performing the same type of operation (e.g., hard chromium electroplating), are subject to the same emission limitation, and are not controlled by an add-on air pollution control device also controlling nonaffected sources;

(ii) The emission limitation calculated according to §63.344(e)(3) if affected sources are performing the same type of operation, are subject to the same emission limitation, and are controlled with an add-on air pollution control device that is also controlling nonaffected sources; and

(iii) The emission limitation calculated according to §63.344(e)(4) if affected sources are performing different types of operations, or affected sources are performing the same operations but subject to different emission limitations, and are controlled with an add-on air pollution control device that may also be controlling emissions from nonaffected sources.

(c) [NA – FACILITY ONLY DOES DECORATIVE CHROME ELECTROPLATING, NOT HARD CHROMIUM ELECTROPLATING]

(d) Standards for decorative chromium electroplating tanks using a chromic acid bath and chromium anodizing tanks. During tank operation, each owner or operator of an existing, new, or reconstructed affected source shall control chromium emissions discharged to the atmosphere from that affected source by either:

(1) Not allowing the concentration of total chromium in the exhaust gas stream discharged to the atmosphere to exceed 0.007 mg/dscm ( $3.1 \times 10^{-6}$  gr/dscf) for all existing decorative chromium electroplating tanks using a chromic acid bath and all existing chromium anodizing tanks; or

(2) Not allowing the concentration of total chromium in the exhaust gas stream discharged to the atmosphere to exceed 0.006 mg/dscm ( $2.6 \times 10^{-6}$  gr/dscf) for all new or reconstructed decorative chromium electroplating tanks using a chromic acid bath and all new or reconstructed chromium anodizing tanks; or

(3) If a chemical fume suppressant containing a wetting agent is used, not allowing the surface tension of the electroplating or anodizing bath contained within the affected tank to exceed 40 dynes/cm ( $2.8 \times 10^{-3}$  lbf/ft), as measured by a stalagmometer or 33 dynes/cm ( $2.3 \times 10^{-3}$  lbf/ft), as measured by a tensiometer at any time during tank operation, for all existing, new, or reconstructed decorative chromium electroplating tanks using a chromic acid bath and all existing, new, or reconstructed chromium anodizing tanks; or

(4) After September 21, 2015, the owner or operator of an affected decorative chromium electroplating tank or an affected chromium anodizing tank shall not add PFOS-based fume suppressants to any affected decorative chromium electroplating

**SECTION E. Source Group Restrictions.**

tank or chromium anodizing tank.

(e) Standards for decorative chromium electroplating tanks using a trivalent chromium bath. [NOTE: THIS ONLY APPLIES TO DEP SOURCE 003A "TRIVALENT CHROMIUM TANK ON LINE #4, WORKCENTER 217"] (1) Each owner or operator of an existing, new, or reconstructed decorative chromium electroplating tank that uses a trivalent chromium bath that incorporates a wetting agent as a bath ingredient is subject to the recordkeeping and reporting requirements of §§63.346(b)(14) and 63.347(i), but are not subject to the work practice requirements of paragraph (f) of this section, or the continuous compliance monitoring requirements in §63.343(c). The wetting agent must be an ingredient in the trivalent chromium bath components purchased as a package.

(2) After September 21, 2015, the owner or operator of an affected decorative chromium electroplating tank using a trivalent chromium bath shall not add PFOS-based fume suppressants to any affected decorative chromium electroplating tank.

(3) Each owner or operator of an existing, new, or reconstructed decorative chromium electroplating tank that uses a trivalent chromium bath that does not incorporate a wetting agent as a bath ingredient is subject to the standards of paragraph (d) of this section.

(4) Each owner or operator of an existing, new, or reconstructed decorative chromium electroplating tank that had been using a trivalent chromium bath that incorporated a wetting agent and ceases using this type of bath must fulfill the reporting requirements of §63.347(i)(3) and comply with the applicable emission limitation within the timeframe specified in §63.343(a)(7).

(f) Operation and maintenance practices. All owners or operators subject to the standards in paragraphs (c) and (d) of this section are subject to these operation and maintenance practices.

(1)(i) At all times, including periods of startup, shutdown, and malfunction, owners or operators shall operate and maintain any affected source, including associated air pollution control devices and monitoring equipment, in a manner consistent with good air pollution control practices.

(ii) Malfunctions shall be corrected as soon as practicable after their occurrence.

(iii) Operation and maintenance requirements established pursuant to section 112 of the Act are enforceable independent of emissions limitations or other requirements in relevant standards.

(2)(i) Determination of whether acceptable operation and maintenance procedures are being used will be based on information available to the Administrator, which may include, but is not limited to, monitoring results; review of the operation and maintenance plan, procedures, and records; and inspection of the source.

(ii) Based on the results of a determination made under paragraph (f)(2)(i) of this section, the Administrator may require that an owner or operator of an affected source make changes to the operation and maintenance plan required by paragraph (f)(3) of this section for that source. Revisions may be required if the Administrator finds that the plan:

(A) Does not address a malfunction that has occurred;

(B) Fails to provide for the proper operation of the affected source, the air pollution control techniques, or the control system and process monitoring equipment during a malfunction in a manner consistent with good air pollution control practices; or

(C) Does not provide adequate procedures for correcting malfunctioning process equipment, air pollution control techniques, or monitoring equipment as quickly as practicable.

(3) Operation and maintenance plan. (i) The owner or operator of an affected source subject to paragraph (f) of this section shall prepare an operation and maintenance plan no later than the compliance date, except for hard chromium electroplaters and the chromium anodizing operations in California which have until January 25, 1998. The plan shall be incorporated by reference into the source's title V permit, if and when a title V permit is required. The plan shall include the following elements:

(A) The plan shall specify the operation and maintenance criteria for the affected source, the add-on air pollution control

**SECTION E. Source Group Restrictions.**

device (if such a device is used to comply with the emission limits), and the process and control system monitoring equipment, and shall include a standardized checklist to document the operation and maintenance of this equipment;

(B) For sources using an add-on control device or monitoring equipment to comply with this subpart, the plan shall incorporate the operation and maintenance practices for that device or monitoring equipment, as identified in Table 1 of this section, if the specific equipment used is identified in Table 1 of this section;

(C) If the specific equipment used is not identified in Table 1 of this section, the plan shall incorporate proposed operation and maintenance practices. These proposed operation and maintenance practices shall be submitted for approval as part of the submittal required under §63.343(d);

(D) The plan shall specify procedures to be followed to ensure that equipment or process malfunctions due to poor maintenance or other preventable conditions do not occur; and

(E) The plan shall include a systematic procedure for identifying malfunctions of process equipment, add-on air pollution control devices, and process and control system monitoring equipment and for implementing corrective actions to address such malfunctions.

(F) The plan shall include housekeeping procedures, as specified in Table 2 of this section.

(ii) If the operation and maintenance plan fails to address or inadequately addresses an event that meets the characteristics of a malfunction at the time the plan is initially developed, the owner or operator shall revise the operation and maintenance plan within 45 days after such an event occurs. The revised plan shall include procedures for operating and maintaining the process equipment, add-on air pollution control device, or monitoring equipment during similar malfunction events, and a program for corrective action for such events.

(iii) Recordkeeping associated with the operation and maintenance plan is identified in §63.346(b). Reporting associated with the operation and maintenance plan is identified in §63.347 (g) and (h) and paragraph (f)(3)(iv) of this section.

(iv) If actions taken by the owner or operator during periods of malfunction are inconsistent with the procedures specified in the operation and maintenance plan required by paragraph (f)(3)(i) of this section, the owner or operator shall record the actions taken for that event and shall report by phone such actions within 2 working days after commencing actions inconsistent with the plan. This report shall be followed by a letter within 7 working days after the end of the event, unless the owner or operator makes alternative reporting arrangements, in advance, with the Administrator.

(v) The owner or operator shall keep the written operation and maintenance plan on record after it is developed to be made available for inspection, upon request, by the Administrator for the life of the affected source or until the source is no longer subject to the provisions of this subpart. In addition, if the operation and maintenance plan is revised, the owner or operator shall keep previous (i.e., superseded) versions of the operation and maintenance plan on record to be made available for inspection, upon request, by the Administrator for a period of 5 years after each revision to the plan.

(vi) To satisfy the requirements of paragraph (f)(3) of this section, the owner or operator may use applicable standard operating procedure (SOP) manuals, Occupational Safety and Health Administration (OSHA) plans, or other existing plans, provided the alternative plans meet the requirements of this section.

(g) The standards in this section that apply to chromic acid baths shall not be met by using a reducing agent to change the form of chromium from hexavalent to trivalent.

**TABLE 1 TO §63.342—SUMMARY OF OPERATION AND MAINTENANCE PRACTICES****A. Control Technique: Composite mesh-pad (CMP) system [APPLIES TO CHROME PLATING TANKS 1 & 2]****Operation and maintenance practices:**

1. Visually inspect device to ensure there is proper drainage, no chromic acid buildup on the pads, and no evidence of chemical attack on the structural integrity of the device. Frequency: 1/quarter

**SECTION E. Source Group Restrictions.**

2. Visually inspect back portion of the mesh pad closest to the fan to ensure there is no breakthrough of chromic acid mist. Frequency: 1/quarter

3. Visually inspect ductwork from tank to the control device to ensure there are no leaks. Frequency: 1/quarter

4. Perform washdown of the composite mesh-pads in accordance with manufacturers recommendations. Frequency: per manufacturer.

B. Control Technique: Packed-bed scrubber (PSB) [NA]

C. Control Technique: PBS/CMP system [NA]

D. Control Technique: Fiber-bed mist eliminator [NA]

E. Control Technique: Air pollution control device (APCD) not listed in rule [NA]

F. Monitoring Equipment: Pitot Tube

Operation and maintenance practices: Backflush with water, or remove from the duct and rinse with fresh water. Replace in the duct and rotate 180 degrees to ensure that the same zero reading is obtained. Check pitot tube ends for damage. Replace pitot tube if cracked or fatigued. Frequency: 1/quarter.

F. Monitoring Equipment: Stalagmometer

Operation and maintenance practices: Follow manufacturers recommendations.

END OF TABLE 1 REQUIREMENTS

TABLE 2 TO §63.342—HOUSEKEEPING PRACTICES

1. For any substance used in an affected chromium electroplating or chromium anodizing tank that contains hexavalent chromium, you must:

a) Store the substance in a closed container in an enclosed storage area or building, at this minimum frequency: At all times, except when transferring the substance to and from the container, AND

b) Use a closed container when transporting the substance from the enclosed storage area, at this minimum frequency: whenever transporting substance, except when transferring the substance to and from the container.

2. For each affected tank, to minimize spills of bath solution that result from dragout, you must: [Note: this measure does not require the return of contaminated bath solution to the tank. This requirement applies only as the parts are removed from the tank. Once away from the tank area, any spilled solution must be handled in accordance with Item 4 of these housekeeping measures]

a) Install drip trays that collect and return to the tank any bath solution that drips or drains from parts as the parts are removed from the tank, at this minimum frequency: prior to operating the tank; OR

b) Contain and return to the tank any bath solution that drains or drips from parts as the parts are removed from the tank, at this minimum frequency: whenever removing parts from an affected tank; OR

(c) Collect and treat in an onsite wastewater treatment plant any bath solution that drains or drips from parts as the parts are removed from the tank, at this minimum frequency: whenever removing parts from an affected tank.

3. For each spraying operation for removing excess chromic acid from parts removed from, and occurring over, an affected tank, you must install a splash guard to minimize overspray during spraying operations and to ensure that any hexavalent chromium laden liquid captured by the splash guard is returned to the affected chromium electroplating or anodizing tank, at this minimum frequency: Prior to any such spraying operation.

**SECTION E. Source Group Restrictions.**

4. For each operation that involves the handling or use of any substance used in an affected chromium electroplating or chromium anodizing tank that contains hexavalent chromium, you must begin clean up, or otherwise contain, all spills of the substance, at this minimum frequency: Within 1 hour of the spill. Note: substances that fall or flow into drip trays, pans, sumps, or other containment areas are not considered spills.

5. For surfaces within the enclosed storage area, open floor area, walkways around affected tanks contaminated with hexavalent chromium from an affected chromium electroplating or chromium anodizing tank, you must:

a) Clean the surfaces using one or more of the following methods: HEPA vacuuming; Hand-wiping with a damp cloth; Wet mopping; Hose down or rinse with potable water that is collected in a wastewater collection system; Other cleaning method approved by the permitting authority, at this minimum frequency: at least once every 7 days if one or more chromium electroplating or chromium anodizing tanks were used, or at least after every 40 hours of operating time of one or more affected chromium electroplating or chromium anodizing tank, whichever is later; OR

b) Apply a non-toxic chemical dust suppressant to the surfaces, at this minimum frequency: According to manufacturer's recommendations.

6. For all buffing, grinding, or polishing operations that are located in the same room as chromium electroplating or chromium anodizing operations, you must separate the operation from any affected electroplating or anodizing operation by installing a physical barrier, at this minimum frequency: Prior to beginning the buffing, grinding, or polishing operation; the barrier may take the form of plastic strip curtains.

7. For all chromium or chromium-containing wastes generated from housekeeping activities, you must store, dispose, recover, or recycle the wastes using practices that do not lead to fugitive dust and in accordance with hazardous waste requirements, at this minimum frequency: At all times.

**END OF TABLE 2 REQUIREMENTS**

[60 FR 4963, Jan. 25, 1995; 60 FR 33122, June 27, 1995, as amended at 61 FR 27787, June 3, 1996; 62 FR 42920, Aug. 11, 1997; 68 FR 37347, June 23, 2003; 69 FR 42894, July 19, 2004; 71 FR 20456, Apr. 20, 2006; 77 FR 58243, Sept. 19, 2012]

**§63.343 Compliance provisions.**

(a) Compliance dates. (1) The owner or operator of an existing affected source shall comply with the emission limitations in §63.342 no later than September 19, 2014.

(2) [NA – SOURCES ARE EXISTING]

(3) The owner or operator of an existing area source that increases actual or potential emissions of hazardous air pollutants such that the area source becomes a major source must comply with the provisions for existing major sources, including the reporting provisions of §63.347(g), immediately upon becoming a major source.

(4) [NA – SOURCES ARE EXISTING]

(5) [NA – NO HARD CHROME PLATING]

(6) [NA – EXTENSION NOT REQUESTED]

(7) An owner or operator of a decorative chromium electroplating tank that uses a trivalent chromium bath that incorporates a wetting agent, and that ceases using the trivalent chromium process, must comply with the emission limitation now applicable to the tank within 1 year of switching bath operation.

(8) After March 19, 2013, the owner or operator of an affected source that is subject to the standards in paragraphs §63.342(c) or (d) shall implement the housekeeping procedures specified in Table 2 of §63.342.

(b) [INITIAL COMPLIANCE IS IN THE PAST]

**SECTION E. Source Group Restrictions.**

(c) Monitoring to demonstrate continuous compliance. The owner or operator of an affected source subject to the emission limitations of this subpart shall conduct monitoring according to the type of air pollution control technique that is used to comply with the emission limitation. The monitoring required to demonstrate continuous compliance with the emission limitations is identified in this section for the air pollution control techniques expected to be used by the owners or operators of affected sources. As an alternative to the daily monitoring, the owner or operator of an affected source may install a continuous pressure monitoring system.

(1) Composite mesh-pad systems. [APPLES TO TANKS 1 & 2] (i) During the initial performance test, the owner or operator of an affected source, or a group of affected sources under common control, complying with the emission limitations in §63.342 through the use of a composite mesh-pad system shall determine the outlet chromium concentration using the test methods and procedures in §63.344(c), and shall establish as a site-specific operating parameter the pressure drop across the system, setting the value that corresponds to compliance with the applicable emission limitation, using the procedures in §63.344(d)(5). An owner or operator may conduct multiple performance tests to establish a range of compliant pressure drop values, or may set as the compliant value the average pressure drop measured over the three test runs of one performance test and accept  $\pm 2$  inches of water column from this value as the compliant range. [INITIAL COMPLIANCE IS IN THE PAST]

(ii) On and after the date on which the initial performance test is required to be completed under §63.7, the owner or operator of an affected source, or group of affected sources under common control, shall monitor and record the pressure drop across the composite mesh-pad system once each day that any affected source is operating. To be in compliance with the standards, the composite mesh-pad system shall be operated within  $\pm 2$  inches of water column of the pressure drop value established during the initial performance test, or shall be operated within the range of compliant values for pressure drop established during multiple performance tests.

(iii) The owner or operator of an affected source complying with the emission limitations in §63.343 through the use of a composite mesh-pad system may repeat the performance test and establish as a new site-specific operating parameter the pressure drop across the composite mesh-pad system according to the requirements in paragraphs (c)(1)(i) or (ii) of this section. To establish a new site-specific operating parameter for pressure drop, the owner or operator shall satisfy the requirements specified in paragraphs (c)(1)(iii)(A) through (D) of this section.

(A) Determine the outlet chromium concentration using the test methods and procedures in §63.344(c);

(B) Establish the site-specific operating parameter value using the procedures §63.344(d)(5);

(C) Satisfy the recordkeeping requirements in §63.346(b)(6) through (8); and

(D) Satisfy the reporting requirements in §63.347(d) and (f).

(iv) The requirement to operate a composite mesh-pad system within the range of pressure drop values established under paragraphs (c)(1)(i) through (iii) of this section does not apply during automatic washdown cycles of the composite mesh-pad system.

(2) Packed-bed scrubber systems. [NA]

(3) Packed-bed scrubber/composite mesh-pad system. [NA]

(4) Fiber-bed mist eliminator. [NA]

(5) Wetting agent-type or combination wetting agent-type/foam blanket fume suppressants. NOTE: THIS ONLY APPLIES TO DEP SOURCE 003A "TRIVALENT CHROMIUM TANK ON LINE #4, WORKCENTER 217"

(i) [NA – INITIAL PERFORMANCE TESTING NOT REQUIRED]

(ii) On and after the date on which the initial performance test is required to be completed under §63.7, the owner or operator of an affected source shall monitor the surface tension of the electroplating or anodizing bath. Operation of the affected source at a surface tension greater than the value established during the performance test, or greater than 40 dynes/cm, as measured by a stalagmometer, or 33 dynes/cm, as measured by a tensiometer, if the owner or operator is



**SECTION E. Source Group Restrictions.**

using this value in accordance with paragraph (c)(5)(i) of this section, shall constitute noncompliance with the standards. The surface tension shall be monitored according to the following schedule:

- (A) The surface tension shall be measured once every 4 hours during operation of the tank with a stalagmometer or a tensiometer as specified in Method 306B, appendix A of this part.
- (B) The time between monitoring can be increased if there have been no exceedances. The surface tension shall be measured once every 4 hours of tank operation for the first 40 hours of tank operation after the compliance date. Once there are no exceedances during 40 hours of tank operation, surface tension measurement may be conducted once every 8 hours of tank operation. Once there are no exceedances during 40 hours of tank operation, surface tension measurement may be conducted once every 40 hours of tank operation on an ongoing basis, until an exceedance occurs. The minimum frequency of monitoring allowed by this subpart is once every 40 hours of tank operation.
- (C) Once an exceedance occurs as indicated through surface tension monitoring, the original monitoring schedule of once every 4 hours must be resumed. A subsequent decrease in frequency shall follow the schedule laid out in paragraph (c)(5)(ii)(B) of this section. For example, if an owner or operator had been monitoring an affected source once every 40 hours and an exceedance occurs, subsequent monitoring would take place once every 4 hours of tank operation. Once an exceedance does not occur for 40 hours of tank operation, monitoring can occur once every 8 hours of tank operation. Once an exceedance does not occur for 40 hours of tank operation on this schedule, monitoring can occur once every 40 hours of tank operation.
- (iii) Once a bath solution is drained from the affected tank and a new solution added, the original monitoring schedule of once every 4 hours must be resumed, with a decrease in monitoring frequency allowed following the procedures of paragraphs (c)(5)(ii) (B) and (C) of this section.

(6) Foam blanket-type fume suppressants. [APPLIES TO TANK 3]

(i) During the initial performance test, the owner or operator of an affected source complying with the emission limitations in §63.342 through the use of a foam blanket in the electroplating or anodizing bath shall determine the outlet chromium concentration using the procedures in §63.344(c), and shall establish as the site-specific operating parameter the thickness of the foam blanket, setting the minimum thickness that corresponds to compliance with the applicable emission limitation. In lieu of establishing the minimum foam blanket thickness during the performance test, the owner or operator may accept 2.54 centimeters (1 inch) as the minimum foam blanket thickness that corresponds to compliance with the applicable emission limitation. All foam blanket measurements must be taken in close proximity to the workpiece or cathode area in the plating tank(s). [INITIAL COMPLIANCE IS IN THE PAST]

(ii) On and after the date on which the initial performance test is required to be completed under §63.7, the owner or operator of an affected source shall monitor the foam blanket thickness of the electroplating or anodizing bath. Operation of the affected source at a foam blanket thickness less than the value established during the performance test, or less than 2.54 cm (1 inch) if the owner or operator is using this value in accordance with paragraph (c)(6)(i) of this section, shall constitute noncompliance with the standards. The foam blanket thickness shall be measured according to the following schedule:

- (A) The foam blanket thickness shall be measured once every 1 hour of tank operation.
- (B) The time between monitoring can be increased if there have been no exceedances. The foam blanket thickness shall be measured once every hour of tank operation for the first 40 hours of tank operation after the compliance date. Once there are no exceedances for 40 hours of tank operation, foam blanket thickness measurement may be conducted once every 4 hours of tank operation. Once there are no exceedances during 40 hours of tank operation, foam blanket thickness measurement may be conducted once every 8 hours of tank operation on an ongoing basis, until an exceedance occurs. The minimum frequency of monitoring allowed by this subpart is once per 8 hours of tank operation.
- (C) Once an exceedance occurs as indicated through foam blanket thickness monitoring, the original monitoring schedule of once every hour must be resumed. A subsequent decrease in frequency shall follow the schedule laid out in paragraph (c)(6)(ii)(B) of this section. For example, if an owner or operator had been monitoring an affected source once every 8 hours and an exceedance occurs, subsequent monitoring would take place once every hour of tank operation. Once an exceedance does not occur for 40 hours of tank operation, monitoring can occur once every 4 hours of tank operation. Once



**SECTION E. Source Group Restrictions.**

an exceedance does not occur for 40 hours of tank operation on this schedule, monitoring can occur once every 8 hours of tank operation.

(iii) Once a bath solution is drained from the affected tank and a new solution added, the original monitoring schedule of once every hour must be resumed, with a decrease in monitoring frequency allowed following the procedures of paragraphs (c)(6)(ii) (B) and (C) of this section.

(7) Fume suppressant/add-on control device. [APPLIES TO TANKS 1 & 2]

(i) If the owner or operator of an affected source uses both a fume suppressant and add-on control device and both are needed to comply with the applicable emission limit, monitoring requirements as identified in paragraphs (c) (1) through (6) of this section, and the work practice standards of Table 1 of §63.342, apply for each of the control techniques used.

(ii) If the owner or operator of an affected source uses both a fume suppressant and add-on control device, but only one of these techniques is needed to comply with the applicable emission limit, monitoring requirements as identified in paragraphs (c) (1) through (6) of this section, and work practice standards of Table 1 of §63.342, apply only for the control technique used to achieve compliance.

(8) Use of an alternative monitoring method. [NA – NO ALTERNATIVE MONITORING METHOD]

(d) An owner or operator who uses an air pollution control device not listed in this section shall submit a description of the device, test results collected in accordance with §63.344(c) verifying the performance of the device for reducing chromium emissions to the atmosphere to the level required by this subpart, a copy of the operation and maintenance plan referenced in §63.342(f) including operation and maintenance practices, and appropriate operating parameters that will be monitored to establish continuous compliance with the standards. The monitoring plan submitted identifying the continuous compliance monitoring is subject to the Administrator's approval.

[60 FR 4963, Jan. 25, 1995; 60 FR 33122, June 27, 1995, as amended at 62 FR 42920, Aug. 11, 1997; 68 FR 37347, June 23, 2003; 69 FR 42895, July 19, 2004; 77 FR 58245, Sept. 19, 2012]

§63.344 Performance test requirements and test methods. [INCORPORATED BY REFERENCE]

§63.345 Provisions for new and reconstructed sources. [NA – SOURCES ARE EXISTING]

§63.346 Recordkeeping requirements.

(a) The owner or operator of each affected source subject to these standards shall fulfill all recordkeeping requirements outlined in this section and in the General Provisions to 40 CFR part 63, according to the applicability of subpart A of this part as identified in Table 1 of this subpart.

(b) The owner or operator of an affected source subject to the provisions of this subpart shall maintain the following records for such source:

(1) Inspection records for the add-on air pollution control device, if such a device is used, and monitoring equipment, to document that the inspection and maintenance required by the work practice standards of §63.342(f) and Table 1 of §63.342 have taken place. The record can take the form of a checklist and should identify the device inspected, the date of inspection, a brief description of the working condition of the device during the inspection, and any actions taken to correct deficiencies found during the inspection.

(2) Records of all maintenance performed on the affected source, the add-on air pollution control device, and monitoring equipment, except routine housekeeping practices;

(3) Records of the occurrence, duration, and cause (if known) of each malfunction of process, add-on air pollution control, and monitoring equipment;

(4) Records of actions taken during periods of malfunction to minimize emissions in accordance with §63.342(a)(1), including corrective actions to restore malfunctioning process and air pollution control and monitoring equipment to its

**SECTION E. Source Group Restrictions.**

normal or usual manner of operation;

(5) Other records, which may take the form of checklists, necessary to demonstrate consistency with the provisions of the operation and maintenance plan required by §63.342(f)(3);

(6) Test reports documenting results of all performance tests;

(7) All measurements as may be necessary to determine the conditions of performance tests, including measurements necessary to determine compliance with the special compliance procedures of §63.344(e);

(8) Records of monitoring data required by §63.343(c) that are used to demonstrate compliance with the standard including the date and time the data are collected;

(9) The specific identification (i.e., the date and time of commencement and completion) of each period of excess emissions, as indicated by monitoring data, that occurs during malfunction of the process, add-on air pollution control, or monitoring equipment;

(10) The specific identification (i.e., the date and time of commencement and completion) of each period of excess emissions, as indicated by monitoring data, that occurs during periods other than malfunction of the process, add-on air pollution control, or monitoring equipment;

(11) The total process operating time of the affected source during the reporting period;

(12) [NA – NO HARD CHROME PLATING]

(13) For sources using fume suppressants to comply with the standards, records of the date and time that fume suppressants are added to the electroplating or anodizing bath and records of the fume suppressant manufacturer and product name;

(14) For sources complying with §63.342(e), records of the bath components purchased, with the wetting agent clearly identified as a bath constituent contained in one of the components;

(15) Any information demonstrating whether a source is meeting the requirements for a waiver of recordkeeping or reporting requirements, if the source has been granted a waiver under §63.10(f); and

(16) All documentation supporting the notifications and reports required by §63.9, §63.10, and §63.347.

(c) All records shall be maintained for a period of 5 years in accordance with §63.10(b)(1).

[60 FR 4963, Jan. 25, 1995, as amended at 77 FR 58248, Sept. 19, 2012]

#### §63.347 Reporting requirements.

(a) The owner or operator of each affected source subject to these standards shall fulfill all reporting requirements outlined in this section and in the General Provisions to 40 CFR part 63, according to the applicability of subpart A as identified in Table 1 of this subpart. These reports shall be made to the Administrator at the appropriate address as identified in §63.13 or to the delegated State authority.

(1) Reports required by subpart A of this part and this section may be sent by U.S. mail, fax, or by another courier.

(i) Submittals sent by U.S. mail shall be postmarked on or before the specified date.

(ii) Submittals sent by other methods shall be received by the Administrator on or before the specified date.

(2) If acceptable to both the Administrator and the owner or operator of an affected source, reports may be submitted on electronic media.

**SECTION E. Source Group Restrictions.**

(b) The reporting requirements of this section apply to the owner or operator of an affected source when such source becomes subject to the provisions of this subpart.

(c) [INITIAL NOTIFICATIONS ARE IN THE PAST]

(d) Notification of performance test. [NA – PERFORMANCE TEST NOT REQUIRED]

(e) Notification of compliance status. [NOCS FOR EXISTING SOURCES IS IN THE PAST]

(f) Reports of performance test results. [NA – PERFORMANCE TEST NOT REQUIRED]

(g) Ongoing compliance status reports for major sources. [NA – NOT A MAJOR SOURCE]

(h) Ongoing compliance status reports for area sources. The requirements of this paragraph do not alleviate affected area sources from complying with the requirements of State or Federal operating permit programs under 40 CFR part 71.

(1) The owner or operator of an affected source that is located at an area source site shall prepare a summary report to document the ongoing compliance status of the affected source. The report shall contain the information identified in paragraph (g)(3) of this section, shall be completed annually and retained on site, and made available to the Administrator upon request. The report shall be completed annually except as provided in paragraph (h)(2) of this section.

(2) Reports of exceedances. (i) If either of the following conditions is met, semiannual reports shall be prepared and submitted to the Administrator:

(A) The total duration of excess emissions (as indicated by the monitoring data collected by the owner or operator of the affected source in accordance with §63.343(c)) is 1 percent or greater of the total operating time for the reporting period; or

(B) The total duration of malfunctions of the add-on air pollution control device and monitoring equipment is 5 percent or greater of the total operating time.

(ii) Once an owner or operator of an affected source reports an exceedance as defined in paragraph (h)(2)(i) of this section, ongoing compliance status reports shall be submitted semiannually until a request to reduce reporting frequency under paragraph (h)(3) of this section is approved.

(iii) The Administrator may determine on a case-by-case basis that the summary report shall be completed more frequently and submitted, or that the annual report shall be submitted instead of being retained on site, if these measures are necessary to accurately assess the compliance status of the source.

(3) Request to reduce frequency of ongoing compliance status reports. (i) An owner or operator who is required to submit ongoing compliance status reports on a semiannual (or more frequent) basis, or is required to submit its annual report instead of retaining it on site, may reduce the frequency of reporting to annual and/or be allowed to maintain the annual report onsite if all of the following conditions are met:

(A) For 1 full year (e.g., 2 semiannual or 4 quarterly reporting periods), the ongoing compliance status reports demonstrate that the affected source is in compliance with the relevant emission limit;

(B) The owner or operator continues to comply with all applicable recordkeeping and monitoring requirements of subpart A of this part and this subpart; and

(C) The Administrator does not object to a reduced reporting frequency for the affected source, as provided in paragraphs (h)(3) (ii) and (iii) of this section.

(ii) The frequency of submitting ongoing compliance status reports may be reduced only after the owner or operator notifies the Administrator in writing of his or her intention to make such a change, and the Administrator does not object to the intended change. In deciding whether to approve a reduced reporting frequency, the Administrator may review information concerning the source's previous performance history during the 5-year recordkeeping period prior to the intended change, or the recordkeeping period since the source's compliance date, whichever is shorter. Records subject to review may

**SECTION E. Source Group Restrictions.**

include performance test results, monitoring data, and evaluations of an owner or operator's conformance with emission limitations and work practice standards. Such information may be used by the Administrator to make a judgement about the source's potential for noncompliance in the future. If the Administrator disapproves the owner or operator's request to reduce reporting frequency, the Administrator will notify the owner or operator in writing within 45 days after receiving notice of the owner or operator's intention. The notification from the Administrator to the owner or operator will specify the grounds on which the disapproval is based. In the absence of a notice of disapproval within 45 days, approval is automatically granted.

(iii) As soon as the monitoring data required by §63.343(c) show that the source is not in compliance with the relevant emission limit, the frequency of reporting shall revert to semiannual, and the owner shall state this exceedance in the ongoing compliance status report for the next reporting period. After demonstrating ongoing compliance with the relevant emission limit for another full year, the owner or operator may again request approval from the Administrator to reduce the reporting frequency as allowed by paragraph (h)(3) of this section.

(i) Reports associated with trivalent chromium baths. The requirements of this paragraph do not alleviate affected sources from complying with the requirements of State or Federal operating permit programs under title V. Owners or operators complying with the provisions of §63.342(e) are not subject to paragraphs (a) through (h) of this section, but must instead submit the following reports:

(1) Within 180 days after January 25, 1995, submit an initial notification that includes:

(i) The same information as is required by paragraphs (c)(1) (i) through (v) of this section; and

(ii) A statement that a trivalent chromium process that incorporates a wetting agent will be used to comply with §63.342(e); and

(iii) The list of bath components that comprise the trivalent chromium bath, with the wetting agent clearly identified; and

(2) Within 30 days of the compliance date specified in §63.343(a), a notification of compliance status that contains an update of the information submitted in accordance with paragraph (i)(1) of this section or a statement that the information is still accurate; and

(3) Within 30 days of a change to the trivalent chromium electroplating process, a report that includes:

(i) A description of the manner in which the process has been changed and the emission limitation, if any, now applicable to the affected source;

(ii) If a different emission limitation applies, the applicable information required by paragraph (c)(1) of this section; and

(iii) The notification and reporting requirements of paragraphs (d), (e), (f), (g), and (h) of this section, which shall be submitted in accordance with the schedules identified in those paragraphs.

[60 FR 4963, Jan. 25, 1995, as amended at 61 FR 27787, June 3, 1996; 62 FR 4465, Jan. 30, 1997, 62 FR 42921, Aug. 11, 1997; 69 FR 42897, July 19, 2004; 77 FR 58248, Sept. 19, 2012]

§63.348 Implementation and enforcement.

(a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or Tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or Tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. Contact the applicable U.S. EPA Regional Office to find out if implementation and enforcement of this subpart is delegated to a State, local, or Tribal agency.

(b) In delegating implementation and enforcement authority of this subpart to a State, local, or Tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or Tribal agency.

**SECTION E. Source Group Restrictions.**

(c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (4) of this section.

(1) Approval of alternatives to the requirements in §§63.340, 63.342(a) through (e) and (g), and 63.343(a).

(2) Approval of major alternatives to test methods under §63.7(e)(2)(ii) and (f), as defined in §63.90, and as required in this subpart.

(3) Approval of major alternatives to monitoring under §63.8(f), as defined in §63.90, and as required in this subpart.

(4) Approval of major alternatives to recordkeeping and reporting under §63.10(f), as defined in §63.90, and as required in this subpart.

[68 FR 37347, June 23, 2003]

Table 1 to Subpart N of Part 63—General Provisions Applicability to Subpart N [INCORPORATED BY REFERENCE]

[60 FR 4963, Jan. 25, 1995, as amended at 61 FR 27787, June 3, 1996; 70 FR 75345, Dec. 19, 2005; 77 FR 58248, Sept. 19, 2012]

**Regulatory Changes**

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart N shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director  
United States Environmental Protection Agency  
Region III, Air and Radiation Division  
Permits Branch (3AD10)  
Four Penn Center  
1600 John F. Kennedy Boulevard  
Philadelphia, Pennsylvania 19103-2852

The DEP copies shall be forwarded to the DEP SCRO Air Quality Program Manager at [wiveaver@pa.gov](mailto:wiveaver@pa.gov), unless otherwise directed in writing by DEP.

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.

**SECTION F. Alternative Operation Requirements.**

No Alternative Operations exist for this State Only facility.

**SECTION G. Emission Restriction Summary.**

No emission restrictions listed in this section of the permit.

**SECTION H. Miscellaneous.**

- #001. This is a renewal of State Only Operating Permit 22-03041 issued on August 24, 2017. This permit supercedes that permit.
- #002. The mesh pad mist eliminator is used as a secondary control for the chromium emissions on Source IDs 001 and 002. When used the mist eliminator shall be operated and maintained in accordance with the manufacturer's specifications.
- #003. Insignificant Source List:  
The following sources do not require any restrictions and work practice standards, or monitoring, recordkeeping and reporting requirements:
- (a) Three Dip Tanks for application of Plastisol coating on racks, including a primer tank and two coating tanks. The annual usage of plastisol is approximately 50 gallons.
  - (b) Curing Oven for plastisol, 0.6 mmbtu/hr, gas fired.
  - (c) Buffing and Grinding Room #2, controlled by a cyclone and two sets of bag filters with magnahelic gauges. The air is returned back to the room.
  - (d) Four Boilers (i.e., each <10 MMBtu/hr fired on natural gas)
  - (e) One spray booth, installed in the Spring of 2017, which operates less than two (2) hours per week and applies about two (2) gallons per month of a clear lacquer called "Enduralac CN-10974."
- #004. Source ID No. 001 (Chromeplating Tank 1, Workcenter 145) is associated with Line #1 chromeplating. Primary control is surface tension and secondary control is the mist eliminator.
- #005. Source ID No. 002 (Chromeplating Tank 2, Workcenter 510) is associated with Line #4 chromeplating. Primary control is surface tension and secondary control is the mist eliminator.
- #006. Source ID No. 003 (Electroplating Operation) is associated with Line #1,2,3 alkalines/acids and Line #4,5 acids. The operation is controlled by both Viron Wet Scrubbers (i.e., see #009 and #010 below).
- #007. Source ID No. 003A (Trivalent Chromium Tank on Line #4, Workcenter 217) is controlled by a wetting agent with surface tension maintained between 30-50 dynes.
- #008. Source ID No. 003B (Electroplating Operation) is associated with Line #6 alkalines/acids.
- #009. Source ID No. 004 (Chromeplating Tank 3, Station 25) is associated with Line #6 chromeplating. Control for Tank 3 is surface tension, controlled by fume suppressant.
- #010. Control Device ID No. C003 (Control, Viron Wet Scrubber 1) controls Line 1,2,3 alkalines/acids.
- #011. Control Device ID No. C003A (Control, Viron Wet Scrubber 2) controls Line 4,5 acids.





\*\*\*\*\* End of Report \*\*\*\*\*

---