

COMMONWEALTH OF PENNSYLVANIA DEPARTMENT OF ENVIRONMENTAL PROTECTION AIR QUALITY PROGRAM

STATE ONLY SYNTHETIC MINOR OPERATING PERMIT

Issue Date: November 23, 2021 Effective Date: December 1, 2021

Expiration Date: November 30, 2026

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.


The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 01-05017

Synthetic Minor

Federal Tax Id - Plant Code: 13-3634870-1

	Owner Information			
Name: BERRYVILLE GRAPHICS INC Mailing Address: 100 N MILLER ST FAIRFIELD, PA 17320-9707				
Plant Information				
Plant: BERRYVILLE GRAPHICS/FAIRFIELD Location: 01 Adams County SIC Code: 2732 Manufacturing - Book Printing	01913 Fairfield Borough			
	Responsible Official			
Name: JEFF NEWHOUSE Title: PLANT DIRECTOR Phone: (717) 549 - 4748	Email: Jeffery.newhouse@bpg-usa.com			
Permit Contact Person				
Name: RONNIE SHUTTS Title: EH&S MANAGER Phone: (540) 955 - 9301	Email: ronnie.shutts@bvgraphics.com			
[Signature]	AIR PROGRAM MANAGER			



SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents Site Inventory List

Section B. General State Only Requirements

#001	Definitions
#UU I	Delinilions.

- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- **Operating Permit Modifications** #011
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #016 Reactivation
- #015 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- Sampling, Testing and Monitoring Procedures. #019
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #024 Reporting
- #023 Report Format

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

E-I: Restrictions



SECTION A. Table of Contents

E-II: Testing Requirements
E-III: Monitoring Requirements
E-IV: Recordkeeping Requirements
E-V: Reporting Requirements
E-VI: Work Practice Standards
E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

F-I: Restrictions

F-II: Testing Requirements
F-III: Monitoring Requirements
F-IV: Recordkeeping Requirements
F-V: Reporting Requirements
F-VI: Work Practice Standards
F-VII: Additional Requirements

Section G. Emission Restriction Summary

Section H. Miscellaneous






SECTION A. Site Inventory List

Source	ID Source Name	Capacity/	Throughput	Fuel/Material
031 BOILER 1		8.400	MMBTU/HR	
		8.400	MCF/HR	Natural Gas
032	BOILER 2	8.400	MMBTU/HR	
	8.400	MCF/HR	Natural Gas	
102A PRESS 2	9.974	MMBTU/HR		
	2.500	Lbs/HR	VOC	
	10.000	MCF/HR	Natural Gas	
104A PRESS 4	9.974	MMBTU/HR		
		10.000	MCF/HR	Natural Gas
		2.500	Lbs/HR	VOC
106 PRESS 6	8.800	MMBTU/HR		
		8.800	MCF/HR	Natural Gas
	50.000	Lbs/HR	VOC	
107 PRESS 7	PRESS 7	2.570	MMBTU/HR	
	2.600	MCF/HR	Natural Gas	
	8.000	Lbs/HR	VOC	
108 PRESS 8	PRESS 8	5.180	MMBTU/HR	
	5.200	MCF/HR	Natural Gas	
			Lbs/HR	VOC
201	COLD CLEANING MACHINE(S)	5.000	Lbs/HR	VOC
301	BINDING OPERATIONS GLUE VOC	4.000	Lbs/HR	VOC
401	EMERGENCY GENERATOR			
402	EMERGENCY FIRE PUMPS			
C500	REGENERATIVE THERMAL OXIDIZER (RTO)	4.800	MCF/HR	Natural Gas
FML03	DIESEL FUEL STORAGE			
FML25	NATURAL GAS PIPELINE			
S031	BOILER 1 STACK			
S032	BOILER 2 STACK			
S107	PRESS 7 STACK			
S108	PRESS 8 STACK			
S401	EMERGENCY GENERATOR STACK			
S402	EMERGENCY FIRE PUMP STACKS			
S500	RTO STACK			
Z201	SOURCE 201 FUGITIVE EMISSIONS			
Z301	SOURCE 301 FUGITIVE EMISSIONS			

PERMIT MAPS






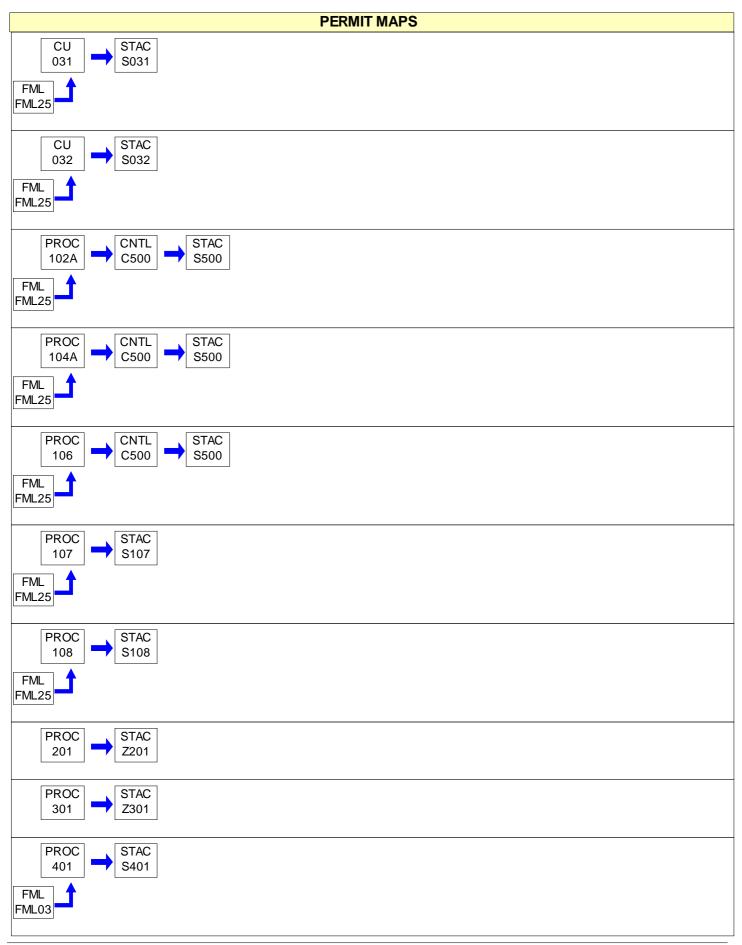











#001 [25 Pa. Code § 121.1]

Definitions.

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]

Operating Permit Duration.

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]

Permit Renewal.

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]

Operating Permit Fees under Subchapter I.

- (a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.
 - (1) For a synthetic minor facility, a fee equal to:
 - (i) Four thousand dollars (\$4,000) for calendar years 2021—2025.
 - (ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.
 - (iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.





- (2) For a facility that is not a synthetic minor, a fee equal to:
 - (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
 - (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
 - (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.
- (b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]

Transfer of Operating Permits.

- (a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.
- (b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.
- (c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]

Inspection and Entry.

- (a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:
- (1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
 - (2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.
- (b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.
- (c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]

Compliance Requirements.

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:



- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application
- (b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.
- (c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]

Need to Halt or Reduce Activity Not a Defense.

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]

Duty to Provide Information.

- (a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.
- (b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]

Revising an Operating Permit for Cause.

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]

Operating Permit Modifications

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:





- (b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.
- (c) Minor Operating Permit Modifications. The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.
- (d) Significant Operating Permit Modifications. The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.
- (e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#012 [25 Pa. Code § 127.441]

Severability Clause.

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]

De Minimis Emission Increases.

- (a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:
 - (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.
- (b) The Department may disapprove or condition de minimis emission increases at any time.
- (c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:
- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NOx from a single source during the term of the permit and 5 tons of NOx at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.
- (4) Six-tenths of a ton of PM10 from a single source during the term of the permit and 3.0 tons of PM10 at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
- (5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:



- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
- (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
- (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]

Operational Flexibility.

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)





- (6) Section 127.462 (relating to minor operating permit modifications)
- (7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11]

Reactivation

- (a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).
- (b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]

Health Risk-based Emission Standards and Operating Practice Requirements.

- (a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].
- (b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]

Circumvention.

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]

Reporting Requirements.

- (a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.
- (b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.
- (c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

- (d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.
- (e) Any records, reports or information submitted to the Department shall be available to the public except for such



records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]

Sampling, Testing and Monitoring Procedures.

- (a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.
- (b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]

Recordkeeping.

- (a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:
 - (1) The date, place (as defined in the permit) and time of sampling or measurements.
 - (2) The dates the analyses were performed.
 - (3) The company or entity that performed the analyses.
 - (4) The analytical techniques or methods used.
 - (5) The results of the analyses.
 - (6) The operating conditions as existing at the time of sampling or measurement.
- (b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.
- (c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]

Property Rights.

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]

Alternative Operating Scenarios.

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.





#023 [25 Pa. Code §135.3]

Reporting

- (a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.
- (b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#024 [25 Pa. Code §135.4]

Report Format

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.





SECTION C. Site Level Requirements

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall not allow the emission into the outdoor atmosphere of a fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of buildings or structures.
- (b) Grading, paving, and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars, and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of materials.
- (f) Sources and classes of sources other than those identified in (a)-(e), above, for which the permittee has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
- (1) The emissions are of minor significance with respect to causing air pollution; and
- (2) The emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

002 [25 Pa. Code §123.2]

Fugitive particulate matter

The permittee shall not allow the emission of fugitive particulate matter into the outdoor atmosphere from a source specified in Section C, Condition #001(a)-(f), if the emissions are visible at the point the emissions pass outside the permittee's property.

003 [25 Pa. Code §123.31]

Limitations

The permittee shall not allow the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the permittee's property.

004 [25 Pa. Code §123.41]

Limitations

Except as stated in Condition #002 of Section E (re: Group 001), the permittee shall not allow the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:


- (a) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any one hour.
- (b) Equal to or greater than 60% at any time.

005 [25 Pa. Code §123.42]

Exceptions

The visible emission limitations of Condition #004 of Section C shall not apply when:

- (a) The presence of uncombined water is the only reason for failure of the emission to meet the limitations.
- (b) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (c) The emission results from sources specified in Section C, Condition #001(a)-(f).



SECTION C. **Site Level Requirements**

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall limit the facility's annual emissions to less than the following thresholds during any consecutive 12month period:

- (a) 100 tons per year (TPY) of NOx.
- (b) 100 TPY of carbon monoxide (CO).
- (c) 50 TPY of volatile organic compounds (VOC).
- (d) 100 TPY of sulfur oxides (SOx).
- (e) 100 TPY of PM-10 (particulate matter having an effective aerodynamic diameter less than or equal to a nominal 10 micron body).
- (f) 100 tons/year of PM-2.5 (particulate matter with an aerodynamic diameter of less than or equal to a nominal 2.5 micrometer body as measured by the applicable reference method or an equivalent method)
- (g) 10 TPY of any individual hazardous air pollutant (HAP).
- (h) 25 TPY of aggregate HAPs.

007 [25 Pa. Code §129.14]

Open burning operations

- (a) The permittee shall not allow the open burning of material on the permittee's property in a manner such that:
- (1) The emissions are visible, at any time, at the point such emissions pass outside the permittee's property.
- (2) Malodorous air contaminants from the open burning are detectable outside the permittee's property.
- (3) The emissions interfere with the reasonable enjoyment of life or property.
- (4) The emissions cause damage to vegetation or property.
- (5) The emissions are or may be deleterious to human or animal health.
- (b) The requirements of (a), above, do not apply when the open burning operations result from:
- (1) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (2) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (3) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (4) A fire set solely for recreational or ceremonial purposes.
- (5) A fire set solely for cooking food.
- (c) This permit condition does not constitute authorization to burn solid waste pursuant to Section 610(3) of the Solid Waste Management Act (SWMA), contained at 35 P.S. Section 6018.610(3), or any other provision of the SWMA.

II. TESTING REQUIREMENTS.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The Department reserves the right to require exhaust stack testing of the sources referenced in this operating permit to measure emissions for purposes including verification of operating permit condition compliance and estimation of annual air emissions.





SECTION C. Site Level Requirements

009 [25 Pa. Code §139.1]

Sampling facilities.

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such source. In the request, the Department will set forth the time period in which the facilities shall be provided as well as the specifications for such facilities.

010 [25 Pa. Code §139.11]

General requirements.

- (a) As specified in 25 Pa. Code Section 139.11(1), performance tests shall be conducted while the source is operating at maximum routine operating conditions or under such other conditions, within the capacity of the equipment, as may be requested by the Department.
- (b) As specified in 25 Pa. Code Section 139.11(2), the Department will consider test results for approval where sufficient information is provided to verify the source conditions existing at the time of the test and where adequate data is available to show the manner in which the test was conducted. Information submitted to the Department shall include, at a minimum, all of the following:
- (1) A thorough source description, including a description of any air cleaning devices and the flue.
- (2) Process conditions, for example, the fuel firing rate, boiler pressure or temperature, dryer temperature, web speed, RTO combustion chamber temperature, and other conditions which may affect emissions from the process.
- (3) The location of the sampling ports.
- (4) Effluent characteristics, including velocity, temperature, moisture content, gas density (percentage CO, CO2, O2, and N2), static and barometric pressures.
- (5) Sample collection techniques employed, including procedures used, equipment descriptions, and data to verify that isokinetic sampling for particulate matter collection occurred and that acceptable test conditions were met.
- (6) Laboratory procedures and results.
- (7) Calculated results.

III. MONITORING REQUIREMENTS.

011 [25 Pa. Code §123.43]

Measuring techniques

Visible emissions may be measured using either of the following:


- (a) A device approved by the Department and maintained to provide accurate opacity measurements (e.g. Continuous Opacity Monitor).
- (b) Observers trained and certified in EPA Reference Method 9 to measure plume opacity with the naked eye; or with the aid of any device(s) approved by the Department.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall conduct a monthly inspection around the plant periphery during daylight hours when the plant is in production to detect visible emissions, fugitive particulate matter emissions, and malodorous air contaminants. Monthly inspections are necessary to determine:

(a) The presence of visible emissions. Visible emissions may be measured according to the methods specified in Section C, Condition #011. Alternately, plant personnel who observe visible emissions may report the incidence of visible emissions to the Department within two (2) hours of the incident and make arrangements for a certified observer to measure the visible emissions.



SECTION C. **Site Level Requirements**

- (b) The presence of fugitive particulate matter emissions beyond the plant property boundaries, as stated in Section C, Condition #002.
- (c) The presence of malodorous air contaminants beyond the plant property boundaries, as stated in Section C, Condition #003.

013 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall calculate monthly air emissions from the facility using AP-42 emission factors, material balance, manufacturer-supplied emission factors, performance (stack) test data, or other method(s) approved by the Department in order to demonstrate compliance with Condition #006 of Section C.

RECORDKEEPING REQUIREMENTS.

[25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the monthly air emissions referenced in Section C, Condition #013.
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

015 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the monthly usage of each fuel consumed at the entire facility.
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

#016 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the monthly inspections referenced in Section C, Condition #012. The records shall include, at a minimum, the following information:
- (1) The name of the company representative monitoring each inspection.
- (2) The date and time of each inspection.
- (3) The wind direction during each inspection.
- (4) A description of the visible emissions, fugitive particulate matter emissions (beyond the plant property boundaries), and malodorous air contaminants (beyond the plant property boundaries) observed, if any, and actions taken to mitigate them. If no visible emissions or fugitive particulate matter emissions or malodors are observed, then document that none were observed.
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

017 [25 Pa. Code §127.442]

Reporting requirements.

The permittee shall report malfunctions which occur at the facility to the Department. A malfunction is any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment, or a process to operate in a normal or usual manner that may result in an increase in air emissions above minor significance. Failures





SECTION C. Site Level Requirements

that are caused in part by poor maintenance or careless operation are not malfunctions. Malfunctions shall be reported as follows:

- (a) Malfunctions which pose an imminent danger to public health, safety, welfare and the environment, shall be immediately reported to the Department by telephone. The telephone report of such malfunctions shall occur no later than two hours after discovery of the incident. Telephone reports can be made to the Air Quality Program at (717) 705-4886 during normal business hours, or to the Department's Emergency Hotline 866-825-0208 at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx.
 - (1) The notice shall describe the:
 - (i) name and location of the facility;
 - (ii) nature and cause of the malfunction or breakdown;
 - (iii) time when the malfunction or breakdown was first observed;
 - (iv) expected duration of excess emissions; and
 - (v) estimated rate of emissions.
 - (2) The owner or operator shall notify the Department immediately when corrective measures have been accomplished.
- (3) The permittee shall submit a written report of instances of such malfunctions to the department, in writing, within three (3) days of the of the telephone report.
- (4) The owner or operator shall submit reports on the operation and maintenance of the source to the Regional Air Program Manager at such intervals and in such form and detail as may be required by the Department. Information required in the reports may include, but is not limited to, process weight rates, firing rates, hours of operation, and maintenance schedules.
- (b) Unless otherwise required by this permit, any other malfunction that is not subject to the reporting requirements of (a) above, shall be reported to the Department, in writing, within five (5) days of discovery of the malfunction.
- (c) Malfunctions shall be reported electronically to DEP at the following email address: dbubbenmoy@pa.gov

018 [25 Pa. Code §135.3] Reporting

- (a) An annual air emissions report for a given calendar year is due no later than March 1 of the following year, and shall be submitted at AES-Online, unless otherwise specified.
- (b) The monthly fuel usage referenced in Condition #015 of Section C shall be included in the annual air emissions report.
- (c) The monthly air emissions and calculations referenced in Conditions #013 and #014 of Section C shall be included in the annual air emissions report.
- (d) The permittee may request an extension of time from the Department for the filing of the air emissions report specified in part (a), above, and the Department may grant the extension for reasonable cause.


VI. WORK PRACTICE REQUIREMENTS.

019 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall take all reasonable actions to prevent particulate matter from becoming airborne from any source specified in Section C, Condition #001(a)-(f). These actions shall include, but not be limited to, the following:

- (a) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (b) Application of asphalt, oil, water, or suitable chemicals on dirt roads, material stockpiles and other surfaces which may





SECTION C. **Site Level Requirements**

give rise to airborne dusts.

01-05017

- (c) Paving and maintenance of roadways.
- (d) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

[25 Pa. Code §127.444]

Compliance requirements.

The permittee shall operate and maintain all sources and any air cleaning devices identified in this operating permit in accordance with the manufacturer's recommendations/specifications, as well as in a manner consistent with good operating practices.

ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.



Source ID: 031 Source Name: BOILER 1

Source Capacity/Throughput: 8.400 MMBTU/HR

8.400 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



Source ID: 032 Source Name: BOILER 2

Source Capacity/Throughput: 8.400 MMBTU/HR

8.400 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 002



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).





Source ID: 102A Source Name: PRESS 2

Source Capacity/Throughput: 9.974 MMBTU/HR


2.500 Lbs/HR VOC

10.000 MCF/HR Natural Gas

Conditions for this source occur in the following groups: 001

003

006



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).





Source ID: 104A Source Name: PRESS 4

Source Capacity/Throughput: 9.974 MMBTU/HR


10.000 MCF/HR Natural Gas

2.500 Lbs/HR VOC

Conditions for this source occur in the following groups: 001

003

006



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



Source ID: 106 Source Name: PRESS 6

Source Capacity/Throughput: 8.800 MMBTU/HR


8.800 MCF/HR Natural Gas

50.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001

003

006



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



Source ID: 107 Source Name: PRESS 7

Source Capacity/Throughput: 2.570 MMBTU/HR


2.600 MCF/HR Natural Gas

8.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001

004

006



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.1]

Purpose.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017B]

The permittee shall not allow the emission into the outdoor atmosphere of particulate matter (PM) from each of the dryers associated with Source ID 107 in a manner that the concentration of PM in the effluent gas exceeds 0.02 grain per dry standard cubic foot.

[Compliance with this operating permit condition assures compliance with 25 Pa. Code Section 123.13]

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017B]

Total annual VOC emissions from Source ID 107 shall not equal or exceed ten (10) tons during any consecutive 12-month period.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).





V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).





Source ID: 108 Source Name: PRESS 8

Source Capacity/Throughput: 5.180 MMBTU/HR


5.200 MCF/HR Natural Gas

5.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 001

004

006



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

The permittee shall not allow the emission into the outdoor atmosphere of particulate matter (PM) from each of the dryers associated with Source ID 108 in a manner that the concentration of PM in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

Total annual VOC emissions from Source ID 108 shall not equal or exceed ten (10) tons during any consecutive 12-month period.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).





VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



Source ID: 201 Source Name: COLD CLEANING MACHINE(S)

Source Capacity/Throughput: 5.000 Lbs/HR VOC

PROC STAC Z201

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.63]

Degreasing operations

- (a) The permittee may not use in any Source ID 201 machine any solvent with a vapor pressure of 1.0 millimeter of mercury (mm Hg) or greater and containing greater than 5% VOC by weight, measured at 20°C (68°F) containing VOCs.
- (b) This permit condition does not apply:
- (1) If a Source ID 201 machine is used in extreme cleaning service. Extreme cleaning service is defined as the use of a cold cleaning machine to clean parts used in the manufacture of the following gases or to clean parts exposed to these gases in manufacturing, production, research and development, analytical work, or other similar operations:
- (A) Oxygen in concentrations greater than 23%
- (B) Ozone
- (C) Nitrous oxide
- (D) Fluorine
- (E) Chlorine
- (F) Bromine
- (G) Halogenated compounds
- (2) If the permittee demonstrates, and the Department approves in writing, that compliance with this permit condition will result in unsafe operating conditions.
- (3) To immersion cold cleaning machines with a freeboard ratio is equal to or greater than 0.75. As defined at 25 Pa. Code Section 121.1, the freeboard ratio is defined as the distance from the liquid solvent in the idling mode to the top edge of the cleaning machine divided by the smaller dimension (length or width) of the cleaning machine.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall maintain the following records for each Source ID 201 machine:

(a) The name and address of the solvent supplier.





- (b) The type of solvent including the product or vendor identification number.
- (c) The vapor pressure of the solvent measured in mm Hg at 20°C (68°F).

An invoice, bill of sale, certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this section.

The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §129.63]

Degreasing operations

Immersion cold cleaning machines shall have a freeboard ratio of 0.50 or greater.

As defined at 25 Pa. Code Section 121.1, the freeboard ratio is defined as the distance from the liquid solvent in the idling mode to the top edge of the cleaning machine divided by the smaller dimension (length or width) of the cleaning machine.

004 [25 Pa. Code §129.63]

Degreasing operations

Each Source ID 201 machine shall have a permanent, conspicuous label summarizing the operating requirements in Condition #006, below. In addition, the label shall include the following discretionary good operating practices:

- (a) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the Source ID 201 machine.
- (b) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.
- (c) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

005 [25 Pa. Code §129.63]

Degreasing operations

Each Source ID 201 machine shall be equipped with one of the following:

- (a) A cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent.
- (b) A perforated drain with a diameter of not more than six (6) inches, if the Source ID 201 machine drains directly into the solvent storage reservoir.

006 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall operate each Source ID 201 machine in accordance with the following procedures:

(a) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.





01-05017



SECTION D. **Source Level Requirements**

- (b) Flushing of parts using a flexible hose or other flushing device shall be performed only within the Source ID 201 machine. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.
- (c) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in any Source ID 201 machine.
- (d) Air-agitated solvent baths may not be used.
- (e) Spills during solvent transfer and use of any Source ID 201 machine shall be cleaned up immediately.

VII. ADDITIONAL REQUIREMENTS.

007 [25 Pa. Code §129.63]

Degreasing operations

All of the aforementioned permit conditions apply to a Source ID 201 cold cleaning machine so long as the cold cleaning machine uses 2 gallons or more of solvents containing greater than 5% VOC content by weight for the cleaning of metal parts.






Source ID: 301 Source Name: BINDING OPERATIONS GLUE VOC

Source Capacity/Throughput: 4.000 Lbs/HR VOC

Conditions for this source occur in the following groups: 007



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

001 [25 Pa. Code §135.3] Reporting

- (a) The permittee shall include the following information for each Source ID 301 VOC-containing binder glue/adhesive in the annual air emissions report referenced in Condition #018 of Section C:
- (1) Name of VOC-containing binder glue/adhesive
- (2) The VOC content of the binder glue/adhesive
- (3) The HAP content of the binder glue/adhesive
- (4) Gallons per month used
- (5) Pounds per month of VOC emissions (minus exempt VOC)
- (6) Pounds per month of HAP(s) emissions (by type)
- (b) The total days and approximate hours of operation of Source ID 301 shall also be included in the annual report.
- (c) If waste binder glues/adhesives or mixtures are sent off-site for recycling or disposal and emission credits are desired, the permittee shall provide the following information in order to obtain credit for VOC and HAP(s) emissions reporting for (a)(5) and (a)(6), respectively, above:
- (1) Pounds or gallons per month of waste binder glues/adhesives or mixtures shipped from the facility
- (2) Waste profile or sampling data for a representative shipment (conducted a minimum of once each calendar year)
- (3) Identification of the waste disposal company for each shipment







VI. WORK PRACTICE REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall keep all containers which contain VOCs tightly closed when not in use. Spills of materials containing VOCs shall be cleaned up immediately with cleaning cloths or other methods that will minimize the evaporation of VOCs into the atmosphere. Solvent-laden cleaning cloths shall be kept in closed containers when not in use.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).






Source ID: 401 Source Name: EMERGENCY GENERATOR

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 005



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.


No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



Source ID: 402 Source Name: EMERGENCY FIRE PUMPS

Source Capacity/Throughput:

Conditions for this source occur in the following groups: 005



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).



SECTION D. Source Level Requirements

Source ID: C500 Source Name: REGENERATIVE THERMAL OXIDIZER (RTO)

Source Capacity/Throughput: 4.800 MCF/HR Natural Gas

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: 001

Group Description: ALL LITHOGRAPHIC PRINTING PRESSES

Sources included in this group

ID	Name
102A	PRESS 2
104A	PRESS 4
106	PRESS 6
107	PRESS 7
108	PRESS 8

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.21]

General

[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017B, 01-05017C and 01-05017E]

The permittee shall not allow the emission into the outdoor atmosphere of sulfur oxides from each of the dryers associated with the Group 001 sources in a manner that the concentration of the sulfur oxides (expressed as SO2) in the effluent gas exceeds 500 parts per million, by volume, dry basis.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017B, 01-05017C and 01-05017E; and 25 Pa. Code Section 127.1 (Best Available Technology)]

The permittee shall not allow the emission into the outdoor atmosphere of visible air contaminants from each Group 001 source's dryers in such a manner that the opacity of the emission is either of the following:

- (a) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any one hour.
- (b) Equal to or greater than 30% at any time.

[Compliance with this operating permit condition assures compliance with 25 Pa. Code Section 123.41]

Fuel Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017B, 01-05017C, 01-05017D, and 01-05017E]

The permittee shall operate each of the dryers associated with the Group 001 sources using natural gas fuel only.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





IV. RECORDKEEPING REQUIREMENTS.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017A, 01-05017B, 01-05017C, 01-05017D, and 01-05017E]

The permittee shall maintain Material Safety Data Sheets (MSDSs), Certified Product Data Sheets (CPDSs) or Environmental Data Sheets (EDSs) for all inks, cutting solvents/thinners, fountain solutions, and cleanup solvents used by the Group 001 sources within the most recent five-year period. This information shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

005 [25 Pa. Code §135.3]

Reporting

[Additional authority for this permit condition is also derived from Operating Permit Nos. 01-320-001, 01-320-003, and 01-320-004 as well as Plan Approval Nos. 01-05017A, 01-05017B, 01-05017C, 01-05017D, and 01-05017E]

- (a) The permittee shall include the following information in the annual air emissions report referenced in Condition #018 of Section C for each VOC solution (as applied to the substrate) applied at each Group 001 source:
- (1) VOC solution type (i.e. ink, fountain solution)
- (2) VOC solution identification (i.e. manufacturer or trade name)
- (3) Pounds of VOC per gallon solution (minus water and exempt solvents)
- (4) Solution density (pounds per gallon, at 25°C)
- (5) Percent total volatiles/solvents (by volume or weight)
- (6) Percent water (by volume or weight)
- (7) Percent solids (by volume or weight)
- (8) Percent exempt VOC(s) (by volume or weight)
- (9) Percent VOCs (by volume or weight)
- (10) Percent HAP(s) (by type and volume or weight)
- (11) Cutting solvent (or thinner) used, if any
- (12) Cutting ratio (gallon cutting solvent added per gallon solution)
- (13) Gallons per month of solution used (including water)
- (14) Gallons per month of solution used (minus water)
- (15) Pounds per month of VOC emissions
- (16) Pounds per month of HAP(s) emissions (by type)
- (b) The permittee shall also include the type and amount (gallons per month) of VOC/HAP-containing cleanup solvent(s) used in conjunction with the operation of the Group 001 sources, as well as the resultant monthly VOC and HAP(s) emissions.
- (c) The total days and approximate hours of operation (i.e. not including set-up time, maintenance time) of each Group 001 source shall also be included in the annual air emissions report.
- (d) If waste coatings, solvents, or mixtures are sent off-site for recycling or disposal and emission credits are desired, the permittee shall provide the following information in order to obtain credit for VOC and HAP(s) emissions reporting of items (a)(15) and (a)(16), respectively, above:
- (1) Pounds and gallons per month of waste coatings, solvents, or mixtures shipped from the facility
- (2) Waste profile or sampling data for a representative shipment (conducted a minimum of once each calendar year)
- (3) Identification of the waste disposal company for each shipment

VI. WORK PRACTICE REQUIREMENTS.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017A, 01-05017B, 01-05017C,







01-05017D, and 01-05017E]

The permittee shall keep all containers which contain VOCs tightly closed when not in use. Spills of materials containing VOCs shall be cleaned up immediately with cleaning cloths or other methods that will minimize the evaporation of VOCs into the atmosphere. Solvent-laden cleaning cloths shall be kept in closed containers when not in use.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: 002
Group Description: BOILERS
Sources included in this group

ID	Name
031	BOILER 1
032	BOILER 2

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.11]

Combustion units

The permittee shall not allow the emission of particulate matter into the outdoor atmosphere from either Group 002 boiler in excess of 0.4 pound per million BTU of heat input.

002 [25 Pa. Code §123.22]

Combustion units

The permittee shall not allow the emission into the outdoor atmosphere of sulfur oxides, expressed as SO2, from either Group 002 boiler in excess of four (4) pounds per million BTU of heat input over any one (1) hour period.

Fuel Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate each Group 002 boiler using natural gas only.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall calculate monthly air emissions from each Group 002 boiler using AP-42 emission factors, manufacturer-supplied emission factors, or other method(s) approved by the Department.

IV. RECORDKEEPING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain the following records for each Group 002 boiler:
- (1) Monthly fuel usage
- (2) Monthly air emissions (e.g. NOx, CO, SO2, PM-10)
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall include the following information in the annual air emissions report described in Condition #018 of Section C for each Group 002 boiler:







- (a) Monthly fuel usage
- (b) Monthly air emissions (e.g. NOx, CO, SO2, PM-10)

VI. WORK PRACTICE REQUIREMENTS.

007 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall operate and maintain each Group 002 boiler in accordance with the manufacturer's specifications.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: 003

Group Description: CONTROLLED LITHOGRAPHIC PRINTING PRESSES

Sources included in this group

ID	Name
102A	RESS 2
104A	RESS 4
106	PRESS 6

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.13]

Processes

The permittee shall not allow the emission into the outdoor atmosphere of particulate matter (PM) from each of the dryers associated with the Group 003 sources in a manner that the concentration of PM in the effluent gas exceeds 0.04 grain per dry standard cubic foot.

002 [25 Pa. Code §123.21]

General

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall not allow the emission into the outdoor atmosphere of sulfur oxides from the regenerative thermal oxidizer (RTO) [Source ID C500] in a manner that the concentration of the sulfur oxides (expressed as SO2) in the effluent gas exceeds 500 parts per million, by volume, dry basis.

003 [25 Pa. Code §127.1]

Purpose.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall not allow the emission into the outdoor atmosphere of particulate matter (PM) from the RTO in a manner that the concentration of PM in the effluent gas exceeds 0.02 grain per dry standard cubic foot.

[Compliance with this operating permit condition assures compliance with 25 Pa. Code Section 123.13]

Fuel Restriction(s).

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall operate the RTO using natural gas fuel only.

Control Device Efficiency Restriction(s).

005 [25 Pa. Code §127.1]

Purpose.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]


The RTO shall have a VOC destruction and removal efficiency of at least 90% or a post-control VOC concentration of 20 ppmvd or less as methane (CH4), whichever is less stringent.

II. TESTING REQUIREMENTS.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

(a) Unless otherwise approved in writing by DEP, the permittee shall perform a stack test once during the term of this permit to demonstrate a non-methane hydrocarbon (NMHC) destruction and removal efficiency of at least 90% or a post-control





01-05017

NMHC concentration of 20 ppmvd or less as methane (CH4), whichever is less stringent.

- (b) The stack test shall be performed in accordance with 25 Pa. Code Chapter 139, the current revision of the Department's Source Testing Manual and the following methods and requirements:
- (i) Methods in Appendix A of 40 CFR Part 60 or any alternate methods approved by the Department:
- (1) Methods 1 through 4 shall be used to determine the volumetric flow rate of the effluent entering and exiting the air pollution control device.
 - (2) Method 25A shall be used to determine the total hydrocarbon (THC) concentration.
- (3) Method 18 shall be used to determine the methane concentration of the effluent entering and exiting the air control device.
- (ii) Testing shall be conducted under normal or representative operating conditions. Such operating conditions should strive to minimize downtime while running as many presses as practicable, when a common control device is serving multiple presses. Because activities such as cycling of automatic blanket washing systems, press speed variations, web breaks or other short-term events in which the print quality is being checked, may be a part of normal, representative operations, sampling should continue during these short-term events while the control device is being tested.
- (iii) The following process data shall be recorded during each test run to document the operation of the heatset web press:
- 1. Line speed (fpm)
- 2. Web width
- 3. Ink usage
- 4. Number of colors
- 5. Press downtime (minutes)
- (iv) The following data shall be recorded in fifteen (15) minute intervals during each test run to document the operation of the oxidizer:
- 1. Oxidizer combustion chamber temperature (°F)
- (c) Dryers shall be demonstrated to operate at a negative pressure relative to the surrounding by using such devices as differential pressure gauge, smoke stick or aluminum ribbons.

[25 Pa. Code §127.441] # 007

Operating permit terms and conditions.

- (a) Unless otherwise approved in writing by DEP, the permittee shall do the following:
- (1) For testing on the RTO to demonstrate compliance with a VOC destruction and removal efficiency of at least 90% or a post-control VOC concentration of 20 ppmvd or less as methane (CH4), whichever is less stringent, submit to DEP a test protocol for review and approval by no later than 365 days prior to the expiration of this permit, and not conduct the test that is the subject of the protocol until the protocol has been approved by DEP.
- (2) If DEP finds deficiencies in the protocol, the permittee shall provide a response to DEP addressing the deficiencies within 30 days of being notified of the deficiencies.
- (3) Complete the performance test within 120 days of DEP's approval of the test protocol.
- (b) At least 15 calendar days prior to commencing an emission testing program, notification as to the date and time of testing shall be given to the appropriate Regional Office. Notification shall also be sent to the Division of Source Testing and Monitoring. Notification shall not be made without prior receipt of a protocol acceptance letter from the Department.
- (c) Within 15 calendar days after completion of the on-site testing portion of an emission test program, if a complete test report has not yet been submitted, an electronic mail notification shall be sent to the Department's Division of Source



Testing and Monitoring indicating the completion date of the on-site testing.

(d) Three (3) copies of the test results shall be submitted to the Regional Air Quality Program Manager for review within 60 days after completion of all testing. Correspondence should be forwarded to:

The Regional Air Quality Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

- (e) A complete test report shall include a summary of the emission results on the first page of the report indicating if each pollutant measured is within permitted limits and a statement of compliance or non-compliance with all applicable permit conditions. The summary results will include, at a minimum, the following information:
- 1. A statement that the owner or operator has reviewed the report from the emissions testing body and agrees with the findings.
- 2. Permit number(s) and condition(s) which are the basis for the evaluation.
- 3. Summary of results with respect to each applicable permit condition.
- 4. Statement of compliance or non-compliance with each applicable permit condition.
- (f) All submittals shall meet all applicable requirements specified in the most current version of the Department's Source Testing Manual.
- (g) All testing shall be performed in accordance with the provisions of Chapter 139 of the Rules and Regulations of the Department of Environmental Protection.
- (h) Pursuant to 25 Pa. Code Section 139.53(a)(1) and 139.53(a)(3) all submittals, besides notifications, shall be accomplished through PSIMS*Online available through https://www.depgreenport.state.pa.us/ecomm/Login.jsp when it becomes available. If internet submittal cannot be accomplished, submittal shall be made as follows:

Regional Office:

Digital copy (only): RA-epscstacktesting@pa.gov

Bureau of Air Quality:

Digital copy (only): RA-epstacktesting@pa.gov"

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

- (a) The permittee shall install and maintain instrumentation to measure, display, and record the RTO's combustion chamber temperature.
- (b) During periods of instrumentation malfunction or its maintenance/repair, the permittee shall:
- (1) Notify the Air Quality District Supervisor (or appropriate designee) by telephone or e-mail within 24 hours after discovery of the malfunction, or commencement of instrumentation maintenance/repair. The permittee shall submit a written report of the malfunction or instrumentation maintenance/repair to the Air Quality District Supervisor (or appropriate designee) within three (3) days of the telephone/e-mail report.







- (2) Manually record the RTO's combustion chamber temperature at a minimum frequency of once every one (1) hour of operation.
- (c) The RTO combustion chamber temperature recording instrumentation shall be calibrated a minimum of once per calendar year.
- (d) The permittee shall retain the above records for a minimum of five (5) years and shall make the records available to the Department upon its request.

009 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

- (a) The permittee shall maintain detailed records of all maintenance performed on the RTO.
- (b) The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

010 [25 Pa. Code §127.1]

Purpose.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall operate the RTO at all times that one or more Group 003 source(s) are operating.

011 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall operate and maintain the RTO in accordance with the manufacturer's specifications.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from Plan Approval No. 01-05017D]

The permittee shall preheat the RTO's combustion chamber to a minimum temperature of 1400°F prior to the operation of any of the Group 003 source(s). The permittee shall subsequently operate the RTO at a minimum sustainable combustion chamber temperature of 1400°F during operation of any of the Group 003 source(s).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: 004

Group Description: UNCONTROLLED LITHOGRAPHIC PRINTING PRESSES

Sources included in this group

ID	Name
107	PRESS 7
108	PRESS 8

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.1]

Purpose.

[Additional authority for this permit condition is also derived from Operating Permit No. 01-320-004; Plan Approval Nos. 01-05017A, 01-05017B, 01-05017C and 01-05017E]

The ink oil emission rate (IOER) from each Group 004 source's dryers shall not exceed five (5) pounds per hour at any time during press operation (i.e. not including set-up time, maintenance time).

The IOER, expressed in units of pounds ink oil per hour, shall be calculated as follows:

where:

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.


[Additional authority for this permit condition is also derived from Plan Approval Nos. 01-05017A, 01-05017B, 01-05017C, and 01-05017E]

- (a) The permittee shall maintain daily records of ink consumption, ink oil content (percent by weight), ink oil retention factor, actual operating hours (i.e. not including set-up time, maintenance time) and the resultant IOER using the equation in Condition #001, above, for each ink used at each Group 004 source.
- (b) These records shall be maintained on-site for a minimum of five (5) years and shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

^{**} IORF = ink oil retention factor (ranges from 0.2 to 0.8)





VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).





Group Name: 005

Group Description: 40 CFR Part 63, Subpart ZZZZ Requirements

Sources included in this group

ID	Name
401	EMERGENCY GENERATOR
402	EMERGENCY FIRE PUMPS

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [40 CFR Part 63 NESHAPS for Source Categories §40 CFR 63.6585]

Subpart ZZZZ - National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

Am I subject to this subpart?

§ 63.6585 Am I subject to this subpart?

You are subject to this subpart if you own or operate a stationary RICE at a major or area source of HAP emissions, except if the stationary RICE is being tested at a stationary RICE test cell/stand.

- (a) A stationary RICE is any internal combustion engine which uses reciprocating motion to convert heat energy into mechanical work and which is not mobile. Stationary RICE differ from mobile RICE in that a stationary RICE is not a non-road engine as defined at 40 CFR 1068.30, and is not used to propel a motor vehicle or a vehicle used solely for competition.
- (b) A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site.
- (c) An area source of HAP emissions is a source that is not a major source.
- (d) If you are an owner or operator of an area source subject to this subpart, your status as an entity subject to a standard or





other requirements under this subpart does not subject you to the obligation to obtain a permit under 40 CFR part 70 or 71, provided you are not required to obtain a permit under 40 CFR 70.3(a) or 40 CFR 71.3(a) for a reason other than your status as an area source under this subpart. Notwithstanding the previous sentence, you must continue to comply with the provisions of this subpart as applicable.

- (e) [NA NOT USED FOR NATIONAL SECURITY PURPOSES]
- (f) [NA RICE NOT RESIDENTIAL, COMMERCIAL OR INSTITUTIONAL]
- [69 FR 33506, June 15, 2004, as amended at 73 FR 3603, Jan. 18, 2008; 78 FR 6700, Jan. 30, 2013]
- § 63.6590 What parts of my plant does this subpart cover?

This subpart applies to each affected source.

- (a) Affected source. An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand.
- (1) Existing stationary RICE.
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.
- (iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.
- (2) New stationary RICE.
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (iii) [NA NOT A NEW SOURCE]
- (3) [NA NOT A RECONSTRUCTED SOURCE]
- (b) Stationary RICE subject to limited requirements. (1) An affected source which meets either of the criteria in paragraphs (b)(1)(i) through (ii) of this section does not have to meet the requirements of this subpart and of subpart A of this part except for the initial notification requirements of § 63.6645(f).
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]
- (2) [NA NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]
- (3) The following stationary RICE do not have to meet the requirements of this subpart and of subpart A of this part, including initial notification requirements:
- (i) [NA NOT A MAJOR HAP SOURCE]
- (ii) [NA NOT A MAJOR HAP SOURCE]





01-05017

- (iii) [NA NOT A MAJOR HAP SOURCE]
- (iv) [NA NOT A MAJOR HAP SOURCE]
- (v) [NA NOT A MAJOR HAP SOURCE AND DOES NOT COMBUST LFG]
- (c) [NA NOT SUBJECT TO SUBPARTS IIII OR JJJJ]

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9674, Mar. 3, 2010; 75 FR 37733, June 30, 2010; 75 FR 51588, Aug. 20, 2010; 78 FR 6700, Jan. 30, 2013]

- § 63.6595 When do I have to comply with this subpart?
- (a) Affected sources. (1) If you have an existing stationary RICE, excluding existing non-emergency CI stationary RICE, with a site rating of more than 500 brake HP located at a major source of HAP emissions, you must comply with the applicable emission limitations, operating limitations and other requirements no later than June 15, 2007. IF YOU HAVE an existing non-emergency CI stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, an existing stationary CI RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, or AN EXISTING STATIONARY CIRICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS. OPERATING LIMITATIONS. AND OTHER REQUIREMENTS NO LATER THAN MAY 3, 2013.

IF YOU HAVE an existing stationary SI RICE with a site rating of less than or equal to 500 brake HP located at a major source of hap emissions, or AN EXISTING STATIONARY SI RICE LOCATED AT AN AREA SOURCE OF HAP EMISSIONS, YOU MUST COMPLY WITH THE APPLICABLE EMISSION LIMITATIONS, OPERATING LIMITATIONS, AND OTHER REQUIREMENTS NO LATER THAN OCTOBER 19, 2013.

- (2) [NA NOT A MAJOR HAP SOURCE]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) [NA NOT A MAJOR HAP SOURCE]
- (5) [NA NOT A MAJOR HAP SOURCE]
- (6) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (7) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (b) Area sources that become major sources. If you have an area source that increases its emissions or its potential to emit such that it becomes a major source of HAP, the compliance dates in paragraphs (b)(1) and (2) of this section apply to you.
- (1) Any stationary RICE for which construction or reconstruction is commenced after the date when your area source becomes a major source of HAP must be in compliance with this subpart upon startup of your affected source.
- (2) Any stationary RICE for which construction or reconstruction is commenced before your area source becomes a major source of HAP must be in compliance with the provisions of this subpart that are applicable to RICE located at major sources within 3 years after your area source becomes a major source of HAP.
- (c) If you own or operate an affected source, you must meet the applicable notification requirements in § 63.6645 and in 40 CFR part 63, subpart A.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3604, Jan. 18, 2008; 75 FR 9675, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 78 FR 6701, Jan. 30, 2013]

Emission and Operating Limitations





§ 63.6600 What emission limitations and operating limitations must I meet if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?

[NA – NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6601 What emission limitations must I meet if I own or operate a new or reconstructed 4SLB stationary RICE with a site rating of greater than or equal to 250 brake HP and less than or equal to 500 brake HP located at a major source of HAP emissions?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6602 What emission limitations and other requirements must I meet if I own or operate an existing stationary RICE with a site rating of equal to or less than 500 brake HP located at a major source of HAP emissions?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6603 What emission limitations, operating limitations, and other requirements must I meet if I own or operate an existing stationary RICE located at an area source of HAP emissions?

Compliance with the numerical emission limitations established in this subpart is based on the results of testing the average of three 1-hour runs using the testing requirements and procedures in § 63.6620 and Table 4 to this subpart.

(a) If you own or operate an existing stationary RICE located at an area source of HAP emissions, YOU MUST COMPLY WITH THE REQUIREMENTS IN TABLE 2d to this subpart and the operating limitations in Table 2b to this subpart that apply to you.

TABLE 2d REQUIREMENTS:

- 4. For each EMERGENCY STATIONARY CI RICE and black start stationary CI RICE**, you must meet the following requirement, except during periods of startup:
- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect air cleaner every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.
- 5. For each EMERGENCY STATIONARY SI RICE; black start stationary SI RICE; non-emergency, non-black start 4SLB stationary RICE >500 HP that operate 24 hours or less per calendar year; non-emergency, non-black start 4SRB stationary RICE >500 HP that operate 24 hours or less per calendar year**, you must meet the following requirement, except during periods of startup:
- a. Change oil and filter every 500 hours of operation or annually, whichever comes first*;
- b. Inspect spark plugs every 1,000 hours of operation or annually, whichever comes first, and replace as necessary; and
- c. Inspect all hoses and belts every 500 hours of operation or annually, whichever comes first, and replace as necessary.
- *Sources have the option to utilize an oil analysis program as described in § 63.6625(i) or (j) in order to extend the specified oil change requirement in Table 2d of this subpart.
- **If an emergency engine is operating during an emergency and it is not possible to shut down the engine in order to perform the management practice requirements on the schedule required in Table 2d of this subpart, or if performing the management practice on the required schedule would otherwise pose an unacceptable risk under federal, state, or local law, the management practice can be delayed until the emergency is over or the unacceptable risk under federal, state, or local law has abated. The management practice should be performed as soon as practicable after the emergency has





ended or the unacceptable risk under federal, state, or local law has abated. Sources must report any failure to perform the management practice on the schedule required and the federal, state or local law under which the risk was deemed unacceptable.

[END OF TABLE 2d REQUIREMENTS]

- (b) [NA EMERGENCY ENGINE(S)]
- (c) [NA EMERGENCY ENGINE(S)]
- (d) [NA EMERGENCY ENGINE(S)]
- (e) [NA EMERGENCY ENGINE(S)]
- (f) [NA EMERGENCY ENGINE(S)]

[75 FR 9675, Mar. 3, 2010, as amended at 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6701, Jan. 30, 2013]

- § 63.6604 What fuel requirements must I meet if I own or operate a stationary CI RICE?
- (a) [NA EMERGENCY ENGINE(S)]
- (b) Beginning January 1, 2015, if you own or operate an existing emergency CI stationary RICE with a site rating of more than 100 brake HP and a displacement of less than 30 liters per cylinder that uses diesel fuel and operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in § 63.6640(f)(4)(ii), you must use diesel fuel that meets the requirements in 40 CFR 1090.305 for nonroad diesel fuel, except that any existing diesel fuel purchased (or otherwise obtained) prior to January 1, 2015, may be used until depleted.
- (c) [NA NOT A MAJOR SOURCE]
- (d) [NA NOT IN SPECIFIED GEOGRAPHIC LOCATIONS]

[78 FR 6702, Jan. 30, 2013, as amended at 85 FR 78463, Dec. 4, 2020]

General Compliance Requirements

- § 63.6605 What are my general requirements for complying with this subpart?
- (a) You must be in compliance with the emission limitations, operating limitations, and other requirements in this subpart that apply to you at all times.
- (b) At all times you must operate and maintain any affected source, including associated air pollution control equipment and monitoring equipment, in a manner consistent with safety and good air pollution control practices for minimizing emissions. The general duty to minimize emissions does not require you to make any further efforts to reduce emissions if levels required by this standard have been achieved. Determination of whether such operation and maintenance procedures are being used will be based on information available to the Administrator which may include, but is not limited to, monitoring results, review of operation and maintenance procedures, review of operation and maintenance records, and inspection of the source.

[75 FR 9675, Mar. 3, 2010, as amended at 78 FR 6702, Jan. 30, 2013]

Testing and Initial Compliance Requirements

§ 63.6610 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a stationary RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions?



[NA - NOT A MAJOR HAP SOURCE]

§ 63.6611 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate a new or reconstructed 4SLB SI stationary RICE with a site rating of greater than or equal to 250 and less than or equal to 500 brake HP located at a major source of HAP emissions?

[NA - NOT A MAJOR HAP SOURCE]

§ 63.6612 By what date must I conduct the initial performance tests or other initial compliance demonstrations if I own or operate an existing stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing stationary RICE located at an area source of HAP emissions?

[NA - NO PERFORMANCE TESTING REQUIRED]

§ 63.6615 When must I conduct subsequent performance tests?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6620 What performance tests and other procedures must I use?

[NA - NO PERFORMANCE TESTING REQUIRED]

§ 63.6625 What are my monitoring, installation, collection, operation, and maintenance requirements?

(a) [NA - CEMS NOT REQUIRED]

(b) [NA - CPMS NOT REQUIRED]

(c) [NA – LFG NOT USED]

(d) [NA - NOT A MAJOR HAP SOURCE]

(e) If you own or operate any of the following stationary RICE, you must operate and maintain the stationary RICE and after-treatment control device (if any) according to the manufacturer's emission-related written instructions or develop your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions:

(1) [NA – NOT A MAJOR HAP SOURCE]

(2) [NA – NOT A MAJOR HAP SOURCE]

(3) An existing emergency or black start stationary RICE located at an area source of HAP emissions;

(4) [NA – EMERGENCY ENGINE(S)]

(5) [NA - EMERGENCY ENGINE(S)]

(6) [NA - EMERGENCY ENGINE(S)]

(7) [NA - EMERGENCY ENGINE(S)]

(8) [NA - EMERGENCY ENGINE(S)]

(9) [NA - EMERGENCY ENGINE(S)]

(10) [NA – EMERGENCY ENGINE(S)]





(f) If you own or operate an existing emergency stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions or an existing emergency stationary RICE located at an area source of HAP emissions, you must install a non-resettable hour meter if one is not already installed.


(g) [NA - EMERGENCY ENGINE(S)]

- (h) If you operate a new, reconstructed, or existing stationary engine, you must minimize the engine's time spent at idle during startup and minimize the engine's startup time to a period needed for appropriate and safe loading of the engine, not to exceed 30 minutes, after which time the emission standards applicable to all times other than startup in Tables 1a, 2a, 2c, and 2d to this subpart apply.
- (i) If you own or operate a stationary CI engine that is subject to the work, operation or management practices in items 1 or 2 of Table 2c to this subpart or in items 1 or 4 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Base Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Base Number is less than 30 percent of the Total Base Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the analysis, and the oil changes for the engine. The analysis program must be part of the maintenance plan for the engine.
- (j) If you own or operate a stationary SI engine that is subject to the work, operation or management practices in items 6, 7, or 8 of Table 2c to this subpart or in items 5, 6, 7, 9, or 11 of Table 2d to this subpart, you have the option of utilizing an oil analysis program in order to extend the specified oil change requirement in Tables 2c and 2d to this subpart. The oil analysis must be performed at the same frequency specified for changing the oil in Table 2c or 2d to this subpart. The analysis program must at a minimum analyze the following three parameters: Total Acid Number, viscosity, and percent water content. The condemning limits for these parameters are as follows: Total Acid Number increases by more than 3.0 milligrams of potassium hydroxide (KOH) per gram from Total Acid Number of the oil when new; viscosity of the oil has changed by more than 20 percent from the viscosity of the oil when new; or percent water content (by volume) is greater than 0.5. If all of these condemning limits are not exceeded, the engine owner or operator is not required to change the oil. If any of the limits are exceeded, the engine owner or operator must change the oil within 2 business days of receiving the results of the analysis; if the engine is not in operation when the results of the analysis are received, the engine owner or operator must change the oil within 2 business days or before commencing operation, whichever is later. The owner or operator must keep records of the parameters that are analyzed as part of the program, the results of the engine.

[69 FR 33506, June 15, 2004, as amended at 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51589, Aug. 20, 2010; 76 FR 12866, Mar. 9, 2011; 78 FR 6703, Jan. 30, 2013]

§ 63.6630 How do I demonstrate initial compliance with the emission limitations, operating limitations, and other requirements?

- (a) You must demonstrate initial compliance with each emission limitation, operating limitation, and other requirement that applies to you according to Table 5 of this subpart. [NA NONE OF THE CATEGORIES IN TABLE 5 APPLY TO EMERGENCY ENGINES]
- (b) [NA PERFORMANCE TESTING NOT REQUIRED]
- (c) [NA NOCS NOT REQUIRED FOR EXISTING EMERGENCY RICE]
- (d) [NA EMERGENCY ENGINE(S)]



(e) [NA - EMERGENCY ENGINE(S)]

01-05017

[69 FR 33506, June 15, 2004, as amended at 78 FR 6704, Jan. 30, 2013]

Continuous Compliance Requirements

§ 63.6635 How do I monitor and collect data to demonstrate continuous compliance?

[NA - NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]

§ 63.6640 How do I demonstrate continuous compliance with the emission limitations, operating limitations, and other requirements?

(a) You must demonstrate continuous compliance with each emission limitation, operating limitation, and other requirements in Tables 1a and 1b, Tables 2a and 2b, Table 2c, and Table 2d to this subpart that apply to you according to methods specified in Table 6 to this subpart.

TABLE 6 REQUIREMENTS

- 9. FOR EACH existing emergency and black start stationary RICE <=500 HP located at a major source of HAP, existing nonemergency stationary RICE <100 HP located at a major source of HAP, EXISTING EMERGENCY and black start STATIONARY RICE LOCATED AT AN AREA SOURCE OF HAP, existing non-emergency stationary CI RICE <=300 HP located at an area source of HAP, existing non-emergency 2SLB stationary RICE located at an area source of HAP, existing non-emergency stationary SI RICE located at an area source of HAP which combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, existing non-emergency 4SLB and 4SRB stationary RICE <=500 HP located at an area source of HAP, existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that operate 24 hours or less per calendar year, and existing non-emergency 4SLB and 4SRB stationary RICE >500 HP located at an area source of HAP that are remote stationary RICE, complying with the requirement to "Work or Management practices", you must demonstrate continuous compliance by:
- i. Operating and maintaining the stationary RICE according to the manufacturer's emission-related operation and maintenance instructions; or
- ii. Develop and follow your own maintenance plan which must provide to the extent practicable for the maintenance and operation of the engine in a manner consistent with good air pollution control practice for minimizing emissions.


[END OF TABLE 6 REQUIREMENTS]

- (b) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (c) [NA ANNUAL COMPLIANCE DEMONSTRATION NOT REQUIRED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) You must also report each instance in which you did not meet the requirements in Table 8 to this subpart that apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing emergency stationary RICE, an existing limited use stationary RICE, or an existing stationary RICE which fires landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in Table 8 to this subpart, except for the initial notification requirements: a new or reconstructed stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new or reconstructed emergency stationary RICE, or a new or



reconstructed limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

- (f) If you own or operate an emergency stationary RICE, you must operate the emergency stationary RICE according to the requirements in paragraphs (f)(1) through (4) of this section. In order for the engine to be considered an emergency stationary RICE under this subpart, any operation other than emergency operation, maintenance and testing, emergency demand response, and operation in non-emergency situations for 50 hours per year, as described in paragraphs (f)(1) through (4) of this section, is prohibited. If you do not operate the engine according to the requirements in paragraphs (f)(1) through (4) of this section, the engine will not be considered an emergency engine under this subpart and must meet all requirements for non-emergency engines.
- (1) There is no time limit on the use of emergency stationary RICE in emergency situations.
- (2) You may operate your emergency stationary RICE for any combination of the purposes specified in paragraphs (f)(2)(i) through (iii) of this section for a maximum of 100 hours per calendar year. Any operation for non-emergency situations as allowed by paragraphs (f)(3) and (4) of this section counts as part of the 100 hours per calendar year allowed by this paragraph (f)(2).
- (i) Emergency stationary RICE may be operated for maintenance checks and readiness testing, provided that the tests are recommended by federal, state or local government, the manufacturer, the vendor, the regional transmission organization or equivalent balancing authority and transmission operator, or the insurance company associated with the engine. The owner or operator may petition the Administrator for approval of additional hours to be used for maintenance checks and readiness testing, but a petition is not required if the owner or operator maintains records indicating that federal, state, or local standards require maintenance and testing of emergency RICE beyond 100 hours per calendar year.
- (ii)-(iii) [VACATED AS OF 5/2/16 PER COURT ORDER]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) Emergency stationary RICE located at area sources of HAP may be operated for up to 50 hours per calendar year in non-emergency situations. The 50 hours of operation in non-emergency situations are counted as part of the 100 hours per calendar year for maintenance and testing and emergency demand response provided in paragraph (f)(2) of this section. Except as provided in paragraphs (f)(4)(i) and (ii) of this section, the 50 hours per year for non-emergency situations cannot be used for peak shaving or non-emergency demand response, or to generate income for a facility to an electric grid or otherwise supply power as part of a financial arrangement with another entity.
- (i) Prior to May 3, 2014, the 50 hours per year for non-emergency situations can be used for peak shaving or non-emergency demand response to generate income for a facility, or to otherwise supply power as part of a financial arrangement with another entity if the engine is operated as part of a peak shaving (load management program) with the local distribution system operator and the power is provided only to the facility itself or to support the local distribution system.
- (ii) The 50 hours per year for non-emergency situations can be used to supply power as part of a financial arrangement with another entity if all of the following conditions are met:
- (A) The engine is dispatched by the local balancing authority or local transmission and distribution system operator.
- (B) The dispatch is intended to mitigate local transmission and/or distribution limitations so as to avert potential voltage collapse or line overloads that could lead to the interruption of power supply in a local area or region.
- (C) The dispatch follows reliability, emergency operation or similar protocols that follow specific NERC, regional, state, public utility commission or local standards or guidelines.
- (D) The power is provided only to the facility itself or to support the local transmission and distribution system.
- (E) The owner or operator identifies and records the entity that dispatches the engine and the specific NERC, regional, state, public utility commission or local standards or guidelines that are being followed for dispatching the engine. The local balancing authority or local transmission and distribution system operator may keep these records on behalf of the engine





owner or operator.

[69 FR 33506, June 15, 2004, as amended at 71 FR 20467, Apr. 20, 2006; 73 FR 3606, Jan. 18, 2008; 75 FR 9676, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6704, Jan. 30, 2013]

Notifications, Reports, and Records

- § 63.6645 What notifications must I submit and when?
- (a) You must submit all of the notifications in §§ 63.7(b) and (c), 63.8(e), (f)(4) and (f)(6), 63.9(b) through (e), and (g) and (h) that apply to you by the dates specified if you own or operate any of the following;
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) [NA PER (5) BELOW]
- (3) [NA NOT A MAJOR HAP SOURCE]
- (4) [NA NOT A MAJOR HAP SOURCE]
- (5) THIS REQUIREMENT DOES NOT APPLY IF YOU OWN OR OPERATE an existing stationary RICE less than 100 HP, AN EXISTING STATIONARY EMERGENCY RICE, OR AN EXISTING STATIONARY RICE THAT IS NOT SUBJECT TO ANY NUMERICAL EMISSION STANDARDS.
- (b) [NA NOT A MAJOR HAP SOURCE]
- (c) [NA NOT A MAJOR HAP SOURCE]
- (d) [NA NOT A MAJOR HAP SOURCE]
- (e) [NA NOT A MAJOR HAP SOURCE]
- (f) [NA 63.6590(b) DOES NOT APPLY]
- (g) [NA PERFORMANCE TEST NOT REQUIRED]
- (h) [NA PERFORMANCE TEST NOT REQUIRED]
- (i) [NA EMERGENCY ENGINE(S)]

[73 FR 3606, Jan. 18, 2008, as amended at 75 FR 9677, Mar. 3, 2010; 75 FR 51591, Aug. 20, 2010; 78 FR 6705, Jan. 30, 2013; 85 FR 73912, Nov. 19, 2020]

- § 63.6650 What reports must I submit and when?
- (a) You must submit each report in Table 7 of this subpart that applies to you.

TABLE 7 REQUIREMENTS

4. For each emergency stationary RICE that operate or are contractually obligated to be available for more than 15 hours per year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operate for the purposes specified in § 63.6640(f)(4)(ii), you must submit a Report. The report must contain the information in § 63.6650(h)(1). You must submit the report annually according to the requirements in § 63.6650(h)(2)-(3).

[END OF TABLE 7 REQUIREMENTS]

(b) Unless the Administrator has approved a different schedule for submission of reports under § 63.10(a), you must



submit each report by the date in Table 7 of this subpart and according to the requirements in paragraphs (b)(1) through (b)(9) of this section.

- (1) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (2) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (3) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (4) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (5) [NA ANNUAL REPORT REQUIRED, ONLY UNDER CERTAIN CONDITIONS]
- (6) For annual Compliance reports, the first Compliance report must cover the period beginning on the compliance date that is specified for your affected source in § 63.6595 and ending on December 31.
- (7) For annual Compliance reports, the first Compliance report must be postmarked or delivered no later than January 31 following the end of the first calendar year after the compliance date that is specified for your affected source in § 63.6595.
- (8) For annual Compliance reports, each subsequent Compliance report must cover the annual reporting period from January 1 through December 31.
- (9) For annual Compliance reports, each subsequent Compliance report must be postmarked or delivered no later than January 31.
- (c) [NA "COMPLIANCE REPORT" NOT REQUIRED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (f) [NA NOT SUBJECT TO TITLE V PERMITTING]
- (g) [NA LFG NOT USED]
- (h) If you own or operate an emergency stationary RICE with a site rating of more than 100 brake HP that operates or is contractually obligated to be available for more than 15 hours per calendar year for the purposes specified in § 63.6640(f)(2)(ii) and (iii) or that operates for the purpose specified in § 63.6640(f)(4)(ii), you must submit an annual report according to the requirements in paragraphs (h)(1) through (3) of this section.
- (1) The report must contain the following information:
- (i) Company name and address where the engine is located.
- (ii) Date of the report and beginning and ending dates of the reporting period.
- (iii) Engine site rating and model year.
- (iv) Latitude and longitude of the engine in decimal degrees reported to the fifth decimal place.
- (v) Hours operated for the purposes specified in § 63.6640(f)(2)(ii) and (iii), including the date, start time, and end time for engine operation for the purposes specified in § 63.6640(f)(2)(ii) and (iii).
- (vi) Number of hours the engine is contractually obligated to be available for the purposes specified in § 63.6640(f)(2)(ii) and (iii).
- (vii) Hours spent for operation for the purpose specified in § 63.6640(f)(4)(ii), including the date, start time, and end time for






engine operation for the purposes specified in \S 63.6640(f)(4)(ii). The report must also identify the entity that dispatched the engine and the situation that necessitated the dispatch of the engine.

- (viii) If there were no deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), a statement that there were no deviations from the fuel requirements during the reporting period.
- (ix) If there were deviations from the fuel requirements in § 63.6604 that apply to the engine (if any), information on the number, duration, and cause of deviations, and the corrective action taken.
- (2) The first annual report must cover the calendar year 2015 and must be submitted no later than March 31, 2016. Subsequent annual reports for each calendar year must be submitted no later than March 31 of the following calendar year.
- (3) The annual report must be submitted electronically using the subpart specific reporting form in the Compliance and Emissions Data Reporting Interface (CEDRI) that is accessed through EPA's Central Data Exchange (CDX) (www.epa.gov/cdx). However, if the reporting form specific to this subpart is not available in CEDRI at the time that the report is due, the written report must be submitted to the Administrator at the appropriate address listed in § 63.13.

[69 FR 33506, June 15, 2004, as amended at 75 FR 9677, Mar. 3, 2010; 78 FR 6705, Jan. 30, 2013]

- § 63.6655 What records must I keep?
- (a) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (b) [NA NO CEMS OR CPMS]
- (c) [NA LFG NOT USED]
- (d) [NA NOT SUBJECT TO EMISSION OR OPERATING LIMITATIONS]
- (e) You must keep records of the maintenance conducted on the stationary RICE in order to demonstrate that you operated and maintained the stationary RICE and after-treatment control device (if any) according to your own maintenance plan if you own or operate any of the following stationary RICE;
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) An existing stationary emergency RICE.
- (3) An existing stationary RICE located at an area source of HAP emissions subject to management practices as shown in Table 2d to this subpart.
- (f) If you own or operate any of the stationary RICE in paragraphs (f)(1) through (2) of this section, you must keep records of the hours of operation of the engine that is recorded through the non-resettable hour meter. The owner or operator must document how many hours are spent for emergency operation, including what classified the operation as emergency and how many hours are spent for non-emergency operation. If the engine is used for the purposes specified in \S 63.6640(f)(2)(ii) or (iii) or \S 63.6640(f)(4)(ii), the owner or operator must keep records of the notification of the emergency situation, and the date, start time, and end time of engine operation for these purposes.
- (1) [NA NOT A MAJOR HAP SOURCE]
- (2) An existing emergency stationary RICE located at an area source of HAP emissions that does not meet the standards applicable to non-emergency engines.
- [69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010; 75 FR 51592, Aug. 20, 2010; 78 FR 6706, Jan. 30, 2013]
- § 63.6660 In what form and how long must I keep my records?



- (a) Your records must be in a form suitable and readily available for expeditious review according to § 63.10(b)(1).
- (b) As specified in § 63.10(b)(1), you must keep each record for 5 years following the date of each occurrence, measurement, maintenance, corrective action, report, or record.
- (c) You must keep each record readily accessible in hard copy or electronic form for at least 5 years after the date of each occurrence, measurement, maintenance, corrective action, report, or record, according to § 63.10(b)(1).

[69 FR 33506, June 15, 2004, as amended at 75 FR 9678, Mar. 3, 2010]

Other Requirements and Information

§ 63.6665 What parts of the General Provisions apply to me?

Table 8 to this subpart shows which parts of the General Provisions in §§ 63.1 through 63.15 apply to you. If you own or operate a new or reconstructed stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions (except new or reconstructed 4SLB engines greater than or equal to 250 and less than or equal to 500 brake HP), a new or reconstructed stationary RICE located at an area source of HAP emissions, or any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with any of the requirements of the General Provisions specified in Table 8: An existing 2SLB stationary RICE, an existing 4SLB stationary RICE, an existing stationary RICE that combusts landfill or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, an existing emergency stationary RICE, or an existing limited use stationary RICE. If you own or operate any of the following RICE with a site rating of more than 500 brake HP located at a major source of HAP emissions, you do not need to comply with the requirements in the General Provisions specified in Table 8 except for the initial notification requirements: A new stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis, a new emergency stationary RICE, or a new limited use stationary RICE. [EXISTING EMERGENCY RICE AT AREA HAP SOURCES ARE NOT AMONG THOSE EXEMPTED FROM THIS SECTION]

[75 FR 9678, Mar. 3, 2010]

Regulatory Changes:

Individual sources within this source group that are subject to 40 CFR Part 63 Subpart ZZZZ -National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines shall comply with all applicable requirements of the Subpart. 40 CFR 63.13(a) requires submission of copies of all requests, reports and other communications to both the Department and the EPA. The EPA copies shall be forwarded to:

Director Air Protection Division (3AP00) U.S. EPA Region III 1650 Arch Street Philadelphia, PA 19103-2029

The Department copies shall be forwarded to:

Regional Air Program Manager PA Department of Environmental Protection 909 Elmerton Avenue Harrisburg, PA 17110-8200

In the event that the Federal Subpart that is the subject of this Source Group is revised, the permittee shall comply with the revised version of the subpart, and shall not be required to comply with any provisions in this permit designated as having the subpart as their authority, to the extent that such permit provisions would be inconsistent with the applicable provisions of the revised subpart.





Group Name: 006

Group Description: 25 Pa. Code, Section 129.67b Requirements

Sources included in this group

ID	Name
102A	PRESS 2
104A	PRESS 4
106	PRESS 6
107	PRESS 7
108	PRESS 8

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

[25 Pa. Code §129.67b]

Control of VOC emissions from offset lithographic printing presses and letterpress printing presses.

- (a) Applicability.
- (1) Except as specified in paragraph (3), this section applies to the owner and operator of an offset lithographic printing press or a letterpress printing press, or both, if the press meets one or a combination of the following:
 - (i) [N/A POTENTIAL EMISSIONS ARE LESS THAN 25 TPY]
 - (ii) [N/A THE FACILITY DOES NOT OPERATE LETTERPRESS PRINTING PRESSES]
- (iii) Offset lithographic printing. One or more offset lithographic printing presses if the total actual VOC emissions from all inks (including varnishes), coatings, adhesives and fountain solutions combined from all offset lithographic printing presses and all VOC emissions from related cleaning activities at the facility are equal to or greater than 450 pounds (204.1 kilograms) per month or 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.
- (iv) Offset lithographic printing and letterpress printing. One or more offset lithographic printing presses and one or more letterpress printing presses if the total actual VOC emissions from all inks (including varnishes), coatings, adhesives



and fountain solutions combined and all VOC emissions from related cleaning activities at the facility are equal to or greater than 450 pounds (204.1 kilograms) per month or 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.

- (v) Emissions below 450 pounds per month and 2.7 tons per 12-month rolling period. The total actual VOC emissions from all inks (including varnishes), coatings, adhesives and fountain solutions combined from all offset lithographic printing presses, all letterpress printing presses and all VOC emissions from related cleaning activities at the facility are less than 450 pounds (204.1 kilograms) per month and 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of add-on controls.
- (2) The owner or operator of an offset lithographic printing press subject to paragraph (1) may use the VOC emission retention factors and capture efficiency factors specified in subsection (I) to determine the amount of potential or actual VOC emissions that is available for capture and control from the inks (including varnishes), fountain solutions and cleaning solutions used on the offset lithographic printing press.
- (3) VOCs from adhesives used at a facility that are not used or applied on or with an offset lithographic printing press or a letterpress printing press are not subject to this section and may be regulated under § 129.77 or Chapter 130, Subchapter D (relating to control of emissions from the use or application of adhesives, sealants, primers and solvents; and adhesives, sealants, primers and solvents).
- (b) [N/A FACILITY DOES NOT HAVE A RACT PERMIT]
- (c) Emission limits for cleaning solutions and fountain solutions used in or on printing presses subject to this section.
- (1) Cleaning solutions. Beginning January 1, 2015, a person subject to subsection (a)(1)(i), (ii), (iii) or (iv) may not cause or permit the emission into the outdoor atmosphere of VOCs from cleaning solutions used in or on an offset lithographic printing press or a letterpress printing press unless the following conditions are met:
 - (i) The cleaning solutions used must meet one or both of the following VOC limits:
 - (A) A VOC composite partial vapor pressure less than 10 millimeters of mercury at 68°F (20°C).
 - (B) A VOC content less than 70% by weight.
- (ii) The use of one or more cleaning solutions with a higher VOC composite partial vapor pressure or higher VOC content, or both, than is listed in subparagraph (i) is limited to 110 gallons per year, combined, of all cleaning solutions that exceed the limits in subparagraph (i).
- (2) Fountain solutions. Except as specified in paragraph (3), beginning January 1, 2015, a person subject to subsection (a)(1)(i), (iii) or (iv) may not cause or permit the emission into the outdoor atmosphere of VOCs from a fountain solution used in an offset lithographic printing press unless the fountain solution meets one or more of the following VOC limits.
- (i) For each heatset web offset lithographic printing press, the press-ready (as applied) fountain solution must meet one of the following limits:
 - (A) A VOC content of 1.6% or less by weight.
 - (B) A VOC content of 3% or less by weight if the fountain solution is refrigerated below 60°F (15.5°C).
 - (C) A VOC content of 5% or less by weight and no alcohol in the fountain solution.
- (D) Another method that achieves a level of control of VOC emissions from the press-ready (as applied) fountain solution equal to or better than the methods listed in clauses (A)—(C).
 - (ii) [N/A SHEET-FED OFFSET LITHOGRAPHIC PRINTING PRESSES ARE NOT USED]
 - (iii) [N/A NON-HEATSET WEB OFFSET LITHOGRAPHIC PRESSES ARE NOT USED]



- (3) Fountain solution exceptions. The control requirements under paragraph (2) for a fountain solution do not apply to the owner or operator of either of the following:
 - (i) [N/A SHEET-FED OFFSET LITHOGRAPHIC PRINTING PRESSES ARE NOT USED]
 - (ii) An offset lithographic printing press with total fountain solution reservoir of less than 1 gallon.
- (d) Emission limits for heatset web offset lithographic printing presses and heatset web letterpress printing presses.
- (1) [N/A THE FACILITY IS NOT SUBJECT TO SUBSECTION (a)(1)(i)]
- (2) This subsection does not apply for one or a combination of the following circumstances:
- (i) The press is used for book printing.
- (ii) The press has a maximum web width of 22 inches or less.
- (iii) The press is operated with one or a combination of the following inks, coatings or varnishes:
- (A) Waterborne coatings.
- (B) Ultra-violet light or electron beam radiation cured materials.
- (C) Sheet-fed or non-heatset web inks.
- (D) Sheet-fed or non-heatset web varnishes.
- (3) This subsection does not apply to the owner or operator of the press if the Department has issued a plan approval, operating permit or Title V permit to the owner or operator prior to January 1, 2015, establishing a Federally-enforceable limitation to limit the potential emissions of VOC from the offset lithographic printing press or the letterpress printing press below 25 tpy, before consideration of add-on controls.
- (e) Compliance and monitoring requirements.
- (1) [N/A THE FACILITY IS NOT USING AN ADD-ON AIR POLLUTION CONTROL DEVICE IN ACCORDANCE WITH SUBSECTION (d)]
- (2) Fountain solution. The owner or operator of an offset lithographic printing press subject to this section that is required to meet one of the fountain solution VOC limits of subsection (c)(2) shall demonstrate compliance by using one or more of the following methods:
- (i) Analysis of a sample of the press-ready (as applied) fountain solution for VOC content using EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, codified in 40 CFR Part 60, Appendix A, including updates and revisions.
- (ii) Maintenance onsite of MSDS, CPDS or other data provided by the manufacturer of the fountain solution that indicates the VOC content of the press-ready (as applied) fountain solution.
- (iii) Calculation of the VOC content of the press-ready (as applied) fountain solution that combines the EPA Reference Method 24 analytical VOC content data for each of the concentrated components or additives used to prepare the press-ready fountain solution.
- (A) The VOC content data for each of the concentrated components or additives shall be combined in the proportions in which the concentrated components or additives are mixed to make the batch of press-ready (as applied) fountain solution.
- (B) The VOC content shall be calculated one time for each recipe of press-ready (as applied) fountain solution. The recipe name, VOC content for each concentrated component or additive and fountain solution mix ratio shall be recorded in a logbook.
- (C) The EPA Reference Method 24 analysis of the concentrated components or additives used to prepare the press-ready (as applied) fountain solution may be performed by the supplier of the components or additives and these results provided to the owner or operator of the affected press.



- (iv) Measurement of the recirculating reservoir temperature of a refrigerated press-ready (as applied) fountain solution specified in subsection (c)(2)(i)(B) or (ii)(B) with a thermometer or other temperature detection device capable of reading to 0.5°F (0.28°C) to ensure that the temperature of the refrigerated fountain solution containing alcohol is maintained below 60°F (15.5°C) at all times. The temperature on the thermometer or other temperature detection device shall be continuously monitored. The temperature reading shall be recorded at least once per operating day to verify that the refrigeration system is operating properly.
- (v) Monitoring of the press-ready (as applied) fountain solution for alcohol concentration or VOC content with one or more of the following instruments:
 - (A) A refractometer or a hydrometer to monitor the fountain solution alcohol concentration. The instrument must:
 - (I) Be corrected for temperature one time per 8-hour shift.
 - (II) Have a visual, analog or digital readout with an accuracy of 0.5%.
 - (III) Be calibrated with a standard solution for the type of alcohol used in the fountain solution.
- (B) A conductivity meter to determine the fountain solution VOC content. Reading for the fountain solution must be referenced to the conductivity of the incoming water.
- (vi) Another method to determine compliance with the VOC content limits for fountain solutions in subsection (c)(2) if the following requirements are met:
- (A) The facility owner or operator submits a request, in writing, to the appropriate regional office of the Department for approval of the alternative method.
- (B) The request demonstrates that the alternative method provides results that accurately determine the fountain solution VOC content.
 - (C) The Department provides prior written approval of the alternative method.
- (3) Cleaning solution. The owner or operator of an offset lithographic printing press or a letterpress printing press subject to this section shall demonstrate compliance with the VOC content limit or VOC composite partial vapor pressure limit for cleaning solutions in subsection (c)(1) by one or more of the following methods:
 - (i) Analysis of a sample of press-ready (as applied) cleaning solution for VOC content using EPA Reference Method 24.
- (ii) Use of the equation in subsection (j) to calculate the composite partial vapor pressure of the press-ready (as applied) cleaning solution.
- (iii) Use of the methods in subsection (k) to determine the VOC composite partial vapor pressure of a single concentrated component or additive used to prepare the press-ready (as applied) cleaning solution.
- (iv) Maintenance onsite of MSDS, CPDS or other data provided by the manufacturer of the press-ready (as applied) cleaning solution that indicates the VOC content or the VOC composite partial vapor pressure, or both, of the press-ready (as applied) cleaning solution.
- (v) Calculation of the VOC content or the VOC composite partial vapor pressure, or both, of the press-ready (as applied) cleaning solution that combines the EPA Reference Method 24 analytical VOC content data or analytical VOC composite partial vapor pressure data for each of the concentrated components or additives used to prepare the press-ready (as applied) cleaning solution.
- (A) The VOC content data or VOC composite partial vapor pressure data for each of the concentrated components or additives shall be combined in the proportions in which the concentrated components or additives are mixed to make the batch of press-ready (as applied) cleaning solution.



- (B) The VOC content or VOC composite partial vapor pressure shall be calculated one time for each recipe of pressready (as applied) cleaning solution. The recipe name, VOC content or VOC composite partial vapor pressure for each concentrated component or additive and cleaning solution mix ratio shall be recorded in a log book.
- (C) The EPA Reference Method 24 analysis of the concentrated components or additives used to prepare the press-ready (as applied) cleaning solution may be performed or the VOC composite partial vapor pressure data may be determined by the supplier of the components or additives and these results provided to the owner or operator of the affected press.
- (vi) Another method to determine compliance with the VOC content limits for cleaning solutions in subsection (c)(1) if the following requirements are met:
- (A) The facility owner or operator submits a request, in writing, to the appropriate regional office of the Department for approval of the alternative method.
- (B) The request demonstrates that the alternative method provides results that accurately determine the cleaning solution VOC content or VOC composite partial vapor pressure.
 - (C) The Department provides prior written approval of the alternative method.
- (f) Recordkeeping requirements. Beginning January 1, 2015, the owner or operator of a printing press subject to this section shall maintain records sufficient to demonstrate compliance with this section. Records maintained for compliance demonstrations may include purchase, use, production and other records.
 - (1) [N/A THE FACILITY IS NOT USING AN ADD-ON CONTROL DEVICE SUBJECT TO SUBSECTION (e)]
- (2) An owner or operator subject to subsection (a)(1)(i), (ii), (iii) or (iv) shall maintain records of cleaning solutions and fountain solutions used at the facility, including:
 - (i) The following parameters for each press ready blanket, roller or other cleaning solution:
 - (A) The name and identification number for the blanket, roller or other cleaning solution.
 - (B) The VOC content (weight %) or VOC composite partial vapor pressure of each cleaning solution as applied.
- (C) The volume used of each cleaning solution as applied, if the owner or operator is using cleaning solutions which exceed the limits in subsection (c)(1)(i).
 - (D) Records of cleaning solution monitoring as required under subsection (e)(3).
 - (ii) The following parameters for each press-ready (as applied) fountain solution:
 - (A) The VOC content (weight %).
 - (B) Records of fountain solution monitoring as required under subsection (e)(2).
- (3) An owner or operator claiming exemption from a VOC control provision of this section based on potential or actual VOC emissions, as applicable, shall maintain records that demonstrate to the Department that the press or facility is exempt.
- (4) The owner or operator may group materials into classes using the highest VOC content in any material in a class to represent that class of material.
- (g) Reporting requirements. Beginning January 1, 2015, the owner or operator of an offset lithographic printing press or a letterpress printing press subject to this section shall meet the following reporting requirements:
- (1) The records required under subsection (f) shall be maintained onsite for 2 years unless a longer period is required by



a plan approval or operating permit issued under Chapter 127 (relating to construction, modification, reactivation and operation of sources). The records shall be submitted to the Department in an acceptable format upon receipt of a written request.

- (2) [N/A THE FACILITY IS NOT SUBJECT TO SUBSECTION (d)]
- (h) Sampling and testing.
 - (1) Sampling and testing shall be performed as follows:
- (i) Sampling of an ink, varnish, coating, fountain solution or cleaning solution and testing for the VOC content of the ink, varnish, coating, fountain solution or cleaning solution shall be performed in accordance with the procedures and test methods specified in Chapter 139.
- (ii) [N/A THE FACILITY IS NOT SUBJECT TO SUBSECTION (a)(1)(i) AND IS NOT USING AN ADD-ON AIR POLLUTION CONTROL DEVICE IN ACCORDANCE WITH SUBSECTION (d)]
- (2) [N/A THE FACILITY IS NOT SUBJECT TO SUBSECTION (a)(1)(i) AND IS NOT USING AN ADD-ON AIR POLLUTION CONTROL DEVICE IN ACCORDANCE WITH SUBSECTION (d)]
- (3) Other test methods demonstrated to provide results that are acceptable for purposes of determining compliance with this section may be used if prior approval is obtained in writing from the Department and the EPA.
- (i) Work practice requirements for cleaning activities.
- (1) Except as specified in paragraph (3), beginning January 1, 2015, the owner or operator of an offset lithographic printing press or a letterpress printing press subject to subsection (a)(1)(i), (ii), (iii) or (iv) shall comply with the following work practices for cleaning activities at the facility:
 - (i) Store all VOC-containing cleaning solutions, waste cleaning solutions and used shop towels in closed containers.
- (ii) Ensure that mixing vessels and storage containers used for VOC-containing cleaning solutions, waste cleaning solutions and used shop towels are kept closed at all times, except when depositing or removing these solutions or shop towels.
 - (iii) Minimize spills of VOC-containing cleaning solutions and waste cleaning solutions and clean up spills immediately.
- (iv) Convey VOC-containing cleaning solutions, waste cleaning solutions and used shop towels from one location to another in closed containers or pipes.
 - (2) The requirements in paragraph (1) apply to the following activities:
- (i) Cleaning of a press, including blanket washing, roller washing, plate cleaners, metering roller cleaners, impression cylinder cleaners and rubber rejuvenators.
 - (ii) Cleaning of press parts, including press parts that have been removed from the press for cleaning.
 - (iii) Cleaning of ink, coating or adhesive from areas around a press.
 - (3) The requirements in paragraph (1) do not apply to the following activities:
 - (i) Cleaning electronic components of a press.
 - (ii) Cleaning in pre-press (for example, platemaking) operations.
 - (iii) Cleaning in post-press (for example, binding) operations.



- (iv) Using janitorial supplies (for example, detergents or floor cleaners) for general cleaning around a press.
- (v) The use of parts washers or cold cleaners at an offset lithographic printing or a letterpress printing facility. The use of parts washers and cold cleaners is regulated under § 129.63 (relating to degreasing operations).
- (j) Composite partial vapor pressure. The composite partial vapor pressure of organic compounds in cleaning solutions shall be determined by one of the following procedures:
- (1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using an appropriate and current ASTM test method with prior written approval by the Department.
 - (2) Calculating the composite partial vapor pressure using the following equation:

(The equation formula does not copy. Please see original text for exact formula)

- (k) Determination of vapor pressure of single organic compounds in cleaning solutions. The vapor pressure of each single component compound shall be determined from one or more of the following:
 - (1) An appropriate and current ASTM test method with prior written approval by the Department.
 - (2) The most recent edition of one or more of the following sources:
 - (i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company, New York.
 - (ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.
 - (iii) CRC Handbook of Chemistry and Physics, CRC Press.
 - (iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.
 - (v) Additional sources approved by the Department.
- (I) VOC retention factors and capture efficiency factors. As specified in subsection (a)(2), if:
- (1) A portion of the VOCs contained in the ink or cleaning solution, or both, is retained in the printed web substrate or in the shop towels used for cleaning, the following VOC emission retention factors shall be used, as applicable:
- (i) A 20% VOC emission retention factor for a petroleum ink oil-based heatset ink printed on an absorptive substrate, meaning 80% of the petroleum ink oil content is emitted as VOC during the printing process and is available for capture and control by an add-on air pollution control device. The petroleum ink oil content of a heatset ink may be determined from formulation data included on a CPDS or MSDS.
- (ii) A 95% VOC emission retention factor for a petroleum ink oil-based non-heatset web or non-heatset sheet-fed ink, meaning 5% of the petroleum ink oil content is emitted as VOC during the printing process and is available for capture and control by an add-on air pollution control device. The petroleum ink oil content of a non-heatset web or non-heatset sheet-fed ink may be determined from formulation data included on a CPDS or MSDS.
 - (iii) A 100% VOC emission retention factor for vegetable ink oil-based heatset and non-heatset inks.
- (iv) A 50% VOC emission retention factor for low VOC composite vapor pressure cleaning solutions in shop towels if both of the following conditions are met:
 - (A) The VOC composite vapor pressure of the cleaning solution is less than 10mm Hg at 20°C (68°F).
 - (B) The cleaning solutions and used shop towels are kept in closed containers.
 - (2) A portion of the VOCs contained in one or more of the ink, fountain solution or automatic blanket wash materials is



captured in the press dryer for control by the add-on air pollution control device, the following capture efficiency factors shall be used, as applicable:

- (i) A 100% VOC emission capture efficiency for volatilized ink oils for oil-based heatset paste inks and varnishes as specified in paragraph (1) if both of the following conditions are met:
 - (A) The press dryer is operating at negative pressure relative to the surrounding pressroom.
 - (B) The air flow is into the press dryer.
 - (ii) A 70% VOC emission capture efficiency for a fountain solution that contains an alcohol substitute.
- (iii) A 40% VOC emission capture efficiency for an automatic blanket wash if the VOC composite vapor pressure of the cleaning solution is less than 10mm Hg at 20° C (68° F).





Group Name: 007

Group Description: 25 Pa. Code, Section 129.77 Requirements

Sources included in this group

ID	Name
301	BINDING OPERATIONS GLUE VOC

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

001 [25 Pa. Code §129.77.]

Control of emissions from the use or application of adhesives, sealants, primers and solvents.

- (a) This section applies to the owner or operator of a facility that uses or applies one or more of the following at the facility on or after January 1, 2012:
- (1) An adhesive, sealant, adhesive primer or sealant primer subject to the VOC content limits in Table V.

TABLE V REQUIREMENTS:

Table V. VOC Content Limits for Adhesives, Sealants, Adhesive Primers and Sealant Primers, As Applied

	VOC content	VOC Content
	Limit (pounds	Limit (grams
	VOC per gallon,	VOC per liter,
Adhesive, sealant, adhesive	less water and	less water and
primer or sealant primer	exempt	exempt
category	compounds)*	compounds)*
Adhasiva Primars		

Adhesive Primers

Other 2.1 250



*The VOC content is determined as the weight of VOC per volume of product, less water and exempt compounds, as specified in subsections (bb) and (cc) or as the weight of VOC per volume of product, as specified in subsection (dd).

(2) An adhesive or sealant product applied to the listed substrate subject to the VOC content limits in Table VI.

TABLE VI REQUIREMENTS:

Table VI. VOC Content Limits for Adhesive or Sealant Products Applied to Particular Substrates, As Applied

	VOC content Limit (pounds	VOC Content Limit (grams
	VOC per gallon,	VOC per liter,
Adhesive or Sealant Products Applied to the Listed Substrate	less water and exempt compounds)*	less water and exempt compounds)*
Porous material Other substrates	1.0 2.1	120 250

- *The VOC content is determined as the weight of VOC per volume of product, less water and exempt compounds, as specified in subsections (bb) and (cc) or as the weight of VOC per volume of product, as specified in subsection (dd).
- (3) [N/A SURFACE PREPARATION SOLVENTS AND CLEANUP SOLVENTS ARE NOT USED ON SOURCE ID 301 PROCESSES]
- (b) On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility an adhesive, sealant, adhesive primer or sealant primer that exceeds the applicable VOC content limit in Table V or VI, except as provided elsewhere in this section.
- (c) [N/A SURFACE PREPARATION SOLVENTS AND CLEANUP SOLVENTS ARE NOT USED ON SOURCE ID 301 PROCESSES]
- (d) The VOC content limits in Table VI for adhesives or sealants applied to particular substrates apply as follows:
- (1) [N/A THE FACILITY IS NOT USING ADHESIVES OR SEALANTS SUBJECT TO A SPECIFIC VOC CONTENT LIMIT IN TABLE <math>V
- (2) If an owner or operator of a facility uses or applies at the facility an adhesive to bond dissimilar substrates together, the applicable substrate category with the highest VOC content limit is the limit for this use.
- (e) An owner or operator of a facility subject to this section using or applying a surface preparation solvent or cleanup solvent at the facility may not:
- (1) [N/A FACILITY IS NOT USING SURFACE PREPARATION SOLVENT MATERIALS]
- (2) [N/A FACILITY IS NOT APPLYING SINGEL-PLY ROOF MEMBRANE]
- (3) [N/A FACILITY IS NOT USING CLEANUP SOLVENTS FOR THE REMOVAL OF ADHESIVES FROM SURFACES]
- (f) [N/A SPRAY APPLICATION EQUIPMENT IS NOT USED]
- (g) $[N/A-ADD-ON\ AIR\ POLLUTION\ EQUIPMENT\ IS\ NOT\ USED\ TO\ COMPLY\ WITH\ ADHESIVE\ VOC\ CONTENT\ LIMITS\ OF\ THIS\ SECTION]$
- (h) An owner or operator of a facility subject to this section shall store or dispose of all absorbent materials, including cloth or paper, which are moistened with adhesives, sealants, primers, surface preparation solvents or cleanup solvents subject



to this section, in nonabsorbent containers at the facility that are kept closed except when placing materials in or removing materials from the container.

- (i) An owner or operator of a facility subject to this section may not solicit, require or specify the use or application of an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent if the use or application would result in a violation of this section, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g). The prohibition of this subsection applies to all written or oral contracts created on or after January 1, 2012, under which an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent subject to this section is to be used or applied at a facility in this Commonwealth.
- (j) An owner or operator of a facility subject to this section who uses or applies an adhesive, sealant, adhesive primer or sealant primer subject to this section may not add solvent to the adhesive, sealant, adhesive primer or sealant primer in an amount in excess of the manufacturer's recommendation for application, if this addition causes the adhesive, sealant, adhesive primer or sealant primer to exceed the applicable VOC content limit listed in Table V or VI, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g).
- (k) This section does not apply to the use or application of the following compounds or products:
- (1) Adhesives, sealants, adhesive primers or sealant primers being tested or evaluated in a research and development, quality assurance or analytical laboratory, if records are maintained as required in subsections (p) and (q).
- (2) Adhesives, sealants, adhesive primers or sealant primers that are subject to § 129.73 (relating to aerospace manufacturing and rework) or Chapter 130, Subchapter B or C (relating to consumer products; and architectural and industrial maintenance coatings).
- (3) Adhesives and sealants that contain less than 20 grams of VOC per liter of adhesive or sealant, less water and less exempt compounds, as applied.
- (4) Cyanoacrylate adhesives.
- (5) Adhesives, sealants, adhesive primers or sealant primers that are sold or supplied by the manufacturer or supplier in containers with a net volume of 16 fluid ounces or less, or a net weight of 1 pound or less, except plastic cement welding adhesives and contact adhesives.
- (6) Contact adhesives that are sold or supplied by the manufacturer or supplier in containers with a net volume of 1 gallon or less.
- (I) This section does not apply to the use of adhesives, sealants, adhesive primers, sealant primers, surface preparation solvents or cleanup solvents in the following operations:
- (1) Tire repair operations, if the label of the adhesive states, "For tire repair only."
- (2) The assembly, repair and manufacture of aerospace components or undersea-based weapons systems.
- (3) The manufacture of medical equipment.
- (4) Plaque laminating operations in which adhesives are used to bond clear, polyester acetate laminate to wood with lamination equipment installed prior to July 1, 1992. An owner or operator claiming an exemption under this paragraph shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) (q).
- (m) This section does not apply if the total VOC emissions from all adhesives, sealants, adhesive primers and sealant primers used or applied at the facility are less than 200 pounds or an equivalent volume, per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) (q).
- (n) This section does not apply to the use or application of a noncomplying adhesive, sealant, adhesive primer, sealant



primer, surface preparation solvent or cleanup solvent if the total volume of noncomplying adhesives, sealants, primers, surface preparation and cleanup solvents used or applied facility-wide does not exceed 55 gallons per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) - (q).

- (o) Except as provided in subsection (p), each owner or operator subject to this section shall maintain records demonstrating compliance with this section, including the following information:
- (1) A list of each adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent and cleanup solvent product in use and in storage.
- (2) A data sheet or material list which provides the product name, manufacturer identification and use or material application for each product included on the list required under paragraph (1).
- (3) The VOC content of each product on the list required under paragraph (1), as supplied.
- (4) Catalysts, reducers or other components used and the mix ratio.
- (5) The VOC content or vapor pressure of each product on the list required by paragraph (1), as applied, if solvent or other VOC is added to the product before application.
- (6) The volume purchased or produced of each product on the list required under paragraph (1).
- (7) The monthly volume used or applied as part of a manufacturing process at the facility of each product on the list required under paragraph (1).
- (p) For an adhesive, sealant, adhesive primer and sealant primer product subject to the laboratory testing exemption of subsection (k)(1), the person conducting the testing shall make and maintain records of all products used, including the following information:
- (1) The product name.
- (2) The product category of the material or type of application.
- (3) The VOC content of the material.
- (g) Records made to determine compliance with this section shall be:
- (1) Maintained onsite for 5 years from the date the record is created.
- (2) Made available to the Department upon receipt of a written request.
- (r) Except as otherwise provided in this section, the VOC and solids content of nonaerosol adhesives (including one-part moisture cure urethane adhesives and silicone adhesives), sealants, adhesive primers, sealant primers, surface preparation solvents and cleanup solvents shall be determined using one of the following:
- (1) EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.
- (2) SCAQMD Method 304, Determination of Volatile Organic Compounds (VOC) in Various Materials, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (s) The weight volatile matter content and weight solids content for one-part or multiple part reactive adhesives, except one-part moisture cure urethane adhesives and silicone adhesives, shall be determined using the EPA Reference Method, Determination of Weight Volatile Matter Content and Weight Solids Content of Reactive Adhesives, found at 40 CFR 63, Subpart PPPP, Appendix A, including updates and revisions.



- (t) The identity and concentration of exempt organic compounds shall be determined using one of the following:
- (1) ASTM D4457, Standard Test Method for Determination of Dichloromethane and 1,1,1-Trichloroethane in Paints and Coatings by Direct Injection into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA including updates and revisions.
- (2) SCAQMD Method 303, Determination of Exempt Compounds, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (u) The VOC content of a plastic cement welding adhesive or primer shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (v) To determine if a diluent is a reactive diluent, the percentage of the reactive organic compound that becomes an integral part of the finished material shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (w) The composite partial vapor pressure of organic compounds in cleaning materials shall be determined by the following procedure:
- (1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using the following methods:
- (i) ASTM E260, Standard Practice for Packed Column Gas Chromatography, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for organic content, including updates and revisions.
- (ii) ASTM D3792, Standard Test Method for Water Content of Coatings by Direct Injection Into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for water content, including updates and revisions.
 - (2) Calculating the composite partial vapor pressure using the following equation:

(The equation formula does not copy. Please see original text for exact formula)

- (x) The vapor pressure of each single component compound shall be determined from one or more of the following:
- (1) ASTM D2879, Standard Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isoteniscope, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, including updates and revisions.
- (2) The most recent edition of one or more of the following sources:
 - (i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company, New York.
 - (ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.
 - (iii) CRC Handbook of Chemistry and Physics, CRC Press.
 - (iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.
 - (v) Additional sources approved by the SCAQMD or other California air districts.
- (y) [N/A NO ADD-ON CONTROLS ARE USED]
- (z) The active and passive solvent losses from the use of an enclosed spray gun cleaning system or equivalent cleaning system, as listed in subsection (f)(1), shall be determined using the SCAQMD method, General Test Method for



Determining Solvent Losses from Spray Gun Cleaning Systems, dated October 3, 1989, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

- (1) The test solvent for this determination shall be a lacquer thinner with a minimum vapor pressure of 105 mm of mercury at 20° C.
 - (2) The minimum test temperature shall be 15° C.
- (aa) Another test method may be used to determine the VOC or solids content of a product if the request for approval of the test method meets the following requirements:
 - (1) The request is submitted to the Department in writing.
- (2) The request demonstrates that the test method provides results that accurately determine the concentration of VOCs in the product or its emissions.
 - (3) The Department approves the request in writing.
- (bb) For adhesive, sealant, adhesive primer or sealant primer products that do not contain reactive diluents, grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

Where:

Ws = weight of volatile compounds, in grams.

Ww = weight of water, in grams.

We = weight of exempt compounds, in grams.

Vm = volume of material, in liters.

(cc) For adhesive, sealant, adhesive primer or sealant primer products that contain reactive diluents, the VOC content of the product is determined after curing. The grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

Grams of VOC per liter of product, as applied = Wrs - Wrw - Wre
------Vrm - Vrw - Vre

Where:

Wrs = weight of volatile compounds not consumed during curing, in grams.

Wrw = weight of water not consumed during curing, in grams.

Wre = weight of exempt compounds not consumed during curing, in grams.

Vrm = volume of material not consumed during curing, in liters.

Vrw = volume of water not consumed during curing, in liters.

Vre = volume of exempt compounds not consumed during curing, in liters.

(dd) For low-solids adhesive, sealant, adhesive primer or sealant primer products, grams of VOC per liter of product thinned to the manufacturer's recommendation, including the volume of water and exempt compounds, shall be calculated according to the following equation:

Where:





Ws = weight of volatile compounds, in grams.

Ww = weight of water, in grams.

01-05017

We = weight of exempt compounds, in grams.

Vm = volume of material, in liters.

(ee) Percent VOC by weight shall be calculated according to the following equation:

% VOC by weight = $[(Wv/W)] \times 100$

Where:

Wv = weight of VOCs, in grams.

W = weight of material, in grams.

(ff) To convert from grams per liter (g/l) to pounds per gallon (lb/gal), multiply the result (VOC content) by $8.345 \times 10-3$ (lb/gal/g/l).



SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.







SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.





SECTION H. Miscellaneous.

This operating permit includes sources and applicable conditions covered in the previous operating permit and supersedes that permit.

Source ID 401, Emergency Generator consists of an 105 HP, CI diesel fired emergency generator

Source ID 402, Emergency Fire Pumps consists of the following:

- a.) 170 HP CI diesel fired emergency fire pump
- b.) 235 HP CI diesel fired emergency fire pump

The above emergency stationary RICE are not subject to 40 CFR Part 63, Subpart ZZZZ as long as the stationary RICE meets the definition of an emergency stationary RICE in § 63.6675, which includes operating according to the provisions specified in §63.6640(f). The emergency stationary RICE shall not operate or be contractually obligated to be available for the purposes specified in § 63.6640(f)(2)(ii) and (iii) and shall not operate for the purpose specified in § 63.6640(f)(4)(ii).

The following sources or activities have been exempted from work practice standards, and testing, monitoring, record keeping, and reporting requirements:

- * Paper Trimming Operation controlled by Cyclone(s)
- * One Kodak Nexpress digital printing press
- * Two Xerox Nuvera 288 digital printing presses
- * 290 gallon No. 2 oil (diesel) aboveground storage tank for emergency generator.
- * 210 gallon No. 2 oil (diesel) aboveground storage tank for fire pumphouse south of main building
- * 210 gallon No. 2 oil (diesel) aboveground storage tank for fire pumphouse at fire water pond
- * 2.5 mmBtu/hr, natural gas fired space heater at Paper Warehouse

The following corpor on a description of the Source IDs

The following serves as a description of the Source IDs:

Source ID 102A was previously the subject of Plan Approval No. 01-05017D.

Source ID 104A was previously the subject of Plan Approval No. 01-05017D.

Source ID 106 was previously the subject of Operating Permit No. 01-320-003 and Plan Approval No. 01-05017D.

Source ID 107 was previously the subject of Operating Permit No. 01-320-004 and Plan Approval No. 01-05017B.

Source ID 108 was previously the subject of Plan Approval No. 01-05017A.

Source ID C500 was previously the subject of Plan Approval No. 01-05017D.



***** End of Report *****