



STATE ONLY SYNTHETIC MINOR OPERATING PERMIT

Issue Date: September 11, 2023 Effective Date:

Revision Date: July 10, 2024 Expiration Date: September 30, 2028

Revision Type: Modification, Significant

In accordance with the provisions of the Air Pollution Control Act, the Act of January 8, 1960, P.L. 2119, as amended, and 25 Pa. Code Chapter 127, the Owner, [and Operator if noted] (hereinafter referred to as permittee) identified below is authorized by the Department of Environmental Protection (Department) to operate the air emission source(s) more fully described in this permit. This Facility is subject to all terms and conditions specified in this permit. Nothing in this permit relieves the permittee from its obligations to comply with all applicable Federal, State and Local laws and regulations.

The regulatory or statutory authority for each permit condition is set forth in brackets. All terms and conditions in this permit are federally enforceable unless otherwise designated.

State Only Permit No: 67-05145

Synthetic Minor

Federal Tax Id - Plant Code: 75-2196684-1

Owner Information

Name: OLDCASTLE BLDGENVELOPE INC

Mailing Address: 1551 MOUNT ROSE AVE YORK, PA 17403-2909

Plant Information

Plant: OLDCASTLE BLDG ENVELOPE INC/YORK

Location: 67 York County 67003 Spring Garden Township

SIC Code: 3442 Manufacturing - Metal Doors, Sash, And Trim

Responsible Official

Name: MICHAEL DEROSA Title: GENERAL MANAGER

Phone: (717) 849 - 8100 Email: mderosa@grahamwindows.com

Permit Contact Person

Name: MICHAEL DEROSA
Title: GENERAL MANAGER

Phone: (717) 849 - 8100 Email: mderosa@grahamwindows.com

[Signature]	

WILLIAM R. WEAVER, SOUTHCENTRAL REGION AIR PROGRAMMANAGER



*

SECTION A. Table of Contents

Section A. Facility/Source Identification

Table of Contents Site Inventory List

Section B. General State Only Requirements

- #001 Definitions.
- #002 Operating Permit Duration.
- #003 Permit Renewal.
- #004 Operating Permit Fees under Subchapter I.
- #005 Transfer of Operating Permits.
- #006 Inspection and Entry.
- #007 Compliance Requirements.
- #008 Need to Halt or Reduce Activity Not a Defense.
- #009 Duty to Provide Information.
- #010 Revising an Operating Permit for Cause.
- #011 Operating Permit Modifications
- #012 Severability Clause.
- #013 De Minimis Emission Increases.
- #014 Operational Flexibility.
- #015 Reactivation of Sources
- #016 Health Risk-based Emission Standards and Operating Practice Requirements.
- #017 Circumvention.
- #018 Reporting Requirements.
- #019 Sampling, Testing and Monitoring Procedures.
- #020 Recordkeeping.
- #021 Property Rights.
- #022 Alternative Operating Scenarios.
- #023 Reporting
- #024 Report Format

Section C. Site Level State Only Requirements

- C-I: Restrictions
- C-II: Testing Requirements
- C-III: Monitoring Requirements
- C-IV: Recordkeeping Requirements
- C-V: Reporting Requirements
- C-VI: Work Practice Standards
- C-VII: Additional Requirements
- C-VIII: Compliance Certification
- C-IX: Compliance Schedule

Section D. Source Level State Only Requirements

- D-I: Restrictions
- D-II: Testing Requirements
- D-III: Monitoring Requirements
- D-IV: Recordkeeping Requirements
- D-V: Reporting Requirements
- D-VI: Work Practice Standards
- D-VII: Additional Requirements

Note: These same sub-sections are repeated for each source!

Section E. Source Group Restrictions

E-I: Restrictions





SECTION A. Table of Contents

E-II: Testing Requirements
E-III: Monitoring Requirements
E-IV: Recordkeeping Requirements
E-V: Reporting Requirements
E-VI: Work Practice Standards
E-VII: Additional Requirements

Section F. Alternative Operating Scenario(s)

F-I: Restrictions

F-II: Testing Requirements
F-III: Monitoring Requirements
F-IV: Recordkeeping Requirements
F-V: Reporting Requirements
F-VI: Work Practice Standards
F-VII: Additional Requirements

Section G. Emission Restriction Summary


Section H. Miscellaneous





SECTION A. Site Inventory List

Source II	Source Name	Capacity	/Throughput	Fuel/Material
102	CLEANING AND SOLVENT OPERATIONS	40.000	Lbs/HR	VOC
103	SEAM SEALER USAGE	10.000	Lbs/HR	TOLUENE/VOC
201	BURN OFF OVEN	500.000	MCF/HR	Natural Gas
301	REMOTE RESERVOIR COLD CLEANING MACHINE(S)	5.000	Lbs/HR	VOC
C201	SOURCE 201 AFTERBURNER	800.000	CF/HR	Natural Gas
FML25	NATURAL GAS PIPELINE			
S201	SOURCE 201 STACK			
Z102	SOURCE 102 FUGITIVE EMISSIONS			
Z103	SOURCE 103 FUGITIVE EMISSIONS			
Z301	SOURCE 301 FUGITIVE EMISSIONS			

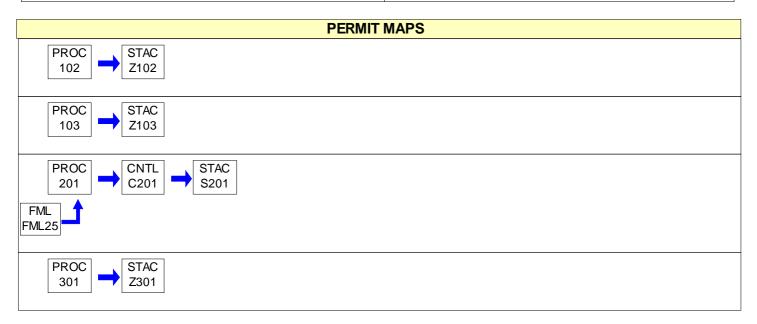





#001 [25 Pa. Code § 121.1]

Definitions.

Words and terms that are not otherwise defined in this permit shall have the meanings set forth in Section 3 of the Air Pollution Control Act (35 P.S. § 4003) and in 25 Pa. Code § 121.1.

#002 [25 Pa. Code § 127.446]

Operating Permit Duration.

- (a) This operating permit is issued for a fixed term of five (5) years and shall expire on the date specified on Page 1 of this permit.
- (b) The terms and conditions of the expired permit shall automatically continue pending issuance of a new operating permit, provided the permittee has submitted a timely and complete application and paid applicable fees required under 25 Pa. Code Chapter 127, Subchapter I and the Department is unable, through no fault of the permittee, to issue or deny a new permit before the expiration of the previous permit.

#003 [25 Pa. Code §§ 127.412, 127.413, 127.414, 127.446 & 127.703(b)]

Permit Renewal.

- (a) The permittee shall submit a timely and complete application for renewal of the operating permit to the appropriate Regional Air Program Manager. The application for renewal of the operating permit shall be submitted at least six (6) months and not more than 18 months before the expiration date of this permit.
- (b) The application for permit renewal shall include the current permit number, a description of any permit revisions that occurred during the permit term, and any applicable requirements that were promulgated and not incorporated into the permit during the permit term. An application is complete if it contains sufficient information to begin processing the application, has the applicable sections completed and has been signed by a responsible official.
- (c) The permittee shall submit with the renewal application a fee for the processing of the application as specified in 25 Pa. Code § 127.703(b). The fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" and submitted with the fee form to the respective regional office.
- (d) The renewal application shall also include submission of proof that the local municipality and county, in which the facility is located, have been notified in accordance with 25 Pa. Code § 127.413.
- (e) The application for renewal of the operating permit shall also include submission of supplemental compliance review forms in accordance with the requirements of 25 Pa. Code § 127.412(b) and § 127.412(j).
- (f) The permittee, upon becoming aware that any relevant facts were omitted or incorrect information was submitted in the permit application, shall promptly submit such supplementary facts or corrected information as necessary to address any requirements that become applicable to the source after the permittee submits a complete application, but prior to the date the Department takes action on the permit application.

#004 [25 Pa. Code § 127.703]

Operating Permit Fees under Subchapter I.

- (a) The permittee shall pay the annual operating permit maintenance fee according to the following fee schedule in either paragraph (1) or (2) in accordance with 25 Pa. Code § 127.703(d) on or before December 31 of each year for the next calendar year.
 - (1) For a synthetic minor facility, a fee equal to:
 - (i) Four thousand dollars (\$4,000) for calendar years 2021—2025.
 - (ii) Five thousand dollars (\$5,000) for calendar years 2026—2030.
 - (iii) Six thousand three hundred dollars (\$6,300) for the calendar years beginning with 2031.



- (2) For a facility that is not a synthetic minor, a fee equal to:
 - (i) Two thousand dollars (\$2,000) for calendar years 2021—2025.
 - (ii) Two thousand five hundred dollars (\$2,500) for calendar years 2026—2030.
 - (iii) Three thousand one hundred dollars (\$3,100) for the calendar years beginning with 2031.
- (b) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#005 [25 Pa. Code §§ 127.450 (a)(4) and 127.464]

Transfer of Operating Permits.

- (a) This operating permit may not be transferred to another person, except in cases of transfer-of-ownership that are documented and approved by the Department.
- (b) In accordance with 25 Pa. Code § 127.450(a)(4), a change in ownership of the source shall be treated as an administrative amendment if the Department determines that no other change in the permit is required and a written agreement has been submitted to the Department identifying the specific date of the transfer of permit responsibility, coverage and liability between the current and the new permittee and a compliance review form has been submitted to, and the permit transfer has been approved by, the Department.
- (c) This operating permit is valid only for those specific sources and the specific source locations described in this permit.

#006 [25 Pa. Code § 127.441 and 35 P.S. § 4008]


Inspection and Entry.

- (a) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow the Department or authorized representatives of the Department to perform the following:
- (1) Enter at reasonable times upon the permittee's premises where a source is located or emissions related activity is conducted, or where records are kept under the conditions of this permit;
 - (2) Have access to and copy, at reasonable times, any records that are kept under the conditions of this permit;
- (3) Inspect at reasonable times, any facilities, equipment including monitoring and air pollution control equipment, practices, or operations regulated or required under this permit;
- (4) Sample or monitor, at reasonable times, any substances or parameters, for the purpose of assuring compliance with the permit or applicable requirements as authorized by the Clean Air Act, the Air Pollution Control Act, or the regulations promulgated under the Acts.
- (b) Pursuant to 35 P.S. § 4008, no person shall hinder, obstruct, prevent or interfere with the Department or its personnel in the performance of any duty authorized under the Air Pollution Control Act or regulations adopted thereunder including denying the Department access to a source at this facility. Refusal of entry or access may constitute grounds for permit revocation and assessment of criminal and/or civil penalties.
- (c) Nothing in this permit condition shall limit the ability of the EPA to inspect or enter the premises of the permittee in accordance with Section 114 or other applicable provisions of the Clean Air Act.

#007 [25 Pa. Code §§ 127.441 & 127.444]

Compliance Requirements.

(a) The permittee shall comply with the conditions of this operating permit. Noncompliance with this permit constitutes a violation of the Clean Air Act and the Air Pollution Control Act and is grounds for one or more of the following:





- (1) Enforcement action
- (2) Permit termination, revocation and reissuance or modification
- (3) Denial of a permit renewal application
- (b) A person may not cause or permit the operation of a source which is subject to 25 Pa. Code Article III unless the source(s) and air cleaning devices identified in the application for the plan approval and operating permit and the plan approval issued for the source is operated and maintained in accordance with specifications in the applications and the conditions in the plan approval and operating permit issued by the Department. A person may not cause or permit the operation of an air contamination source subject to 25 Pa. Code Chapter 127 in a manner inconsistent with good operating practices.
- (c) For purposes of Sub-condition (b) of this permit condition, the specifications in applications for plan approvals and operating permits are the physical configurations and engineering design details which the Department determines are essential for the permittee's compliance with the applicable requirements in this State-Only permit. Nothing in this sub-condition shall be construed to create an independent affirmative duty upon the permittee to obtain a predetermination from the Department for physical configuration or engineering design detail changes made by the permittee.

#008 [25 Pa. Code § 127.441]

Need to Halt or Reduce Activity Not a Defense.

It shall not be a defense for the permittee in an enforcement action that it was necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

#009 [25 Pa. Code §§ 127.442(a) & 127.461]

Duty to Provide Information.

- (a) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of each source at the facility.
- (b) The permittee shall furnish to the Department, in writing, information that the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit, or to determine compliance with the permit. Upon request, the permittee shall also furnish to the Department copies of records that the permittee is required to maintain in accordance with this permit.

#010 [25 Pa. Code § 127.461]

Revising an Operating Permit for Cause.

This operating permit may be terminated, modified, suspended or revoked and reissued if one or more of the following applies:

- (1) The permittee constructs or operates the source subject to the operating permit so that it is in violation of the Air Pollution Control Act, the Clean Air Act, the regulations thereunder, a plan approval, a permit or in a manner that causes air pollution.
- (2) The permittee fails to properly or adequately maintain or repair an air pollution control device or equipment attached to or otherwise made a part of the source.
- (3) The permittee has failed to submit a report required by the operating permit or an applicable regulation.
- (4) The EPA determines that the permit is not in compliance with the Clean Air Act or the regulations thereunder.

#011 [25 Pa. Code §§ 127.450, 127.462, 127.465 & 127.703]

Operating Permit Modifications

(a) The permittee is authorized to make administrative amendments, minor operating permit modifications and significant operating permit modifications, under this permit, as outlined below:





- (b) Administrative Amendments. The permittee shall submit the application for administrative operating permit amendments (as defined in 25 Pa. Code § 127.450(a)), according to procedures specified in § 127.450 unless precluded by the Clean Air Act or its regulations.
- (c) Minor Operating Permit Modifications. The permittee shall submit the application for minor operating permit modifications (as defined 25 Pa. Code § 121.1) in accordance with 25 Pa. Code § 127.462.
- (d) Significant Operating Permit Modifications. The permittee shall submit the application for significant operating permit modifications in accordance with 25 Pa. Code § 127.465.
- (e) The applicable fees shall be made payable to "The Commonwealth of Pennsylvania Clean Air Fund" with the permit number clearly indicated and submitted to the respective regional office.

#012 [25 Pa. Code § 127.441]

Severability Clause.

The provisions of this permit are severable, and if any provision of this permit is determined by a court of competent jurisdiction to be invalid or unenforceable, such a determination will not affect the remaining provisions of this permit.

#013 [25 Pa. Code § 127.449]

De Minimis Emission Increases.

- (a) This permit authorizes de minimis emission increases in accordance with 25 Pa. Code § 127.449 so long as the permittee provides the Department with seven (7) days prior written notice before commencing any de minimis emissions increase. The written notice shall:
 - (1) Identify and describe the pollutants that will be emitted as a result of the de minimis emissions increase.
- (2) Provide emission rates expressed in tons per year and in terms necessary to establish compliance consistent with any applicable requirement.
- (b) The Department may disapprove or condition de minimis emission increases at any time.
- (c) Except as provided below in (d), the permittee is authorized to make de minimis emission increases (expressed in tons per year) up to the following amounts without the need for a plan approval or prior issuance of a permit modification:
- (1) Four tons of carbon monoxide from a single source during the term of the permit and 20 tons of carbon monoxide at the facility during the term of the permit.
- (2) One ton of NOx from a single source during the term of the permit and 5 tons of NOx at the facility during the term of the permit.
- (3) One and six-tenths tons of the oxides of sulfur from a single source during the term of the permit and 8.0 tons of oxides of sulfur at the facility during the term of the permit.
- (4) Six-tenths of a ton of PM10 from a single source during the term of the permit and 3.0 tons of PM10 at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
- (5) One ton of VOCs from a single source during the term of the permit and 5.0 tons of VOCs at the facility during the term of the permit. This shall include emissions of a pollutant regulated under Section 112 of the Clean Air Act unless precluded by the Clean Air Act, the regulations thereunder or 25 Pa. Code Article III.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (d) In accordance with § 127.14, the permittee is authorized to install the following minor sources without the need for a plan approval or permit modification:





- (1) Air conditioning or ventilation systems not designed to remove pollutants generated or released from other sources.
 - (2) Combustion units rated at 2,500,000 or less Btu per hour of heat input.
- (3) Combustion units with a rated capacity of less than 10,000,000 Btu per hour heat input fueled by natural gas supplied by a public utility or by commercial fuel oils which are No. 2 or lighter, viscosity less than or equal to 5.82 c St, and which meet the sulfur content requirements of 25 Pa. Code §123.22 (relating to combustion units). For purposes of this permit, commercial fuel oil shall be virgin oil which has no reprocessed, recycled or waste material added.
 - (4) Space heaters which heat by direct heat transfer.
 - (5) Laboratory equipment used exclusively for chemical or physical analysis.
 - (6) Other sources and classes of sources determined to be of minor significance by the Department.
- (e) This permit does not authorize de minimis emission increases if the emissions increase would cause one or more of the following:
- (1) Increase the emissions of a pollutant regulated under Section 112 of the Clean Air Act except as authorized in Subparagraphs (c)(4) and (5) of this permit condition.
- (2) Subject the facility to the prevention of significant deterioration requirements in 25 Pa. Code Chapter 127, Subchapter D and/or the new source review requirements in Subchapter E.
- (3) Violate any applicable requirement of this permit, the Air Pollution Control Act, the Clean Air Act, or the regulations promulgated under either of the acts.
- (f) Emissions authorized under this permit condition shall be included in the monitoring, recordkeeping and reporting requirements of this permit.
- (g) Except for de minimis emission increases, installation of minor sources made pursuant to this permit condition and Plan Approval Exemptions under 25 Pa. Code § 127.14 (relating to exemptions), the permittee is prohibited from making changes or engaging in activities that are not specifically authorized under this permit without first applying for a plan approval. In accordance with § 127.14(b), a plan approval is not required for the construction, modification, reactivation, or installation of the sources creating the de minimis emissions increase.
- (h) The permittee may not meet de minimis emission threshold levels by offsetting emission increases or decreases at the same source.

#014 [25 Pa. Code § 127.3]

Operational Flexibility.

The permittee is authorized to make changes within the facility in accordance with the regulatory provisions outlined in 25 Pa. Code § 127.3 (relating to operational flexibility) to implement the operational flexibility requirements provisions authorized under Section 6.1(i) of the Air Pollution Control Act and the operational flexibility terms and conditions of this permit. The provisions in 25 Pa. Code Chapter 127 which implement the operational flexibility requirements include the following:

- (1) Section 127.14 (relating to exemptions)
- (2) Section 127.447 (relating to alternative operating scenarios)
- (3) Section 127.448 (relating to emissions trading at facilities with Federally enforceable emissions caps)
- (4) Section 127.449 (relating to de minimis emission increases)
- (5) Section 127.450 (relating to administrative operating permit amendments)





- (6) Section 127.462 (relating to minor operating permit modifications)
- (7) Subchapter H (relating to general plan approvals and general operating permits)

#015 [25 Pa. Code § 127.11a]

Reactivation of Sources

- (a) The permittee may not reactivate a source that has been out of operation or production for at least one year unless the reactivation is conducted in accordance with a plan approval granted by the Department or in accordance with reactivation and maintenance plans developed and approved by the Department in accordance with 25 Pa. Code § 127.11a(a).
- (b) A source which has been out of operation or production for more than five (5) years but less than 10 years may be reactivated and will not be considered a new source if the permittee satisfies the conditions specified in 25 Pa. Code § 127.11a(b).

#016 [25 Pa. Code § 127.36]

Health Risk-based Emission Standards and Operating Practice Requirements.

- (a) When needed to protect public health, welfare and the environment from emissions of hazardous air pollutants from new and existing sources, the permittee shall comply with the health risk-based emission standards or operating practice requirements imposed by the Department, except as precluded by §§ 6.6(d)(2) and (3) of the Air Pollution Control Act [35 P.S. § 4006.6(d)(2) and (3)].
- (b) A person challenging a performance or emission standard established by the Department has the burden to demonstrate that performance or emission standard does not meet the requirements of Section 112 of the Clean Air Act.

#017 [25 Pa. Code § 121.9]

Circumvention.

No person may permit the use of a device, stack height which exceeds good engineering practice stack height, dispersion technique or other technique which, without resulting in reduction of the total amount of air contaminants emitted, conceals or dilutes an emission of air contaminants which would otherwise be in violation of 25 Pa. Code Article III, except that with prior approval of the Department, the device or technique may be used for control of malodors.

#018 [25 Pa. Code §§ 127.402(d) & 127.442]

Reporting Requirements.

- (a) The permittee shall comply with the applicable reporting requirements of the Clean Air Act, the regulations thereunder, the Air Pollution Control Act and 25 Pa. Code Article III including Chapters 127, 135 and 139.
- (b) The permittee shall submit reports to the Department containing information the Department may prescribe relative to the operation and maintenance of any air contamination source.
- (c) Reports, test data, monitoring data, notifications and requests for renewal of the permit shall be submitted to the:

Regional Air Program Manager
PA Department of Environmental Protection
(At the address given in the permit transmittal letter, or otherwise notified)

- (d) Any records or information including applications, forms, or reports submitted pursuant to this permit condition shall contain a certification by a responsible official as to truth, accuracy and completeness. The certifications submitted under this permit shall require a responsible official of the facility to certify that based on information and belief formed after reasonable inquiry, the statements and information in the documents are true, accurate and complete.
- (e) Any records, reports or information submitted to the Department shall be available to the public except for such

67-05145



SECTION B. General State Only Requirements

records, reports or information which meet the confidentiality requirements of § 4013.2 of the Air Pollution Control Act and §§ 112(d) and 114(c) of the Clean Air Act. The permittee may not request a claim of confidentiality for any emissions data generated for the facility.

#019 [25 Pa. Code §§ 127.441(c) & 135.5]

Sampling, Testing and Monitoring Procedures.

- (a) The permittee shall comply with the monitoring, recordkeeping or reporting requirements of 25 Pa. Code Chapter 139 and the other applicable requirements of 25 Pa. Code Article III and additional requirements related to monitoring, reporting and recordkeeping required by the Clean Air Act and the regulations thereunder including the Compliance Assurance Monitoring requirements of 40 CFR Part 64, where applicable.
- (b) Unless alternative methodology is required by the Clean Air Act and regulations adopted thereunder, sampling, testing and monitoring required by or used by the permittee to demonstrate compliance with any applicable regulation or permit condition shall be conducted in accordance with the requirements of 25 Pa. Code Chapter 139.

#020 [25 Pa. Code §§ 127.441(c) and 135.5]

Recordkeeping.

- (a) The permittee shall maintain and make available, upon request by the Department, the following records of monitored information:
 - (1) The date, place (as defined in the permit) and time of sampling or measurements.
 - (2) The dates the analyses were performed.
 - (3) The company or entity that performed the analyses.
 - (4) The analytical techniques or methods used.
 - (5) The results of the analyses.
 - (6) The operating conditions as existing at the time of sampling or measurement.
- (b) The permittee shall retain records of any required monitoring data and supporting information for at least five (5) years from the date of the monitoring, sample, measurement, report or application. Supporting information includes the calibration data and maintenance records and original strip-chart recordings for continuous monitoring instrumentation, and copies of reports required by the permit.
- (c) The permittee shall maintain and make available to the Department upon request, records including computerized records that may be necessary to comply with the reporting, recordkeeping and emission statement requirements in 25 Pa. Code Chapter 135 (relating to reporting of sources). In accordance with 25 Pa. Code Chapter 135, § 135.5, such records may include records of production, fuel usage, maintenance of production or pollution control equipment or other information determined by the Department to be necessary for identification and quantification of potential and actual air contaminant emissions.

#021 [25 Pa. Code § 127.441(a)]

Property Rights.

This permit does not convey any property rights of any sort, or any exclusive privileges.

#022 [25 Pa. Code § 127.447]

Alternative Operating Scenarios.

The permittee is authorized to make changes at the facility to implement alternative operating scenarios identified in this permit in accordance with 25 Pa. Code § 127.447.



#023 [25 Pa. Code §135.3]

67-05145

Reporting

- (a) If the facility is a Synthetic Minor Facility, the permittee shall submit by March 1 of each year an annual emissions report for the preceding calendar year. The report shall include information for all active previously reported sources, new sources which were first operated during the preceding calendar year, and sources modified during the same period which were not previously reported. All air emissions from the facility should be estimated and reported.
- (b) A source owner or operator of a Synthetic Minor Facility may request an extension of time from the Department for the filing of an annual emissions report, and the Department may grant the extension for reasonable cause.

#024 [25 Pa. Code §135.4]

Report Format

If applicable, the emissions reports shall contain sufficient information to enable the Department to complete its emission inventory. Emissions reports shall be made by the source owner or operator in a format specified by the Department.





I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall not allow the emission into the outdoor atmosphere of a fugitive air contaminant from a source other than the following:

- (a) Construction or demolition of buildings or structures.
- (b) Grading, paving, and maintenance of roads and streets.
- (c) Use of roads and streets. Emissions from material in or on trucks, railroad cars, and other vehicular equipment are not considered as emissions from use of roads and streets.
- (d) Clearing of land.
- (e) Stockpiling of materials.
- (f) Open burning operating.
- (g) Blasting in open pit mines. Emissions from drilling are not considered as emissions from blasting.
- (h) Coke oven batteries, provided the fugitive air contaminants emitted from any coke oven battery comply with the standards for visible fugitive emissions in § § 123.44 and 129.15 (relating to limitations of visible fugitive air contaminants from operation of any coke oven battery; and coke pushing operations).
- (i) Sources and classes of sources other than those identified in (a)-(e), above, for which the permittee has obtained a determination from the Department that fugitive emissions from the source, after appropriate control, meet the following requirements:
- (1) The emissions are of minor significance with respect to causing air pollution; and
- (2) The emissions are not preventing or interfering with the attainment or maintenance of any ambient air quality standard.

002 [25 Pa. Code §123.2]

Fugitive particulate matter

The permittee shall not allow the emission of fugitive particulate matter into the outdoor atmosphere from a source specified in Section C, Condition #001, if the emissions are visible at the point the emissions pass outside the permittee's property.

003 [25 Pa. Code §123.31]

Limitations

The permittee shall not allow the emission into the outdoor atmosphere of any malodorous air contaminants from any source in such a manner that the malodors are detectable outside the permittee's property.

004 [25 Pa. Code §123.41]

Limitations

The permittee shall not allow the emission into the outdoor atmosphere of visible air contaminants in such a manner that the opacity of the emission is either of the following:

- (a) Equal to or greater than 20% for a period or periods aggregating more than three minutes in any one hour.
- (b) Equal to or greater than 60% at any time.

005 [25 Pa. Code §123.42]

Exceptions

The emission limitations of Section C, Condition #004, shall not apply when:

(a) The presence of uncombined water is the only reason for failure of the emission to meet the limitations.





- (b) The emission results from the operation of equipment used solely to train and test persons in observing the opacity of visible emissions.
- (c) The emission results from sources specified in Section C, Condition #001(a)-(f).

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall limit the facility's total actual emissions below the following levels:

- (a) 100 tons per year of nitrogen oxides (NOx)
- (b) 100 tons per year of carbon monoxide (CO)
- (c) 100 tons per year of sulfur oxides (SOx)
- (d) 100 tons per year of PM-10 (particulate matter with an effective aerodynamic diameter of less than or equal to a nominal 10 micrometer body as measured by the applicable reference method or an equal method).
 - (e) 50 tons per year of volatile organic compounds (VOCs)
 - (f) 10 tons per year of any individual hazardous air pollutant (HAP)
 - (g) 25 tons per year of total combined hazardous air pollutants (HAPs)

The above emission limits is based upon a 12-month rolling total and apply to each consecutive 12-month rolling total period. Compliance verification requires emissions to be calculated for each month and each consecutive 12-month rolling total period.

007 [25 Pa. Code §129.14]

Open burning operations

The permittee shall not allow the open burning of material on the permittee's property except when the open burning operations result from:

- (a) A fire set to prevent or abate a fire hazard, when approved by the Department and set by or under the supervision of a public officer.
- (b) A fire set for the purpose of instructing personnel in fire fighting, when approved by the Department.
- (c) A fire set for the prevention and control of disease or pests, when approved by the Department.
- (d) A fire set in conjunction with the production of agricultural commodities in their unmanufactured state on the premises of the farm operation.
- (e) A fire set for the purpose of burning domestic refuse, when the fire is on the premises of a structure occupied solely as a dwelling by two families or less and when the refuse results from the normal occupancy of the structure.
- (f) A fire set solely for recreational or ceremonial purposes.
- (g) A fire set solely for cooking food.

II. TESTING REQUIREMENTS.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The Department reserves the right to require exhaust stack testing of the sources referenced in this operating permit to measure emissions for purposes including verification of operating permit condition compliance and estimation of annual

67-05145



SECTION C. Site Level Requirements

air emissions.

009 [25 Pa. Code §139.1]

Sampling facilities.

Upon the request of the Department, the permittee shall provide adequate sampling ports, safe sampling platforms and adequate utilities for the performance by the Department of tests on such source. In the request, the Department will set forth the time period in which the facilities shall be provided as well as the specifications for such facilities.

010 [25 Pa. Code §139.11]

General requirements.

- (a) As specified in 25 Pa. Code Section 139.11(1), performance tests shall be conducted while the source is operating at maximum routine operating conditions or under such other conditions, within the capacity of the equipment, as may be requested by the Department.
- (b) As specified in 25 Pa. Code Section 139.11(2), the Department will consider test results for approval where sufficient information is provided to verify the source conditions existing at the time of the test and where adequate data is available to show the manner in which the test was conducted. Information submitted to the Department shall include, at a minimum, all of the following:
- (1) A thorough source description, including a description of any air cleaning devices and the flue.
- (2) Process conditions, for example, the production rate, and other conditions which may affect emissions from the process.
- (3) The location of the sampling ports.
- (4) Effluent characteristics, including velocity, temperature, moisture content, gas density (percentage CO, CO2, O2, and N2), static and barometric pressures.
- (5) Sample collection techniques employed, including procedures used, equipment descriptions, and data to verify that isokinetic sampling for particulate matter collection occurred and that acceptable test conditions were met.
- (6) Laboratory procedures and results.
- (7) Calculated results.

III. MONITORING REQUIREMENTS.

011 [25 Pa. Code §123.43]

Measuring techniques

Visible emissions may be measured using either of the following:

- (a) A device approved by the Department and maintained to provide accurate opacity measurements (e.g. Continuous Opacity Monitor).
- (b) Observers trained and certified in EPA Reference Method 9 to measure plume opacity with the naked eye; or with the aid of any device(s) approved by the Department.

012 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall conduct a weekly inspection around the plant periphery during daylight hours when the plant is in production to detect visible emissions, fugitive particulate matter emissions, and malodorous air contaminants. Weekly inspections are necessary to determine:

- (a) The presence of visible emissions. Visible emissions may be measured according to the methods specified in Section
- C. Alternately, plant personnel who observe visible emissions may report the incidence of visible emissions to the





Department within two (2) hours of the incident and make arrangements for a certified observer to measure the visible emissions.

- (b) The presence of fugitive particulate matter emissions beyond the plant property boundaries, as stated in Section C.
- (c) The presence of malodorous air contaminants beyond the plant property boundaries, as stated in Section C.

013 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall calculate monthly air emissions from the facility using AP-42 emission factors, material balance, manufacturer-supplied emission factors, stack test results, or other method(s) approved by the Department and include the information in the annual air emissions report referenced in Section C.

IV. RECORDKEEPING REQUIREMENTS.

014 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the weekly inspections referenced in Section C. The records shall include, at a minimum, the following information:
- (1) The name of the company representative monitoring each inspection.
- (2) The date and time of the inspection.
- (3) The wind direction during each inspection.
- (4) A description of the visible emissions, fugitive particulate matter emissions (beyond the plant property boundaries), and malodorous air contaminants (beyond the plant property boundaries) observed, if any, and actions taken to mitigate them. If no visible emissions or fugitive particulate matter emissions or malodors are observed, then document that none were observed.
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

015 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain adequate records to demonstrate the compliance with all conditions of Section C.
- (b) Records shall be maintained on-site for the most recent five-year period and made available to Department's representatives upon request.

016 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain records of the monthly usage of each fuel consumed at the entire facility.
- (b) The permittee shall retain these records for a minimum of five (5) years. The records shall be made available to the Department upon its request.

V. REPORTING REQUIREMENTS.

017 [25 Pa. Code §127.442]

Reporting requirements.

- (a) The permittee shall report each malfunction to the Department that occurs at this facility. For purposes of this condition, a malfunction is defined as any sudden, infrequent, and not reasonably preventable failure of air pollution control equipment, process equipment or a process to operate in a normal or usual manner that may result in an increase in air emissions above minor significance.
- (b) When the malfunction poses an imminent and substantial danger to the public health and safety or harm to the





environment, the notification shall be submitted to the Department no later than two hours after the incident is detected by the company.

- (1) The notice shall describe the:
 - (i) name and location of the facility;
 - (ii) nature and cause of the malfunction or breakdown;
 - (iii) time when the malfunction or breakdown was first observed;
 - (iv) expected duration of excess emissions; and
 - (v) estimated rate of emissions.
- (2) The permittee shall notify the Department immediately when corrective measures have been accomplished.
- (3) Subsequent to the malfunction, the permittee shall submit a full report of the malfunction to the Department within 15 days, if requested.
- (4) The permittee shall submit reports on the operation and maintenance of the source to the Regional Air Program Manager at such intervals and in such form and detail as may be required by the Department. Information required in the reports may include, but is not limited to, process weight rates, firing rates, hours of operation, and maintenance schedules.
- (c) Malfunctions shall be reported to the Department at the following address:

SouthCentral Regional Office Air Quality Program 909 Elmerton Avenue Harrisburg, PA 17110

Telephone reports can be made to the Air Quality Program at (717) 705-4702 during normal business hours or to the Department's Emergency Hotline at any time. The Emergency Hotline phone number is changed/updated periodically. The current Emergency Hotline phone number can be found at

https://www.dep.pa.gov/About/Regional/SouthcentralRegion/Pages/default.aspx.

VI. WORK PRACTICE REQUIREMENTS.

018 [25 Pa. Code §123.1]

Prohibition of certain fugitive emissions

The permittee shall take all reasonable actions to prevent particulate matter from becoming airborne from any source specified in Section C. These actions shall include, but not be limited to, the following:

- (a) Use, where possible, of water or chemicals for control of dust in the demolition of buildings or structures, construction operations, the grading of roads, or the clearing of land.
- (b) Application of asphalt, oil, water, or suitable chemicals on dirt roads, material stockpiles and other surfaces which may give rise to airborne dusts.
- (c) Paving and maintenance of roadways.
- (d) Prompt removal of earth or other material from paved streets onto which earth or other material has been transported by trucking or earth moving equipment, erosion by water, or other means.

019 [25 Pa. Code §127.444]

Compliance requirements.

The permittee shall operate and maintain all sources and any air cleaning devices identified in this operating permit in accordance with the manufacturer's recommendations/specifications, as well as in a manner consistent with good operating practices.





VII. ADDITIONAL REQUIREMENTS.

020 [25 Pa. Code §127.441]

Operating permit terms and conditions.

This condition constitutes a compliance schedule:

Oldcastle Building Envelope (OBE) uses isopropyl alcohol (IPA) as a surface preparation solvent, which does not comply with the 25 Pa. Code §129.77(e)(1) VOC content limit of less than 0.6 lbs VOC/gallon (70 grams VOC/gallon). OBE is required by various customers to use the IPA to meet the standards of AAMAWDMA/CSA 101/I.S.2/A440. A suitable replacement solvent that meets both the building codes and 25 Pa. Code 129.77 requirements has not yet been found. However, OBE has stated its intention to continue searching for a replacement for IPA. Unless otherwise approved in writing by the Department, OBE shall comply with the following:

- a. OBE shall continue to search for a replacement for IPA as a surface preparation solvent, and submit to DEP a status report by no later than December 31 of each year during the term of the permit.
- b. Until a replacement for IPA has been found, the facility shall continue to limit VOC emissions from the use of applying IPA as a surface preparation solvent by using applicator bottles.
- c. The facility shall continue to use Sealant Removal Wipes to remove both uncured and cured sealant from manufactured windows.
- d. The permittee shall not use IPA as a surface preparation solvent at the facility in an amount that results in greater than 1.0 ton of excess VOC emissions per calendar year, as compared to the amount of emissions that would have been allowable under 25 Pa. Code Section 129.77(e)(1).

VIII. COMPLIANCE CERTIFICATION.

No additional compliance certifications exist except as provided in other sections of this permit including Section B (relating to State Only General Requirements).

IX. COMPLIANCE SCHEDULE.

No compliance milestones exist.








Source ID: 102 Source Name: CLEANING AND SOLVENT OPERATIONS

Source Capacity/Throughput: 40.000 Lbs/HR VOC

Conditions for this source occur in the following groups: G001



I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.63a]

Control of VOC emissions from industrial cleaning solvents.

- (a) The owner or operator of a facility claiming exemption under subsection 25 Pa. Code §129.63a(c)(3) shall maintain monthly records of the industrial cleaning solvents used or applied at the subject cleaning unit operations sufficient to demonstrate that the total combined actual VOC emissions from all subject cleaning unit operations at the facility are less than 2.7 tons (2,455 kilograms) per 12-month rolling period, before consideration of controls.
- (b) If actual VOC emissions exceed 2.7 tpy during any 12-month rolling total period, the facility shall immediately become subject to all applicable requirements of 25 Pa. Code §129.63a for all cleaning unit operations, as defined under 25 Pa. Code §129.63a(b).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

V. REPORTING REQUIREMENTS.

002 [25 Pa. Code §135.3]

Reporting

- (a) The permittee shall include the following information for each Source ID 102 solvent in the annual air emissions report referenced in Section B:
- (1) Name of cleanup solvent
- (2) The VOC content of the cleanup solvent
- (3) The HAP content of the cleanup solvent
- (4) Gallons per month used
- (5) Pounds per month of VOC emissions (minus exempt VOC)
- (6) Pounds per month of HAP(s) emissions (by type)
- (b) The permittee shall provide the following information for waste solvents or mixtures sent off-site for recycling or disposal in order to obtain credit for VOC and HAP(s) emissions reporting for (a)(5) and (a)(6), respectively, above:





- (1) Pounds or gallons per month of waste binder glues/adhesives or mixtures shipped from the facility
- (2) Waste profile or sampling data for a representative shipment (conducted a minimum of once each calendar year)
- (3) Identification of the waste disposal company for each shipment

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §127.441] Operating permit terms and conditions.

The permittee shall keep all surface coating containers which contain VOCs tightly closed when not in use. Spills of materials containing VOCs shall be cleaned up immediately with cleaning cloths or other methods that will minimize the evaporation of VOCs into the atmosphere. Solvent-laden cleaning cloths shall be kept in closed containers when not in use.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

Page 20








Source ID: 103 Source Name: SEAM SEALER USAGE

Source Capacity/Throughput: 10.000 Lbs/HR TOLUENE/VOC

Conditions for this source occur in the following groups: G001



I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).

IV. RECORDKEEPING REQUIREMENTS.

001 [25 Pa. Code §129.52]

Surface coating processes

The permittee shall maintain daily records of:

- (a) The following parameters for each coating, thinner and other component(s) as supplied:
- (1) The coating, thinner or component(s) name and identification number
- (2) The volume used
- (3) The mix ratio for the as applied surface coating
- (4) The density or specific gravity
- (5) The weight percent of total volatiles, water, solids and exempt VOCs
- (6) The volume percent of solids
- (b) The VOC content of each coating, thinner and other component(s) as supplied.
- (c) The VOC content of each as applied surface coating.

The permittee shall maintain these records for a minimum of five (5) years. The records shall be made available to the Department upon request.

V. REPORTING REQUIREMENTS.

002 [25 Pa. Code §135.3]

Reporting

- (a) The permittee shall include the following information for each Source ID 103 seam sealer in the annual air emissions report referenced in Section C:
- (1) Name of seam sealer
- (2) The VOC content of the seam sealer (pounds per gallon)
- (3) The HAP content of the seam sealer (pounds per gallon)



SECTION D.

Source Level Requirements



- (4) Gallons per month used
- (5) Pounds per month of VOC emissions (minus exempt VOC)
- (6) Pounds per month of HAP(s) emissions (by type)
- (b) The permittee shall provide the following information for waste coatings, solvents, or mixtures sent off-site for recycling or disposal in order to obtain credit for VOC and HAP(s) emissions reporting for (a)(5) and (a)(6), respectively, above:
- (1) Pounds or gallons per month of waste coatings, solvents, or mixtures shipped from the facility
- (2) Waste profile or sampling data for a representative shipment (conducted a minimum of once each calendar year)
- (3) Identification of the waste disposal company for each shipment

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

The permittee shall keep all surface coating containers which contain VOCs tightly closed when not in use. Spills of materials containing VOCs shall be cleaned up immediately with cleaning cloths or other methods that will minimize the evaporation of VOCs into the atmosphere. Solvent-laden cleaning cloths shall be kept in closed containers when not in use.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements) and/or Section E (Source Group Restrictions).


67-05145



SECTION D. Source Level Requirements

Source ID: 201 Source Name: BURN OFF OVEN

Source Capacity/Throughput: 500.000 MCF/HR Natural Gas

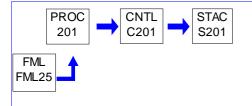

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from 25 Pa. Code Section 123.21 and General Operating Permit No. GP4-67-05072]

The permittee shall not allow the emission into the outdoor atmosphere of sulfur oxides from Source ID 201 in a manner that the concentration of the sulfur oxides (expressed as SO2) in the effluent gas exceeds 500 parts per million, by volume, dry basis.

002 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from 25 Pa. Code Section 127.1 and General Operating Permit No. GP4-67-05072]

Particulate matter (PM) emissions from Source ID 201's secondary chamber exhaust shall not exceed 0.02 grain per dry standard cubic foot, corrected to 12% carbon dioxide.

[Compliance with the requirement(s) specified in this streamlined operating permit condition assures compliance with the PM emission limit specified in 25 Pa. Code Section 123.13(c)(1)(i)]

Fuel Restriction(s).

003 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from General Operating Permit No. GP4-67-05072]

The permittee shall operate Source ID 201's primary burner and Source ID 201's afterburner (Source ID C201) using natural gas fuel only.

Throughput Restriction(s).

004 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from General Operating Permit No. GP4-67-05072]

The permittee shall not use Source ID 201 to burn coatings that contain halogenated hydrocarbons such as PVC or Teflons.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).



III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

005 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from General Operating Permit No. GP4-67-05072]

- (a) The permittee shall operate and maintain instrumentation to continuously monitor, display, and record Source ID 201's secondary chamber temperature. The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.
- (b) During periods of instrumentation malfunction or its maintenance/repair, the permittee shall:
- (1) Notify the Department by telephone within two (2) hours after discovery of the malfunction or commencement of instrumentation maintenance/repair. The permittee shall submit a written report of the malfunction or instrumentation maintenance/repair to the Department within three (3) days of the telephone report.
- (2) The permittee shall manually record the secondary chamber temperature at a minimum frequency of once every one (1) hour of source operation. The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.
- (c) The secondary chamber exit temperature recording instrumentation shall be calibrated a minimum of once per year.

006 [25 Pa. Code §127.441]

Operating permit terms and conditions.

- (a) The permittee shall maintain the following information:
- (1) Detailed records of all maintenance performed on Source ID 201 and its afterburner (Source ID C201).
- (2) Calibration dates of Source ID 201's secondary chamber exit temperature recording instrumentation.
- (b) The permittee shall retain this information for the most recent five (5) year time period and shall make it available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

007 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from General Operating Permit No. GP4-67-05072]

The permittee shall establish a minimum secondary chamber exit temperature of 1400°F prior to ignition of Source ID 201's primary burner. The permittee shall maintain a minimum secondary chamber exit temperature of 1400°F and a minimum gas residence time of 0.5 second throughout Source ID 201's burnoff cycle.

008 [25 Pa. Code §127.441]

Operating permit terms and conditions.

[Additional authority for this permit condition is also derived from General Operating Permit No. GP4-67-05072]





The permittee shall operate the afterburner (Source ID C201) at all times that Source ID 201 is operating.

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

Page 25



Source ID: 301 Source Name: REMOTE RESERVOIR COLD CLEANING MACHINE(S)

Source Capacity/Throughput: 5.000 Lbs/HR VOC

PROC 301 STAC Z301

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.63]

Degreasing operations

- (a) The permittee may not use in each Source ID 301 machine any solvent with a vapor pressure of 1.0 millimeter of mercury (mm Hg) or greater and containing greater than 5% VOC by weight, measured at 20°C (68°F) containing VOCs.
- (b) This permit condition does not apply:
- (1) If any Source ID 301 machine is used in extreme cleaning service. Extreme cleaning service is defined as the use of a cold cleaning machine to clean parts used in the manufacture of the following gases or to clean parts exposed to these gases in manufacturing, production, research and development, analytical work, or other similar operations:
 - (A) Oxygen in concentrations greater than 23%
 - (B) Ozone
 - (C) Nitrous oxide
 - (D) Fluorine
 - (E) Chlorine
 - (F) Bromine
 - (G) Halogenated compounds
- (2) If the permittee demonstrates, and the Department approves in writing, that compliance with this permit condition will result in unsafe operating conditions.

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

002 [25 Pa. Code §129.63]

Degreasing operations

- (a) The permittee shall maintain the following records for each Source ID 301 machine:
- (1) The name and address of the solvent supplier.
- (2) The type of solvent including the product or vendor identification number.
- (3) The vapor pressure of the solvent measured in mm Hg at 20°C (68°F).

An invoice, bill of sale, certificate that corresponds to a number of sales, Material Safety Data Sheet (MSDS), or other appropriate documentation acceptable to the Department may be used to comply with this condition.





(b) The permittee shall retain these records for a minimum of five (5) years and shall make them available to the Department upon its request.

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

003 [25 Pa. Code §129.63]

Degreasing operations

Each Source ID 301 machine shall have a permanent, conspicuous label summarizing the operating requirements in Condition # 005, below. In addition, the label shall include the following discretionary good operating practices:

- (a) Cleaned parts should be drained at least 15 seconds or until dripping ceases, whichever is longer. Parts having cavities or blind holes shall be tipped or rotated while the part is draining. During the draining, tipping or rotating, the parts should be positioned so that solvent drains directly back to the Source ID 301 machine.
- (b) When a pump-agitated solvent bath is used, the agitator should be operated to produce a rolling motion of the solvent with no observable splashing of the solvent against the tank walls or the parts being cleaned.
- (c) Work area fans should be located and positioned so that they do not blow across the opening of the degreaser unit.

[25 Pa. Code §129.63]

Degreasing operations

Each Source ID 301 machine shall be equipped with one of the following:

- (a) A cover that shall be closed at all times except during cleaning of parts or the addition or removal of solvent, or
- (b) A perforated drain with a diameter of not more than six (6) inches, if the Source ID 301 machine drains directly into the solvent storage reservoir.

005 [25 Pa. Code §129.63]

Degreasing operations

The permittee shall operate each Source ID 301 machine in accordance with the following procedures:

- (a) Waste solvent shall be collected and stored in closed containers. The closed containers may contain a device that allows pressure relief, but does not allow liquid solvent to drain from the container.
- (b) Flushing of parts using a flexible hose or other flushing device shall be performed only within the Source ID 301 machine. The solvent spray shall be a solid fluid stream, not an atomized or shower spray.
- (c) Sponges, fabric, wood, leather, paper products and other absorbent materials may not be cleaned in any Source ID 301 machine.
- (d) Air-agitated solvent baths may not be used.
- (e) Spills during solvent transfer and use of each Source ID 301 machine shall be cleaned up immediately.

VII. ADDITIONAL REQUIREMENTS.

006 [25 Pa. Code §129.63]

Degreasing operations

All of the aforementioned operating permit conditions apply only to Source ID 301 machine using 2 gallons or more of





solvents containing greater than 5% VOC by weight for the cleaning of metal parts.

DEP Auth ID: 1479558 DEP

DEP PF ID:

Page 28



67-05145



SECTION D. Source Level Requirements

Source ID: C201 Source Name: SOURCE 201 AFTERBURNER

Source Capacity/Throughput: 800.000 CF/HR Natural Gas

I. RESTRICTIONS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

No additional requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

67-05145



SECTION E. Source Group Restrictions.

Group Name: G001

Group Description: 25 Pa. Code 129.77

Sources included in this group

ID	Name
102	CLEANING AND SOLVENT OPERATIONS
103	SEAM SEALER USAGE

I. RESTRICTIONS.

Emission Restriction(s).

001 [25 Pa. Code §129.77.]

Control of emissions from the use or application of adhesives, sealants, primers and solvents.

On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility an adhesive, sealant, adhesive primer or sealant primer that exceeds the applicable VOC content limits, expressed as lbs VOC / gallon product, less water and exempt compounds, as specified in Table V of 25 Pa Code 129.77:

(a) Architectural Sealants - 2.1 (250 grams VOC per liter, less water and exempt compounds)

[TABLE VI DOES NOT APPLY PER 129.77(d)(1)]

II. TESTING REQUIREMENTS.

No additional testing requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

III. MONITORING REQUIREMENTS.

No additional monitoring requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

IV. RECORDKEEPING REQUIREMENTS.

No additional record keeping requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

V. REPORTING REQUIREMENTS.

No additional reporting requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VI. WORK PRACTICE REQUIREMENTS.

No additional work practice requirements exist except as provided in other sections of this permit including Section B (State Only General Requirements).

VII. ADDITIONAL REQUIREMENTS.

002 [25 Pa. Code §129.77.]

Control of emissions from the use or application of adhesives, sealants, primers and solvents.

- (a) This section applies to the owner or operator of a facility that uses or applies one or more of the following at the facility on or after January 1, 2012:
 - (1) An adhesive, sealant, adhesive primer or sealant primer subject to the VOC content limits in Table V.
 - (2) An adhesive or sealant product applied to the listed substrate subject to the VOC content limits in Table VI.
 - (3) A surface preparation solvent or cleanup solvent.





- (b) On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility an adhesive, sealant, adhesive primer or sealant primer that exceeds the applicable VOC content limit in Table V or VI, except as provided elsewhere in this section.
- (c) On or after January 1, 2012, an owner or operator of a facility may not use or apply at the facility a surface preparation or cleanup solvent that exceeds the applicable VOC content limit or composite partial vapor pressure requirements of this section, except as provided elsewhere in this section.
- (d) The VOC content limits in Table VI for adhesives or sealants applied to particular substrates apply as follows:
- (1) If an owner or operator of a facility uses or applies at the facility an adhesive or sealant subject to a specific VOC content limit in Table V, the specific limit is applicable rather than the adhesive-to-substrate limit in Table VI.
- (2) If an owner or operator of a facility uses or applies at the facility an adhesive to bond dissimilar substrates together, the applicable substrate category with the highest VOC content limit is the limit for this use.
- (e) An owner or operator of a facility subject to this section using or applying a surface preparation solvent or cleanup solvent at the facility may not:
- (1) Except as provided in paragraph (2) for single-ply roof membrane, use materials containing VOCs for surface preparation, unless the VOC content of the surface preparation solvent is less than 70 grams per liter of material or 0.6 pound of VOC per gallon of material.
 - (2) [N/A SINGLE PLY ROOF MEMBRANE NOT USED]
- (3) Except as provided in subsection (f), use cleanup solvent materials containing VOCs for the removal of adhesives, sealants, adhesive primers or sealant primers from surfaces, other than from the parts of spray application equipment, unless the composite partial vapor pressure of the solvent is less than or equal to 45 mm mercury at 20° C.
- (f) Removal of an adhesive, sealant, adhesive primer or sealant primer from the parts of spray application equipment shall be performed by one or more of the following methods:
- (1) Using an enclosed cleaning system, or an equivalent cleaning system as determined by the test method identified in subsection (z).
- (2) Using a solvent with a VOC content less than or equal to 70 grams of VOC per liter of material or 0.6 pound of VOC per gallon of material.
- (3) Soaking parts containing dried adhesive in a solvent if the composite partial vapor pressure of the solvent, excluding water and exempt compounds, is less than or equal to 9.5 mm mercury at 20° C and the parts and solvent are in a closed container that remains closed except when adding parts to or removing parts from the container.
- (g) [N/A ADD-ON CONTROL EQUIPMENT NOT USED]
- (h) An owner or operator of a facility subject to this section shall store or dispose of all absorbent materials, including cloth or paper, which are moistened with adhesives, sealants, primers, surface preparation solvents or cleanup solvents subject o this section, in nonabsorbent containers at the facility that are kept closed except when placing materials in or removing materials from the container.
- (i) An owner or operator of a facility subject to this section may not solicit, require or specify the use or application of an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent if the use or application would result in a violation of this section, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g). The prohibition of this subsection applies to all written or oral contracts created on or after January 1, 2012, under which an adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent subject to this section is to be used or applied at a facility in this Commonwealth.
- (j) An owner or operator of a facility subject to this section who uses or applies an adhesive, sealant, adhesive primer or



sealant primer subject to this section may not add solvent to the adhesive, sealant, adhesive primer or sealant primer in an amount in excess of the manufacturer's recommendation for application, if this addition causes the adhesive, sealant, adhesive primer or sealant primer to exceed the applicable VOC content limit listed in Table V or VI, unless the emissions are controlled through the use of add-on air pollution control equipment as specified in subsection (g).

- (k) This section does not apply to the use or application of the following compounds or products:
- (1) Adhesives, sealants, adhesive primers or sealant primers being tested or evaluated in a research and development, quality assurance or analytical laboratory, if records are maintained as required in subsections (p) and (q).
- (2) Adhesives, sealants, adhesive primers or sealant primers that are subject to § 129.73 (relating to aerospace manufacturing and rework) or Chapter 130, Subchapter B or C (relating to consumer products; and architectural and industrial maintenance coatings).
- (3) Adhesives and sealants that contain less than 20 grams of VOC per liter of adhesive or sealant, less water and less exempt compounds, as applied.
 - (4) Cyanoacrylate adhesives.
- (5) Adhesives, sealants, adhesive primers or sealant primers that are sold or supplied by the manufacturer or supplier in containers with a net volume of 16 fluid ounces or less, or a net weight of 1 pound or less, except plastic cement welding adhesives and contact adhesives.
- (6) Contact adhesives that are sold or supplied by the manufacturer or supplier in containers with a net volume of 1 gallon or less.
- (I) This section does not apply to the use of adhesives, sealants, adhesive primers, sealant primers, surface preparation solvents or cleanup solvents in the following operations:
 - (1) Tire repair operations, if the label of the adhesive states, ``For tire repair only."
 - (2) The assembly, repair and manufacture of aerospace components or undersea-based weapons systems.
 - (3) The manufacture of medical equipment.
- (4) Plaque laminating operations in which adhesives are used to bond clear, polyester acetate laminate to wood with lamination equipment installed prior to July 1, 1992. An owner or operator claiming an exemption under this paragraph shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) thru(q).
- (m) This section does not apply if the total VOC emissions from all adhesives, sealants, adhesive primers and sealant primers used or applied at the facility are less than 200 pounds or an equivalent volume, per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) thru (q).
- (n) This section does not apply to the use or application of a noncomplying adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent or cleanup solvent if the total volume of noncomplying adhesives, sealants, primers, surface preparation and cleanup solvents used or applied facility-wide does not exceed 55 gallons per calendar year. An owner or operator of a facility claiming exemption under this subsection shall record and maintain operational records sufficient to demonstrate compliance with this exemption, in accordance with subsections (o) thru (q).
- (o) Except as provided in subsection (p), each owner or operator subject to this section shall maintain records demonstrating compliance with this section, including the following information:
- (1) A list of each adhesive, sealant, adhesive primer, sealant primer, surface preparation solvent and cleanup solvent product in use and in storage.





- (2) A data sheet or material list which provides the product name, manufacturer identification and use or material application for each product included on the list required under paragraph (1).
 - (3) The VOC content of each product on the list required under paragraph (1), as supplied.
 - (4) Catalysts, reducers or other components used and the mix ratio.
- (5) The VOC content or vapor pressure of each product on the list required by paragraph (1), as applied, if solvent or other VOC is added to the product before application.
 - (6) The volume purchased or produced of each product on the list required under paragraph (1).
- (7) The monthly volume used or applied as part of a manufacturing process at the facility of each product on the list required under paragraph (1).
- (p) For an adhesive, sealant, adhesive primer and sealant primer product subject to the laboratory testing exemption of subsection (k)(1), the person conducting the testing shall make and maintain records of all products used, including the following information:
 - (1) The product name.
 - (2) The product category of the material or type of application.
 - (3) The VOC content of the material.
- (q) Records made to determine compliance with this section shall be:
 - (1) Maintained onsite for 5 years from the date the record is created.
 - (2) Made available to the Department upon receipt of a written request.
- (r) Except as otherwise provided in this section, the VOC and solids content of nonaerosol adhesives (including one-part moisture cure urethane adhesives and silicone adhesives), sealants, adhesive primers, sealant primers, surface preparation solvents and cleanup solvents shall be determined using one of the following:
- (1) EPA Reference Method 24, Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings, found at 40 CFR 60, Subpart D, Appendix A, including updates and revisions.
- (2) SCAQMD Method 304, Determination of Volatile Organic Compounds (VOC) in Various Materials, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (s) The weight volatile matter content and weight solids content for one-part or multiple part reactive adhesives, except onepart moisture cure urethane adhesives and silicone adhesives, shall be determined using the EPA Reference Method, Determination of Weight Volatile Matter Content and Weight Solids Content of Reactive Adhesives, found at 40 CFR 63, Subpart PPPP, Appendix A, including updates and revisions.
- (t) The identity and concentration of exempt organic compounds shall be determined using one of the following:
- (1) ASTM D4457, Standard Test Method for Determination of Dichloromethane and 1,1,1-Trichloroethane in Paints and Coatings by Direct Injection into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA including updates and revisions.
- (2) SCAQMD Method 303, Determination of Exempt Compounds, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (u) The VOC content of a plastic cement welding adhesive or primer shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley



Drive, Diamond Bar, CA 91765 USA, including updates and revisions.

- (v) To determine if a diluent is a reactive diluent, the percentage of the reactive organic compound that becomes an integral part of the finished material shall be determined using SCAQMD Method 316A, Determination of Volatile Organic Compounds (VOC) in Materials Used for Pipes and Fittings, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (w) The composite partial vapor pressure of organic compounds in cleaning materials shall be determined by the following procedure:
- (1) Quantifying the amount of each compound in the blend using gas chromatographic analysis, using the following methods:
- (i) ASTM E260, Standard Practice for Packed Column Gas Chromatography, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for organic content, including updates and revisions.
- (ii) ASTM D3792, Standard Test Method for Water Content of Coatings by Direct Injection Into a Gas Chromatograph, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, for water content, including updates and revisions.
 - (2) Calculating the composite partial vapor pressure using the following equation:

REFER TO REGULATION FOR EQUATION

- (x) The vapor pressure of each single component compound shall be determined from one or more of the following:
- (1) ASTM D2879, Standard Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isoteniscope, ASTM International, 100 Barr Harbor Drive, P. O. Box C700, West Conshohocken, PA 19428-2959 USA, including updates and revisions.
 - (2) The most recent edition of one or more of the following sources:
 - (i) Vapour Pressures of Pure Substances, Boublik, Elsevier Scientific Publishing Company, New York.
 - (ii) Perry's Chemical Engineers' Handbook, Green and Perry, McGraw-Hill Book Company.
 - (iii) CRC Handbook of Chemistry and Physics, CRC Press.
 - (iv) Lange's Handbook of Chemistry, McGraw-Hill Book Company.
- (v) Additional sources approved by the SCAQMD or other California air districts.
- (y) NA ADD-ON CONTROL EQUIPMENT NOT USED.
- (z) The active and passive solvent losses from the use of an enclosed spray gun cleaning system or equivalent cleaning system, as listed in subsection (f)(1), shall be determined using the SCAQMD method, General Test Method for Determining Solvent Losses from Spray Gun Cleaning Systems, dated October 3, 1989, SCAQMD, 21865 Copley Drive, Diamond Bar, CA 91765 USA, including updates and revisions.
- (1) The test solvent for this determination shall be a lacquer thinner with a minimum vapor pressure of 105 mm of mercury at 20° C.
 - (2) The minimum test temperature shall be 15° C.
- (aa) Another test method may be used to determine the VOC or solids content of a product if the request for approval of the test method meets the following requirements:
 - (1) The request is submitted to the Department in writing.
- (2) The request demonstrates that the test method provides results that accurately determine the concentration of VOCs in the product or its emissions.





- (3) The Department approves the request in writing.
- (bb) For adhesive, sealant, adhesive primer or sealant primer products that do not contain reactive diluents, grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

Grams of VOC per liter of product, as applied = (Ws - Ww - We)/(Vm - Vw - Ve)

Where:

67-05145

Ws = weight of volatile compounds, in grams.

Ww = weight of water, in grams.

We = weight of exempt compounds, in grams.

Vm = volume of material, in liters.

Vw = volume of water, in liters.

Ve = volume of exempt compounds, in liters.

(cc) For adhesive, sealant, adhesive primer or sealant primer products that contain reactive diluents, the VOC content of the product is determined after curing. The grams of VOC per liter of product thinned to the manufacturer's recommendation, less water and exempt compounds, shall be calculated according to the following equation:

Grams of VOC per liter of product, as applied = (Wrs - Wrw - Wre)/(Vrm - Vrw - Vre)

Where:

Wrs = weight of volatile compounds not consumed during curing, in grams.

Wrw = weight of water not consumed during curing, in grams.

Wre = weight of exempt compounds not consumed during curing, in grams.

Vrm = volume of material not consumed during curing, in liters.

Vrw = volume of water not consumed during curing, in liters.

Vre = volume of exempt compounds not consumed during curing, in liters.

(dd) For low-solids adhesive, sealant, adhesive primer or sealant primer products, grams of VOC per liter of product thinned to the manufacturer's recommendation, including the volume of water and exempt compounds, shall be calculated according to the following equation:

Grams of VOC per liter of product, as applied = (Ws - Ww - We)/Vm

Where:

Ws = weight of volatile compounds, in grams.

Ww = weight of water, in grams.

We = weight of exempt compounds, in grams.

Vm = volume of material, in liters.

(ee) Percent VOC by weight shall be calculated according to the following equation:

% VOC by weight = $[(Wv/W)] \times 100$

Where:

Wv = weight of VOCs, in grams.

W = weight of material, in grams.

(ff) To convert from grams per liter (g/l) to pounds per gallon (lb/gal), multiply the result (VOC content) by 8.345 x 10-3 (lb/gal/g/l).

Page 35

67-05145 OLDCASTLE BLDG ENVELOPE INC/YORK

SECTION F. Alternative Operation Requirements.

No Alternative Operations exist for this State Only facility.



SECTION G. Emission Restriction Summary.

No emission restrictions listed in this section of the permit.

SECTION H. Miscellaneous.

67-05145

The following activities have been exempted from work practice standards, and testing, monitoring, record keeping, and reporting requirements:

- Electric Drying Oven
- Acid Cleaning Line
- Electrostatic Powder Coating Line
- 2.5 mmBTU/hr Convection Curing Oven
- 1.2 mmBTU/hr Infrared Curing Oven

The following serves as	a description of the Source IDs:

Source ID 201 was previously the subject of Operating Permit No. GP4-67-05113

The following equipment and activities are not subject to any specific work practice standards, testing, monitoring, record keeping or reporting requirements:

- Air conditioning and ventilation systems;
- Office equipment;
- Janitorial equipment;
- Plant maintenance (painting, welding, woodworking, cleaning, etc.);
- Mobile sources (trucks, forklifts, snow-blowers, etc.);
- Fuel oil, propane and other storage tanks;
- Emergency equipment (lights, pumps, etc., and training);
- Materials handling and storage; and
- Laboratory/analytical activities.

During a site visit in December 2016, a Baghouse was identified which was not previously listed in the permit. The Debridge Saw Vacuum Chip Collector system is in place to control particulate matter created by the Debridge Saw Production and is vented indoor.

The Department approved RFD 8558 on June 29th, 2020 for the use of sealant removal wipes to remove excess uncured and cured sealant from windows.

The 1980 31 HP natural gas emergency generator is subject to 40 CFR Part 63 Subpart ZZZZ-National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines.

DEP Auth ID: 1479558



***** End of Report *****