

NPDES:PA026
6990

Application Type New
Wastewater Type Sewage
Facility Type SRSTP

**NPDES PERMIT FACT SHEET
INDIVIDUAL SFTF/SRSTP**

Application No. WQM: 0519402
APS ID 1000796
Authorization ID 1286784

Applicant, Facility and Project Information

Applicant Name	<u>John J Pepple</u>	Facility Name	<u>Pepple Residence</u>
Applicant Address	<u>1954 French Creek Road Everett, PA 15537</u>	Facility Address	<u>2251 French Creek Road Everett, PA 15537</u>
Applicant Contact	<u>John Pepple</u>	Facility Contact	<u>John Pepple</u>
Applicant Phone	<u>(814) 977-8718</u>	Facility Phone	<u>(814) 977-8718</u>
Client ID	<u>352132</u>	Site ID	<u>838596</u>
SIC Code	<u>8811</u>	Municipality	<u>East Providence Township</u>
SIC Description	<u>Services - Private Households</u>	County	<u>Bedford</u>
Date Application Received	<u>August 29, 2019</u>	WQM Required	
Date Application Accepted	<u>September 9, 2019</u>	WQM App. No.	<u>0519402</u>
Project Description	<u>This is an application for a new NPDES and WQM discharge.</u>		

Approve	Deny	Signatures	Date
X		Nicholas Hong, P.E. / Environmental Engineering Specialist	September 17, 2019
		Daniel W. Martin, P.E. / Environmental Engineer Manager	
		Maria Bebenek, P.E. / Environmental Program Manager	

Summary of Review

The application submitted by the applicant requests a NPDES permit for the Pepple Residence located at 2251 French Creek Road, Everett, PA 15537 in Bedford County, municipality of East Providence. The application for renewal was received by DEP Southcentral Regional Office (SCRO) on August 29, 2019.

The purpose of this Fact Sheet is to present the basis of information used for establishing the proposed NPDES permit effluent limitations. The Fact Sheet includes a description of the facility, a description of the facility's receiving waters, a description of the facility's receiving waters attainment/non-attainment assessment status. Section 5 provides the justification for the proposed NPDES effluent limits derived from technology based effluent limits (TBEL), water quality based effluent limits (WQBEL), total maximum daily loading (TMDL), antidegradation, anti-backsliding, and/or whole effluent toxicity (WET). A brief summary of the outlined descriptions has been included in the Summary of Review section.

The subject facility is a 0.004 MGD (400 GPD) treatment facility. The NPDES application has been processed as a Small Treatment Facility due to the type of sewage and the design flow rate for the facility. The applicant disclosed the Act 14 requirement to Bedford County Planning Commission and East Providence Township and the notice was received by the parties on February 25, 2019. A planning approval letter was granted to the facility on August 22, 2019.

Utilizing the DEP's web-based Emap-PA information system, the receiving waters has been determined to be Tributary 14110 to French Run. The sequence of receiving streams that Tributary 14110 to French Run discharges into are the French Run, the Raystown Branch Juniata River, the Juniata River, and the Susquehanna River which eventually drains into the Chesapeake Bay. The subject site is not subject to the Chesapeake Bay implementation requirements. The receiving water has protected water usage for migratory fishes (MF) and warm water fishes (WWF). No Class A Wild Trout fisheries are impacted by this discharge. The absence of high quality and/or exceptional value surface waters removes the need for an additional evaluation of anti-degradation requirements.

Tributary 14110 to French Run is a Category 2 stream listed in the 2016 Integrated List of All Waters (formerly 303d Listed Streams). This stream is an attaining stream that supports aquatic life. The receiving waters is not subject to a total maximum daily load (TMDL) plan to improve water quality in the subject facility's watershed.

The proposed permit will expire five (5) years from the effective date.

Based on the review in this report, it is recommended that the permit be drafted. DEP will publish notice of the receipt of the NPDES permit application and a tentative decision to issue the individual NPDES permit in the *Pennsylvania Bulletin* in accordance with 25 Pa. Code § 92a.82. Upon publication in the *Pennsylvania Bulletin*, DEP will accept written comments from interested persons for a 30-day period (which may be extended for one additional 15-day period at DEP's discretion), which will be considered in making a final decision on the application. Any person may request or petition for a public hearing with respect to the application. A public hearing may be held if DEP determines that there is significant public interest in holding a hearing. If a hearing is held, notice of the hearing will be published in the *Pennsylvania Bulletin* at least 30 days prior to the hearing and in at least one newspaper of general circulation within the geographical area of the discharge.

Any additional information or public review of documents associated with the discharge or facility may be available at PA DEP Southcentral Regional Office (SCRO), 909 Elmerton Avenue, Harrisburg, PA 17110. To make an appointment for file review, contact the SCRO File Review Coordinator at 717.705.4700.

1.0 Applicant

1.1 General Information

This fact sheet summarizes PA Department of Environmental Protection's review for the NPDES renewal for the following subject facility.

Facility Name: Pepple Residence

NPDES Permit # PA0266990

Physical Address: 2251 French Creek Road
Everett, PA 15537

Mailing Address: 1954 French Creek Road
Everett, PA 15537

Contact: John J. Pepple

Consultant: John Delacio
Advanced Treatment, Inc.
3013 White Pine Drive
Gibsonia, PA 15044
Delacio.john@gmail.com

1.2 Permit History

There is nothing to report for Permit History. This is an application for a new NPDES/WQM permit.

2.0 Treatment Facility Summary

2.1 Site location

The physical address for the facility is 2251 French Creek Road, Everett, PA 15537. A topographical and an aerial photograph of the facility are depicted as Figure 1 and Figure 2.

Figure 1: Topographical map of the subject facility


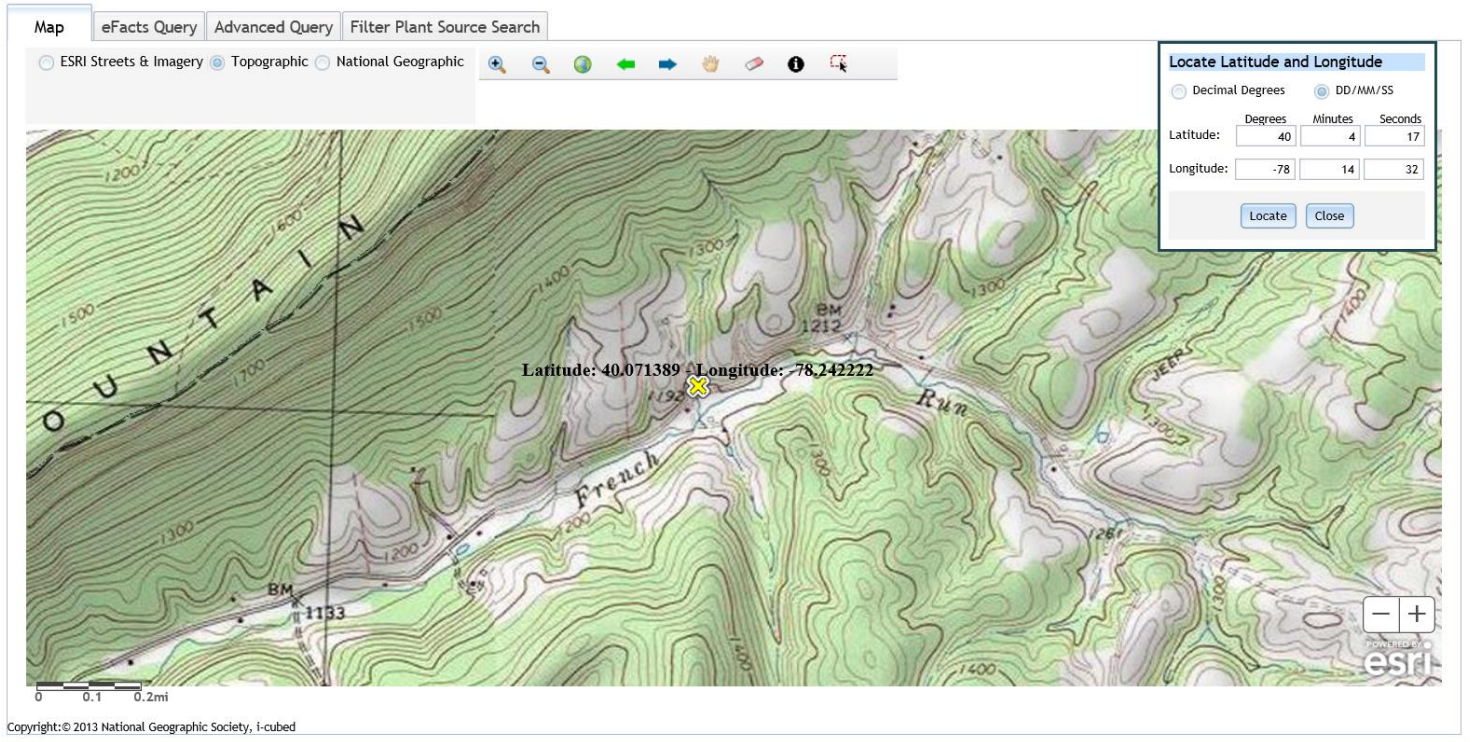


Figure 2: Aerial Photograph of the subject facility

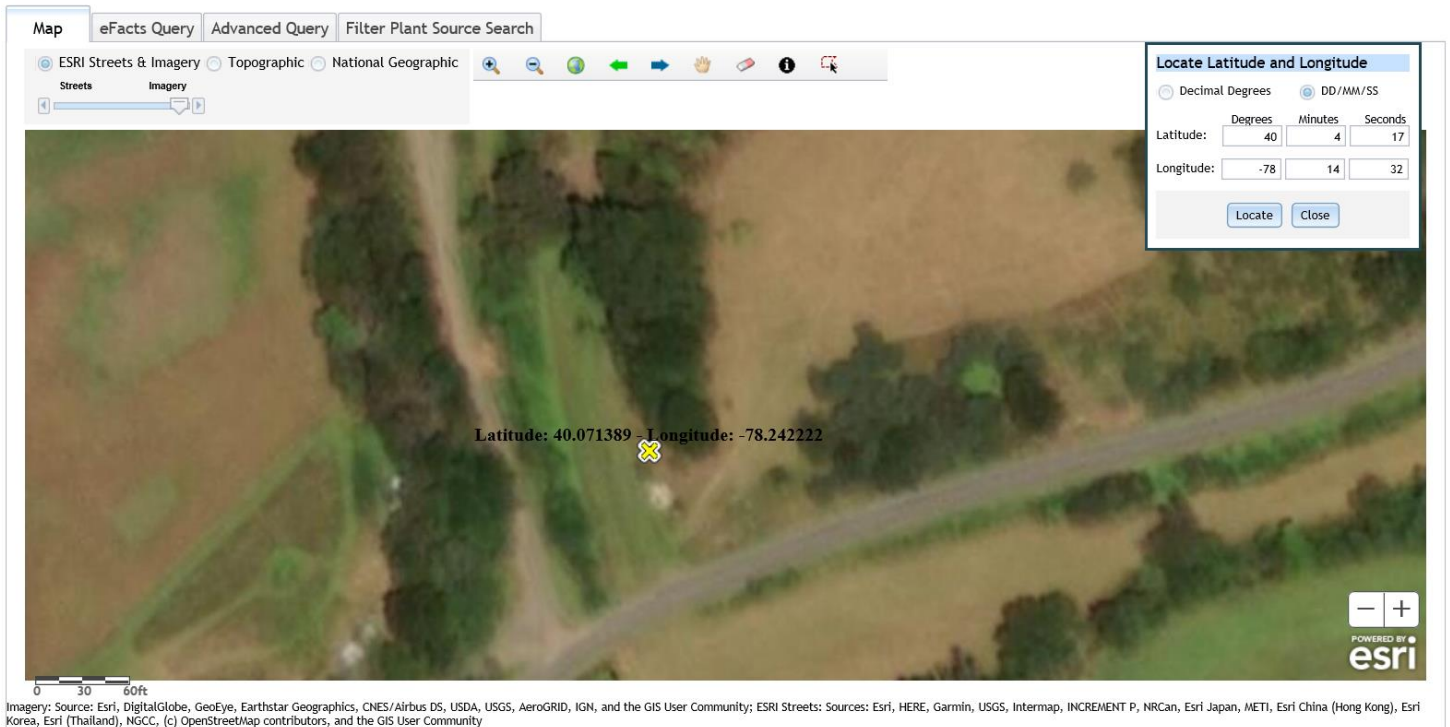

2.2 Description of Wastewater Treatment Process

The subject facility is a 0.0004 MGD (400 GPD) design flow facility. The subject facility treats wastewater using a 1,000-gal duam compartment septic tank with effluent filter, and Ecoflo coco filter, and a uv unit for disinfection prior to discharge through the outfall. The facility will be evaluated for flow, BOD5, TSS, fecal coliform.

The treatment process is summarized in the table.

Treatment Facility Summary				
Treatment Facility Name: SFTF Pepple John Residence				
WQM Permit No.		Issuance Date		
0519402		TBD		
Waste Type	Degree of Treatment	Process Type	Disinfection	Avg Annual Flow (MGD)
Sewage	Tertiary	ECOFLOW Coco Filter	Ultraviolet	0.0004
Hydraulic Capacity (MGD)	Organic Capacity (lbs/day)	Load Status	Biosolids Treatment	Biosolids Use/Disposal
0.0004		Not Overloaded		

2.3 Facility Outfall Information

The facility has the following outfall information.

Outfall No.	001	Design Flow (MGD)	.0004
Latitude	40° 4' 17.00"	Longitude	-78° 14' 32.00"
Wastewater Description:	Sewage Effluent		

3.0 Receiving Waters and Water Supply Information Detail Summary

3.1 Receiving Waters

The receiving waters has been determined to be Tributary 14110 to French Run. The sequence of receiving streams that Tributary 14110 to French Run discharges into are the French Run, the Raystown Branch Juniata River, the Juniata River, and the Susquehanna River which eventually drains into the Chesapeake Bay.

3.2 Public Water Supply (PWS) Intake

The closest PWS to the subject facility is Saxton Municipal Water Authority (PWS ID #4050021) located approximately 26.5 miles downstream of the subject facility on the Raystown Branch Juniata River. Based upon the distance and the flow rate of the facility, the PWS should not be impacted.

3.3 Class A Wild Trout Streams

Class A Wild Trout Streams are waters that support a population of naturally produced trout of sufficient size and abundance to support long-term and rewarding sport fishery. DEP classifies these waters as high-quality coldwater fisheries.

The information obtained from EMAP suggests that no Class A Wild Trout Fishery will be impacted by this discharge.

3.4 2016 Integrated List of All Waters (303d Listed Streams):

Section 303(d) of the Clean Water Act requires States to list all impaired surface waters not supporting uses even after appropriate and required water pollution control technologies have been applied. The 303(d) list includes the reason for impairment which may be one or more point sources (i.e. industrial or sewage discharges) or non-point sources (i.e. abandoned mine lands or agricultural runoff and the pollutant causing the impairment such as metals, pH, mercury or siltation).

States or the U.S. Environmental Protection Agency (EPA) must determine the conditions that would return the water to a condition that meets water quality standards. As a follow-up to listing, the state or EPA must develop a Total Maximum Daily Load (TMDL) for each waterbody on the list. A TMDL identifies allowable pollutant loads to a waterbody from both point and non-point sources that will prevent a violation of water quality standards. A TMDL also includes a margin of safety to ensure protection of the water.

The water quality status of Pennsylvania's waters uses a five-part categorization (lists) of waters per their attainment use status. The categories represent varying levels of attainment, ranging from Category 1, where all designated water uses are met to Category 5 where impairment by pollutants requires a TMDL for water quality protection.

The receiving waters is listed in the 2016 Pennsylvania Integrated Water Quality Monitoring and Assessment Report as a Category 2 waterbody. The surface waters is an attaining stream that supports aquatic life. The designated use has been classified as protected waters for warm water fishes and migratory fishes.

3.5 Low Flow Stream Conditions

Water quality modeling estimates are based upon conservative data inputs. The data are typically estimated using either a stream gauge or through USGS web based StreamStats program. The NPDES effluent limits are based upon the combined flows from both the stream and the facility discharge.

A conservative approach to estimate the impact of the facility discharge using values which minimize the total combined volume of the stream and the facility discharge. The volumetric flow rate for the stream is based upon the seven-day, 10-year low flow (Q710) which is the lowest estimated flow rate of the stream during a 7 consecutive day period that occurs once in 10 year time period. The facility discharge is based upon a known design capacity of the subject facility.

The low flow yield and the Q710 for the subject facility was estimated using StreamStats. The low flow yield is 0.013 ft³/s/mi² and the Q710 is 0.00282 ft³/s.

3.6 Summary of Discharge, Receiving Waters and Water Supply Information

Outfall No.	<u>001</u>	Design Flow (MGD)	<u>.0004</u>
Latitude	<u>40° 4' 17.18"</u>	Longitude	<u>-78° 14' 33.14"</u>
Quad Name	<u></u>	Quad Code	<u></u>
Wastewater Description: <u>Sewage Effluent</u>			

Receiving Waters	<u>Unnamed Tributary to French Run (WWF, MF)</u>	Stream Code	<u>14096</u>
NHD Com ID	<u>65845299</u>	RMI	<u>0.0700</u>
Drainage Area	<u>0.21</u>	Yield (cfs/mi ²)	<u>0.013</u>
Q ₇₋₁₀ Flow (cfs)	<u>0.00282</u>	Q ₇₋₁₀ Basis	<u>StreamStats</u>
Elevation (ft)	<u>1502</u>	Slope (ft/ft)	<u></u>
Watershed No.	<u>11D</u>	Chapter 93 Class.	<u>Warm Water Fishes, Migratory Fishes</u>
Existing Use	<u>Same as Chapter 93</u>	Existing Use Qualifier	<u></u>
Exceptions to Use	<u></u>	Exceptions to Criteria	<u>None</u>
Assessment Status	<u>Attaining Use(s) supports aquatic life.</u>		
Cause(s) of Impairment	<u>Not appl.</u>		
Source(s) of Impairment	<u>Not appl.</u>		
TMDL Status	<u>Not appl.</u>	Name	<u></u>

Background/Ambient Data		Data Source
pH (SU)	<u>Not appl.</u>	<u></u>
Temperature (°F)	<u>Not appl.</u>	<u></u>
Hardness (mg/L)	<u>Not appl.</u>	<u></u>
Other:	<u></u>	<u></u>

Nearest Downstream Public Water Supply Intake	<u>Saxton Municipal Water Authority</u>	
PWS Waters	<u>Raystown Branch Juniata River</u>	Flow at Intake (cfs) <u></u>
PWS RMI	<u>65.3</u>	Distance from Outfall (mi) <u>26.5</u>

4.0: Overview of Presiding Water Quality Standards

4.1 General

There are at least six (6) different policies which determines the effluent performance limits for the NPDES permit. The policies are technology based effluent limits (TBEL), water quality based effluent limits (WQBEL), antidegradation, total maximum daily loading (TMDL), anti-backsliding, and whole effluent toxicity (WET) The effluent performance limitations enforced are the selected permit limits that is most protective to the designated use of the receiving waters. An overview of each of the policies that are applicable to the subject facility has been presented in Section 6.

4.2 Technology-Based Limitations

TBEL treatment requirements under section 301(b) of the Act represent the minimum level of control that must be imposed in a permit issued under section 402 of the Act (40 CFR 125.3).

Small flow treatment facilities are confined to permit limitations promulgated by the Small Flow Treatment Facilities Manual (Document # 36-0300-002) and the SOP- New and Reissuance Small Flow Treatment Facility Individual NPDES Permit Application (Revised January 13, 2015).

The permit limitations and monitoring requirements are summarized in the table.

Parameter	Avg Mo	IMAX	Sample Type	Frequency: SRSTPs
Flow (GPD)	Report	XXX	Estimate	1/year
BOD5 (mg/l)	10	20	Grab	1/year
TSS (mg/l)	10	20	Grab	1/year
TRC (mg/l)	Report for SRSTPs		Grab	1/month
Fecal Coliform (No/100 ml)	200 Geometric Mean		Grab	1/year

4.3 Water Quality-Based Limitations

WQBEL are based on the need to attain or maintain the water quality criteria and to assure protection of designated and existing uses (PA Code 25, Chapter 92a.2). The subject facility that is typically enforced is the more stringent limit of either the TBEL or the WQBEL.

Determination of WQBEL is calculated by spreadsheet analysis or by a computer modeling program developed by DEP. DEP permit engineers utilize the following computing programs for WQBEL permit limitations: (1) MS Excel worksheet for Total Residual Chlorine (TRC); (2) WQM 7.0 for Windows Wasteload Allocation Program for Dissolved Oxygen and Ammonia Nitrogen Version 1.0 (WQM Model) and (3) PENTOXSD for Windows 2.0 (PENTOXSD) for Toxics pollutants.

4.3.1 Water Quality Modeling 7.0

The facility is not subject to WQM.

4.3.2 PENTOXSD Modeling

The facility is not subject to PENTOXSD.

4.3.3 Whole Effluent Toxicity (WET)

The facility is not subject to WET.

4.4 Total Maximum Daily Loading (TMDL)

4.4.1 TMDL

The goal of the Clean Water Act (CWA), which governs water pollution, is to ensure that all of the Nation's waters are clean and healthy enough to support aquatic life and recreation. To achieve this goal, the CWA created programs designed to regulate and reduce the amount of pollution entering United States waters. Section 303(d) of the CWA requires states to assess their waterbodies to identify those not meeting water quality standards. If a waterbody is not meeting standards, it is listed as impaired and reported to the U.S. Environmental Protection Agency. The state then develops a plan to clean up the impaired waterbody. This plan includes the development of a Total Maximum Daily Load (TMDL) for the pollutant(s) that were found to be the cause of the water quality violations. A Total Maximum Daily Load (tmdl) calculates the maximum amount of a specific pollutant that a waterbody can receive and still meet water quality standards.

Pennsylvania has committed to restoring all impaired waters by developing TMDLs and TMDL alternatives for all impaired waterbodies. The TMDL serves as the starting point or planning tool for restoring water quality.

4.4.1.1 Local TMDL

The subject facility does not discharge into a local TMDL.

4.4.1.2 Chesapeake Bay TMDL Requirement

The Chesapeake Bay Watershed is a large ecosystem that encompasses approximately 64,000 square miles in Maryland, Delaware, Virginia, West Virginia, Pennsylvania, New York and the District of Columbia. An ecosystem is composed of interrelated parts that interact with each other to form a whole. All of the plants and animals in an ecosystem depend on each other in some way. Every living thing needs a healthy ecosystem to survive. Human activities affect the Chesapeake Bay ecosystem by adding pollution, using resources and changing the character of the land.

Most of the Chesapeake Bay and many of its tidal tributaries have been listed as impaired under Section 303(d) of the federal Water Pollution Control Act ("Clean Water Act"), 33 U.S.C. § 1313(d). While the Chesapeake Bay is outside the boundaries of Pennsylvania, more than half of the State lies within the watershed. Two major rivers in Pennsylvania are part of the Chesapeake Bay Watershed. They are (a) the Susquehanna River and (b) the Potomac River. These two rivers total 40 percent of the entire Chesapeake Bay watershed.

The overall management approach needed for reducing nitrogen, phosphorus and sediment are provided in the Bay TMDL document and the Phase I and II WIPs which is described in the Bay TMDL document and Executive Order 13508.

The Bay TMDL is a comprehensive pollution reduction effort in the Chesapeake Bay watershed identifying the necessary pollution reductions of nitrogen, phosphorus and sediment across the seven Bay watershed jurisdictions of Delaware, Maryland, New York, Pennsylvania, Virginia, West Virginia and the District of Columbia to meet applicable water quality standards in the Bay and its tidal waters.

The Watershed Implementation Plans (WIPs) provides objectives for how the jurisdictions in partnership with federal and local governments will achieve the Bay TMDL's nutrient and sediment allocations. The jurisdictions have developed or will develop WIPs over three Phases.

Phase I and Phase II WIPs were developed and submitted to EPA in 2010 and 2012 for objectives to be implemented by 2017 and 2025 to achieve applicable water quality standards. The Phase II WIPs build on the initial Phase I WIPs platform by providing more specific local actions. In 2018, Phase III WIPs will be developed to include further actions for jurisdictions to implement between 2018 and 2025.

Section 7 of the Phase II WIP describes Pennsylvania's strategy for reducing nutrients to the Chesapeake Bay from wastewater facilities. The supplement to Section 7 of the Phase II WIP provides an update on Chesapeake Bay TMDL implementation activities for point sources and DEP's current implementation strategy for wastewater. The supplement is updated periodically to reflect changes due to PA DEP's permit actions as well as changes to strategies in managing the wastewater sector's allocated loads under the TMDL. The latest revision of the supplement was October 14, 2016.

The Chesapeake Bay TMDL (Appendix Q) categorizes point sources into four sectors

:

- Sector A- significant sewage dischargers;
- Sector B- significant industrial waste (IW) dischargers;
- Sector C- non-significant dischargers (both sewage and IW facilities); and
- Sector D- combined sewer overflows (CSOs).

All sectors contain a listing of individual facilities with NPDES permits that were believed to be discharging at the time the TMDL was published (2010). All sectors with the exception of the non-significant dischargers have individual wasteload allocations (WLAs) for TN and TP assigned to specific facilities. Non-significant dischargers have a bulk or aggregate allocation for TN and TP based on the facilities in that sector that were believed to be discharging at that time and their estimated nutrient loads.

Based upon the supplement the subject facility has been categorized as a Sector C discharger. The supplement defines Sector C as a sewage facility is considered non-significant dischargers if it is a Phase 4 facility or Phase 5 facility having a specified flow rate (i.e. Phase 4 facility ≥ 0.2 MGD and < 0.4 MGD, Phase 5 facility > 0.002 MGD and < 0.2 MGD), a small flow/single residence sewage treatment facilities (≤ 0.002 MGD), or a non-significant IW facilities. These facilities may be covered by statewide general permits or may have individual NPDES permits.

Currently, there are approximately 1,000 Phase 4 and 5 sewage facilities and approximately 740 small flow sewage treatment facilities covered by the general permit. There are also approximately 600 non-significant IW facilities.

A list of non-significant sewage and industrial waste dischargers with Cap Loads in NPDES permits is presented in Attachment B of the Phase 2 WIP.

This facility is not subject to Sector C monitoring requirements.

4.5 Anti-Degradation Requirement

Chapter 93.4a of the PA regulations requires that surface water of the Commonwealth of Pennsylvania may not be degraded below levels that protect the existing uses. The regulations specifically state that *Existing instream water uses and the level of water quality necessary to protect the existing uses shall be maintained and protected*. Antidegradation requirements are implemented through DEP's guidance manual entitled Water Quality Antidegradation Implementation Guidance (Document #391-0300-02).

The policy requires DEP to protect the existing uses of all surface waters and the existing quality of High Quality (HQ) and Exceptional Value (EV) Waters. Existing uses are protected when DEP makes a final decision on any permit or approval for an activity that may affect a protected use. Existing uses are protected based upon DEP's evaluation of the best available information (which satisfies DEP protocols and Quality Assurance/Quality Control (QA/QC) procedures) that indicates the protected use of the waterbody.

For a new, additional, or increased point source discharge to an HQ or EV water, the person proposing the discharge is required to utilize a nondischarge alternative that is cost-effective and environmentally sound when compared with the cost of the proposed discharge. If a nondischarge alternative is not cost-effective and environmentally sound, the person must use the best available combination of treatment, pollution prevention, and wastewater reuse technologies and assure that any discharge is nondegrading. In the case of HQ waters, DEP may find that after satisfaction of intergovernmental coordination and public participation requirements lower water quality is necessary to accommodate important economic or social development in the area in which the waters are located. In addition, DEP will assure that cost-effective and reasonable best management practices for nonpoint source control in HQ and EV waters are achieved.

The subject facility's discharge will be to a non-special protection waters and the permit conditions are imposed to protect existing instream water quality and uses. Neither HQ waters or EV waters is impacted by this discharge.

4.6 Anti-Backsliding

Anti-backsliding is a federal regulation which prohibits a permit from being renewed, reissued, or modified containing effluent limitations which are less stringent than the comparable effluent limitations in the previous permit (40 CFR 122.1.1 and 40 CFR 122.1.2). A review of the existing permit limitations with the proposed permit limitations confirm that the facility is consistent with anti-backsliding requirements. The facility has proposed effluent limitations that are as stringent as the existing permit.

5.0 NPDES Parameter Details

The basis for the proposed sampling and their monitoring frequency that will appear in the permit for each individual parameter are itemized in this Section. The final limits are the more stringent of technology based effluent treatment (TBEL) requirements, water quality based (WQBEL) limits, TMDL, antidegradation, anti-degradation, or WET.

The reader will find in this section:

- a) a justification of recommended permit monitoring requirements and limitations for each parameter in the proposed NPDES permit; and
- b) a summary of the proposed NPDES effluent limits.

5.1 Recommended Monitoring Requirements and Effluent Limitations

A summary of the recommended monitoring requirements and effluent limitations are itemized in the tables. The table is categorized by Conventional Pollutants and Disinfection.

5.1.1 Conventional Pollutants and Disinfection

Summary of Proposed NPDES Parameter Details for Conventional Pollutants and Disinfection			
Pepple Residence, PA026690			
Parameter	Permit Limitation Required by ¹ :	Recommendation	
CBOD	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP)
		Effluent Limit:	Effluent limits shall not exceed 10 mg/l as an average monthly (SOP)
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
TSS	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP).
		Effluent Limit:	Effluent limits shall not exceed 10 mg/l as an average monthly (SOP)
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
Fecal Coliform	TBEL	Monitoring:	The monitoring frequency shall be 1x/yr as a grab sample (SOP).
		Effluent Limit:	Effluent limits shall not exceed 200 MPN as a geometric mean (SOP).
		Rationale:	The monitoring frequency and the effluent limits assigned by the SOP.
Notes:			
1 The NPDES permit was limited by (a) anti-Backsliding, (b) Anti-Degradation, (c) SOP, (d) TBEL, (e) TMDL, (f) WQBEL, or (g) WET			
2 Monitoring frequency based on flow rate of 0.0004 MGD.			
3 SOP, New and Reissuance Small Flow Treatment Facility Individual NPDES Permit Applications, Revised January 13, 2015			
4 Water Quality Antidegradation Implementaton Guidance (Document # 391-0300-002)			
5 Phase 2 Watershed Implementation Plan Wastewater Supplement, Revised September 6, 2017			

5.2 Summary of Proposed NPDES Effluent Limits

The proposed NPDES effluent limitations are summarized in the table below.

PART A - EFFLUENT LIMITATIONS, MONITORING, RECORDKEEPING AND REPORTING REQUIREMENTS

I. A. For Outfall 001, Latitude 40° 4' 17.00", Longitude 78° 14' 32.00", River Mile Index 0.0, Stream Code 14096

Receiving Waters: Unnamed Tributary to French Run (WWF, MF)

Type of Effluent: Sewage Effluent

1. The permittee is authorized to discharge during the period from **Permit Effective Date** through **Permit Expiration Date**.
2. Based on the anticipated wastewater characteristics and flows described in the permit application and its supporting documents and/or amendments, the following effluent limitations and monitoring requirements apply (see also Additional Requirements and Footnotes).

Parameter	Effluent Limitations						Monitoring Requirements	
	Mass Units (lbs/day) ⁽¹⁾		Concentrations (mg/L)				Minimum ⁽²⁾ Measurement Frequency	Required Sample Type
	Average Monthly	Average Weekly	Minimum	Annual Average	Maximum	Instant. Maximum		
Flow (MGD)	Report Annl Avg	XXX	XXX	XXX	XXX	XXX	1/year	Estimate
BOD5	XXX	XXX	XXX	10.0	XXX	20.0	1/year	Grab
TSS	XXX	XXX	XXX	10.0	XXX	20.0	1/year	Grab
Fecal Coliform (No./100 ml)	XXX	XXX	XXX	200	XXX	XXX	1/year	Grab

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location(s):

at Outfall 001